

# A Word to Mazda Owners

---

Thank you for choosing a Mazda. We at Mazda design and build vehicles with complete customer satisfaction in mind.

To help ensure enjoyable and trouble-free operation of your Mazda, read this manual carefully and follow its recommendations.

Regular servicing of your vehicle by an expert repairer helps maintain both its roadworthiness and its resale value. A world-wide network of Authorised Mazda Repairers can help you with their professional servicing expertise.

Their specially trained personnel are best qualified to service your Mazda vehicle properly and exactly. Also, they are supported by a wide range of highly specialized tools and equipment specially developed for servicing Mazda vehicles. When maintenance or service is necessary, consult an expert repairer (we recommend an Authorised Mazda Repairer).

We assure you that all of us at Mazda have an ongoing interest in your motoring pleasure and in your full satisfaction with your Mazda product.

**Mazda Motor Corporation**  
**HIROSHIMA, JAPAN**

## **Important Notes About This Manual**

Keep this manual in the glove compartment as a handy reference for the safe and enjoyable use of your Mazda. Should you resell the vehicle, leave this manual with it for the next owner.

All specifications and descriptions are accurate at the time of printing. Because improvement is a constant goal at Mazda, we reserve the right to make changes in specifications at any time without notice and without obligation.

**Please be aware that this manual applies to all models, equipment and options. As a result, you may find some explanations for equipment not installed on your vehicle.**

©2021 Mazda Motor Corporation  
September 2021 (Print2)


# How to Use This Manual

---

We want to help you get the most driving pleasure from your vehicle. Your owner's manual, when read from cover to cover, can do that in many ways.

Illustrations complement the words of the manual to best explain how to enjoy your Mazda. By reading your manual, you can find out about the features, important safety information, and driving under various road conditions.

The symbol below in this manual means “Do not do this” or “Do not let this happen”.



References to left hand and right hand are made as if facing in the same direction the vehicle faces. Although this manual explains a left-hand-drive model, it also applies to right-hand-drive models.

**Index:** A good place to start is the Index, an alphabetical listing of all information in your manual.

You'll find several WARNINGS, CAUTIONS, and NOTES in the manual.



A **WARNING** indicates a situation in which serious injury or death could result if the warning is ignored.



A **CAUTION** indicates a situation in which bodily injury or damage to your vehicle, or both, could result if the caution is ignored.

## **NOTE**

A **NOTE** provides information and sometimes suggests how to make better use of your vehicle.

The following symbol, located on some parts of the vehicle, indicates that this manual contains information related to the part.

Please refer to the manual for a detailed explanation.



# Table of Contents

---

## **Pictorial Index**

Interior, exterior views and part identification of your Mazda.

**1**

---

## **Essential Safety Equipment**

Important information about safety equipment, including seats, seat belt system, child-restraint systems and SRS air bags.

**2**

---

## **Before Driving**

Use of various features, including keys, doors, mirrors and windows.

**3**

---

## **When Driving**

Information concerning safer driving and stopping.

**4**

---

## **Interior Features**

Use of various features for ride comfort, including air-conditioning and audio system.

**5**

---

## **Maintenance and Care**

How to keep your Mazda in top condition.

**6**

---

## **If Trouble Arises**

Helpful information on what to do if a problem arises with the vehicle.

**7**

---

## **Customer Information**

Important consumer information including warranties and add-on equipment.

**8**

---

## **Specifications**

Technical information about your Mazda.

**9**

---

## **Index**

**10**



# 1

## Pictorial Index

Interior, exterior views and part identification of your Mazda.

### **Interior Overview (Left-Hand Drive Model).....1-2**

- Interior Equipment (View A).....1-2
- Interior Equipment (View B).....1-3
- Interior Equipment (View C).....1-4
- Interior Equipment (View D).....1-5
- Interior Equipment (View E).....1-6

### **Interior Overview (Right-Hand Drive Model).....1-7**

- Interior Equipment (View A).....1-7


- Interior Equipment (View B).....1-8
- Interior Equipment (View C).....1-9
- Interior Equipment (View D).....1-10
- Interior Equipment (View E).....1-11

### **Exterior Overview.....1-12**

- Front.....1-12
- Rear.....1-13

# Interior Overview (Left-Hand Drive Model)


## Interior Equipment (View A)

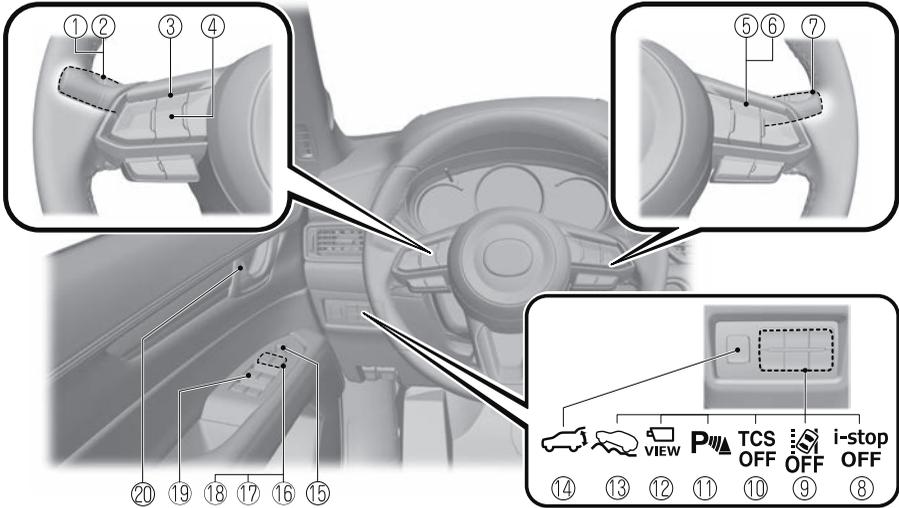

①	Lighting control.....	page 4-91
②	Turn and lane-change signal.....	page 4-98
③	Audio control switches.....	page 5-76, 5-94
④	INFO switch.....	page 4-23, 4-43, 4-62
⑤	Mazda Radar Cruise Control (MRCC) switches.....	page 4-167, 4-181
⑥	Cruise control switches.....	page 4-318
⑦	Wiper and washer lever.....	page 4-99
⑧	i-stop OFF switch.....	page 4-16
⑨	Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS) OFF switch.....	page 4-225
⑩	TCS OFF switch.....	page 4-121
⑪	Parking sensor switch.....	page 4-356, 4-366
⑫	360° View Monitor switch.....	page 4-255, 4-282
⑬	Off-Road Traction Assist switch.....	page 4-124
⑭	Power liftgate switch.....	page 3-21
⑮	Outside mirror switch.....	page 3-38
⑯	Power window lock switch.....	page 3-42
⑰	Outside mirror folding switch.....	page 3-38
⑱	Door-lock switch.....	page 3-15
⑲	Power window switches.....	page 3-42
⑳	Door-lock knob.....	page 3-17

# Interior Overview (Left-Hand Drive Model)


## Interior Equipment (View B)

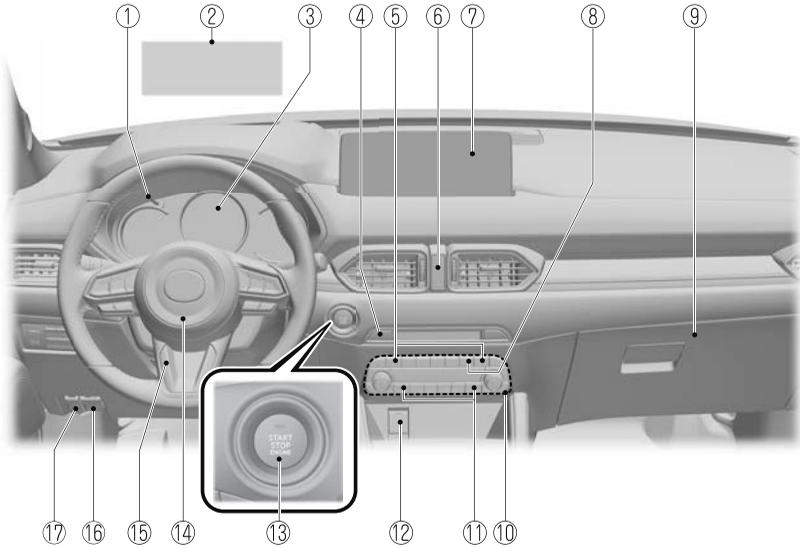

- ① Instrument panel illumination knob.....page 4-27, 4-47, 4-65
- ② Active driving display..... page 4-75
- ③ Instrument cluster..... page 4-21
- ④ Heated steering wheel switch..... page 2-25
- ⑤ Seat warmer switches..... page 2-23
- ⑥ Hazard warning flasher switch..... page 4-107
- ⑦ Mazda Connect..... page 5-70, 5-87
- ⑧ Rear window defogger switch..... page 4-104
- ⑨ Glove compartment..... page 5-117
- ⑩ Air-conditioning system..... page 5-2
- ⑪ Seat ventilation switches..... page 2-24
- ⑫ Accessory socket.....page 5-109
- ⑬ Push button start..... page 4-4
- ⑭ Horn..... page 4-106
- ⑮ Lock release lever..... page 2-5
- ⑯ Bonnet release handle..... page 6-21
- ⑰ Remote fuel-filler flap release.....page 3-36

# Interior Overview (Left-Hand Drive Model)


## Interior Equipment (View C)

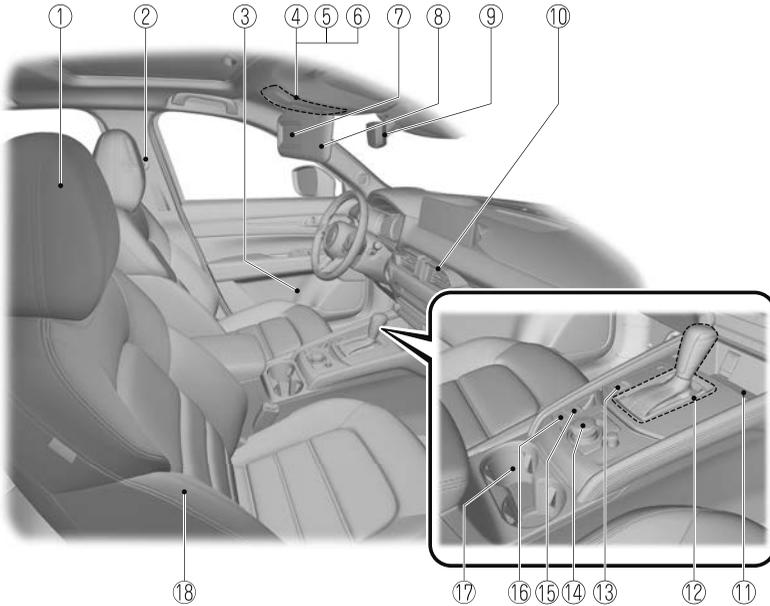

① Head restraint.....	page 2-21
② Seat belt.....	page 2-26
③ Bottle holder.....	page 5-116
④ Overhead lights.....	page 5-105
⑤ Overhead console.....	page 5-117
⑥ Sunroof switch.....	page 3-45
⑦ Vanity mirror.....	page 5-105
⑧ Sunvisor.....	page 5-105
⑨ Rearview mirror.....	page 3-40
⑩ Vent.....	page 5-3
⑪ Wireless charger (Qi).....	page 5-112
⑫ Shift lever/Selector lever.....	page 4-78, 4-80
⑬ Mazda intelligent Drive Select (Mi-Drive) switch.....	page 4-127
⑭ Commander switch.....	page 5-75, 5-91
⑮ Electric parking brake (EPB) switch.....	page 4-109
⑯ AUTOHOLD switch.....	page 4-115
⑰ Cup holder.....	page 5-115
⑱ Front seat.....	page 2-5

# Interior Overview (Left-Hand Drive Model)


## Interior Equipment (View D)

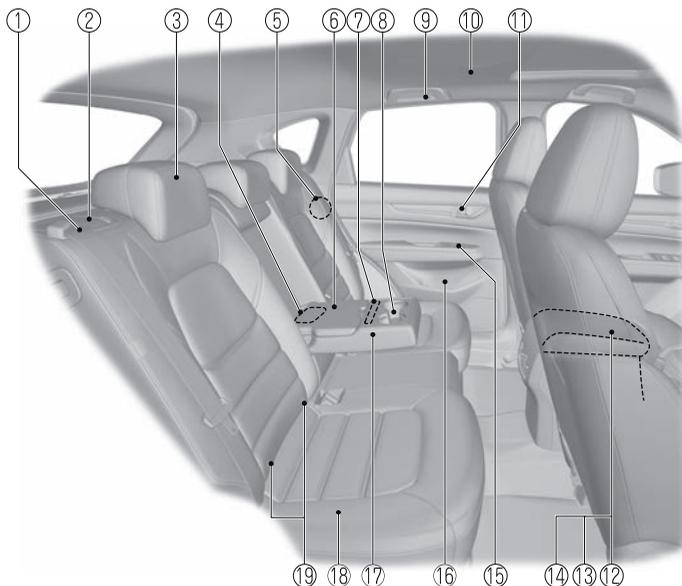

① Seat belt.....	page 2-26
② Lever.....	page 2-16, 2-20
③ Head restraint.....	page 2-21
④ USB power outlet.....	page 5-111
⑤ Child safety lock.....	page 3-18
⑥ Armrest box.....	page 5-118
⑦ Seat warmer switches.....	page 2-23
⑧ Cup holder.....	page 5-115
⑨ Rear coat hook.....	page 5-124
⑩ Rear map lights.....	page 5-105
⑪ Door-lock knob.....	page 3-17
⑫ Centre console.....	page 5-118
⑬ External input terminal.....	page 5-70, 5-87
⑭ Accessory socket.....	page 5-109
⑮ Power window switch.....	page 3-42
⑯ Bottle holder.....	page 5-116
⑰ Armrest.....	page 2-20
⑱ Rear seat.....	page 2-16
⑲ ISOFIX anchors.....	page 2-49

# Interior Overview (Left-Hand Drive Model)


## Interior Equipment (View E)

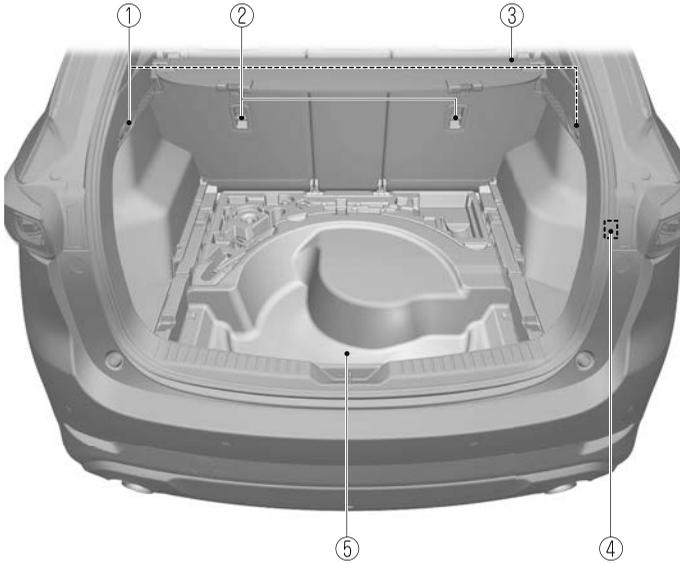

① Remote handles.....	page 2-16
② Anchor brackets.....	page 2-48
③ Luggage compartment cover.....	page 3-27
④ Accessory socket.....	page 5-109
⑤ Cargo sub-compartment.....	page 5-119

# Interior Overview (Right-Hand Drive Model)


## Interior Equipment (View A)

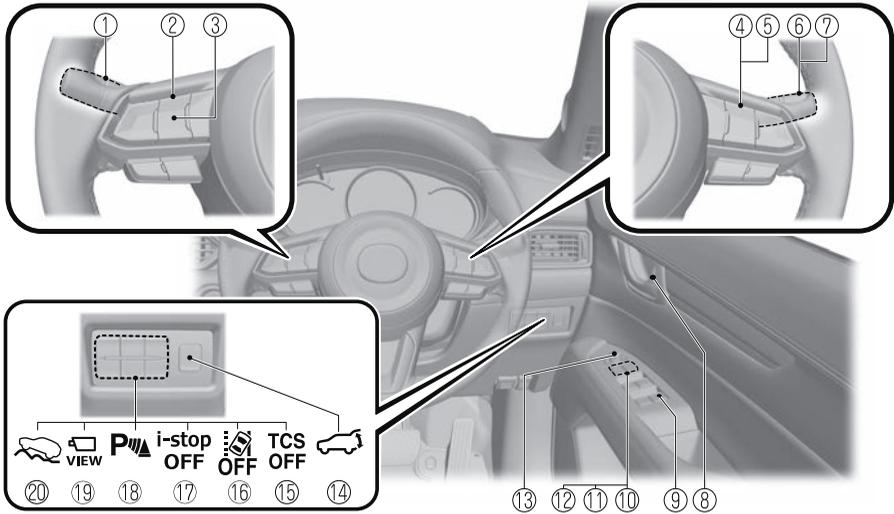

① Wiper and washer lever.....	page 4-99
② Audio control switches.....	page 5-76, 5-94
③ INFO switch.....	page 4-23, 4-43, 4-62
④ Mazda Radar Cruise Control (MRCC) switches.....	page 4-167, 4-181
⑤ Cruise control switches.....	page 4-318
⑥ Lighting control.....	page 4-91
⑦ Turn and lane-change signal.....	page 4-98
⑧ Door-lock knob.....	page 3-17
⑨ Power window switches.....	page 3-42
⑩ Power window lock switch.....	page 3-42
⑪ Outside mirror folding switch.....	page 3-38
⑫ Door-lock switch.....	page 3-15
⑬ Outside mirror switch.....	page 3-38
⑭ Power liftgate switch.....	page 3-21
⑮ TCS OFF Switch.....	page 4-121
⑯ Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS) OFF switch.....	page 4-225
⑰ i-stop OFF switch.....	page 4-16
⑱ Parking sensor switch.....	page 4-356, 4-366
⑳ 360° View Monitor switch.....	page 4-255, 4-282
㉑ Off-Road Traction Assist switch.....	page 4-124

# Interior Overview (Right-Hand Drive Model)


## Interior Equipment (View B)

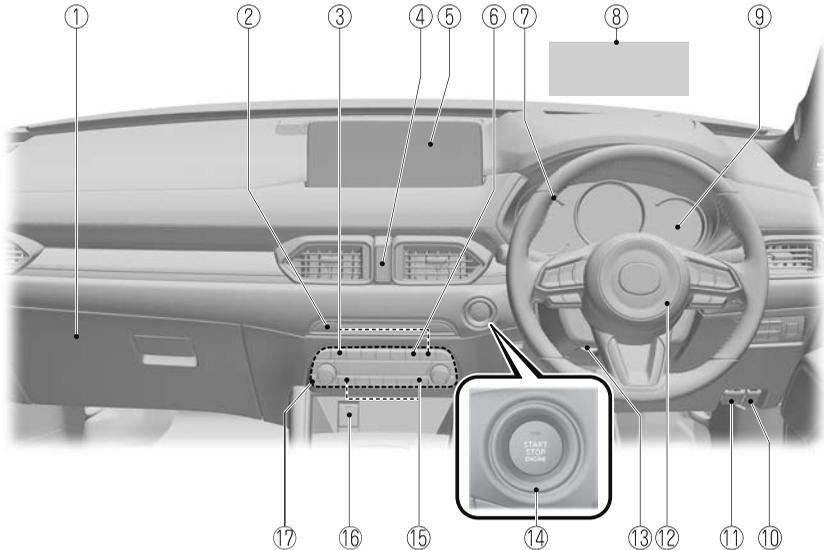

- ① Glove compartment..... page 5-117
- ② Heated steering wheel switch..... page 2-25
- ③ Seat warmer switches..... page 2-23
- ④ Hazard warning flasher switch..... page 4-107
- ⑤ Mazda Connect..... page 5-70, 5-87
- ⑥ Rear window defogger switch..... page 4-104
- ⑦ Instrument panel illumination knob..... page 4-27, 4-47, 4-65
- ⑧ Active driving display..... page 4-75
- ⑨ Instrument cluster..... page 4-21
- ⑩ Remote fuel-filler flap release..... page 3-36
- ⑪ Bonnet release handle..... page 6-21
- ⑫ Horn..... page 4-106
- ⑬ Lock release lever..... page 2-5
- ⑭ Push button start..... page 4-4
- ⑮ Seat ventilation switches..... page 2-24
- ⑯ Accessory socket..... page 5-109
- ⑰ Air-conditioning system..... page 5-2

# Interior Overview (Right-Hand Drive Model)


## Interior Equipment (View C)

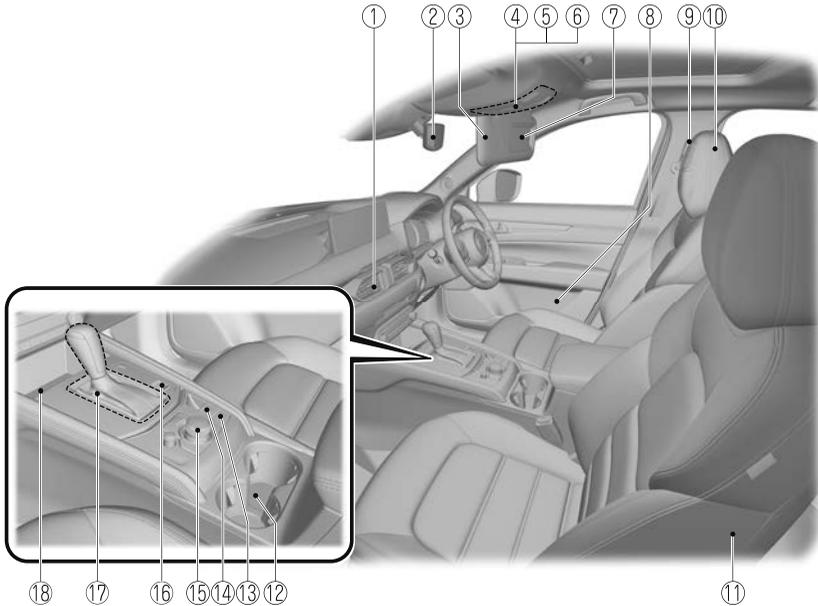

① Vent.....	page 5-3
② Rearview mirror.....	page 3-40
③ Sunvisor.....	page 5-105
④ Overhead lights.....	page 5-105
⑤ Overhead console.....	page 5-117
⑥ Sunroof switch.....	page 3-45
⑦ Vanity mirror.....	page 5-105
⑧ Bottle holder.....	page 5-116
⑨ Seat belt.....	page 2-26
⑩ Head restraint.....	page 2-21
⑪ Front seat.....	page 2-5
⑫ Cup holder.....	page 5-115
⑬ AUTOHOLD switch.....	page 4-115
⑭ Electric parking brake (EPB) switch.....	page 4-109
⑮ Commander switch.....	page 5-75, 5-91
⑯ Mazda intelligent Drive Select (Mi-Drive) switch.....	page 4-127
⑰ Shift lever/Selector lever.....	page 4-78, 4-80
⑱ Wireless charger (Qi).....	page 5-112

# Interior Overview (Right-Hand Drive Model)


## Interior Equipment (View D)

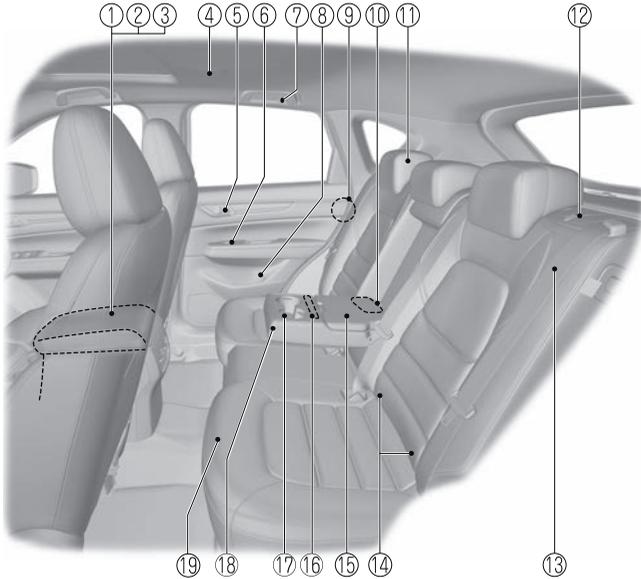

① Centre console.....	page 5-118
② External input terminal.....	page 5-70, 5-87
③ Accessory socket.....	page 5-109
④ Rear map lights.....	page 5-105
⑤ Door-lock knob.....	page 3-17
⑥ Power window switch.....	page 3-42
⑦ Rear coat hook.....	page 5-124
⑧ Bottle holder.....	page 5-116
⑨ Child safety lock.....	page 3-18
⑩ USB power outlet.....	page 5-111
⑪ Head restraint.....	page 2-21
⑫ Lever.....	page 2-16, 2-20
⑬ Seat belt.....	page 2-26
⑭ ISOFIX anchors.....	page 2-49
⑮ Armrest box.....	page 5-118
⑯ Seat warmer switches.....	page 2-23
⑰ Cup holder.....	page 5-115
⑱ Armrest.....	page 2-20
⑲ Rear seat.....	page 2-16

# Interior Overview (Right-Hand Drive Model)

## Interior Equipment (View E)

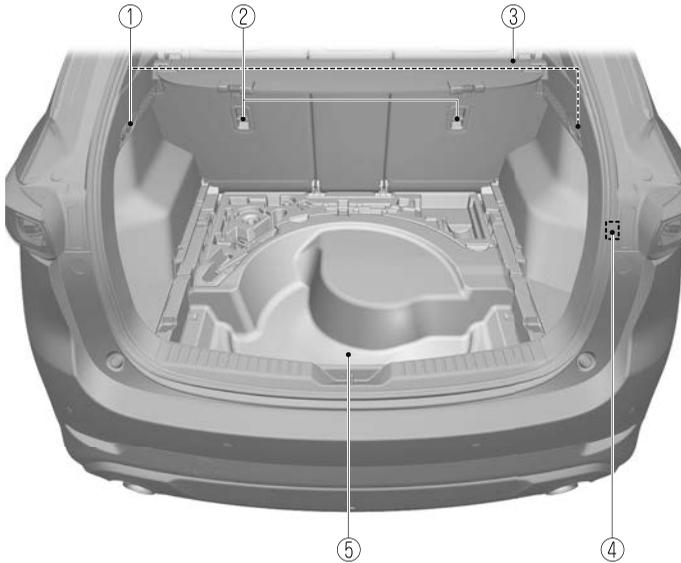


① Remote handles.....	page 2-16
② Anchor brackets.....	page 2-48
③ Luggage compartment cover.....	page 3-27
④ Accessory socket.....	page 5-109
⑤ Cargo sub-compartment.....	page 5-119

# Exterior Overview


---

## Front

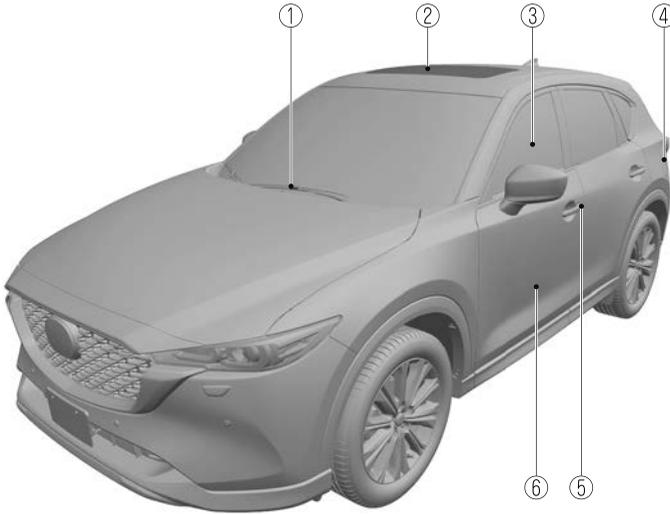

① Windscreen wiper blades.....	page 6-39
② Sunroof.....	page 3-45
③ Window.....	page 3-42
④ Fuel-filler flap.....	page 3-36
⑤ Request switch.....	page 3-13
⑥ Door.....	page 3-12

**Rear**

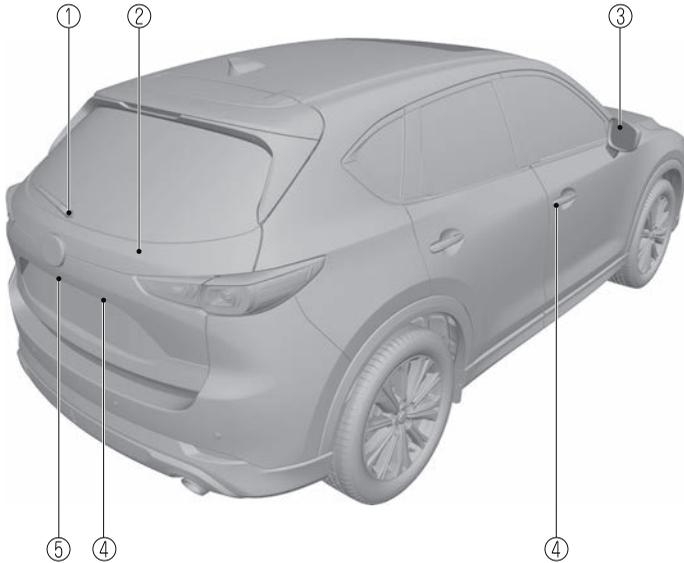

- ① Rear window wiper blade.....page 6-42
- ② Liftgate.....page 3-19
- ③ Outside mirror.....page 3-38
- ④ Request switch.....page 3-13
- ⑤ Electric liftgate opener.....page 3-20

# MEMO

# 2

## Essential Safety Equipment

Important information about safety equipment, including seats, seat belt system, child-restraint systems and SRS air bags.

<b>Seats.....</b>	<b>2-2</b>	<b>Child-Restraint System</b>	
Seat Precautions.....	2-2	Installation.....	2-38
Front Seat.....	2-5	Child-Restraint System Suitability	
Rear Seat.....	2-16	for Various Seat Positions	
Head Restraints.....	2-21	Table.....	2-43
<b>Seat Warmer/Seat Ventilation/Heated</b>		Installing Child-Restraint	
<b>Steering Wheel.....</b>	<b>2-23</b>	Systems.....	2-48
Seat Warmer*.....	2-23	<b>SRS Air Bags.....</b>	<b>2-52</b>
Seat Ventilation*.....	2-24	Supplementary Restraint System	
Heated Steering Wheel*.....	2-25	(SRS) Precautions.....	2-52
<b>Seat Belt Systems.....</b>	<b>2-26</b>	Supplementary Restraint System	
Seat Belt Precautions.....	2-26	Components.....	2-59
Seat Belt.....	2-29	How the SRS Air Bags Work.....	2-61
Seat Belt Warning Systems.....	2-30	SRS Air Bag Deployment	
Seat Belt Pretensioner and Load		Criteria.....	2-65
Limiting Systems.....	2-31	Limitations to SRS Air Bag.....	2-67
<b>Child Restraint.....</b>	<b>2-33</b>	Front Passenger Occupant	
Child-Restraint Precautions.....	2-33	Classification System*.....	2-69
		Constant Monitoring.....	2-74

## Seat Precautions

### **WARNING**

***Make sure the adjustable components of a seat are locked in place:***

*Adjustable seats and seatbacks that are not securely locked are dangerous. In a sudden stop or collision, the seat or seatback could move, causing injury. Make sure the adjustable components of the seat are locked in place by attempting to slide the seat forward and backward and rocking the seatback.*

***Never allow children to adjust a seat:***

*Allowing children to adjust a seat is dangerous as it could result in serious injury if a child's hands or feet become caught in the seat.*

***Do not drive with the seatback unlocked:***

*All of the seatbacks play an important role in your protection in a vehicle. Leaving the seatback unlocked is dangerous as it can allow passengers to be ejected or thrown around and baggage to strike occupants in a sudden stop or collision, resulting in severe injury. After adjusting the seatback at any time, even when there are no other passengers, rock the seatback to make sure it is locked in place.*

***Adjust a seat only when the vehicle is stopped:***

*If the seat is adjusted while the vehicle is being driven, the seating posture may become unstable and the seat could move unexpectedly resulting in injury.*

***Do not modify or replace the front seats:***

*Modifying or replacing the front seats such as replacing the upholstery or loosening any bolts is dangerous. The front seats contain air bag components essential to the supplementary restraint system. Such modifications could damage the supplementary restraint system and result in serious injury. Consult an expert repairer (we recommend an Authorised Mazda Repairer) if there is any need to remove or reinstall the front seats.*

***Do not drive with damaged front seats:***

*Driving with damaged front seats, such as seat cushions torn or damaged down to the urethane, is dangerous. A collision, even one not strong enough to inflate the air bags, could damage the front seats which contain essential air bag components. If there was a subsequent collision, an air bag may not deploy which could lead to injuries. Always have an expert repairer (we recommend an Authorised Mazda Repairer) inspect the front seats, front seat belt pretensioners and air bags after a collision.*

**Do not drive with either front seats reclined:**

*Sitting in a reclined position while the vehicle is moving is dangerous because you do not get the full protection from seat belts. During sudden braking or a collision, you can slide under the lap belt and suffer serious internal injuries. For maximum protection, sit well back and upright.*

**Do not place an object such as a cushion between the seatback and your back:**

*Putting an object such as a cushion between the seatback and your back is dangerous because you will be unable to maintain a safe driving posture and the seat belt cannot function at its full capacity in a collision, which could result in a serious accident, injury or death.*

**Do not place objects under the seat:**

*The object could get stuck and cause the seat to not be fixed securely, and result in an accident.*

**Do not stack cargo higher than the seatbacks:**

*Stacking luggage or other cargo higher than the seatbacks is dangerous. During sudden braking or a collision, objects can fly around and become projectiles that may hit and injure passengers.*

**Make sure luggage and cargo is secured before driving:**

*Not securing cargo while driving is dangerous as it could move or be crushed during sudden braking or a collision and cause injury. Additionally, if the air bags deploy, the cargo may scatter which could result in serious injury or death.*

**Never allow a passenger to sit or stand on the folded seatback while the vehicle is moving:**

*Driving with a passenger on the folded seatback is dangerous. Allowing a child to sit up on the folded seatback while the vehicle is moving is particularly dangerous. In a sudden stop or even a minor collision, a child not in a proper seat or child-restraint system and seat belt could be thrown forward, back or even out of the vehicle resulting in serious injuries or death. The child in the baggage area could be thrown into other occupants and cause serious injury.*



- *When operating a seat, be careful not to put your hands or fingers near the moving parts of the seat or on the side trim to prevent injury.*
- *When moving the seats, make sure there is no cargo in the surrounding area. If the cargo gets caught it could damage the cargo.*

## Seats

---

### ➤ **(Manual Seat)**

*When moving the seats forward and rearward or returning a rear-reclined seatback to its upright position, make sure you hold onto the seatback with your hand while operating. If the seatback is not held, the seat will move suddenly and could cause injury.*

➤ *When inserting your hand under the seat to clean the cabin or pick up something you dropped under the seat, be careful not to hurt yourself. If you contact the moving parts of the seat rail or seat frame, it could result in injury.*

### **NOTE**

· *When returning a rear seat to its original position, place the seat belt in its normal position. Verify that the seat belt pulls out and retracts.*

### · **(Power Seat)**

*The seat-bottom power adjustment is operated by motors. Avoid extended operation because excessive use can damage the motors.*

- *To prevent the battery from running down, avoid using the power adjustment when the engine is stopped. The adjuster uses a large amount of electrical power.*
- *Do not use the switch to make more than one adjustment at a time.*

## Front Seat


### ▼ Adjusting the Driver's Seat

Using the driving position set up procedure recommended by Mazda allows you to maintain a relaxed posture, drive the vehicle for longer periods without feeling tired, and make quick operations naturally.

Also, you can be assured of a clear view in the forward direction to help you drive more safely and comfortably.

The adjustments for the driving position recommended by Mazda are done using the following procedures.

1. Moving the steering wheel and seat to their default positions.
2. Adjusting the seatback angle.
3. Adjusting the seat position forward and back.
4. Adjusting the seat height.
5. Adjusting the steering wheel position.
6. Adjusting the head restraint position.

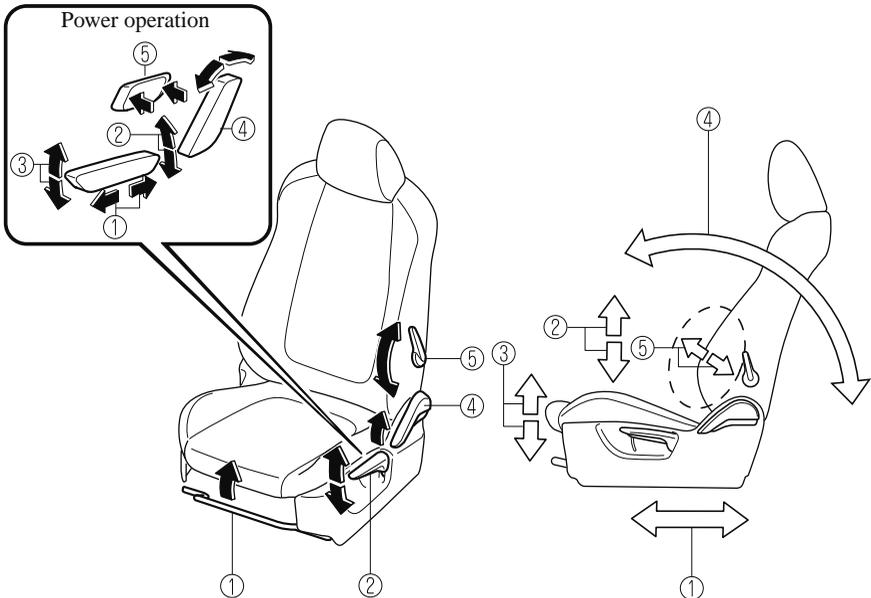

# Seats

---

## ① Seat Slide

(Manual Seat)

To move a seat forward or backward, raise the lever and slide the seat to the desired position and release the lever.

Make sure the lever returns to its original position and the seat is locked in place by attempting to push it forward and backward.

(Power Seat)

To slide the seat, move the slide lifter switch on the outside of the seat to the front or back and hold it. Release the switch at the desired position.

## ② Height Adjustment

(Manual Seat)

To adjust the seat height, move the lever up or down.

(Power Seat)

To adjust the seat height, move the slide lifter switch up or down.

## ③ Height Adjustment for Front Edge of Seat Bottom (Power Seat)

To adjust the front height of the seat bottom, raise or lower the front of the slide lifter switch.

## ④ Seat Recline

(Manual Seat)

To change the seatback angle, lean forward slightly while raising the lever. Then lean back to the desired position and release the lever.

Make sure the lever returns to its original position and the seatback is locked in place by attempting to push it forward and backward.

(Power Seat)

To change the seatback angle, press the front or rear side of the reclining switch. Release the switch at the desired position.

## ⑤ Lumbar Support Adjustment\*

(Manual Seat)

To increase the seat firmness, move the lever downward. Move the lever upward to decrease firmness.

(Power Seat)

To increase the seat firmness, press and hold the front part of the switch to the desired position, then release it.

Press the rear part of the switch to decrease firmness.

**Before making adjustments to the driving position recommended by Mazda**

Before making adjustments, move the steering wheel and seat to their default positions.


**How to move the steering wheel to its default position**** WARNING*****Never adjust the steering wheel while the vehicle is moving:***

*Adjusting the steering wheel while the vehicle is moving is dangerous. Moving it can very easily cause the driver to abruptly turn to the left or right. This can lead to loss of control or an accident.*

***After adjusting the steering wheel position, make sure it is securely locked by trying to move it up and down:***

*Driving with the steering wheel not securely locked in position is dangerous. If the steering wheel moves unexpectedly while driving, you could lose control of the steering resulting in an accident.*

Lower the lever, move the steering wheel to the lowest position, and then push it down and all the way back.

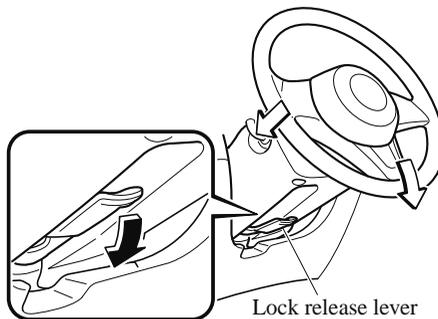**How to move a driver's seat to its default position**

1. Slide the seat all the way back.
2. Lower the seat to its lowest height.
3. Sit squarely in the seat and rest your back against the seatback.

# Seats

---

## Seat adjustment procedure for the driving position recommended by Mazda

### Adjusting the seatback angle (reclining)



Adjust the seatback to the angle providing a comfortable seated posture.

1. With your posture slightly slouched, move the seatback forward to the angle where your waist feels slightly cramped.

Manual Seat




Power Seat

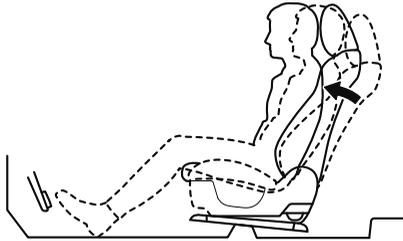



2. Move the seatback backward to a comfortable seated posture without any feeling of cramping in your waist.

Manual Seat



Power Seat

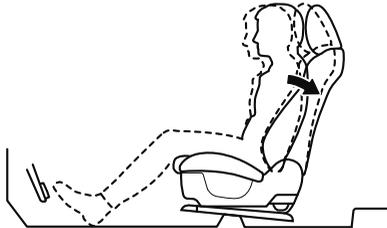



### Adjusting the seat position forward and back (sliding)

Adjust the seat to the position best for operating the accelerator and brake pedals.

1. Place your left foot on the footrest, your right foot between the accelerator and brake pedals, and position your heel to the position allowing easy switching between the pedals.
2. With your heel set on the floor, set your right foot on the brake pedal and move the seat forward as far as possible until you feel a slight cramping in your ankle.

Manual Seat



Power Seat

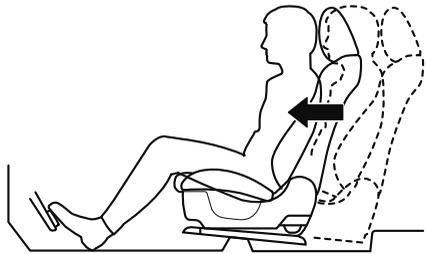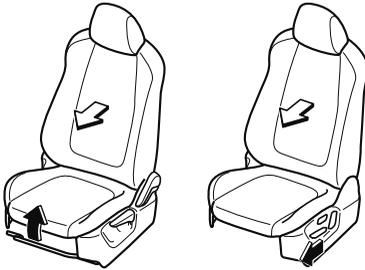

3. With your right foot set on the brake pedal, move the seat back until you no longer feel cramping in your ankle.
4. With your heel set on the floor, make sure you can move your foot between the brake pedal and accelerator pedal smoothly.
5. Depress the accelerator pedal completely with your heel set on the floor and make sure that your ankle does not feel over-stretched.

Manual Seat

Power Seat

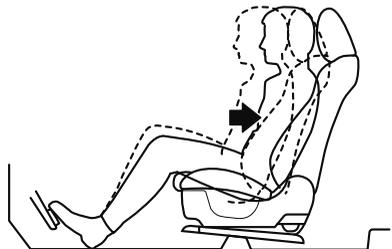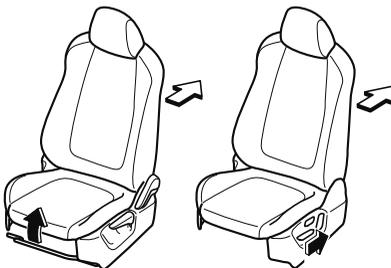

# Seats


---

## Adjusting the seat height

Adjust the seat height to a position where you have a clear forward view and you can drive the vehicle easily.

1. With your back resting against the seatback, raise the seat to the height where you can see the rear edge area of the bonnet surface from the windscreen.


With the manual seat, if you raise the seat height, the seat moves forward. Adjust the seat forward or back again.

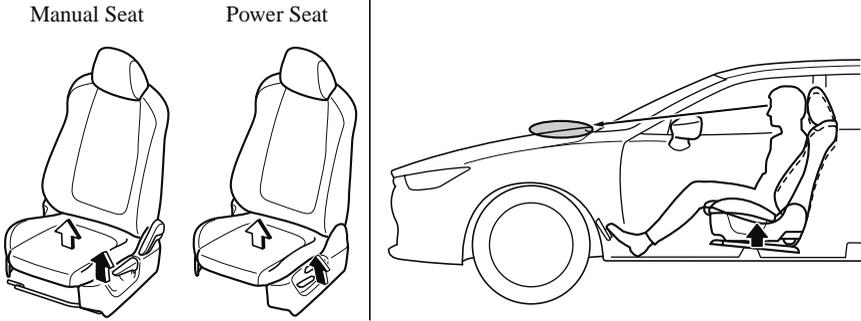

## Adjusting the steering wheel position


Adjust the steering wheel to the position where it can be operated easily and the gauges can be viewed easily.

1. With your back resting against the seatback, extend both arms, place them on the top of the steering wheel, and pull the steering wheel towards you to the position of your wrists.

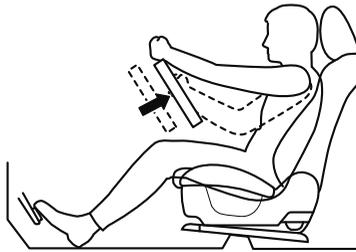

2. Adjust the steering wheel height so that the gauges can be viewed easily.

3. Raise the lever to securely lock the steering wheel.

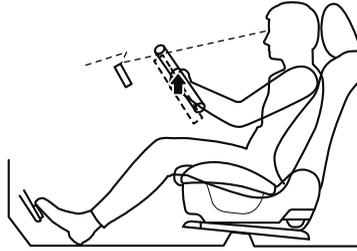

### Adjusting the head restraint position

To prevent shock to the head and neck, adjust the head restraints to their correct positions. Refer to Height Adjustment on page 2-21.


### ▼ Driving Position Memory\*

The desired driving position can be called up after programming the position. The following driving positions can be programmed.

- Driver's seat position (seat slide, height adjustment, front edge of seat bottom, seat recline)  
Refer to Adjusting the Driver's Seat on page 2-5.
- Active driving display (display position, brightness level, display information)  
Refer to Active Driving Display on page 4-75.

### CAUTION

*Do not place fingers or hands around the bottom of the seat while the seat memory function is operating. The seat moves automatically while the seat memory function is operating and fingers or hands could get pinched and injured.*

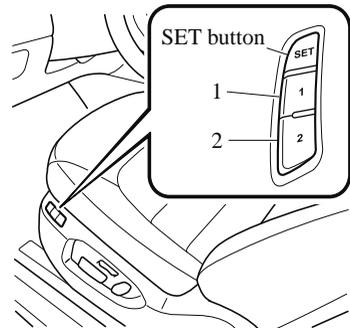

A driving position can be programmed or operated using the buttons on the side of the seat or the key.

## Seats

---

### **NOTE**

- Lumbar support adjustment cannot be programmed.
- A driving position can be programmed to the buttons on the side of the seat and the key in use for driving the vehicle.
- If the vehicle has been serviced and the battery leads disconnected, the programmed seat positions will have been erased. Re-programme the seat positions.

### **Programming**

1. Make sure the parking brake is on.
2. **(Automatic transaxle)**  
Make sure the selector lever is in the P position.
3. Start the engine.
4. Adjust the seat and the active driving display to the desired driving position.
5. Press the SET button on the seat until a beep sound is heard 1 time.
6. Perform one of the following settings within 5 seconds of completing step 5 above:
  - **Programming using a button on the side of the seat**  
Press the button you want to programme, either button 1 or 2, until a beep sound is heard 1 time.
  - **Programming using the key**  
Press the key unlock button until a beep sound is heard 1 time.

### **NOTE**

*If a beep sound is heard 3 times, the operation is cancelled.*

### **To move the driving position to a programmed position**

#### **(Using a button on the side of the seat)**

1. Make sure the parking brake is on.
2. **(Automatic transaxle)**  
Make sure the selector lever is in the P position.
3. Start the engine.
4. Press the programming button for the driving position you want to call up (button 1 or 2).
5. A beep sound is heard when the driving position adjustment is completed.

### **NOTE**

- *If the driving position movement is not changed, only the beep sounds.*
- *A seat position can be called up even with the engine not running.*
- *The driving position adjustment is cancelled in the following cases:*
  - *Any of the seat adjustment switches is operated.*
  - *The SET button is pressed.*
  - *Programming button 1 or 2 is pressed.*
  - *The key lock button or unlock button is operated.*
  - *The vehicle starts moving.*
  - *The active driving display is adjusted.*

**(Using a programmed key)**

1. Unlock the doors by pressing a request switch or the key unlock button.
2. After unlocking the doors, the seat position adjustment begins within 40 seconds of opening the driver's door, and a beep sounds when the operation is finished.
3. Make sure the parking brake is on.
4. **(Automatic transaxle)**  
Make sure the selector lever is in the P position.
5. Start the engine.
6. The active driving display adjustment begins.

**NOTE**

- *If there is no driving position movement, a beep is not heard.*
- *The driving position adjustment is cancelled in the following cases:*
  - *Any of the seat adjustment switches is operated.*
  - *The SET button is pressed.*
  - *Programming button 1 or 2 is pressed.*
  - *The key lock button or unlock button is operated.*
  - *The vehicle starts moving.*
  - *The active driving display is adjusted.*

**Erasing programmed driving positions****(Erasing the driving positions programmed to the key)**


1. Switch the ignition OFF.
2. Press the SET button on the side of the seat until a beep sound is heard 1 time.
3. After the beep sounds, press the key lock button within 5 seconds until a beep sound is heard 1 time.

**NOTE**

*If a beep sound is heard 3 times, the operation is cancelled.*

# Seats

## ▼ Adjusting the Front Passenger's Seat

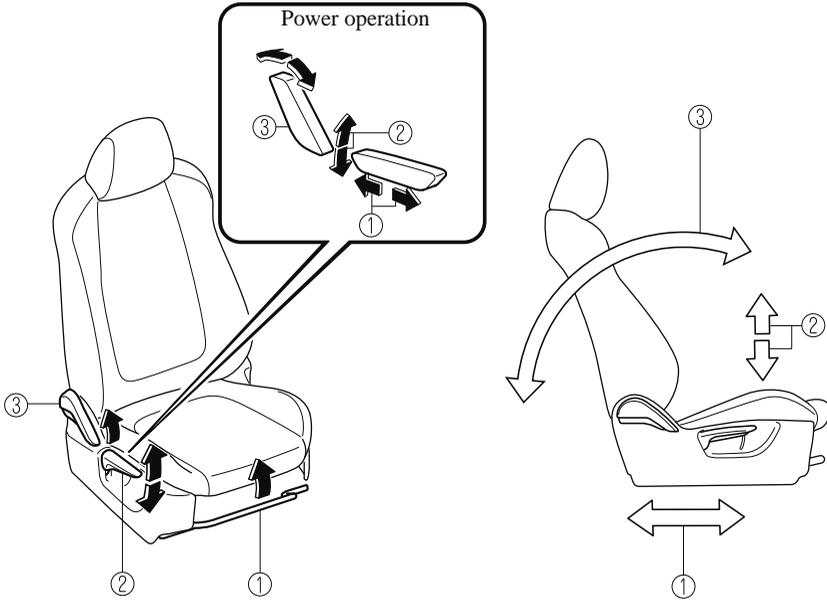

### ① Seat Slide

(Manual Seat)

To move a seat forward or backward, raise the lever and slide the seat to the desired position and release the lever.

Make sure the lever returns to its original position and the seat is locked in place by attempting to push it forward and backward.

(Power Seat)

To slide the seat, move the slide lifter switch on the outside of the seat to the front or back and hold it. Release the switch at the desired position.

### ② Height Adjustment\*

(Manual Seat)

To adjust the seat height, move the lever up or down.

(Power Seat)

To adjust the seat height, move the slide lifter switch up or down.

### ③ Seat Recline

(Manual Seat)

To change the seatback angle, lean forward slightly while raising the lever. Then lean back to the desired position and release the lever.

Make sure the lever returns to its original position and the seatback is locked in place by attempting to push it forward and backward.

(Power Seat)

To change the seatback angle, press the front or rear side of the reclining switch. Release the switch at the desired position.

# Seats

## Rear Seat

### ▼ Split Folding

By lowering the rear seatbacks the luggage compartment space can be expanded.

### **WARNING**

**Tightly secure cargo in the luggage compartment when it is transported with the seatbacks folded down:**

*Driving without tightly securing cargo and luggage is dangerous as it could move and become an obstruction to driving during emergency braking or a collision resulting in an unexpected accident.*

### **CAUTION**

*If the seatback is not supported by your hand, it will move suddenly and could cause injury.*

### Folding both seatbacks down

### **CAUTION**

*Check the position of a front seat before folding a rear seatback. Depending on the position of a front seat, it may not be possible to fold a rear seatback all the way down because it may hit the seatback of the front seat which could scratch or damage the front seat or its pocket. Lower or remove the head restraint on the rear outboard seat if necessary.*

### **NOTE**

*When you fold down the left seatback, the centre seatback folds down at the same time.*


### **Using remote handle\***

#### 1. **(With rear seat warmer)**

Turn the rear seat warmer switch off. Refer to Seat Warmer on page 2-23.

#### 2. After checking that the rear seats are clear, open the liftgate and lower the seatback you want to fold down using the remote handle.

When folding the left side, operate the outer part of the remote handle.



### **WARNING**

**Always remove the child-restraint system from the rear seat before operating the remote handle for the rear seat:**

*Operating the remote handle while a rear-facing child-restraint system is in the rear seat is dangerous. It could cause injury to a child seated in the child-restraint system when the seatback suddenly flips forward.*

**Make sure there is nobody in the rear seat area before operating (pulling) the remote handle:**

Not checking the rear seat area for persons before folding the seatbacks with the strap/remote handle is dangerous. The rear seat area is difficult to see from the rear of the vehicle. Operating (pulling) the remote handle without checking could cause injury to a person when a seatback suddenly flips forward.

**⚠ CAUTION**

- Before folding the seatbacks down with the remote handle, make sure there is no cup in a rear cup holder. Folding the seatbacks with the remote handle while a cup is in the cup holder could soil or damage the seat bottom and seatback.
- Be careful of the following when using the remote handle:
  - On a downward slope, the seatback could flip forward faster than on a flat surface.
  - On an upward slope, the seatback may not fold down. When the seatbacks cannot be folded down with the remote handle, pull the rear seatback forward from inside the vehicle.

➤ **(Folding the left seatback)**

Be careful when operating the remote handle with the centre seatback folded down. If a person sitting in the right rear seat places a hand on the centre seatback, it could be pinched by a seatback or seat component causing injury.




**Using the lever**

1. **(With rear seat warmer)**

Turn the rear seat warmer switch off. Refer to Seat Warmer on page 2-23.

2. Pull the lever and fold the seatback forward.



**Folding only centre seatback**

**Using remote handle\***


1. **(With rear seat warmer)**

Turn the rear seat warmer switch off. Refer to Seat Warmer on page 2-23.

2. If the centre head restraint is in the position for use, store it.

# Seats

3. After checking that the centre seat is clear, open the liftgate and pull the inside remote handle on the left side of the liftgate compartment.



## WARNING

**Always remove the child-restraint system from the rear seat before operating the remote handle for the rear seat:**

Operating the remote handle while a rear-facing child-restraint system is in the rear seat is dangerous. It could cause injury to a child seated in the child-restraint system when the seatback suddenly flips forward.

**Make sure there is nobody in the rear seat area before operating (pulling) the remote handle:**


Not checking the rear seat area for persons before folding the seatbacks with the strap/remote handle is dangerous. The rear seat area is difficult to see from the rear of the vehicle. Operating (pulling) the remote handle without checking could cause injury to a person when a seatback suddenly flips forward.

## CAUTION

- Before folding the seatbacks down with the remote handle, make sure there is no cup in a rear cup holder. Folding the seatbacks with the remote handle while a cup is in the cup holder could soil or damage the seat bottom and seatback.
- Be careful of the following when using the remote handle:
  - On a downward slope, the seatback could flip forward faster than on a flat surface.
  - On an upward slope, the seatback may not fold down. When the seatbacks cannot be folded down with the remote handle, pull the rear seatback forward from inside the vehicle.

## Using strap

1. **(With rear seat warmer)**  
Turn the rear seat warmer switch off. Refer to Seat Warmer on page 2-23.
2. If the centre head restraint is in the position for use, store it.
3. Pull the strap on the back of the seatback to fold the seatback forward.



### To return the seatbacks to the upright position


#### **WARNING**

***Always make sure the seat belts are fully pulled out from under the seatbacks:***


*A seat belt caught under a seatback after the seatback is returned to its upright position is dangerous. In a collision or sudden stop, the seat belt cannot provide adequate protection.*

***When returning the seatback to its upright position, make sure that it is firmly locked and the red indication is not visible:***

*If the red indication is visible, the seatback is not locked. If the vehicle is driven without the seatback locked, it could fold down suddenly and cause an accident.*

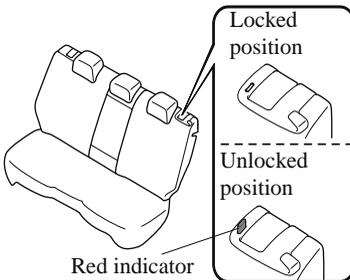

1. Make sure that the seat belt passes through the seat belt guide.



2. Press the seatback rearward and lock it in place. After returning the seatback to its upright position, make sure it is securely locked.


# Seats

## ▼ Rear Seat Recline

### **WARNING**

**After adjusting the seatback, make sure that it is firmly locked and the red indication is not visible by attempting to lightly move the seatback forward and back:**

*If the red indication is visible, the seatback is not locked. If the vehicle is driven with the seatback unlocked, it may move unexpectedly and the seating posture of the occupant becomes unstable, resulting in an accident.*

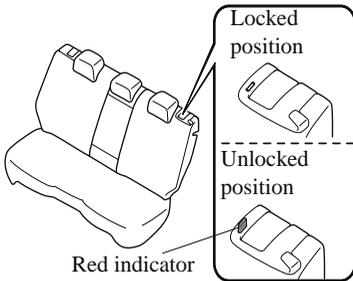

### **CAUTION**


*When adjusting the seatback, always support the seatback with your hand. If the seatback is not supported by your hand, it will move suddenly and could cause injury.*

#### **NOTE**

*When you adjust the left seatback, the centre seatback moves at the same time.*


The left and right seatbacks of the rear seat can be adjusted separately.

Recline the seatback with the lever pulled up.



## ▼ Armrest\*

The rear armrest in the centre of the rear seatback can be used (no occupant in the centre seat) or placed upright.



### **WARNING**

**Never put your hands and fingers around the moving parts of the seat and armrest:**

*Putting your hands and fingers around the moving parts of the seat and armrest is dangerous as they could get injured.*

## Head Restraints

Your vehicle is equipped with head restraints on all outboard seats and the rear centre seat. The head restraints are intended to help protect you and the passengers from neck injury.


### **WARNING**

***Always drive with the head restraints installed when seats are being used and make sure they are properly adjusted. In addition, always raise the head restraints on the rear outboard seats when they are being used:***

*Driving with the head restraints adjusted too low or removed is dangerous. With no support behind your head, your neck could be seriously injured in a collision.*

### ▼ Height Adjustment


Adjust the head restraint so that the centre is even with the top of the passenger's ears.




To raise a head restraint, pull it up to the desired position.

To lower the head restraint, press the stop-catch release, then push the head restraint down.


### Front seats



### Rear outboard seats



### Rear centre seat



# Seats

---

## ▼ Removal/Installation

To remove the head restraint, pull it up while pressing the stop-catch.

To install the head restraint, insert the legs into the holes while pressing the stop-catch.

### **WARNING**

***Always drive with the head restraints installed when seats are being used and make sure they are properly installed:***

*Driving with the head restraints not installed is dangerous. With no support behind your head, your neck could be seriously injured in a collision.*

***After installing a head restraint, try lifting it to make sure that it does not pull out:***

*Driving with an unsecured head restraint is dangerous as the effectiveness of the head restraint will be compromised which could cause it to unexpectedly detach from the seat.*

### **CAUTION**

- *When installing a head restraint, make sure that it is installed correctly with the front of the head restraint facing forward. If the head restraint is installed incorrectly, it could detach from the seat during a collision and result in injury.*
- *The head restraints on each of the front and rear seats are specialized to each seat. Do not switch around the head restraint positions. If a head restraint is not installed to its correct seat position, the effectiveness of the head restraint during a collision will be compromised which could cause injury.*

# Seat Warmer/Seat Ventilation/Heated Steering Wheel


## Seat Warmer\*

The front/rear seats are electrically heated. The ignition must be switched ON. Press the seat warmer switch while the ignition is switched ON to operate the seat warmer. The indicator lights turn on to indicate that the seat warmer is operating. The mode changes as follows each time the seat warmer switch is pressed. When using the rear seat warmer, fold the armrest forward.


Refer to Armrest on page 2-20.

### Front


#### (Manual Air-Conditioning)

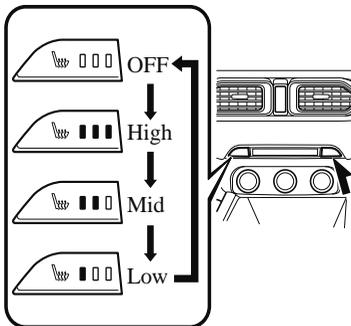

#### (Fully Automatic Air-Conditioning)

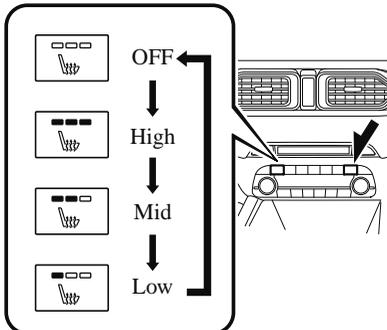

### Rear\*



## ⚠ WARNING

### **Be careful when using the seat warmer:**

The heat from the seat warmer may be too hot for some people, as indicated as follows, and could cause a low-temperature burn.

- Infants, small children, elderly people, and physically challenged people
- People with delicate skin
- People who are excessively fatigued
- People who are intoxicated
- People who have taken sleep-inducing medicine such as sleeping pills or cold medicine

### **Do not use the seat warmer with anything having high moisture-retention ability such as a blanket or cushion on the seat:**

The seat may be heated excessively and cause a low-temperature burn.

### **Do not use the seat warmer even when taking a short nap in the vehicle:**

The seat may be heated excessively and cause a low-temperature burn.

## Seat Warmer/Seat Ventilation/Heated Steering Wheel

**Do not place heavy objects with sharp projections on the seat, or insert needles or pins into it:**

*This could cause the seat to become excessively heated and result in injury from a minor burn.*

### **CAUTION**

➤ **(Rear)**

*Before folding a rear seatback, make sure that the rear seat warmer switch is off. If a rear seatback is folded while the rear seat warmer is in operation, it may heat the seat excessively and damage the seat surface.*

➤ *Do not use organic solvents to clean the seat. It may damage the seat surface and the heater.*


### **NOTE**

- *Use the seat warmer when the engine is running. Leaving the seat warmer on for long periods with the engine not running could cause the battery power to be depleted.*
- *When the engine is stopped while the seat warmers are operating and then the ignition is switched ON, the seat warmers will not turn back on automatically. To turn the seat warmers back on, press the switch. In addition, the seat warmer operation stops automatically after the seat warmers have operated for about 90 minutes.*
- **(Vehicles with seat ventilation)**  
*The front seat warmer cannot be used at the same time as the seat ventilation.*

## Seat Ventilation\*

The seat ventilation uses fans installed in the seats to draw air around the seat surface and ventilate them. The ignition must be switched ON.

Press the seat ventilation switch while the ignition is switched ON to operate the seat ventilation. The indicator lights turn on to indicate that the seat ventilation is operating. The mode changes as follows each time the seat ventilation switch is pressed.

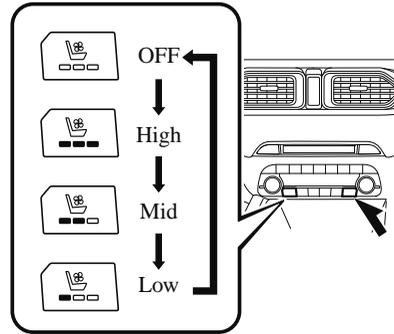

### **CAUTION**

- *Do not use organic solvents to clean the seat. It may damage the seat surface and the seat ventilation parts.*
- *Do not place heavy objects with sharp projections on the seat, or insert needles or pins into it.*

### **NOTE**


- *Use the seat ventilation when the engine is running. Leaving the seat ventilation on for long periods with the engine not running could cause the battery power to be depleted.*

# Seat Warmer/Seat Ventilation/Heated Steering Wheel

- *When the engine is stopped while the seat ventilations are operating and then the ignition is switched ON, the seat ventilations will not turn back on automatically.*
- **(Vehicles with front seat warmer)**  
*The seat ventilation cannot be used at the same time as the front seat warmer.*

## Heated Steering Wheel\*

The grips on the left and right of the steering wheel can be warmed up.

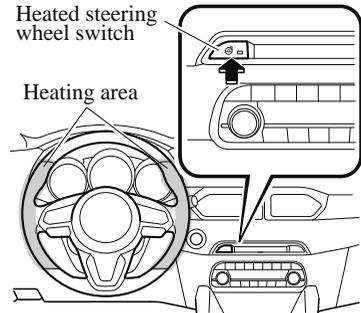

The ignition must be switched ON.

Press the switch to turn on the heated steering wheel. The heated steering wheel operates for about 30 minutes and then turns off automatically.

The indicator light illuminates when the heater is operating.

To turn off the heated steering wheel before the 30 minutes has elapsed, press the switch again.

### CAUTION

*The following types of persons should be careful not to touch the steering wheel. Otherwise, it could cause a low-temperature burn.*

- *Infants, small children, elderly people, and physically challenged people*
- *People with delicate skin*
- *People who are excessively fatigued*
- *People who are intoxicated*
- *People who have taken sleep-inducing medicine such as sleeping pills or cold medicine*

## Seat Belt Precautions

Seat belts help to decrease the possibility of severe injury during accidents and sudden stops. Mazda recommends that the driver and all passengers always wear seat belts. All the seats have lap/shoulder belts. These belts also have retractors with inertia locks that keep them out of the way when not in use. The locks allow the belts to remain comfortable on users, but they will lock in position during a collision.

### **WARNING**

***Always wear your seat belt and make sure all occupants are properly restrained:***

*Not wearing a seat belt is extremely dangerous. During a collision, occupants not wearing seat belts could hit someone or things inside the vehicle or even be thrown out of the vehicle. They could be seriously injured or even killed. In the same collision, occupants wearing seat belts would be much safer.*

***Do not wear twisted seat belts:***

*Twisted seat belts are dangerous. In a collision, the full width of the belt is not available to absorb the impact. This puts more force on the bones beneath the belt, which could cause serious injury or death. So, if your seat belt is twisted, you must straighten the seat belt to remove any twists and to allow the full width of the belt to be used.*

***Never use one seat belt on more than one person at a time:***

*Using one seat belt for more than one person at a time is dangerous. A seat belt used in this way cannot spread the impact forces properly and the two passengers could be crushed together and seriously injured or even killed. Never use one belt for more than one person at a time and always operate the vehicle with each occupant properly restrained.*

***Do not operate a vehicle with a damaged seat belt:***

*Using a damaged seat belt is dangerous. An accident could damage the belt webbing of the seat belt in use. A damaged seat belt cannot provide adequate protection in a collision. Have an expert repairer (we recommend an Authorised Mazda Repairer) inspect all seat belt systems in use during an accident before they are used again.*

***Have your seat belts changed immediately if the pretensioner or load limiter has been expended:***

*Always have an expert repairer (we recommend an Authorised Mazda Repairer) immediately inspect the seat belt pretensioners and air bags after any collision. Like the air bags, the seat belt pretensioners and load limiters will only function once and must be replaced after any collision that caused them to deploy. If the seat belt pretensioners and load limiters are not replaced, the risk of injury in a collision will increase.*

**Positioning the Shoulder Portion of the Seat Belt:**

*Improper positioning of the shoulder portion of the seat belt is dangerous. Always make sure the shoulder portion of the seat belt is positioned across your shoulder and near your neck, but never under your arm, on your neck, or on your upper arm.*

**Positioning the Lap Portion of the Seat Belt:**

*The lap portion of the seat belt worn too high is dangerous. In a collision, this would concentrate the impact force directly on the abdominal area, causing serious injury. Wear the lap portion of the belt snugly and as low as possible.*

*In a rollover crash, an unbelted person is significantly more likely to die than a person wearing a seat belt.*

**Instructions for Use of Seat Belt Assemblies:**

*Seatbelts are designed to bear upon the bony structure of the body, and should be worn low across the front of the pelvis or the pelvis, chest and shoulders, as applicable; wearing the lap section of the belt across the abdominal area must be avoided.*

*Seatbelts should be adjusted as firmly as possible, consistent with comfort, to provide the protection for which they have been designed. A slack belt will greatly reduce the protection afforded to the wearer.*

*Care should be taken to avoid contamination of the webbing with polishes, oils and chemicals, and particularly battery acid. Cleaning may safely be carried out using mild soap and water. The belt should be replaced if webbing becomes frayed, contaminated or damaged.*

*It is essential to replace the entire assembly after it has been worn in a severe impact even if damage to the assembly is not obvious.*

*Belts should not be worn with straps twisted.*

*Each belt assembly must only be used by one occupant; it is dangerous to put a belt around a child being carried on the occupant's lap.*


*No modifications or additions should be made by the user which will either prevent the seat belt adjusting devices from operating to remove slack, or prevent the seat belt assembly from being adjusted to remove slack.*

# Seat Belt Systems

---

**⚠ CAUTION**

*Belt retraction may become difficult if the belts and rings are soiled, so try to keep them clean. For more details about cleaning the seat belts, refer to "Seat Belt Maintenance" (page 6-70).*



### ▼ Pregnant Women and Persons with Serious Medical Conditions

Pregnant women should always wear seat belts. Ask your doctor for specific recommendations.

The lap belt should be worn **SNUGLY AND AS LOW AS POSSIBLE OVER THE HIPS**. The shoulder belt should be worn across your shoulder properly, but never across the stomach area.

Persons with serious medical conditions also should wear seat belts. Check with your doctor for any special instructions regarding specific medical conditions.



### ▼ Emergency Locking Mode


When the seat belt is fastened, it will always be in the emergency locking mode.

In the emergency locking mode, the belt remains comfortable on the occupant and the retractor will lock in position during a collision.


If the belt is locked and cannot be pulled out, retract the belt once, and then try pulling it out slowly. If this fails, pull the belt strongly 1 time and loosen, then pull it out again slowly.

## Seat Belt


### ▼ Fastening the Seat Belt



Position the lap belt as low as possible, not on the abdominal area, then adjust the shoulder belt so that it fits snugly against your body.

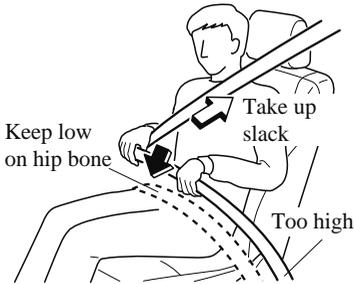


Before fastening the rear seat belt, make sure that the seat belt passes through the seat belt guide correctly and it is not twisted.



### ▼ Unfastening the Seat Belt

Depress the button on the seat belt buckle. If the belt does not fully retract, pull it out and check for kinks or twists. Then make sure it remains untwisted as it retracts.




#### **NOTE**

*If a belt does not fully retract, inspect it for kinks and twists. If it is still not retracting properly, have it inspected at an expert repairer (we recommend an Authorised Mazda Repairer).*

# Seat Belt Systems

---

## ▼ Front Shoulder Belt Adjuster



Make sure the adjuster is locked.

## Seat Belt Warning Systems

If it detects that the occupant seat belt is unfastened, the warning light or beep alerts the occupant.

Refer to Taking Action on page 7-55.

Refer to Seat Belt Warning Beep on page 7-65.

### Seat belt indicator light (rear seat) (green)

# REAR



The light turns on when the ignition is switched ON and a rear seat belt is fastened, and then it turns off after 60 seconds.

## Seat Belt Pretensioner and Load Limiting Systems

For optimum protection, the front seat belts and rear outboard seat belts\* are equipped with pretensioner and load limiting systems. For both these systems to work properly you must wear the seat belt properly.

### **Pretensioners:**

When a collision is detected, the pretensioners deploy simultaneously with the air bags.

#### **(With roll-over sensor)**

The pretensioners deploy simultaneously with the air bags when a roll-over is also detected.

For deployment details, refer to the SRS Air Bag Deployment Criteria (page 2-65).

The seat belt retractors remove slack quickly as the air bags are expanding. Any time the air bags and seat belt pretensioners have fired they must be replaced.

A system malfunction or operation conditions are indicated by a warning. Refer to Taking Action on page 7-55.

Refer to Air Bag/Seat Belt Pretensioner System Warning Beep on page 7-65.

#### **(With Front Passenger Occupant Classification System)**

In addition, the pretensioner system for the front passenger, like the front and side passenger air bag, is designed to only deploy when the front passenger occupant classification sensor detects a passenger sitting on the front passenger's seat.

For details, refer to the front passenger occupant classification sensor (page 2-69).

### **Load limiter:**

The load limiting system releases belt webbing in a controlled manner to reduce belt force on the occupant's chest. While the most severe load on a seat belt occurs in frontal collisions, the load limiter has an automatic mechanical function and can activate in any accident mode with sufficient occupant movement. Even if the pretensioners have not fired, the load limiting function must be checked by an expert repairer (we recommend an Authorised Mazda Repairer).



### ***Wear seat belts only as recommended in this owner's manual:***

*Incorrect positioning of the seat belts is dangerous. Without proper positioning, the pretensioner and load limiting systems cannot provide adequate protection in an accident and this could result in serious injury. For more details about wearing seat belts, refer to "Fastening the Seat Belt" (page 2-29).*

## Seat Belt Systems

---

***Have your seat belts changed immediately if the pretensioner or load limiter has been expended:***

*Always have an expert repairer (we recommend an Authorised Mazda Repairer) immediately inspect the seat belt pretensioners and air bags after any collision. Like the air bags, the seat belt pretensioners and load limiters will only function once and must be replaced after any collision that caused them to deploy. If the seat belt pretensioners and load limiters are not replaced, the risk of injury in a collision will increase.*

***Do not modify the components or wiring, or use electronic testing devices on the pretensioner system:***

*Modifying the components or wiring of the pretensioner system, including the use of electronic testing devices is dangerous. You could accidentally activate it or make it inoperable which would prevent it from activating in an accident. The occupants or repairers could be seriously injured.*

***Properly dispose of the pretensioner system:***

*Improper disposal of the pretensioner system or a vehicle with non-deactivated pretensioners is dangerous. Unless all safety procedures are followed, injury could result. Have an expert repairer (we recommend an Authorised Mazda Repairer) safely dispose of the pretensioner system or scrap a pretensioner system equipped vehicle.*

***NOTE***

- The pretensioner system may not operate depending on the type of the collision. For details, refer to the SRS Air Bag Deployment Criteria (page 2-65).*
- Some smoke (non-toxic gas) will be released when the air bags and pretensioners deploy. This does not indicate a fire. This gas normally has no effect on occupants, however, those with sensitive skin may experience light skin irritation. If residue from the deployment of the air bags or the pretensioner system gets on the skin or in the eyes, wash it off as soon as possible.*

## Child-Restraint Precautions

Mazda strongly urges the use of child-restraint systems for children small enough to use them.

Mazda recommends use of a Mazda genuine child-restraint system or one that complies with the UN-R \*1 44 or UN-R 129 regulation. If you would like to purchase a Mazda genuine child-restraint system, please contact an expert repairer (we recommend an Authorised Mazda Repairer).

Check your local and state or provincial laws for specific requirements regarding the safety of children riding in your vehicle.

\*1 UN-R stands for United Nations Regulation.

Whatever child-restraint system you consider, please pick the appropriate one for the age and size of the child, obey the law and follow the instructions that come with the individual child-restraint system.

A child who has outgrown child-restraint systems should sit in the rear and use seat belts.

The child-restraint system should be installed on the rear seat.

Statistics confirm that the rear seat is the best place for all children up to 12 years of age-the more so with a supplementary restraint system (air bags).

A rear-facing child-restraint system should **NEVER** be used in the front passenger seat with the air bag system activated. The front passenger's seat is also the least preferred seat for other child-restraint systems.

### **(With Front Passenger Occupant Classification System)**

To reduce the chance of injuries caused by deployment of the front passenger air bag, the front passenger occupant classification sensor works as a part of the supplementary restraint system. This system deactivates the front passenger front and side air bags and also the front

## Child Restraint

---

passenger seat belt pretensioner system when the front passenger air bag deactivation OFF indicator light illuminates.

When an infant or small child sits on the front passenger seat, the system shuts off the front passenger front and side air bags and seat belt pretensioner system, so make sure the front passenger air bag deactivation OFF indicator light illuminates.

Even if the front passenger air bag is shut off, Mazda strongly recommends that children be properly restrained and child-restraint systems of all kinds are properly secured on the rear seats which are the best place for children.

For more details, refer to "Front passenger occupant classification sensor" (page 2-69).



**Use the correct size child-restraint system:**

*For effective protection in vehicle accidents and sudden stops, a child must be properly restrained using a seat belt or child-restraint system depending on age and size. If not, the child could be seriously injured or even killed in an accident.*

**Follow the manufacturer's instructions and always keep the child-restraint system buckled down:**

*An unsecured child-restraint system is dangerous. In a sudden stop or a collision it could move causing serious injury or death to the child or other occupants. Make sure any child-restraint system is properly secured in place according to the child-restraint system manufacturer's instructions. When not in use, remove it from the vehicle or fasten it with a seat belt, or latch it down to BOTH ISOFIX anchors, and attach the corresponding tether anchor.*

**Always secure a child in a proper child-restraint system:**

*Holding a child in your arms while the vehicle is moving is extremely dangerous. No matter how strong the person may be, he or she cannot hold onto a child in a sudden stop or collision and it could result in serious injury or death to the child or other occupants. Even in a moderate accident, the child may be exposed to air bag forces that could result in serious injury or death to the child, or the child may be slammed into an adult, causing injury to both child and adult.*

**Extreme Hazard! Never use a rear-facing child-restraint system on the front passenger seat with an air bag that could deploy:**

*NEVER use a rearward facing child restraint on a seat protected by an ACTIVE AIRBAG in front of it, DEATH or SERIOUS INJURY to the CHILD can occur.*

Vehicles with a front passenger air bag have the following warning label. The warning label reminds you not to put a rear-facing child-restraint system on the front passenger seat at any time.

(Taiwan Only)

依規定前排座椅禁止乘載嬰兒、幼童及兒童。

(Europe and other countries  
(Except Taiwan))



(Taiwan only)



Even in a moderate collision, the child-restraint system can be hit by a deploying air bag and moved violently backward resulting in serious injury or death to the child.



(Taiwan, except front passenger seat, if equipped with the following label)

NEVER use a rearward facing child restraint on a seat protected by an ACTIVE AIRBAG in front of it, DEATH or SERIOUS INJURY to the CHILD can occur.



## Child Restraint

---

**Do not install a front-facing child-restraint system on the front passenger seat unless it is unavoidable:**

In a collision, the force of a deploying air bag could cause serious injury or death to the child. If installing a front-facing child-restraint system on the front passenger seat is unavoidable, move the front passenger seat as far back as possible and adjust the seat bottom (height adjustable seat bottom) to the highest position at which the seat belt fastening the child-restraint system is securely tightened.



**Seating a child in a child-restraint system on the front passenger seat is dangerous under certain conditions (With Front Passenger Occupant Classification System):**

Your vehicle is equipped with front passenger occupant classification sensor. Even with the front passenger occupant classification sensor, if you must use the front passenger seat to seat a child, using a child-restraint system on the front passenger seat under the following conditions increases the danger of the front passenger air bag deploying and could result in serious injury or death to the child.

- The front passenger air bag deactivation OFF indicator light does not illuminate when seating a child in the child-restraint system.
- Luggage or other items are placed on the seat with the child in the child-restraint system.
- A rear passenger or luggage pushing or pulling down on the front passenger seatback.
- Luggage or other items are placed on the seatback or hung on the head restraint.
- The seat is washed.
- Liquids are spilled on the seat.
- The front passenger seat is moved backward, pushing into luggage or other items placed behind it.
- The front passenger seatback contacts the rear seat.
- Luggage or other items are placed between the front passenger seat and driver seat.
- An electric device is put on the front passenger's seat.
- An additional electrical device, such as a seat warmer is installed to the surface of the front passenger seat.

The designated positions with seat belts on the rear seats are the safest places for children. Always use seat belts and child restraints.

***Do not allow a child or anyone to lean over to or against the side window of a vehicle with side and curtain air bags:***

*It is dangerous to allow anyone to lean over to or against the side window, the area of the front passenger seat, the front and rear window pillars and the roof edge along both sides from which the side and curtain air bags deploy, even if a child-restraint system is used. The impact of inflation from a side or curtain air bag could cause serious injury or death to an out of position child. Furthermore, leaning over to or against the door could block the side and curtain air bags and eliminate the advantages of supplementary protection. Because the front seats are equipped with front air bags, the rear seat is always a better location for children. Take special care not to allow a child to lean over to or against the side window, even if the child is seated in a child-restraint system.*

***Never use one seat belt on more than one person at a time:***

*Using one seat belt for more than one person at a time is dangerous. A seat belt used in this way cannot spread the impact forces properly and the two passengers could be crushed together and seriously injured or even killed. Never use one belt for more than one person at a time and always operate the vehicle with each occupant properly restrained.*

***Use the tether and tether anchor only for a child-restraint system:***

*Child-restraint system anchorages are designed to withstand only those loads imposed by correctly installed child-restraint systems. Under no circumstances are they to be used for adult seat belts, harnesses, or for attaching other items or equipment to the vehicle.*

***Always remove the head restraint and install child-restraint system (except when installing a booster seat):***

*Installing a child-restraint system without removing the head restraint is dangerous. The child-restraint system cannot be installed correctly which may result in death or injury to the child in a collision.*



*A seat belt or child-restraint system can become very hot in a closed vehicle during warm weather. To avoid burning yourself or a child, check them before you or your child touches them.*

***NOTE***

*Your Mazda is equipped with ISOFIX anchors for attachment of ISOFIX child-restraint systems on the rear seats. When using these anchors to secure a child-restraint system, refer to “Using ISOFIX Anchor” (page 2-49).*

**Child-Restraint System Installation****▼ Categories of Child-Restraint Systems****NOTE**

When purchasing, ask the manufacturer of the child-restraint system which type of child-restraint system is appropriate for your child and vehicle.

**(Europe and countries conforming to the UN-R 44 and UN-R 129 regulation)**

Child-restraint systems are classified into the following 5 groups according to the UN-R 44 and UN-R 129 regulation.

Group	Age	Weight	Size Classification/ Fixture (CRF)
0	Up to about 9 months old	Up to 10 kg (up to 22 lb)	ISO/L1
			ISO/L2
			ISO/R1
0+	Up to about 2 years old	Up to 13 kg (up to 29 lb)	ISO/R1
			ISO/R2
			ISO/R3
1	About 8 months to 4 years old	9 kg — 18 kg (20 lb — 40 lb)	ISO/R2
			ISO/R3
			ISO/F2
			ISO/F2X
2	About 3 to 7 years old	15 kg — 25 kg (33 lb — 55 lb)	ISO/F3
			—
3	About 6 to 12 years old	22 kg — 36 kg (48 lb — 79 lb)	—

**(Other countries)**

Please comply with the legal regulations concerning the use of child-restraint systems in your country.

### ▼ Child-Restraint System Types

#### **(Europe and countries conforming to the UN-R 44 and UN-R 129 regulation)**

In this owner's manual, explanation of child-restraint systems secured with seat belts is provided for the following 3 types of popular child-restraint systems: baby seat, child seat, junior seat.


#### **NOTE**

- Installation position is determined by the type of child-restraint system. Always read the manufacturer's instructions and this owner's manual carefully.
- Due to variations in the design of child-restraint systems, vehicle seats and seat belts, all child-restraint systems may not fit all seating positions. Before purchasing a child-restraint system, it should be tested in the specific vehicle seating position (or positions) where it is intended to be used. If a previously purchased child-restraint system does not fit, you may need to purchase a different one that will.

#### **Baby seat**

Equal to Group 0 and 0+ of the UN-R 44 and UN-R 129 regulation.

Recommended child-restraint system:  
Britax Römer BABY-SAFE 2 i-SIZE and i-SIZE FLEX BASE



#### **Child seat**

Equal to Group 1 of the UN-R 44 and UN-R 129 regulation.

Recommended child-restraint system:  
Britax Römer Duo Plus




#### **Junior seat**

Equal to Group 2 and 3 of the UN-R 44 and UN-R 129 regulation.

Recommended child-restraint system:  
Britax Römer KIDFIX 2 R

When using the KIDFIX 2 R, make sure that the lap belt passes through the lap belt guide (SecureGuard).

For details on use, refer to the user manual accompanying the KIDFIX 2 R.



\*1

When using a booster seat, always install the vehicle head restraint to the seat where the booster seat is installed.


# Child Restraint

## (Other countries)

Please comply with the legal regulations concerning the use of child-restraint systems in your country.

### ▼ Baby Seat Installation Position

A baby seat is used in the rear-facing position only.



Refer to the table, “Child-Restraint System Suitability for Various Seat Positions” for baby seat installation position (page 2-43).




### **Always install a baby seat in the correct seat position:**

*Installing a baby seat without first consulting the table “Child-Restraint System Suitability for Various Seat Positions” is dangerous. A baby seat installed on the wrong seat position cannot be properly secured. In a collision, the child could hit something or someone in the vehicle and be seriously injured or even killed.*

### **Never use a rear-facing child-restraint system on the front passenger seat protected by an air bag:**

*NEVER use a rearward facing child restraint on a seat protected by an ACTIVE AIRBAG in front of it, DEATH or SERIOUS INJURY to the CHILD can occur.*

*The child-restraint system can be hit by the deploying air bag and knocked out of position. A child in the child-restraint system could be seriously injured or killed.*



### ▼ Child Seat Installation Position

A child seat is used in front-facing and rear-facing positions depending on the age and size of the child. When installing, follow the manufacturer's instructions in accordance with the appropriate age and size of the child as well as the directions for installing the child-restraint system. Refer to the table, “Child-Restraint System Suitability for Various Seat Positions” for child seat installation position (page 2-43).

## Rear-facing type




### **Always install a rear-facing child seat in the correct seat position:**

Installing a rear-facing child seat without first consulting the table "Child-Restraint System Suitability for Various Seat Positions" is dangerous. A rear-facing child seat installed on the wrong seat position cannot be properly secured. In a collision, the child could hit something or someone in the vehicle and be seriously injured or even killed.

### **Never use a rear-facing child-restraint system on the front passenger seat protected by an air bag:**

NEVER use a rearward facing child restraint on a seat protected by an ACTIVE AIRBAG in front of it, DEATH or SERIOUS INJURY to the CHILD can occur.

The child-restraint system can be hit by the deploying air bag and knocked out of position. A child in the child-restraint system could be seriously injured or killed.



## Front-facing type



### **Never install a front-facing child seat in the wrong seat position:**

Installing a front-facing child seat without first consulting the table "Child-Restraint System Suitability for Various Seat Positions" is dangerous. A front-facing child seat installed in the wrong seat position cannot be properly secured. In a collision, the child could hit something or someone in the vehicle and be seriously injured or even killed.

### **Do not install a front-facing child-restraint system on the front passenger seat unless it is unavoidable:**

In a collision, the force of a deploying air bag could cause serious injury or death to the child. If installing a front-facing child-restraint system on the front passenger seat is unavoidable, move the front passenger seat as far back as possible and adjust the seat bottom (height adjustable seat bottom) to the highest position at which the seat belt fastening the child-restraint system is securely tightened.




# Child Restraint

## ▼ Junior Seat Installation Position

A junior seat is used in the front-facing position only.

We recommend the use of the junior seat with backrest to allow simple adjustment of the shoulder belt position and to give your child the best protection.

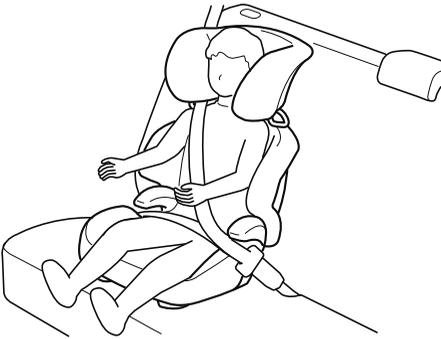

Refer to the table, “Child-Restraint System Suitability for Various Seat Positions” for junior seat installation position (page 2-43).

### **WARNING**

#### **Always install a junior seat in the correct seat position:**

*Installing a junior seat without first consulting the table “Child-Restraint System Suitability for Various Seat Positions” is dangerous. A junior seat installed on the wrong seat position cannot be properly secured. In a collision, the child could hit something or someone in the vehicle and be seriously injured or even killed.*

#### **Do not install a front-facing child-restraint system on the front passenger seat unless it is unavoidable:**

*In a collision, the force of a deploying air bag could cause serious injury or death to the child. If installing a front-facing child-restraint system on the front passenger seat is unavoidable, move the front passenger seat as far back as possible and adjust the seat bottom (height adjustable seat bottom) to the highest position at which the seat belt fastening the child-restraint system is securely tightened.*



## **Child-Restraint System Suitability for Various Seat Positions Table**

### **(Europe and countries conforming to the UN-R 16 regulation)**

Provided information in the table shows your child-restraint system suitability for various seating position. For installation suitability of other manufacturer child-restraint system, carefully consult the manufacturer's instructions which accompany the child-restraint system.

When installing a child-restraint system, the following points must be observed:

- Always remove the head restraint before installing a child-restraint system. However, when installing a booster seat, always install the vehicle head restraint to the seat where the booster seat is installed. In addition, always use a tether strap and attach it securely. Refer to Head Restraints on page 2-21.
- When installing a child-restraint system to the front passenger seat, adjust the seat slide position as far back as possible. Adjust the seat bottom to the highest position so that the seat belt can securely fasten the child-restraint system. Refer to Adjusting the Front Passenger's Seat on page 2-14.
- When it is difficult to install a child-restraint system to the front passenger seat, or the seat belt cannot be secured to the child-restraint system, perform the following operations to adjust the seat holding the child-restraint system so that the seat belt can be secured completely to it.
  - Move the seat forward or back.
  - Move the seatback forward or back.
  - Move the seat upward or downward. (Vehicles with height adjustment function)
- When installing a child-restraint system to the rear seat, adjust the front seat position so that the front seat does not contact the child-restraint system. Refer to Adjusting the Driver's Seat on page 2-5. Refer to Adjusting the Front Passenger's Seat on page 2-14.
- When installing a child-restraint system came equipped with a tether, remove the head restraint. Refer to Head Restraints on page 2-21.
- An i-Size child-restraint system refers to a child-restraint system which has acquired i-Size category certification for the UN-R 129 regulation.

When installing a child-restraint system to the rear seat, refer to the child-restraint system manufacturer's instructions and the Using ISOFIX Anchor on page 2-49.

# Child Restraint

## Europe and other countries (Except Taiwan)

Seating position	Passenger		Rear (Left)	Rear (Centre)	Rear (Right)
	Airbag activated	Airbag de-activated			
Seating position suitable for universal belted (Yes/No)	No	No	Yes (U)	No	Yes (U)
i-Size seating position (Yes/No)	No	No	Yes (i-U)	No	Yes (i-U)
Largest suitable rearward facing fixture (R1)	No	No	Yes (IL)	No	Yes (IL)
Largest suitable rearward facing fixture (R2)	No	No	Yes (IL)	No	Yes (IL)
Largest suitable rearward facing fixture (R2X)	No	No	Yes (IL)	No	Yes (IL)
Largest suitable rearward facing fixture (R3)	No	No	Yes (IL)	No	Yes (IL)
Largest suitable forward facing fixture (F2)	No	No	Yes (IUF)	No	Yes (IUF)
Largest suitable forward facing fixture (F2X)	No	No	Yes (IUF)	No	Yes (IUF)
Largest suitable forward facing fixture (F3)	No	No	Yes (IUF)	No	Yes (IUF)
Largest suitable lateral facing fixture (L1)	No	No	No	No	No
Largest suitable lateral facing fixture (L2)	No	No	No	No	No
Largest suitable booster fixture (B2)	No	No	Yes (IUF)	No	Yes (IUF)
Largest suitable booster fixture (B3)	No	No	Yes (IUF)	No	Yes (IUF)

Seating position	Passenger		Rear (Left)	Rear (Centre)	Rear (Right)
	Airbag activated	Airbag de-activated			
Non i-size compatible with a support leg (Yes/No)	No	Yes	Yes	No	Yes
Lower ISOFIX anchorages but without Top Tether (Yes/No)	No	No	No	No	No

U = Suitable for “universal” category restraints approved for use in this mass group.

UF = Suitable for forward-facing “universal” category restraints approved for use in this mass group.

IUF = Suitable for ISOFIX forward child restraints systems of universal category approved for use in the mass group.

L = Suitable for particular child restraints given on attached list. These restraints may be of the “specific vehicle”, “restricted” or “semi-universal” categories.\*1

IL = Suitable for particular ISOFIX child restraint systems (CRS) given in the attached list. These ISOFIX CRS are those of the “specific vehicle”, “restricted” or “semi-universal” categories.\*1

i-U = Suitable for i-Size “universal” Child Restraint Systems forward and rearward facing.

i-UF = Suitable for forward-facing i-Size “universal” Child Restraint Systems only.

Yes = Child-restraint system can be secured on the seat.

No = Child-restraint system cannot be secured on the seat, or there is no fixture.

X = Child-restraint system cannot be installed.

\*1A Mazda genuine child-restraint system can be installed. Regarding child-restraint systems which can be installed, refer to Child-Restraint System Types on page 2-39 or the accessories catalog.

The manufacturer will also recommend a suitable ISOFIX child restraint system. For this, your vehicle and the seat must be listed on the child restraint system manufacturer's model list.

For more information, contact the child restraint system manufacturer or visit the manufacturer's website.

### Taiwan Only

### ISOFIX anchor-secured child-restraint systems

Mass group	Size Class	Fixture	Seat Positions		
			Vehicle ISOFIX positions	Rear seat (centre)	Front passenger seat (outboard)
			Rear seat (out-board)		
Carrycot	F	ISO/L1	X	X	X
	G	ISO/L2	X	X	X
		(1)	X	X	X
GROUP 0 Up to 10 kg (up to 22 lb)	E	ISO/R1	IL	X	X
		(1)	X	X	X

# Child Restraint

Mass group	Size Class	Fixture	Seat Positions		
			Vehicle ISOFIX positions	Rear seat (centre)	Front passenger seat (outboard)
			Rear seat (outboard)		
GROUP 0+ Up to 13 kg (up to 29 lb)	E	ISO/R1	IL	X	X
	D	ISO/R2	IL	X	X
	C	ISO/R3	IL	X	X
		(1)	X	X	X
GROUP 1 9 kg — 18 kg (20 lb — 40 lb)	D	ISO/R2	IL	X	X
	C	ISO/R3	IL	X	X
	B	ISO/F2	IUF	X	X
	B1	ISO/F2X	IUF	X	X
	A	ISO/F3	IUF	X	X
		(1)	X	X	X
GROUP 2 15 kg — 25 kg (33 lb — 55 lb)		(1)	IL	X	X
GROUP 3 22 kg — 36 kg (48 lb — 79 lb)		(1)	IL	X	X

(1) For the CRS which do not carry the ISO/XX size class identification (A to G), for the applicable mass group, the car manufacturer shall indicate the vehicle specific ISOFIX child-restraint system(s) recommended for each position.

Key of letters to be inserted in the above table:

IUF = suitable for ISOFIX forward child-restraints systems of universal category approved for use in this mass group.

IL = suitable for particular ISOFIX child-restraint systems (CRS).

These ISOFIX CRS are those of the “specific vehicle”, “restricted” or “semi-universal” categories.

\*1A Mazda genuine child-restraint system can be installed. Regarding child-restraint systems which can be installed, refer to Child-Restraint System Types on page 2-39 or the accessories catalog.

X = ISOFIX position not suitable for ISOFIX child-restraint systems in this mass group and/or this size class.

## i-Size child-restraint systems

An i-Size child-restraint system can be installed to the specified seat as follows:

	Front passenger seat	Rear seat (outboard)	Rear seat (centre)
i-Size child-restraint systems	X	X	X

Key of letters to be inserted in the above table:

X = Seating position not suitable for i-Size “universal” child-restraint systems.

**Seat belt-secured child-restraint systems**

System group	Age group	Weight group	Child-restraint system type	Front passenger seat	Rear seat (outboard)	Rear seat (centre)
GROUP 0	Up to about 9 months old	Up to 10 kg (up to 22 lb)	Baby seat	X	U	L
GROUP 0+	Up to about 2 years old	Up to 13 kg (up to 29 lb)	Baby seat	X	U	L
GROUP 1	About 8 months to 4 years old	9 kg — 18 kg (20 lb — 40 lb)	Child seat	X	U	X
GROUP 2	About 3 to 7 years old	15 kg — 25 kg (33 lb — 55 lb)	Junior seat	X	U	L
GROUP 3	About 6 to 12 years old	22 kg — 36 kg (48 lb — 79 lb)	Junior seat	X	U	L

Key of letters to be inserted in the above table:

U = Suitable for “universal” category restraints approved for use in this mass group.

L = A Mazda genuine child-restraint system can be installed. Regarding child-restraint systems which can be installed, refer to the accessories catalog.

X = Seat position not suitable for children in this mass group.

A child-restraint system with a support leg cannot be installed on the rear centre seat position.

**(Other countries)**

- Regarding child-restraint systems which can be installed to your Mazda, consult an expert repairer (we recommend an Authorised Mazda Repairer).
- A child-restraint system with a support leg cannot be installed on the rear centre seat position.
- Please comply with the legal regulations concerning the use of child-restraint systems in your country.

# Child Restraint

## Installing Child-Restraint Systems


### ▼ Anchor Bracket

Anchor brackets for securing child-restraint systems are equipped in the vehicle. Locate each anchor position using the illustration.

To install a child-restraint system, remove the head restraint. Always follow the instruction manual accompanying the child-restraint system.

### Anchor bracket location

Use the indicated anchor bracket locations when installing a child-restraint system equipped with a tether.

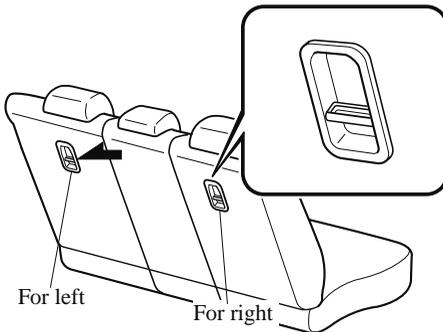


### **WARNING**

#### **Always attach the tether strap to the correct tether anchor position:**

*Attaching the tether strap to the incorrect tether anchor position is dangerous. In a collision, the tether strap could come off and loosen the child-restraint system. If the child-restraint system moves it could result in death or injury to the child.*

#### **Always remove the head restraint and install child-restraint system:**

*Installing a child-restraint system without removing the head restraint is dangerous. The child-restraint system cannot be installed correctly which may result in death or injury to the child in a collision.*

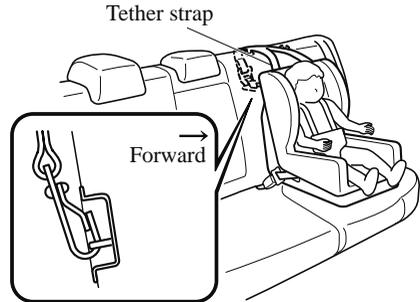

#### **Always install the head restraint and adjust it to the appropriate position after removing the child-restraint system:**

*Driving with the head restraint removed is dangerous as impact to the occupant's head cannot be prevented during emergency braking or in a collision, which could result in a serious accident, injury or death.*

*Refer to Head Restraints on page 2-21.*

### ▼ Using the Seat Belt

When installing a child-restraint system, follow the installation instructions included with the product.

In addition, remove the head restraint.

However, when installing a booster seat, always install the vehicle head restraint to the seat where the booster seat is installed.

▼ Using ISOFIX Anchor



**Follow the manufacturer's instructions for the use of the child-restraint system:**

*An unsecured child-restraint system is dangerous. In a sudden stop or a collision it could move causing serious injury or death to the child or other occupants. Make sure any child-restraint system is properly secured in place according to the manufacturer's instructions.*

**Make sure the child-restraint system is properly secured:**

*A child-restraint system that is not secured is dangerous. In a sudden stop or collision, it can become a projectile and hit someone, causing serious injury. When not in use, remove it from the vehicle, put it in the luggage compartment or at least make sure it is securely fastened to the ISOFIX anchors.*


**Make sure there are no seat belts or foreign objects near or around the ISOFIX anchor-secured child-restraint system:**

*Not following the child-restraint system manufacturer's instructions when installing the child-restraint system is dangerous. If seat belts or a foreign object prevent the child-restraint system from being securely attached to the ISOFIX anchors and the child-restraint system is installed improperly, the child-restraint system could move in a sudden stop or collision causing serious injury or death to the child or other occupants. When installing the child-restraint system, make sure there are no seat belts or foreign objects near or around the ISOFIX anchors. Always follow the child-restraint system manufacturer's instructions.*

1. First, adjust the front seat to allow clearance between the child-restraint system and the front seat.  
Refer to Adjusting the Driver's Seat on page 2-5.  
Refer to Adjusting the Front Passenger's Seat on page 2-14.
2. If the rear seat is reclined, return it to the upright position.
3. Make sure the seatback is securely latched by pushing it back until it is fully locked.

# Child Restraint

- Expand the seams on the rear of the seat bottom slightly to verify the locations of the ISOFIX anchor.

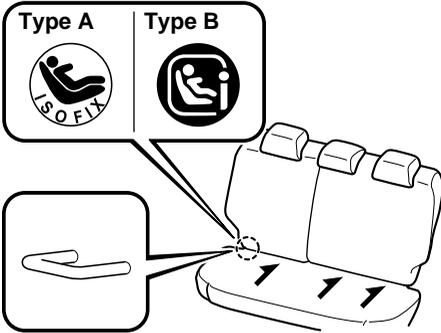

**NOTE**

· The markings above the ISOFIX anchors indicate the locations of the ISOFIX anchors for the attachment of a child-restraint system.

- Remove the head restraint. However, when installing a booster seat, always install the vehicle head restraint to the seat where the booster seat is installed. Refer to Head Restraints on page 2-21.
- Secure the child-restraint system using the ISOFIX anchor, following the child-restraint system manufacturer's instruction.
- If your child-restraint system came equipped with a tether, that probably means it is very important to properly secure the tether for child safety. Please carefully follow the child-restraint system manufacturer's instructions when installing tethers (page 2-48).


**⚠ WARNING**

**Always attach the tether strap to the correct tether anchor position:**

Attaching the tether strap to the incorrect tether anchor position is dangerous. In a collision, the tether strap could come off and loosen the child-restraint system. If the child-restraint system moves it could result in death or injury to the child.

**Always remove the head restraint and install child-restraint system (except when installing a booster seat):**

Installing a child-restraint system without removing the head restraint is dangerous. The child-restraint system cannot be installed correctly which may result in death or injury to the child in a collision.

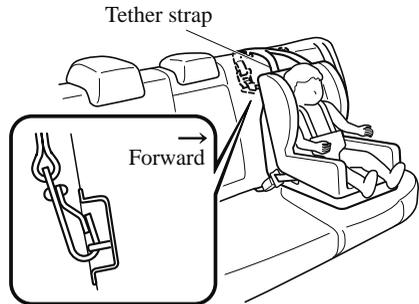

**Always install the head restraint and adjust it to the appropriate position after removing the child-restraint system:**

Driving with the head restraint removed is dangerous as impact to the occupant's head cannot be prevented during emergency braking or in a collision, which could result in a serious accident, injury or death.

*Refer to Head Restraints on page 2-21.*

## Supplementary Restraint System (SRS) Precautions

The front and side supplementary restraint systems (SRS) include different types of air bags. **Please verify the different types of air bags which are equipped on your vehicle by locating the “SRS AIRBAG” location indicators.** These indicators are visible in the area where the air bags are installed.

The air bags are installed in the following locations:

- The steering wheel hub (driver air bag)
- The front passenger instrument panel (front passenger air bag)
- The outboard sides of the front seatbacks (side air bags)
- The front and rear window pillars, and the roof edge along both sides (curtain air bags)

Some vehicles have a sensor which detects an impending roll-over accident.


The air bag supplementary restraint systems are designed to provide supplementary protection in certain situations so seat belts are always important in the following ways:

Without seat belt usage, the air bags cannot provide adequate protection during an accident. Seat belt usage is necessary to:

- Keep the occupant from being thrown into an inflating air bag.
- Reduce the possibility of injuries during an accident that is not designed for air bag inflation, such as rear impact.
- Reduce the possibility of injuries in frontal, near frontal or side collisions or roll-over accidents that are not severe enough to activate the air bags.
- Reduce the possibility of being thrown from your vehicle.
- Reduce the possibility of injuries to lower body and legs during an accident because the air bags provide no protection to these parts of the body.
- Hold the driver in a position which allows better control of the vehicle.

**If your vehicle is also equipped with a front passenger occupant classification system, refer to the Front Passenger Occupant Classification System (page 2-69) for details.**

If your vehicle is equipped with a front passenger occupant classification system, the front passenger air bag deactivation indicator light illuminates for a specified time after the ignition is switched ON.



A child who is too small to use a seat belt must be properly secured using a child-restraint system (page 2-33).

Carefully consider which child-restraint system is necessary for your child and follow the installation directions in this Owner's Manual as well as the child-restraint system manufacturer's instructions.

## **WARNING**

### ***Seat belts must be worn in air bag equipped vehicles:***

*Depending only on the air bags for protection during an accident is dangerous. Alone, air bags may not prevent serious injuries. The appropriate air bags can be expected to inflate only in the first accident, such as frontal, near frontal or side collisions or roll-over accidents that are at least moderate. Vehicle occupants should always wear seat belts.*

### ***Children should not ride in the front passenger seat:***

*Placing a child, 12 years or under, in the front seat is dangerous. The child could be hit by a deploying air bag and be seriously injured or even killed. A sleeping child is more likely to lean against the door and be hit by the side air bag in moderate collision to the front-passenger side of the vehicle. Whenever possible, always secure a child 12 years and under on the rear seats with an appropriate child-restraint system for the child's age and size.*


## SRS Air Bags

---

***Extreme Hazard! Never use a rear-facing child-restraint system on the front passenger seat with an air bag that could deploy:***

*NEVER use a rearward facing child restraint on a seat protected by an ACTIVE AIRBAG in front of it, DEATH or SERIOUS INJURY to the CHILD can occur.*

*Even in a moderate collision, the child-restraint system can be hit by a deploying air bag and moved violently backward resulting in serious injury or death to the child.*



***Do not sit too close to the driver and front passenger air bags:***

*Sitting too close to the driver and front passenger air bag modules or placing hands or feet on them is extremely dangerous. The driver and front passenger air bags inflate with great force and speed. Serious injuries could occur if someone is too close. The driver should always hold onto only the rim of the steering wheel. The front seat passenger should keep both feet on the floor. Front seat occupants should adjust their seats as far back as possible and always sit upright against the seatbacks with seat belts worn properly.*

***Sit in the centre of the seat and wear seat belts properly:***

*Sitting too close to the side air bag modules or placing hands on them, or sleeping up against the door or hanging out the windows is extremely dangerous. The side and curtain air bags inflate with great force and speed directly expanding along the door on the side the car is hit. Serious injury could occur if someone is sitting too close to the door or leaning against a window, or if rear seat occupants grab the sides of the front seatbacks. Give the side and curtain air bags room to work by sitting in the centre of the seat while the vehicle is moving with seat belts worn properly.*

**Do not attach objects on or around the area where air bags deploy:**

Attaching objects to the air bags or placing something in the area where the air bags deploy is dangerous. In an accident, an object could interfere with air bag inflation and injure the occupants. Furthermore, the bag could be damaged causing gases to release. Always keep the deployment area of the air bag modules free of any obstructions.

For example, you should not do any of the following as it may interfere with air bag deployment.

- Do not put a covering on or lean anything against areas such as the instrument panel and lower portion of the instrument panel that blocks the passenger front air bag and knee air bags.
- Do not use seat covers on the front seats and rear seats equipped with in-seat side air bags.
- Do not hang any backpacks, bags or pouches that cover the sides of the seats that block the side air bags.
- Do not place any objects on the assist grips. Only hang clothes directly on the coat hooks.

**Do not touch the components of the supplementary restraint system after the air bags have inflated:**

Touching the components of the supplementary restraint system after the air bags have inflated is dangerous. Immediately after inflation, they are very hot. You could get burned.

**Never install any front-end equipment to your vehicle:**

Installation of front-end equipment, such as frontal protection bar (kangaroo bar, bull bar, push bar, or other similar devices), snowplow, or winches, is dangerous. The air bag crash sensor system could be affected. This could cause air bags to inflate unexpectedly, or it could prevent the air bags from inflating during an accident. Front occupants could be seriously injured.

**Do not modify the suspension:**

Modifying the vehicle suspension is dangerous. If the vehicle's height or the suspension is modified, the vehicle will be unable to accurately detect a collision or roll-over accident resulting in incorrect or unexpected air bag deployment and the possibility of serious injuries.

## SRS Air Bags

---

### **To prevent false detection by the air bag sensor system, heed the following:**

- *Do not use tyres or wheels other than those specified for your Mazda:  
Use of any tyre or wheel other than those specified for your Mazda (page 9-10) is dangerous. Use of such wheels will prevent the vehicle's accident detections system from accurately detecting a collision or roll-over accident resulting in incorrect or unexpected air bag deployment and the possibility of serious injuries.*
- *Do not overload your vehicle:  
Overloading your vehicle is dangerous as it could prevent the air bag crash sensor system from accurately detecting a collision or roll-over accident resulting in incorrect or unexpected air bag deployment and the possibility of serious injuries. The gross axle weight rating (GAWR) and the gross vehicle weight rating (GVWR) for your vehicle are on the Motor Vehicle Safety Standard Label on the driver's door frame. Do not exceed these ratings.*

### **Do not modify a front door or leave any damage unrepaired. Always have an expert repairer (we recommend an Authorised Mazda Repairer) inspect a damaged front door:**

*Modifying a front door or leaving any damage unrepaired is dangerous. Each front door has a side crash sensor as a component of the supplementary restraint system. If holes are drilled in a front door, a door speaker is left removed, or a damaged door is left unrepaired, the sensor could be adversely affected causing it to not detect the pressure of an impact correctly during a side collision. If a sensor does not detect a side impact correctly, the side and curtain air bags and the front seat belt pretensioner may not operate normally which could result in serious injury to occupants.*

### **Do not modify the supplementary restraint system:**

*Modifying the components or wiring of the supplementary restraint system is dangerous. You could accidentally activate it or make it inoperable. Do not make any modifications to the supplementary restraint system. This includes installing trim, badges, or anything else over the air bag modules. It also includes installing extra electrical equipment on or near system components or wiring. An expert repairer (we recommend an Authorised Mazda Repairer) can provide the special care needed in the removal and installation of front seats. It is important to protect the air bag wiring and connections to assure that the bags do not accidentally deploy, and that the driver seat slide position sensor is not damaged and the seats retain an undamaged air bag connection.*

### **Do not place luggage or other objects under the front seats:**

*Placing luggage or other objects under the front seats is dangerous. The components essential to the supplementary restraint system could be damaged, and in the event of a side collision, the appropriate air bags may not deploy, which could result in death or serious injury. To prevent damage to the components essential to the supplementary restraint system, do not place luggage or other objects under the front seats.*

**Do not operate a vehicle with damaged air bag/seat belt pretensioner system components:**

Expend or damaged air bag/seat belt pretensioner system components must be replaced after any collision which caused them to deploy or damage them. Only a trained expert repairer (we recommend an Authorised Mazda Repairer) can fully evaluate these systems to see that they will work in any subsequent accident. Driving with an expended or damaged air bag or pretensioner unit will not afford you the necessary protection in the event of any subsequent accident which could result in serious injury or death.

**Do not remove interior air bag parts:**

Removing any components such as the front seats, front instrument panel, the steering wheel or parts on the front and rear window pillars and along the roof edge, containing air bag parts or sensors is dangerous. These parts contain essential air bag components. The air bag could accidentally activate and cause serious injuries. Always have an expert repairer (we recommend an Authorised Mazda Repairer) remove these parts.

**Properly dispose of the air bag system:**

Improper disposal of an air bag or a vehicle with live air bags in it can be extremely dangerous. Unless all safety procedures are followed, injury could result. Have an expert repairer (we recommend an Authorised Mazda Repairer) safely dispose of the air bag system or scrap an air bag equipped vehicle.

**NOTE**

- When an air bag deploys, a loud inflation noise can be heard and some smoke will be released. Neither is likely to cause injury, however, the texture of the air bags may cause light skin injuries on body parts not covered with clothing through friction.
- Should you sell your Mazda, we urge you to tell the new owner of its air bag systems and that familiarization with all instructions about them, from the Owner's Manual, is important.
- This highly-visible label warns against the use of a rear-facing child-restraint system on the front passenger seat.

**(Taiwan Only)**

依規定前排座椅禁止乘載嬰兒、幼童及兒童。

**(Europe and other countries  
(Except Taiwan))**



**(Taiwan only)**



# SRS Air Bags

---


*(Taiwan, except front passenger seat, if equipped with the following label)*

*The highly-visible labels warn against the use of a rear-facing child-restraint system on the seat protected by an air bag.*



# Supplementary Restraint System Components


(With Front Passenger Occupant Classification System)

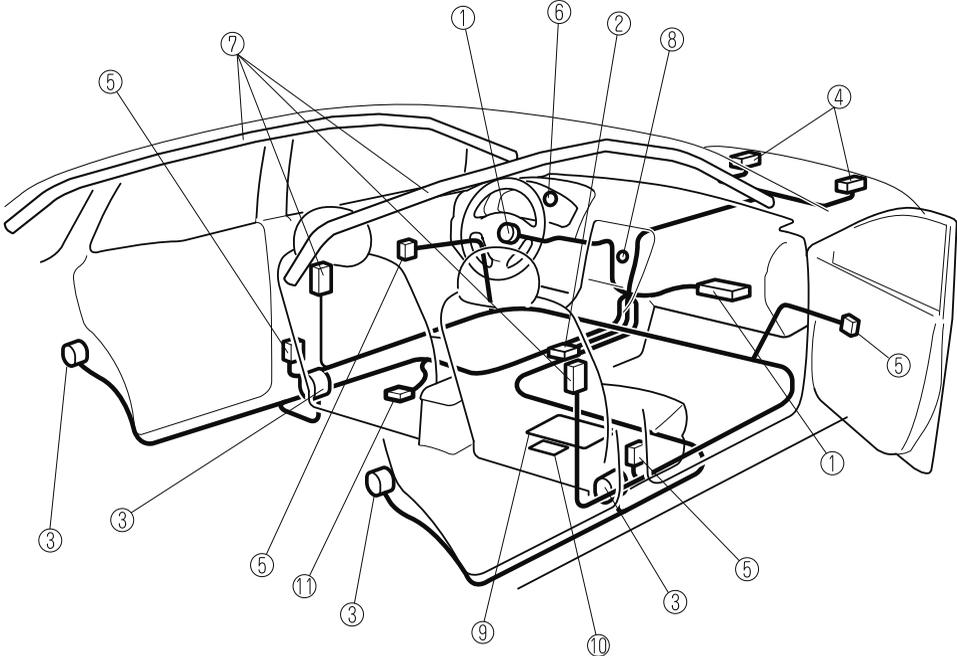

# SRS Air Bags

---

(Without Front Passenger Occupant Classification System)

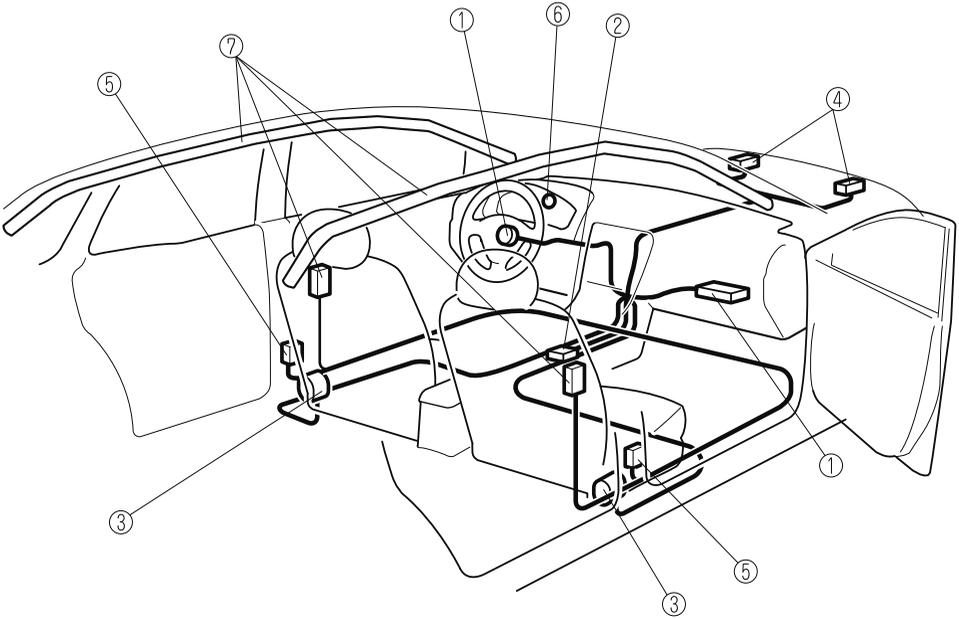

- ① Driver/Front passenger inflators and air bags
- ② Roll-over sensor\*, crash sensors, and diagnostic module (SAS unit)
- ③ Seat belt pretensioners (page 2-31)
- ④ Front air bag sensors
- ⑤ Side crash sensors
- ⑥ Air bag/seat belt pretensioner system warning light (page 7-46)
- ⑦ Side and curtain inflators and air bags
- ⑧ Front passenger air bag deactivation indicator light\* (page 2-69)
- ⑨ Front passenger occupant classification sensor\* (page 2-69)
- ⑩ Front passenger occupant classification module\*
- ⑪ Driver seat slide position sensor\* (page 2-61)

## How the SRS Air Bags Work

Your Mazda is equipped with the following types of SRS air bags. SRS air bags are designed to work together with the seat belts to help to reduce injuries during an accident. The SRS air bags are designed to provide further protection for passengers in addition to the seat belt functions. Be sure to wear seat belts properly.

### ▼ Seat Belt Pretensioners

The pretensioners operate differently depending on what types of air bags are equipped. For more details about seat belt pretensioner operation, refer to the SRS Air Bag Deployment Criteria (page 2-65).

#### Front

The front seat belt pretensioners are designed to deploy in moderate or severe frontal, near frontal collisions.

In addition, the pretensioners operate when a side collision or a roll-over accident (with roll-over sensor) is detected.

#### Rear Outboard\*

The rear outboard seat belt pretensioners are designed to deploy in moderate or severe frontal, near frontal collisions.

### ▼ Driver Air Bag

The driver's air bag is mounted in the steering wheel.

When air bag crash sensors detect a frontal impact of greater than moderate force, the driver's air bag inflates quickly helping to reduce injury mainly to the driver's head or chest caused by directly hitting the steering wheel.

For more details about air bag deployment, refer to "SRS Air Bag Deployment Criteria" (page 2-65).

#### **(With Front Passenger Occupant Classification System)**

The inflation of the driver's dual-stage air bag is controlled in two energy stages depending on the driver's seat position. The driver's seat slide position sensor is located under the driver's seat. The sensor determines whether the driver's seat is forward of or behind a reference position and sends the seat position to the diagnostic module (SAS unit). The SAS unit is designed to control the deployment of the driver's air bag depending on how close the driver's seat is to the steering wheel.

## SRS Air Bags

---

During an impact of moderate severity, the driver's air bag deploys with lesser energy, whereas during more severe impacts and when the driver's seat is behind the reference position, it deploys with more energy.



### ▼ Front Passenger Air Bag

The front passenger air bag is mounted in the front passenger instrument panel. The inflation mechanism for the front passenger air bag is the same as the driver's air bag. For more details about air bag deployment, refer to "SRS Air Bag Deployment Criteria" (page 2-65).

#### **(With Front Passenger Occupant Classification System)**

In addition, the front passenger air bag is designed to only deploy when the front passenger occupant classification sensor detects a passenger sitting on the front passenger's seat. For details, refer to the front passenger occupant classification system (page 2-69).




### ▼ Side Air Bags

The side air bags are mounted in the outboard sides of the front seatbacks. When the air bag crash sensors detect a side impact of greater than moderate force, the system inflates the side air bag only on the side in which the vehicle was hit. The side air bag inflates quickly to reduce injury to the driver or front passenger's chest caused by directly hitting interior parts such as a door or window. For more details about air bag deployment, refer to "SRS Air Bag Deployment Criteria" (page 2-65).

**(With Front Passenger Occupant Classification System)**

In addition, the front passenger side air bag is designed to only deploy when the front passenger occupant classification sensor detects a passenger sitting on the front passenger's seat. For details, refer to the front passenger occupant classification system (page 2-69).



**▼ Curtain Air Bags**


The curtain air bags are mounted in the front and rear window pillars, and the roof edge along both sides.

When the air bag crash sensors detect a side impact of greater than moderate force, the curtain air bag inflates quickly and helps to reduce injury mainly to the rear outboard passenger's head caused by directly hitting interior parts such as a door or window.

For more details about air bag deployment, refer to "SRS Air Bag Deployment Criteria" (page 2-65).

**In a side impact:**

Greater than moderate impact to one side of the vehicle will cause the curtain air bag on that side only to inflate.

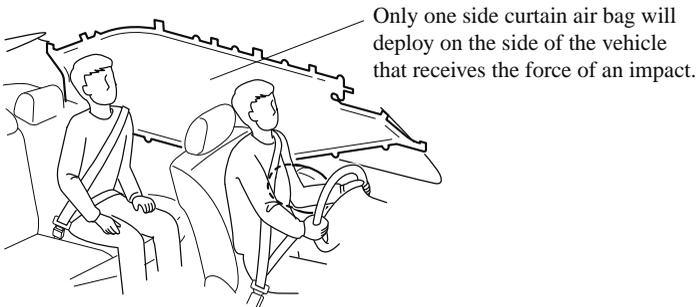

Only one side curtain air bag will deploy on the side of the vehicle that receives the force of an impact.


# SRS Air Bags

---

**(With roll-over sensor)**

**In a roll-over:**

In response to a vehicle roll-over, both curtain air bags inflate.

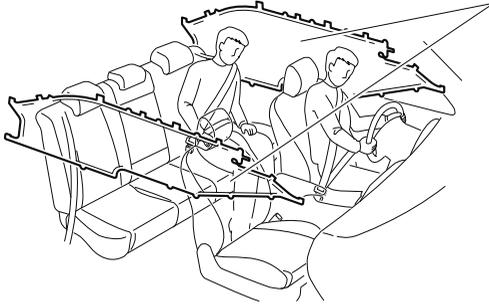

Both curtain air bags will deploy after the roll-over accident is detected.

## ▼ Warning Light/Beep

A system malfunction or operation conditions are indicated by a warning.


Refer to Contact an expert repairer (we recommend an Authorised Mazda Repairer) and Have Vehicle Inspected on page 7-46.

Refer to Warning Sound is Activated on page 7-65.

## SRS Air Bag Deployment Criteria

This chart indicates the applicable SRS equipment that will deploy depending on the type of collision.

(The illustrations are the representative cases of collisions.)

	Types of collision			
	A severe frontal/near frontal collision	A severe side collision*2	A roll-over/near roll-over*3	A rear collision
SRS equipment				
Front seat belt pretensioner	X*1	X*1	X	No air bag and seat belt pretensioner will be activated in a rear collision.
Rear seat belt pretensioner*	X		X	
Driver air bag	X			
Front passenger air bag	X*1			
Side air bag		X*1 (impact side only)		
Curtain air bag		X (impact side only)	X (both sides)	

X: The SRS air bag equipment is designed to deploy in a collision.

**\*1 (With Front Passenger Occupant Classification System)**

The front passenger front and side air bags and the seat belt pretensioner are designed to deploy when the front passenger occupant classification sensor detects a passenger sitting on the front passenger's seat.

**\*2** In a side collision, the seat belt pretensioners and the side/curtain air bags deploy.

**\*3 (With roll-over sensor)**

In a roll-over accident, the seat belt pretensioners and the curtain air bags deploy.

## **SRS Air Bags**

---

***NOTE***

*In a frontal offset collision, the equipped air bags and pretensioners may all deploy depending on the direction, angle, and rate of impact.*


## Limitations to SRS Air Bag

In severe collisions such as those described previously in "SRS Air Bag Deployment Criteria", the applicable SRS air bag equipment will deploy. However, in some accidents, the equipment may not deploy depending on the type of collision and its severity.


### Limitations to front/near front collision detection:

The following illustrations are examples of front/near front collisions that may not be detected as severe enough to deploy the SRS air bag equipment.


Impacts involving trees or poles



Frontal offset impact to the vehicle




Rear-ending or running under a truck's tail gate

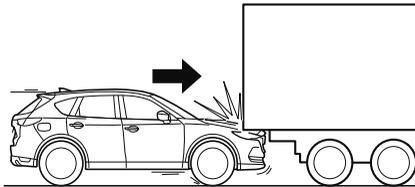


**Limitations to side collision detection:**

The following illustrations are examples of side collisions that may not be detected as severe enough to deploy the SRS air bag equipment.


Side impacts involving trees or poles



Side impacts with two-wheeled vehicles

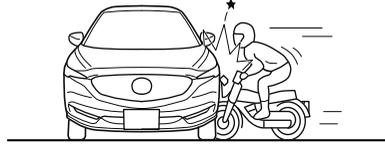

Roll-over (Without roll-over sensor)

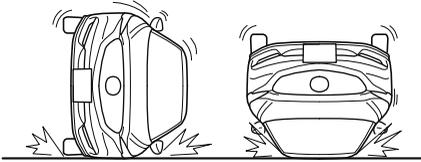


**(With roll-over sensor)**

**Limitations to roll-over detection:**

The following illustration is an example of an accident that may not be detected as a roll-over accident. Therefore, the front seat belt pretensioners and curtain air bags may not deploy.

Pitch end over end

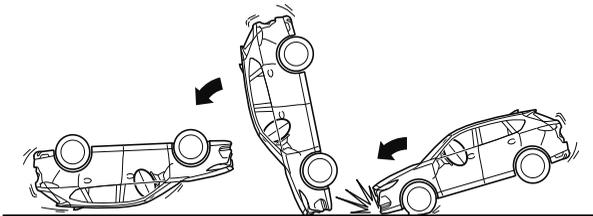

## Front Passenger Occupant Classification System\*

First, please read "Supplementary Restraint System (SRS) Precautions" (page 2-52) carefully.

### ▼ Front Passenger Occupant Classification Sensor

Your vehicle is equipped with a front passenger occupant classification sensor as a part of the supplementary restraint system. This sensor is equipped in the front passenger's seat cushion. This sensor measures the electrostatic capacity of the front passenger's seat. The SAS unit is designed to prevent the front passenger front and side air bags and seat belt pretensioner system from deploying if the front passenger air bag deactivation OFF indicator light turns on.


To reduce the chance of injuries caused by deployment of the front passenger air bag, the system deactivates the front passenger front and side air bags and also the seat belt pretensioner system when the front passenger air bag deactivation OFF indicator light turns on. Refer to the following table for the front passenger air bag deactivation indicator light illumination conditions.

This system shuts off the front passenger front and side air bags and seat belt pretensioner system, so make sure the front passenger air bag deactivation indicator light turns on according to the following table.

The air bag/seat belt pretensioner system warning light flashes and the front passenger air bag deactivation OFF indicator light illuminates if the sensors have a possible malfunction. If this happens, the front passenger front and side air bags and seat belt pretensioner system will not deploy.

### Front passenger air bag deactivation indicator lights

These indicator lights turn on to remind you that the front passenger front and side air bags and seat belt pretensioner will or will not deploy during a collision.



# SRS Air Bags

If the front passenger occupant classification sensor is normal, both indicator lights turn on when the ignition is switched ON. The lights turn off after a few seconds. Then, the indicator lights turn on or off under the following conditions:

## Front passenger air bag deactivation indicator light on/off condition chart

Condition detected by the front passenger occupant classification system	Front passenger air bag deactivation indicator light	Front passenger front and side air bags	Front passenger seat belt pretensioner system
Empty (Not occupied)	 OFF	Deactivated	Deactivated
A child is seated in a child-restraint system* <sup>1</sup>	 OFF	Deactivated	Deactivated
Adult* <sup>2</sup>	 ON Turns off after a short period of time.	Ready	Ready

\*1 The occupant classification sensor may not detect a child seated on the seat, in a child-restraint system, or a junior seat depending on the child's physical size and seated posture.

\*2 If a smaller adult sits on the front passenger seat, the sensors might detect the person as being a child depending on the person's physique.

The curtain air bag is ready for inflating regardless of what the front passenger air bag deactivation indicator light on/off condition chart indicates.

If both of the front passenger air bag deactivation indicator lights do not turn on for a specified period of time when the ignition is switched ON or they do not turn on as indicated in the front passenger air bag deactivation indicator light on/off condition chart, do not allow an occupant to sit in the front passenger seat and consult an expert repairer (we recommend an Authorised Mazda Repairer) as soon as possible. The system may not work properly in an accident.




**Do not allow an occupant in the front passenger's seat to sit with a posture which makes it difficult for the front passenger occupant classification sensor to detect the occupant correctly:**

*Sitting in the front passenger's seat with a posture which makes it difficult for the front passenger occupant classification sensor to detect the occupant correctly is dangerous. If the front passenger occupant classification sensor cannot detect the occupant sitting on the front passenger's seat correctly, the front passenger front and side air bags and pretensioner system may not operate (non-deploy) or they may operate (deploy) accidentally. The front passenger will not have the supplementary protection of the air bags or the accidental operation (deployment) of the air bags could result in serious injury or death.*

*Under the following conditions, the front passenger occupant classification sensor cannot detect a passenger sitting on the front passenger's seat correctly and the deployment/non-deployment of the air bags cannot be controlled as indicated in the front passenger air bag deactivation indicator light on/off condition chart. For example:*

➤ *A front passenger is seated as shown in the following figure:*

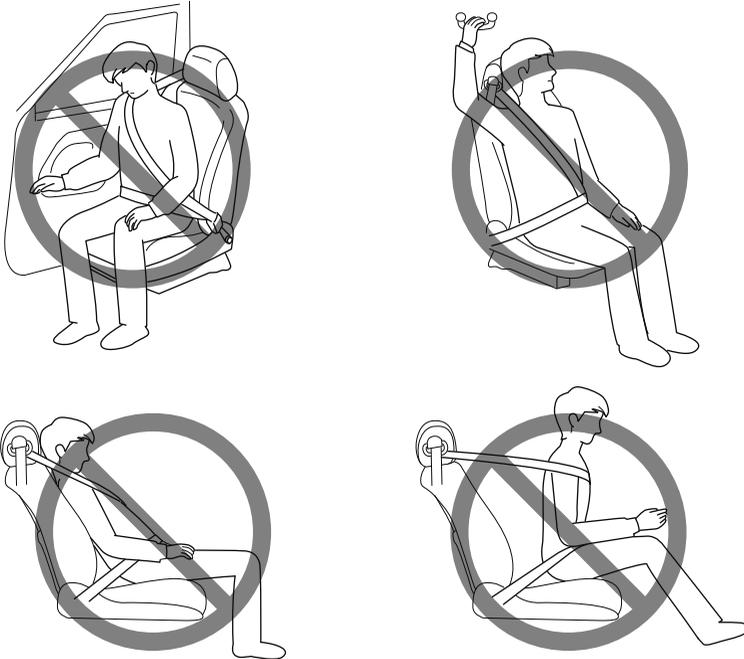

- *A rear passenger pushes up on the front passenger seat with their feet.*
- *Luggage or other items placed under the front passenger seat or between the front passenger seat and driver seat that push up the front passenger seat bottom.*
- *An object, such as a seat cushion, is put on the front passenger's seat or between the passenger's back and the seatback.*
- *A seat cover is put on the front passenger's seat.*
- *Luggage or other items are placed on the seat with the child in the child-restraint system.*
- *A rear passenger or luggage push or pull down on the front passenger seatback.*
- *Luggage or other items are placed on the seatback or hung on the head restraint.*
- *The seat is washed.*
- *Liquids are spilled on the seat.*
- *The front passenger seat is moved backward, pushing into luggage or other items placed behind it.*
- *The front passenger seatback contacts the rear seat.*

## SRS Air Bags

---

- *Luggage or other items are placed between the front passenger seat and driver seat.*
- *An electric device is put on the front passenger's seat.*
- *An additional electrical device, such as a seat warmer is installed to the surface of the front passenger seat.*

*The front passenger front and side air bags and seat belt pretensioner systems will deactivate if the front passenger air bag deactivation OFF indicator light turns on.*

### **CAUTION**

- *To assure proper deployment of the front air bag and to prevent damage to the sensor in the front seat cushion:*
  - *Do not place sharp objects on the front seat cushion or leave heavy luggage on them.*
  - *Do not spill any liquids on the front seats or under the front seats.*
- *To allow the sensors to function properly, always perform the following:*
  - *Adjust the front seats as far back as possible and always sit upright against the seatbacks with seat belts worn properly.*
  - *If you place your child on the passenger seat, secure the child-restraint system properly and slide the passenger seat as far back as possible within the position in which the child-restraint system can be installed.*

### **NOTE**

- *The system requires about 10 seconds to alternate between turning the front passenger front and side air bags and seat belt pretensioner system on or off.*
- *The front passenger air bag deactivation OFF indicator light may turn on repeatedly if luggage or other items are put on the front passenger seat, or if the temperature of the vehicle's interior changes suddenly.*
- *The front passenger air bag deactivation OFF indicator light may turn on for 10 seconds if the electrostatic capacity on the front passenger seat changes.*
- *The air bag/seat belt pretensioner system warning light might turn on if the front passenger seat receives a severe impact.*
- *If the front passenger air bag deactivation OFF indicator light does not turn on after installing a child-restraint system on the front passenger seat, first, re-install your child-restraint system according to the procedure in this owner's manual. Then, if the front passenger air bag deactivation OFF indicator light still does not turn on, install the child-restraint system on the rear seat and consult an expert repairer (we recommend an Authorised Mazda Repairer) as soon as possible.*

- *If the front passenger air bag deactivation OFF indicator light turns on when an occupant is seated directly in the front passenger seat, have the passenger re-adjust their posture by sitting with their feet on the floor, and then re-fastening the seat belt. If the front passenger air bag deactivation OFF indicator light remains turned on, move the passenger to the rear seat. If sitting in the rear seat is not possible, slide the front passenger seat as far back as possible. Consult an expert repairer (we recommend an Authorised Mazda Repairer) as soon as possible.*

## Constant Monitoring

The following components of the air bag systems are monitored by a diagnostic system:

- Front air bag sensors
- Crash sensors, and diagnostic module (SAS unit)
- Side crash sensors
- Air bag modules
- Seat belt pretensioners
- Air bag/Seat belt pretensioner system warning light
- Related wiring

### **(With Front Passenger Occupant Classification System)**

- Driver seat slide position sensor
- Front passenger occupant classification sensor
- Front passenger occupant classification module
- Front passenger air bag deactivation indicator light

The diagnostic module continuously monitors the system's readiness. This begins when the ignition is switched ON and continues while the vehicle is being driven.

# 3

## Before Driving

Use of various features, including keys, doors, mirrors and windows.

<b>Keys.....</b>	<b>3-2</b>	<b>Security System.....</b>	<b>3-48</b>
Keys.....	3-2	Modification and Add-On	
Keyless Entry System.....	3-4	Equipment.....	3-48
<b>Advanced Keyless Entry</b>		Immobilizer System.....	3-48
<b>System.....</b>	<b>3-10</b>	Theft-Deterrent System* .....	3-50
Advanced Keyless Entry System* .....	3-10	<b>Driving Tips.....</b>	<b>3-55</b>
Operational Range.....	3-11	Running-In.....	3-55
<b>Doors and Locks.....</b>	<b>3-12</b>	Saving Fuel and Protection of the	
Door Locks.....	3-12	Environment.....	3-55
Liftgate.....	3-19	Hazardous Driving.....	3-56
<b>Fuel and Emission.....</b>	<b>3-30</b>	Floor Mat.....	3-57
Fuel and Engine Exhaust		Rocking the Vehicle.....	3-58
Precautions.....	3-30	Winter Driving.....	3-58
Fuel-Filler Flap and Cap.....	3-36	Driving In Flooded Area.....	3-61
<b>Mirrors.....</b>	<b>3-38</b>	Turbocharger Information	
Mirrors.....	3-38	(SKYACTIV-G 2.5T, SKYACTIV-D	
<b>Windows.....</b>	<b>3-42</b>	2.2).....	3-62
Power Windows.....	3-42	<b>Towing.....</b>	<b>3-63</b>
Sunroof* .....	3-45	Towing Caravans and Trailers	
		(Europe/Russia/Turkey/Israel/South	
		Africa).....	3-63

# Keys

## Keys

### WARNING

**Do not leave the key in your vehicle with children and keep them in a place where your children will not find or play with them:**

Leaving children in a vehicle with the key is dangerous. This could result in someone being badly injured or even killed. Children may find these keys to be an interesting toy to play with and could cause the power windows or other controls to operate, or even make the vehicle move.


### CAUTION

- Because the key (transmitter) uses low-intensity radio waves, it may not function correctly under the following conditions:
  - The key is carried with communication devices such as cellular phones.
  - The key contacts or is covered by a metal object.
  - The key is near electronic devices such as personal computers.
  - Non-Mazda genuine electronic equipment is installed in the vehicle.
  - There is equipment which discharges radio waves near the vehicle.
- The key (transmitter) may consume battery power excessively if it receives high-intensity radio waves. Do not place the key near electronic devices such as televisions or personal computers.
- To avoid damage to the key (transmitter), DO NOT:

- Drop the key.
- Get the key wet.
- Disassemble the key.
- Expose the key to high temperatures on places such as the instrument panel or bonnet, under direct sunlight.
- Expose the key to any kind of magnetic field.
- Place heavy objects on the key.
- Put the key in an ultrasonic cleaner.
- Put any magnetized objects close to the key.


### NOTE

The driver must carry the key to ensure the system functions properly.




### Removing the auxiliary key

1. Remove the lower cover while sliding the knob in the direction of the arrow.




2. Remove the auxiliary key.




### **Installing the auxiliary key**

1. Install the auxiliary key as the illustration.



2. Insert the tabs of the lower cover into the slots of the transmitter and install the lower cover.

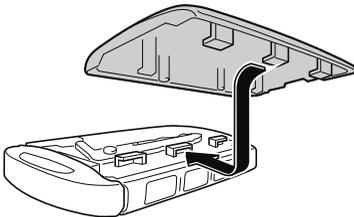


### **Key code number plate**

A code number is stamped on the plate attached to the key set; detach this plate and store it in a safe place (not in the vehicle) for use if you need to make a replacement key (auxiliary key).

Also write down the code number and keep it in a separate safe and convenient place, but not in the vehicle.

If your key (auxiliary key) is lost, consult an expert repairer (we recommend an Authorised Mazda Repairer), and have your code number ready.



## Keyless Entry System

This system uses the key buttons to remotely lock and unlock the doors and the liftgate, and opens/closes the liftgate. The system can start the engine without having to take the key out of your purse or pocket.

Operating the theft-deterrent system is also possible on theft-deterrent system-equipped vehicles.

System malfunctions or warnings are indicated by the following warning lights or beeps.

For vehicles with the type A/type B instrument cluster, check the displayed message for more information and, if necessary, have the vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer), according to the indication.

- KEY Warning Light (Red)  
Refer to Contact expert repairer (we recommend an Authorised Mazda Repairer) and Have Vehicle Inspected on page 7-46.  
Refer to Taking Action on page 7-55.
- Ignition Not Switched Off (STOP) Warning Beep  
Refer to Ignition Not Switched Off (STOP) Warning Beep on page 7-66.
- Key Removed from Vehicle Warning Beep  
Refer to Key Removed from Vehicle Warning Beep on page 7-66.

If you have a problem with the key, consult an expert repairer (we recommend an Authorised Mazda Repairer).

If your key is lost or stolen, consult an expert repairer (we recommend an Authorised Mazda Repairer) as soon as possible for a replacement and to make the lost or stolen key inoperative.



*Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.*

### NOTE

- *The keyless entry system operation may vary due to local conditions.*
- *The keyless entry system is fully operational (door/liftgate lock/unlock) when the ignition is switched off. The system does not operate if the ignition is switched to any position other than off.*
- *If the key does not operate when pressing a button or the operational range becomes too small, the battery may be weak. To install a new battery, refer to Key Battery Replacement (page 6-47).*


- *Battery life is about 1 year. Replace the battery with a new one if the KEY indicator light (green) flashes in the instrument cluster (for vehicles with a type A/type B instrument cluster (page 4-22, 4-42), messages are displayed in the instrument cluster). Replacing the battery about once a year is recommended because the KEY warning light/indicator light may not illuminate or flash depending on the rate of battery depletion.*



- *Additional keys can be obtained at an expert repairer (we recommend an Authorised Mazda Repairer). Up to 6 keys can be used with the keyless functions per vehicle. Bring all keys to the expert repairer (we recommend an Authorised Mazda Repairer) when additional keys are required.*

### ▼ Transmitter

Operation indicator light



### NOTE

- *The headlights turn on/off by operating the transmitter. Refer to Leaving Home Light on page 4-96.*

### • (With theft-deterrent system)

*The hazard warning lights flash when the theft-deterrent system is armed or turned off.*

*Refer to Theft-Deterrent System on page 3-50.*

### • (With the advanced keyless function (European models))

*The setting can be changed so that a beep sound is heard for confirmation when the doors and the liftgate are locked/unlocked using the key.*

### (With the advanced keyless function (Except European models))

*A beep sound can be heard for confirmation when the doors and the liftgate are locked/unlocked using the key. If you prefer, the beep sound can be turned off.*

*The volume of the beep sound can also be changed.*

*Refer to the Settings section in the Mazda Connect Owner's Manual.*

*Use the following procedure to change the setting.*

1. *Switch the ignition off and close all of the doors and the liftgate.*
2. *Open the driver's door.*
3. *Within 30 seconds of opening the driver's door, press and hold the LOCK button on the key for 5 seconds or longer.*

*The beep sound activates at the currently set volume. The setting changes each time the LOCK button on the key is pressed and the beep sound activates at the set volume. (If the beep sound has been set to not activate, it will not activate.)*

## Keys

---

4. The setting change is completed by doing any one of the following:

- Switching the ignition to ACC or ON.
- Closing the driver's door.
- Opening the liftgate.
- Not operating the key for ten seconds.
- Pressing any button except the LOCK button on the key.
- Pressing a request switch.

The operation indicator light flashes when the buttons are pressed.

### Lock button

To lock the doors and the liftgate, press the lock button and the hazard warning lights will flash once.

**(With the advanced keyless function (Except European models))**

A beep sound will be heard once.



### **NOTE**

• **(European models)**

*The doors and the liftgate cannot be locked by pressing the lock button while any other door is open. The hazard warning lights will also not flash.*

**(Except European models)**

*The doors and the liftgate cannot be locked by pressing the lock button while any other door or the liftgate is open. The hazard warning lights will also not flash.*

• **(With the i-stop function (European models))**

*Removing the key from the vehicle, closing all the doors and pressing the LOCK button on the key while the i-stop function is operating (engine is stopped) will switch the ignition OFF and lock all the doors (Steering wheel also locks). Refer to i-stop on page 4-12.*

• *Make sure all doors and the liftgate are locked after pressing the button.*

• **(With double locking system)**

*Pressing the lock button twice within three seconds will activate the double locking system.*

*Refer to Double Locking System on page 3-16.*

• **(With theft-deterrent system)**

*When the doors are locked by pressing the lock button on the key while the theft-deterrent system is armed, the hazard warning lights will flash once to indicate that the system is armed.*

### Unlock button

To unlock the doors and the liftgate, press the unlock button and the hazard warning lights will flash twice.

**(With the advanced keyless function (Except European models))**

A beep sound will be heard twice.



**NOTE****· (Auto re-lock function)**

After unlocking with the key, all doors and the liftgate will automatically lock if any of the following operations are not performed within about 30 seconds. If your vehicle has a theft-deterrent system, the hazard warning lights will flash for confirmation.

The time required for the doors to lock automatically can be changed.

Refer to the Settings section in the Mazda Connect Owner's Manual.

- A door or the liftgate is opened.
- The ignition is switched to any position other than off.

**· (With theft-deterrent system)**

When the doors are unlocked by pressing the unlock button on the key while the theft-deterrent system is turned off, the hazard warning lights will flash twice to indicate that the system is turned off.

**Power liftgate button\***

To open/close the liftgate, press the power liftgate button for one second or longer with the liftgate in the fully closed/open position.

The hazard warning lights flash twice and the liftgate opens/closes after the beep sounds.

**Power liftgate button type A**



**Power liftgate button type B**

**Intrusion sensor cancel button\***

To cancel the intrusion sensor (part of the theft-deterrent system), press the intrusion sensor cancel button within 20 seconds after pressing the lock button and the hazard warning lights will flash three times.

Refer to Theft-Deterrent System on page 3-50.

**Power saving function**

By turning on the transmitter power saving function, the advanced keyless entry\*<sup>1</sup> and push button start system functions turn off and the battery power consumption of the transmitter is restricted.

The remote control function is operational by operating the transmitter switch even while the power saving function is turned on. However, the operation indicator light of the transmitter does not turn on/flash.

**Turning on the power saving function**

After you have turned on the power saving function according to the following procedure, the hazard warning lights and sound operate\*<sup>1</sup> one time.

1. Press the lock button on the transmitter 4 times within 3 seconds to turn on the operation indicator light.
2. Press the lock button continuously for 1.5 seconds or longer while the operation indicator light turns on (for 5 seconds).

# Keys

3. Press any of the buttons on the transmitter to make sure that the operation indicator light does not turn on/flash.

## Turning off the power saving function

After you have turned off the power saving function according to the following procedure, the hazard warning lights and sound operate\*1 one time.

1. Press any of the buttons on the transmitter to make sure that the operation indicator light does not turn on/flash.
2. Press the lock button on the transmitter 4 times within 3 seconds to turn on the operation indicator light.
3. Press the lock button continuously for 1.5 seconds or longer while the operation indicator light turns on (for 5 seconds).

\*1 With the advanced keyless function

## ▼ Operational Range


The system operates only when the driver is in the vehicle or within operational range while the key is being carried.

## Starting the Engine

### NOTE


- Starting the engine may be possible even if the key is outside of the vehicle and extremely close to a door and window, however, always start the engine from the driver's seat.
- If the vehicle is started and the key is not in the vehicle, the vehicle will not restart after it is shut off and the ignition is switched to off.
- The luggage compartment is out of the assured operational range, however, if the key (transmitter) is operable the engine will start.

## With the advanced keyless function



Operational range

## Without the advanced keyless function



Operational range

**NOTE**

*The engine may not start if the key is placed in the following areas:*

- Around the instrument panel*
- In the storage compartments such as the glove compartment or the centre console*

**▼ Key Suspend Function**

If a key is left in the vehicle, the functions of the key left in the vehicle are temporarily suspended to prevent theft of the vehicle.

To restore the functions, press the unlock button on the functions-suspended key in the vehicle.

## Advanced Keyless Entry System

---

### Advanced Keyless Entry System\*

#### **WARNING**

**Radio waves from the key may affect medical devices such as pacemakers:**

Before using the key near people who use medical devices, ask the medical device manufacturer or your physician if radio waves from the key will affect the device.

The advanced keyless function allows you to lock/unlock the door and the liftgate, or open the liftgate while carrying the key.

System malfunctions or warnings are indicated by the following warning beeps.

- Request switch Inoperable Warning Beep  
Refer to Request Switch Inoperable Warning Beep (With the advanced keyless function) on page 7-66.
- Key Left-in-luggage Compartment Warning Beep  
Refer to Key Left-in-luggage Compartment Warning Beep (With the advanced keyless function) on page 7-66.
- Key Left-in-vehicle Warning Beep  
Refer to Key Left-in-vehicle Warning Beep (With the advanced keyless function) on page 7-67.

#### **NOTE**

*The advanced keyless entry system functions can be deactivated to prevent any possible adverse effect on a user wearing a pacemaker or other medical device. If the system is deactivated, you will be unable to start the engine by carrying the key. Consult an expert repairer (we recommend an Authorised Mazda Repairer) for details. If the advanced keyless entry system has been deactivated, you can start the engine by following the procedure indicated when the key battery goes dead.*

*Refer to Engine Start Function When Key Battery is Dead on page 4-9.*

# Advanced Keyless Entry System

## Operational Range


The system operates only when the driver is in the vehicle or within operational range while the key is being carried.

**NOTE**

When the battery power is low, or in places where there are high-intensity radio waves or noise, the operational range may become narrower or the system may not operate. For determining battery replacement, Refer to Keyless Entry System on page 3-4.


▼ **Locking, Unlocking the Doors and the Liftgate**

**Lock**

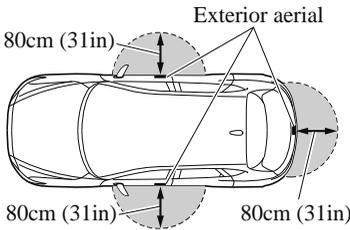

● Operational range

**Unlock**




● Operational range

**NOTE**

- The system may not operate if you are too close to the windows or door handles, or liftgate.
- If the key is left in the following areas and you leave the vehicle, the doors may be locked depending on the radio wave conditions even if the key is left in the vehicle.
  - Around the instrument panel
  - In the storage compartments such as the glove compartment or the centre console
  - Next to a communication device such as a mobile phone

▼ **Opening the Liftgate**

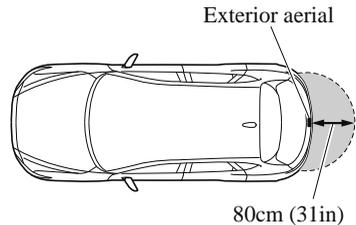

● Operational range

## Doors and Locks

---

### Door Locks

#### **WARNING**

**Always take all children and pets with you or leave a responsible person with them:**

*Leaving a child or a pet unattended in a parked vehicle is dangerous. In hot weather, temperatures inside a vehicle can become high enough to cause brain damage or even death.*

**Do not leave the key in your vehicle with children and keep them in a place where your children will not find or play with them:**

*Leaving children in a vehicle with the key is dangerous. This could result in someone being badly injured or even killed.*

**Always close all the windows and sunroof, lock the doors and the liftgate and take the key with you when leaving your vehicle unattended:**

*Leaving your vehicle unlocked is dangerous as children could lock themselves in a hot vehicle, which could result in death. Also, a vehicle left unlocked becomes an easy target for thieves and intruders.*

**After closing the doors and the liftgate, always verify that they are securely closed:**

*Doors and the liftgate not securely closed are dangerous, if the vehicle is driven with a door and the liftgate not securely closed, the door and the liftgate could open unexpectedly resulting in an accident.*

**Always confirm the safety around the vehicle before opening a door and the liftgate:**

*Suddenly opening a door and the liftgate is dangerous. A passing vehicle or a pedestrian could be hit and cause an accident.*

#### **CAUTION**

- *Always confirm the conditions around the vehicle before opening/closing the doors and the liftgate and use caution during strong winds or when parked on an incline. Not being aware of the conditions around the vehicle is dangerous because fingers could get caught in the door and the liftgate or a passing pedestrian could be hit, resulting in an unexpected accident or injury.*

#### **NOTE**

- *Always stop the engine and lock the doors. In addition, to prevent theft of valuables, do not leave them inside the cabin.*
- *If the key is left in the following areas and you leave the vehicle, the doors may be locked depending on the radio wave conditions even if the key is left in the vehicle.*
  - *Around the instrument panel*
  - *In the storage compartments such as the glove compartment or the centre console*
  - *Next to a communication device such as a mobile phone*

- The vehicle lock-out prevention feature prevents you from locking yourself out of the vehicle.

**(European models)**

All doors and the liftgate will automatically unlock if they are locked using the power door locks with any door open.

If all the doors are closed even though the liftgate is open, all the doors will lock.

**(Except European models)**

All doors and the liftgate will automatically unlock if they are locked using the power door locks with any door or the liftgate open.

- **(Door unlock (control) system with collision detection)\***

This system automatically unlocks the doors and the liftgate in the event the vehicle is involved in an accident to allow passengers to get out of the vehicle immediately and prevent being trapped inside. While the ignition is switched ON and in the event the vehicle receives an impact strong enough to inflate the air bags, all the doors and the liftgate are automatically unlocked after about 6 seconds have elapsed from the time of the accident.

The doors and the liftgate may not unlock depending on how an impact is applied, the force of the impact, and other conditions of the accident.


If door-related systems or the battery is malfunctioning, the doors and the liftgate may not unlock depending on your vehicle type.

▼ **Locking, Unlocking with Request Switch (With the advanced keyless function)**


All doors and the liftgate can be locked/unlocked by pressing the request switch on the front doors while the key is being carried.

The request switch on the liftgate can only be used to lock all doors and the liftgate.

**Front doors**

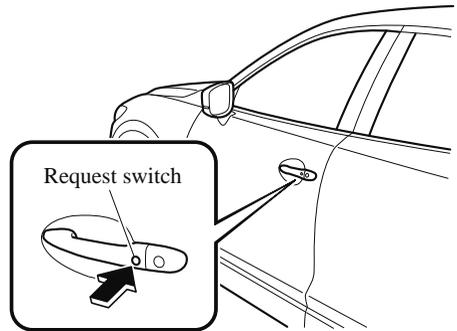

**Liftgate (Lock only)**

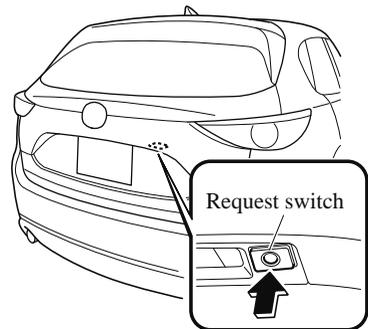

**To lock**

To lock the doors and the liftgate, press the request switch and the hazard warning lights will flash once.

**(Except European models)**

A beep sound will be heard once.

## Doors and Locks

---

### To unlock

To unlock the doors and the liftgate, press the request switch on a front door and the hazard warning lights will flash twice.

#### **(Except European models)**

A beep sound will be heard twice.

#### **NOTE**

- Confirm that all doors and the liftgate are securely locked.

*For the liftgate, move it without pressing the electric liftgate opener to verify that the liftgate has not been left ajar.*

- **(European models)**

*All doors and the liftgate cannot be locked when any door is open.*

#### **(Except European models)**

*All doors and the liftgate cannot be locked when any door or the liftgate is open.*

- *It may require a few seconds for the doors to unlock after the request switch is pressed.*

- **(European models)**

*The setting can be changed so that a beep sound is heard for confirmation when the doors and the liftgate are locked/unlocked using a request switch.*

#### **(Except European models)**

*A beep sound is heard for confirmation when the doors and the liftgate are locked/unlocked using the request switch. If you prefer, the beep sound can be turned off.*

*The volume of the beep sound can also be changed.*

*Refer to the Settings section in the Mazda Connect Owner's Manual.*

*Use the following procedure to change the setting.*

1. Switch the ignition off and close all of the doors and the liftgate.
2. Open the driver's door.
3. Within 30 seconds of opening the driver's door, press and hold the LOCK button on the key for 5 seconds or longer.

*The beep sound activates at the currently set volume. The setting changes each time the LOCK button on the key is pressed and the beep sound activates at the set volume. (If the beep sound has been set to not activate, it will not activate.)*

4. The setting change is completed by doing any one of the following:

- Switching the ignition to ACC or ON.
- Closing the driver's door.
- Opening the liftgate.
- Not operating the key for ten seconds.
- Pressing any button except the LOCK button on the key.
- Pressing a request switch.

- **(With theft-deterrent system)**

*The hazard warning lights flash when the theft-deterrent system is armed or turned off.*

*Refer to Theft-Deterrent System on page 3-50.*

- **(With double locking system)**

*The double locking system can be activated/deactivated using the request switch.*

*Refer to Double Locking System on page 3-16.*

- *The setting can be changed so that the doors and the liftgate are locked automatically without pressing the request switch.*

Refer to the Settings section in the Mazda Connect Owner's Manual.

**(Walk-away auto lock function)**

A beep sound is heard when all doors and the liftgate are closed while the advanced key is being carried. All doors and the liftgate are locked automatically after about three seconds when the advanced key is out of the operational range. Also, the hazard warning lights flash once. (Even if the driver is in the operational range, all doors and the liftgate are locked automatically after about 30 seconds.) If you are out of the operational range before the doors and the liftgate are completely closed or another key is left in the vehicle, the walk-away auto lock function will not work. Always make sure that all doors and the liftgate are closed and locked before leaving the vehicle. The walk-away auto lock function does not close the power windows.

• **(Auto re-lock function)**

After unlocking with the request switch, all doors and the liftgate will automatically lock if any of the following operations are not performed within about 30 seconds. If your vehicle has a theft-deterrent system, the hazard warning lights will flash for confirmation.

The time required for the doors to lock automatically can be changed.

Refer to the Settings section in the Mazda Connect Owner's Manual.

- Opening a door or the liftgate.
- Switching the ignition to any position other than off.


▼ **Locking, Unlocking with Transmitter**

All doors and the liftgate can be locked/unlocked by operating the keyless entry system transmitter, refer to Keyless Entry System (page 3-4).

▼ **Locking, Unlocking with Door-Lock Switch\***

All doors and the liftgate lock automatically when the lock side is pressed with all doors and the liftgate closed.

They all unlock when the unlock side is pressed.

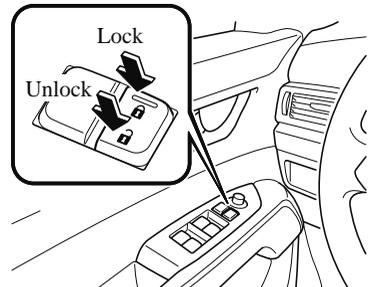

**NOTE**

The doors and the liftgate cannot be locked while any other door or the liftgate is open.

## Doors and Locks

### ▼ Auto Lock/Unlock Function\*



**Do not pull the inner handle on a front door:**

*Pulling the inner handle on a front door while the vehicle is moving is dangerous. Passengers can fall out of the vehicle if the door opens accidentally, which could result in death or serious injury.*

- When the vehicle speed exceeds 20 km/h (12 mph), all the doors and liftgate lock automatically.
- When the ignition is switched off, all the doors and liftgate unlock automatically.


The auto lock/unlock function settings can be changed.

Refer to the Settings section in the Mazda Connect Owner's Manual.

### ▼ Locking, Unlocking with Auxiliary Key

All doors and the liftgate lock automatically when the driver's door is locked using the auxiliary key. They all unlock when the driver's door is unlocked using the auxiliary key.

Turn the auxiliary key toward the front to lock, toward the back to unlock.

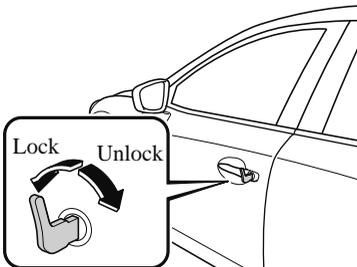

### ▼ Double Locking System\*

The double locking system is designed to prevent someone who has broken into your vehicle from opening the door from the inside.

If you have any problems with the double locking system, consult an expert repairer (we recommend an Authorised Mazda Repairer).




***Never activate the double locking system with passengers, especially children, still inside the vehicle:***

*Activating the system with passengers, especially children, still inside the vehicle is dangerous. The passengers cannot open the doors from inside. They would be trapped and subjected to extreme temperatures. This could result in serious injuries or even death.*

### How to Activate the system

1. Close all the windows and the sunroof\*.
2. Switch the ignition off and take the key with you.
3. Close all doors and the liftgate.

- Insert the auxiliary key in the driver's door, turn the auxiliary key to the lock position, and return it to the centre position. Then turn it to the lock position again within 3 seconds.

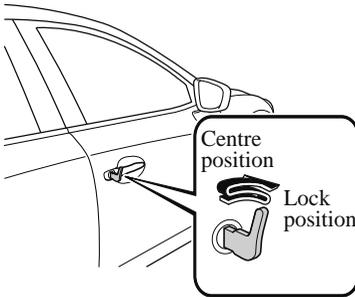**NOTE**

- You can also activate the system by pressing the lock button on the transmitter twice within 3 seconds.
- (With the advanced keyless function)**

You can also activate the system by pressing the request switch twice within 3 seconds.

- The indicator light illuminates for about 3 seconds to indicate that the system has been activated.

**NOTE**

The system cannot be activated when any door or the liftgate is open.

**How to Deactivate the System**

Unlock the driver's door or switch the ignition ON.

**NOTE**

If the power supply is interrupted (fuse blows or the battery is disconnected), the system can only be deactivated by unlocking a door with the auxiliary key.

**▼ Locking, Unlocking with Door-Lock Knob****Operation from inside****(With door-lock switch)**


To lock any door from the inside, press the door-lock knob.

To unlock, pull it outward.

This does not operate the other door locks.

**(Without door-lock switch)**


All doors and the liftgate lock automatically when the driver's door-lock knob is pressed. They all unlock when the driver's door-lock knob is pulled out.

**Operation from outside**

To lock the rear and front passenger doors with the door-lock knob from the outside, press the door-lock knob to the lock position and close the door (holding the door handle in the open position is not required).

## Doors and Locks

This does not operate the other door locks.

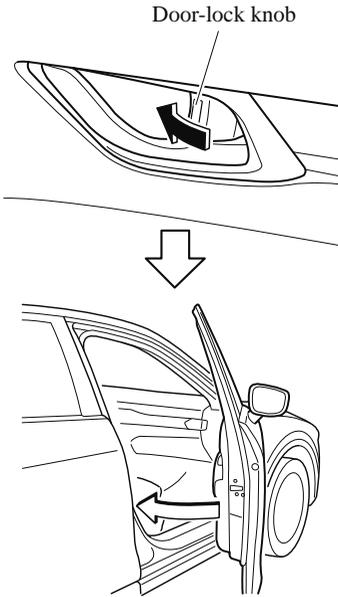

### **NOTE**


*When locking the door this way:*

- *Be careful not to leave the key inside the vehicle.*
- *The driver's door lock knob cannot be used while the driver's door is open.*

### ▼ **Rear Door Child Safety Locks**

These locks are intended to help prevent children from accidentally opening the rear doors. Use them on both rear doors whenever a child rides in the rear seat of the vehicle.

If you slide the child safety lock to the lock position before closing that door, the door cannot be opened from the inside. The door can only be opened by pulling the outside handle.

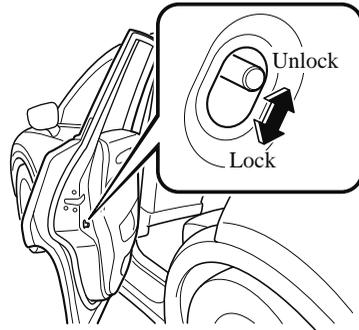

## Liftgate

### WARNING

#### **Never allow a person to ride in the luggage compartment:**

Allowing a person to ride in the luggage compartment is dangerous. The person in the luggage compartment could be seriously injured or killed during sudden braking or a collision.

#### **Do not drive with the liftgate open:**

Exhaust gas in the cabin of a vehicle is dangerous. An open liftgate in a moving vehicle will cause exhaust gas to be drawn into the cabin. This gas contains CO (carbon monoxide), which is colourless, odourless, and highly poisonous, and it can cause loss of consciousness and death. Moreover, an open liftgate could cause occupants to fall out in an accident.


#### **Do not stack or leave loaded luggage unsecured in the luggage compartment:**

Otherwise, the luggage may move or collapse, resulting in injury or an accident. In addition, do not load luggage higher than the seatbacks. It may affect the side or rear field of view.

### CAUTION

- Before opening the liftgate, remove any snow and ice accumulation on it. Otherwise, the liftgate could close under the weight of the snow and ice resulting in injury.

- Be careful when opening/closing the liftgate during strong winds. If a strong gust blows against the liftgate, it could close suddenly resulting in injury.
- Fully open the liftgate and make sure that it stays open. If the liftgate is only opened partially, it could slam shut by vibration or wind gusts resulting in injury.
- When loading or unloading luggage in the luggage compartment, turn off the engine. Otherwise, you could get burned by the heat of the exhaust gas.
- Be careful not to apply excessive force to the damper stay on the liftgate such as by putting your hand on the stay. Otherwise, the damper stay may bend and affect the liftgate operation.

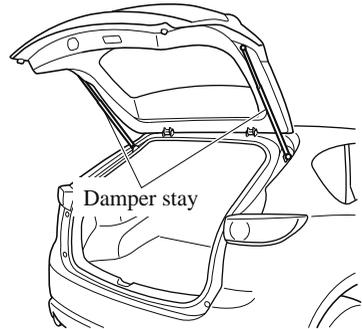

- Do not modify or replace the liftgate damper stay. Consult an expert repairer (we recommend an Authorised Mazda Repairer) if a liftgate damper stay is deformed or damaged for reasons such as a collision or if there is some other problem.


## Doors and Locks

### ▼ Opening and Closing the Liftgate

#### Opening the liftgate with Electric liftgate opener

Unlock the doors and liftgate, then press the electric liftgate opener on the liftgate and raise the liftgate when the latch releases.

For the power liftgate operation, refer to Power Liftgate on page 3-21.

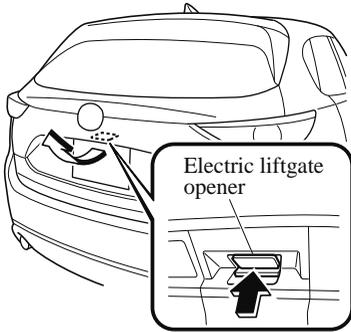

#### **NOTE**

**(With the advanced keyless function)**

- A locked liftgate can also be opened while the key is being carried.
- When opening the liftgate with the doors and the liftgate locked, it may require a few seconds for the liftgate latch to release after the electric liftgate opener is pressed.
- The liftgate can be closed when the doors are locked with the key left in the vehicle. However, to prevent locking the key in the vehicle, the liftgate can be opened by pressing the electric liftgate opener. If the liftgate cannot be opened despite doing this procedure, first push the liftgate completely closed, then press the electric liftgate opener to fully open the liftgate.

- When the liftgate latch is released by pressing the electric liftgate opener, the liftgate raises slightly. If the liftgate is not operated for a certain period of time, the liftgate cannot be raised.

#### **To open**

Press the electric liftgate opener again.

#### **To close**

To close the liftgate from its slightly raised position, open it first by pressing the electric liftgate opener, then close it after waiting at least 1 second.


- If the liftgate is not fully closed, the driver is notified by a warning indicated in the instrument cluster.
- If the vehicle battery is dead or there is a malfunction in the electrical system and the liftgate cannot be unlocked, the liftgate can be opened by performing the emergency procedure.  
Refer to *When Liftgate Cannot be Opened* on page 7-72.

#### Closing the liftgate

Lower the liftgate slowly using the liftgate grip recess, then push the liftgate closed using both hands.

Do not slam it. Pull up on the liftgate to make sure it is secure.

For the power liftgate operation, refer to Power Liftgate on page 3-21.

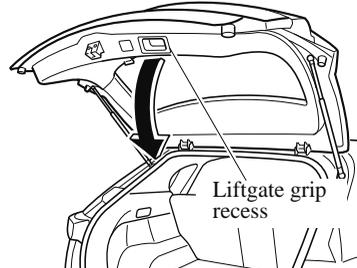

**NOTE**

Confirm that the liftgate is securely closed. The liftgate, move it without pressing the electric liftgate opener to verify that the liftgate has not been left ajar.

**▼ Power Liftgate\***

The power liftgate opens/closes electrically by operating the switches in the vehicle or the buttons on the keyless entry system transmitter.



**Be sure to watch the power liftgate as it opens or closes, and make sure that it closes completely:**

Opening or closing the power liftgate while not watching it move is dangerous. Because of unseen obstacles and the jam-safe feature, a liftgate may not close completely and, if left unnoticed, could result in serious injury or death if an occupant were to fall out of the vehicle. Always be sure that the area around the liftgate is clear before activating it.

**Always confirm the safety of the area around the power liftgate before operating it electrically.**


Not checking the area around the liftgate for people before operating it using the power liftgate switch or the button on the keyless entry system is dangerous. A person could become caught between the liftgate and an obstruction while it is opening electrically or between the liftgate and vehicle while it is closing electrically, resulting in an accident and serious injury.

**Never allow children to operate the power liftgate system:**

Allowing children to operate the power liftgate switch and the keyless entry system is dangerous. Children are not aware of the dangers of people getting fingers and hands caught in a moving liftgate. If someone's neck, head or hands get caught in a closing door, it could result in death or serious injury.



- When closing the power liftgate, make sure there are no foreign objects around the striker. If foreign objects are obstructing the striker, the liftgate may not close properly.

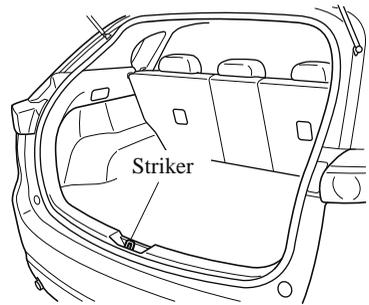

- Do not install accessories to the power liftgate other than specified accessories. Otherwise, it cannot be opened/closed automatically and could result in a malfunction.
- Be careful when switching the power liftgate from electrical to manual operation. The power liftgate may open/close unexpectedly depending on its position which could result in injury.

## Doors and Locks

---

### NOTE

- Do not apply unnecessary force to the power liftgate when it is opening/closing electrically. Unnecessary force on the liftgate may cause it to reverse direction of movement automatically. Also, it could result in a malfunction.
- The power liftgate may not open/close electrically if the vehicle is parked on an incline, or there is strong wind, or the liftgate is laden with snow.
- If a power liftgate system fuse has blown, the liftgate cannot be opened using the power liftgate switch or the electric liftgate opener. Use the emergency lever to open the liftgate.
- Fully close the power liftgate before disconnecting the vehicle battery. If the battery is disconnected with the liftgate open, it cannot be opened or closed automatically after the battery is reconnected. If this happens, fully close the liftgate manually to restore the auto full open/close function.
- If the liftgate is snow-laden, remove the snow before operating the power liftgate. Operating the power liftgate with excessive force applied to the liftgate may damage the liftgate.

### Operation using the transmitter

Press the power liftgate button for one second or longer. The hazard warning lights flash twice and the liftgate opens/closes after the beep sounds.

Refer to Transmitter on page 3-5.

### NOTE

- When the ignition is switched ON, the transmitter does not operate.
- When opening the liftgate by pressing the power liftgate button on the transmitter, the liftgate can be opened even when it is locked.
- If the power liftgate button on the transmitter is pressed while the liftgate is opening/closing electrically, the beep is activated and the liftgate stops. When pressing the power liftgate button again, the liftgate moves in the reverse direction.

### Operation using each switch

#### Operation conditions

#### Opening the liftgate

If the vehicle has satisfied all the following operation conditions, the power liftgate can be opened using the power function.

- All doors and the liftgate are unlocked.
- **(Manual transaxle)**  
The ignition is switched OFF, or when the parking brake is applied with the shift lever in N and the ignition switched ON.
- **(Automatic transaxle)**  
The ignition is switched OFF, or the selector lever is in P with the ignition switched ON.

#### Closing the liftgate

- **(Manual transaxle)**  
The ignition is switched OFF, or when the parking brake is applied with the shift lever in N and the ignition switched ON.

- **(Automatic transaxle)**

The ignition is switched OFF, or the selector lever is in P with the ignition switched ON.

**NOTE**

- **(Manual transaxle)**

*If the vehicle moves with the shift lever shifted to a position other than N while the liftgate is opening/closing electrically, the liftgate moves as follows:*

**While opening electrically**

*The buzzer is activated, and the liftgate moves in the reverse direction automatically and closes. When the shift lever is shifted to N and the parking brake is applied, you can resume the power liftgate operation using the switches.*

**While closing electrically**

*The buzzer is activated, but the liftgate continues closing.*

- **(Automatic transaxle)**

*If the vehicle moves with the selector lever shifted to a position other than P while the liftgate is opening/closing electrically, the liftgate moves as follows:*

**While opening electrically**


*The buzzer is activated, and the liftgate moves in the reverse direction automatically and closes. When the selector lever is shifted to P, you can resume the power liftgate operation using the switches.*

**While closing electrically**

*The buzzer is activated, but the liftgate continues closing.*

**Operation from the driver's seat (To open/close)**

Press the power liftgate switch for about one second or longer while the liftgate is in the fully closed/open position. The hazard warning lights flash twice and the liftgate opens/closes fully after the beep sound is heard.

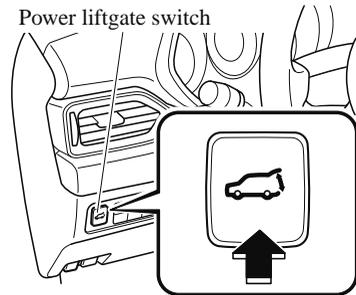


**Operation from outside (To open)**

Press the electric liftgate opener on the liftgate and raise the liftgate. The hazard warning lights flash twice and the liftgate opens automatically after the beep sound is heard.

**(With the advanced keyless function)**


A locked liftgate can also be opened while the key is being carried.

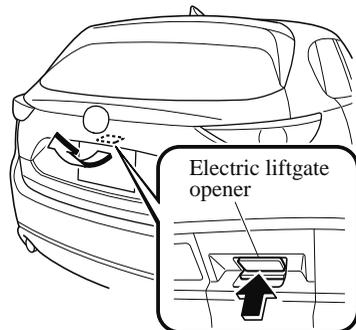

# Doors and Locks

## Operation from outside (To close)

Press the power liftgate close switch while the liftgate is fully opened. The hazard warning lights flash twice and the liftgate closes automatically after the beep sound is heard.

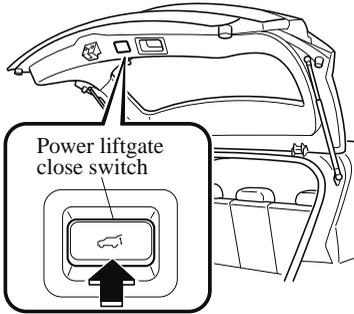

### NOTE

If the power liftgate switch/power liftgate close switch is pressed or the electric liftgate opener is operated while the liftgate is opening/closing electrically, the beep sound is heard and the liftgate stops. Then, it reverses when any of the switches are pressed again.

## Hands-free liftgate\*

When the hands-free liftgate sensor on the centre bottom of the rear bumper detects foot movement (kick-activated liftgate), the liftgate opens/closes automatically. The liftgate can be opened/closed even with both hands full, such as when carrying baggage.

## Operation conditions

Do the kicking motion with your foot when all of the following conditions are met while the vehicle is stopped.

### (When ignition is switched OFF)


- You are carrying the transmitter.

- The hands-free liftgate is on.

### (When ignition is switched ON)

- You are carrying the transmitter.
- The hands-free liftgate is on.
- The selector lever is in the P position.

## How to do the kicking motion

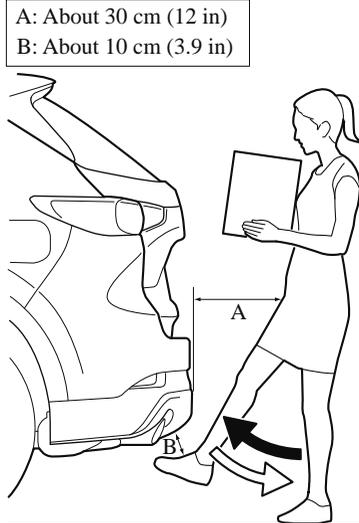

1. Stand at the position about 30 cm (12 in) behind the centre of the rear bumper.
2. Move your foot to the position about 10 cm (3.9 in) from the centre bottom of the rear bumper.
3. Move your foot away from under the bumper within about 1 second after moving it under the bumper.

When the kicking motion is done correctly, the hazard warning lights flash 2 times, a beep sound is activated, and the liftgate opens/closes automatically. Be careful not to contact the liftgate.

If the kicking motion is done while the liftgate is opening/closing automatically,

the liftgate will stop. If the kicking motion is done again, the liftgate moves in the direction opposite to the direction it was moving before it stopped.

### CAUTION


- Do not do the kicking motion while wearing footwear such as sandals, or with your bare foot. If your foot contacts the hot exhaust pipe, it could cause serious burns.
- Do not do the kicking motion while the area where you are standing is unstable such as a slope or icy road. Otherwise, you could fall down, resulting in injury.
- Do not paint the rear bumper or install any add-on equipment to it. Otherwise, the hands-free liftgate sensor may not operate normally.
- If you are carrying the transmitter around the liftgate or there is another person around the liftgate who is carrying a transmitter, do not allow the following to occur. Otherwise, the hands-free liftgate sensor will operate and the liftgate may open/close unexpectedly resulting in an accident.
  - A person not carrying a transmitter does the kicking motion.
  - While the liftgate is open, a person sitting on the edge of the luggage compartment swings his or her legs.
  - Installing/removing the body cover or removing snow around the rear bumper.
  - Picking up something which was dropped under the rear bumper.
  - Spraying water on the rear bumper using a high water pressure car washer.

- Pushing a shopping cart close to the rear bumper.
- A moving object such as an animal or a ball approaches the rear bumper.

To prevent an unintended operation, place the transmitter outside of its operation range or turn off the hands-free liftgate using the Mazda Connect.

### NOTE

- The hands-free liftgate sensor detects in a range of about 30 cm (12 in) on both the left and right sides from the centre of the rear bumper.

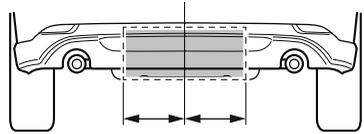

- The hands-free liftgate sensor may not operate normally under the following conditions.
  - Your foot remains placed within the detection area.
  - You move your foot left and right within the detection area.
  - The kicking motion is too fast or too slow.
  - Your foot contacts the rear bumper when doing the kicking motion.
  - You are wearing shoes such as rubber boots which do not conduct electricity well.
  - There is equipment emitting strong radio waves near the vehicle.
  - The detection area of the hands-free liftgate sensor is dirty.

## Doors and Locks

---

- When the detection area of the hands-free liftgate sensor is dirty, wipe it off with a clean cloth. Place the transmitter outside of its operation range or wipe off the area around the sensor with a clean cloth after turning off the hands-free liftgate using the Mazda Connect.
- If the operation using the hands-free liftgate sensor is not possible even though the operation conditions are met, consult an expert repairer (we recommend an Authorised Mazda Repairer).

### Hands-free liftgate ON/OFF switching

The hands-free liftgate can be switched on/off.

To prevent an unintended operation, turn off the function.

Refer to the Settings section in the Mazda Connect Owner's Manual.

### Changing the power liftgate fully open position

The power liftgate fully-open position can be changed according to the height of a garage.

#### When changing the position

1. Stop the liftgate at the desired position.
2. Press the power liftgate close switch for about three seconds.  
A beep sound is activated two times to indicate that the position change has been completed.

#### **NOTE**

*Set the desired fully-open position of the liftgate at the position where it is open more than halfway. The position where it is less than halfway open cannot be set.*

#### **To reset**

1. Open the liftgate.
2. Press the power liftgate close switch for about seven seconds.  
A beep sound is activated three times to indicate that the reset has been completed.

#### **NOTE**

*After about 3 seconds have elapsed since the switch was pressed, a beep sound is activated 2 times to indicate that the liftgate fully-open position has changed. Continuously press the switch for about 7 seconds to complete the reset.*

### Jam-safe equipment

While the power liftgate is opening/closing electrically and the system detects a person or an object in the liftgate's path, the liftgate will move in the reverse direction automatically and stops.




#### **Always check the area around the power liftgate before opening/closing it:**

*Not checking for occupants and objects around the power liftgate before opening/closing it is dangerous. The jam-safe equipment is designed to prevent jamming in the event an obstruction is in the liftgate's path. The system may not detect certain objects obstructing the liftgate depending on the way they are positioned and their shape. However, if the jam-safe function detects an obstruction and moves the liftgate in the reverse direction, an occupant in the liftgate's path could be seriously injured.*

## ⚠ CAUTION

Sensors are installed on both ends of the power liftgate. Be careful not to allow the sensors to be scratched or damaged by sharp objects, otherwise the liftgate may no longer open/close automatically. In addition, if the sensor is damaged while the liftgate is closing automatically, the system will stop.

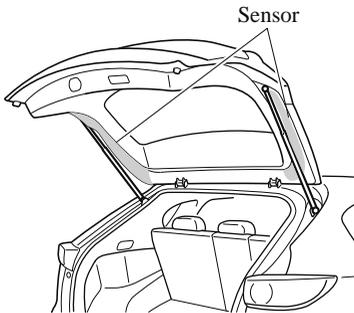

### NOTE

The jam-safe equipment does not activate during easy closure operation when the power liftgate is between the near-shut position and fully closed position.

When the power liftgate is moving in the open/close direction and an obstruction is detected, the beep sound will be heard and the liftgate moves in the reverse direction and stops.

### Liftgate easy closure

The Easy Closure system automatically closes the liftgate completely from the near-shut position.

This system also operates when the liftgate is closed manually.

## ⚠ WARNING

**When closing a liftgate, always keep hands and fingers away from the liftgate:**

Placing hands or fingers around a liftgate is dangerous because the liftgate closes automatically from the near-shut position, which could cause hands and fingers to be pinched and injured.

### NOTE

- If the electric liftgate opener is pressed while the easy closure function is operating, the liftgate can be opened.
- If the liftgate is opened/closed repeatedly in a short period of time, the easy closure function may not operate. Wait for about 2 seconds and then try again.

### ▼ Luggage Compartment Cover\*

#### Luggage Compartment Cover

Use the luggage compartment cover to conceal cargo or luggage. The luggage compartment cover can be stored under the luggage board.

## ⚠ WARNING

**Do not place anything on top of the luggage compartment cover:**

Placing luggage or other cargo on top of the luggage compartment cover is dangerous. During sudden braking or a collision, the cargo could become a projectile that could hit and injure someone.

# Doors and Locks

## ⚠ CAUTION


Make sure the luggage compartment cover is firmly secured. If it is not firmly secured, it could unexpectedly disengage resulting in injury.

### NOTE


- If you attempt to open the liftgate under cold weather conditions with the luggage compartment cover attached, the damper function may not operate normally and the liftgate may be difficult to raise. The liftgate can be opened more easily under cold weather conditions if the luggage compartment cover is not attached.
- When opening/closing the liftgate, the weight of the liftgate is different depending on whether the luggage compartment cover is used or not, however, this does not indicate a malfunction.

### Removing the cover

1. Raise the luggage compartment cover by the tabs with both hands, detach it from the clips, and let it roll up.

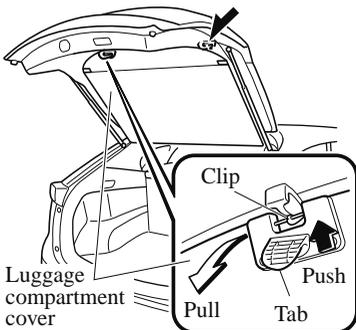


2. Compress either the left or right luggage compartment cover holder inwards.
3. Pull the luggage compartment cover rearward and remove it from the installation hole.
4. Remove the luggage compartment cover from the vehicle at an angle.

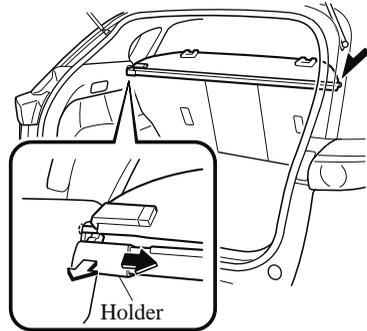


### Storing the cover\*


1. Remove the luggage compartment cover.
2. Open the luggage board using the strap.

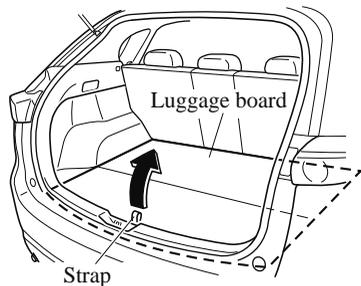

3. Remove the sideboards on both sides of the luggage compartment using the straps.



4. Store the luggage compartment cover with the tab facing downward.



5. Close the luggage board.
6. Return the sideboards and close the luggage board.

### **Installing the cover**

Reverse the procedure for removal.

# Fuel and Emission

## Fuel and Engine Exhaust Precautions

### ▼ Fuel Requirements (SKYACTIV-G 2.0, SKYACTIV-G 2.5, SKYACTIV-G 2.5T)

Vehicles with catalytic converters or oxygen sensors must use **ONLY UNLEADED FUEL**, which will reduce exhaust emissions and keep spark plug fouling to a minimum.

To achieve maximum engine performance, use the specified fuel.

Fuel	Research Octane Number	Country
Premium unleaded fuel (Conforming to EN 228 and within E10)* <sup>1</sup> 	95 or above	Albania, Algeria, Andorra, Antigua, Armenia, Aruba, Austria, Azerbaijan, Barbados, Belarus, Belgium, Bolivia, Bosnia and Herzegovina, Botswana, Brunei, Bulgaria, Canary Islands, Croatia, Cyprus, Czech, Denmark, Estonia, F.Guiana, Faeroe, Finland, France, Georgia, Germany, Greece, Grenada, Guadeloupe, Guatemala, Honduras, Hong Kong, Hungary, Iceland, Ireland, Israel, Italy, Jamaica, Kazakhstan, Latvia, Lebanon, Lesotho, Libya, Liechtenstein, Lithuania, Luxembourg, Macau, Macedonia, Madagascar, Malta, Martinique, Mauritius, Moldova, Monaco, Mongolia, Montenegro, Morocco, Namibia, New Caledonia, Nicaragua, Norway, Paraguay, Poland, Portugal, Reunion, Romania, Russia, San Marino, Serbia, Seychelles, Singapore, Slovakia, Slovenia, South Africa, Spain, ST. Lucia, St. Martin, ST. Vincent, Surinam, Swaziland, Sweden, Switzerland, Tahiti, Taiwan, The Netherlands, Tunisia, Turkey, UAE, UK, Ukraine, Uruguay, Vanuatu, Vatican
Regular unleaded fuel	92 or above	Egypt, Myanmar
	90 or above	Angola, B.Virgin, Bahrain, Burundi, Cambodia, Cameroon, Chile, Colombia, Commonwealth of Dominica, Costa Rica, Curacao, Dominican Republic (LHD), Ecuador, El Salvador, Fiji, Gabon, Ghana, Haiti, Indonesia, Iraq, Ivory Coast, Jordan, Kenya, Kuwait, Laos, Marshall Islands, Mozambique, Nepal, Nigeria, Oman, Panama, Papua New Guinea, Peru, Qatar, Saudi Arabia, Sri Lanka, Tanzania, The Philippines, Trinidad and Tobago, Ustt* <sup>2</sup> , Zimbabwe

\*1 Europe

\*2 Republic of Palau & Federated States of Micronesia

Fuel with a lower rating will negatively affect the emission control system performance and could also cause engine knocking and serious engine damage.

 **CAUTION**

➤ **USE ONLY UNLEADED FUEL.**

*Leaded fuel is harmful to the catalytic converter and oxygen sensors and will lead to deterioration of the emission control system and or failures.*

➤ *The use of E10 fuel with 10 % ethanol in Europe is safe for your vehicle. Damage to your vehicle may occur when ethanol exceeds this recommendation.*

➤ *Never add fuel system additives other than a Mazda genuine product, otherwise the emission control system could be damaged. Consult an expert repairer (we recommend an Authorised Mazda Repairer) for details.*

▼ **Deposit Cleaner**

To get the best performance out of our newest-technology SKYACTIV petrol engines, cleaning of deposits adhering to the fuel related system, such as fuel injectors, may be required by using a Mazda genuine deposit cleaner in the specified countries.

Refer to Maintenance Table on page 6-4.

 **CAUTION**

➤ *According to the inspection result of scheduled maintenance, Mazda genuine deposit cleaner is to be used. Neglected deposits in the fuel system may cause malfunction indicator light coming on to indicate an engine malfunction, and if the vehicle continues to be driven under this condition, it could result in problems occurring such as idling failure and poor acceleration.*

➤ *The Mazda genuine deposit cleaner is not a guarantee of engine performance no matter the quality of the fuel used. When a problem occurs even though the specified fuel is used and the Mazda genuine deposit cleaner is used according to the instructions, consult an expert repairer (we recommend an Authorised Mazda Repairer).*

➤ *If a deposit cleaner other than the Mazda genuine product is used, it could result in damage to the fuel system or the engine internally; therefore use only the Mazda genuine product. Mazda genuine deposit cleaner: K002 W0 001A*

➤ *If cleaning required according to the inspection result of scheduled maintenance is not done with the Mazda genuine deposit cleaner, repair cost for engine malfunctions caused by deposits are borne by the customer.*

**How to use the cleaner**

With the fuel tank full, infuse 1 bottle of Mazda genuine deposit cleaner directly into the fuel tank.

## Fuel and Emission

---

### NOTE

- *Infusing the deposit cleaner when the fuel tank is full provides the concentration of cleaner within the range effective for removing the deposits and the best cleaning results can be obtained by the full tank of fuel with the infused deposit cleaner contacting the deposits for a long period of time until the full tank of fuel is nearly used up.*

### ▼ Fuel Requirements (SKYACTIV-D 2.2)

The vehicle will operate efficiently on diesel fuel with specification EN590 or the equivalent.

**(Except Thailand)**



**(Thailand)**



- *Never use fuel other than specification EN590 or the equivalent for your vehicle. Use of petrol or paraffin in diesel engines will result in engine damage.*
- *Never add fuel system additives other than a Mazda genuine product, otherwise the emission control system could be damaged. Consult an expert repairer (we recommend an Authorised Mazda Repairer) for details.*

### NOTE

*When refuelling, always add at least 10 L (2.6 US gal, 2.2 Imp gal) of fuel.*

### ▼ Emission Control System (SKYACTIV-G 2.0, SKYACTIV-G 2.5, SKYACTIV-G 2.5T)

This vehicle is equipped with an emission control system (the catalytic converter is part of this system) that enables the vehicle to comply with existing exhaust emissions requirements.

**⚠ WARNING****Never park over or near anything flammable:**

*Parking over or near anything flammable, such as dry grass, is dangerous. Even with the engine turned off, the exhaust system remains very hot after normal use and could ignite anything flammable. A resulting fire could cause serious injury or death.*

**⚠ CAUTION**

*Ignoring the following precautions could cause lead to accumulate on the catalyst inside the converter or cause the converter to get very hot. Either condition will damage the converter and cause poor performance.*

- *USE ONLY UNLEADED FUEL.*
- *Do not drive your Mazda with any sign of engine malfunction.*
- *Do not coast with the ignition switched off.*
- *Do not descend steep grades in gear with the ignition switched off.*
- *Do not operate the engine at high idle for more than 2 minutes.*
- *Do not tamper with the emission control system. All inspections and adjustments must be made by a qualified technician.*
- *Do not push-start or tow-start this vehicle.*

**▼ Emission Control System (SKYACTIV-D 2.2)**

This vehicle is equipped with an emission control system (the catalytic converter and the Selective Catalytic Reduction (SCR) system\*<sup>1</sup> are part of this system) that enables the vehicle to comply with existing exhaust emissions requirements.

\*1 SCR system is designed to reduce nitrogen oxide (NOx) in the exhaust gas and purify the exhaust gas by injecting it with AdBlue®. For more details, refer to the Selective Catalytic Reduction (SCR) System (page 4-329).

**About the catalytic converter****⚠ WARNING****Never park over or near anything flammable:**

*Parking over or near anything flammable, such as dry grass, is dangerous. Even with the engine turned off, the exhaust system remains very hot after normal use and could ignite anything flammable. A resulting fire could cause serious injury or death.*

## Fuel and Emission

---

### CAUTION

*Ignoring the following precautions could cause lead to accumulate on the catalyst inside the converter or cause the converter to get very hot. Either condition will damage the converter and cause poor performance.*

- *Do not drive your Mazda with any sign of engine malfunction.*
- *Do not coast with the ignition switched off.*
- *Do not descend steep grades in gear with the ignition switched off.*
- *Do not operate the engine at high idle for more than 2 minutes.*
- *Do not tamper with the emission control system. All inspections and adjustments must be made by a qualified technician.*
- *Do not push-start or pull-start this vehicle.*

### About the SCR system

### WARNING

***Be careful not to allow the AdBlue® fluid to run out. If the AdBlue® fluid completely runs out, the SCR system will not operate normally:***

*If the vehicle runs out of AdBlue®, the vehicle speed is restricted in steps to prevent contaminants from being exhausted. When the remaining distance-to-empty reaches 0 km (0 miles) in the final stage, the engine cannot restart. For replenishment of the AdBlue® supply, consult an expert repairer (we recommend an Authorised Mazda Repairer).*

### CAUTION

*Use a Mazda genuine product or a product conforming to ISO22241-1 for AdBlue®. If incompatible AdBlue® is used, the SCR system may not operate normally. In addition, the use of incompatible AdBlue® may be subject to fines and penalties. For the recommended AdBlue®, consult the nearest expert repairer (we recommend an Authorised Mazda Repairer).*

### NOTE

- *When the remaining distance-to-empty is 1400 km (869.9 miles) or shorter while the AdBlue® warning indication is displayed, the SCR warning light turns on and the vehicle speed is restricted. In addition, if there is a problem with the SCR system/AdBlue® and the remaining distance-to-empty is 700 km (435 miles) or shorter, the SCR warning light flashes and the vehicle speed is restricted.*

- AdBlue® needs to be replenished periodically according to the scheduled maintenance information. If a warning message is displayed in the multi-information display or the SCR warning light flashes, consult an expert repairer (we recommend an Authorised Mazda Repairer).
- Normally, the vehicle can be driven about 12,000 km (7,500 miles) before AdBlue® needs to be replenished.

## ▼ Engine Exhaust (Carbon monoxide)



### **Do not drive your vehicle if you smell exhaust gas inside the vehicle:**

Engine exhaust gas is dangerous. This gas contains carbon monoxide (CO), which is colourless, odourless, and poisonous. When inhaled, it can cause loss of consciousness and death. If you smell exhaust gas inside the vehicle, keep all windows fully open and contact an expert repairer (we recommend an Authorised Mazda Repairer) immediately.

### **Do not run the engine when inside an enclosed area:**

Running the engine inside an enclosed area, such as a garage, is dangerous. Exhaust gas, which contains poisonous carbon monoxide, could easily enter the cabin. Loss of consciousness or even death could occur.

### **Open the windows or adjust the heating or cooling system to draw fresh air when idling the engine:**

Exhaust gas is dangerous. When the vehicle is stopped with the windows closed and the engine running for a long time even in an open area, exhaust gas, which contains poisonous carbon monoxide, could enter the cabin. Loss of consciousness or even death could occur.

### **Clear snow from underneath and around your vehicle, particularly the tail pipe, before starting the engine:**

Running the engine when a vehicle is stopped in deep snow is dangerous. The exhaust pipe could be blocked by the snow, allowing exhaust gas to enter the cabin. Because exhaust gas contains poisonous carbon monoxide, it could cause loss of consciousness or even death to occupants in the cabin.

# Fuel and Emission

## Fuel-Filler Flap and Cap

### WARNING

**When removing the fuel-filler cap, loosen the cap slightly and wait for any hissing to stop, then remove it:**

Fuel spray is dangerous. Fuel can burn skin and eyes and cause illness if ingested. Fuel spray is released when there is pressure in the fuel tank and the fuel-filler cap is removed too quickly.

**Before refuelling, stop the engine, and always keep sparks and flames away from the filler neck:**

Fuel vapour is dangerous. It could be ignited by sparks or flames causing serious burns and injuries.

Additionally, use of the incorrect fuel-filler cap or not using a fuel-filler cap may result in a fuel leak, which could result in serious burns or death in an accident.

**Do not continue refuelling after the fuel pump nozzle shuts off automatically:**

Continuing to add fuel after the fuel pump nozzle has shut off automatically is dangerous because overfilling the fuel tank may cause fuel overflow or leakage. Fuel overflow and leakage could damage the vehicle and if the fuel ignites it could cause a fire and explosion resulting in serious injury or death.


### CAUTION

Always use only a designated Mazda fuel-filler cap or an approved equivalent, available at an expert repairer (we recommend an Authorised Mazda Repairer). The wrong cap can result in a serious malfunction of the fuel and emission control systems.

### ▼ Refuelling

Before refuelling, close all the doors, windows, and the liftgate, and switch the ignition OFF.


1. To open the fuel-filler flap, pull the remote fuel-filler flap release.

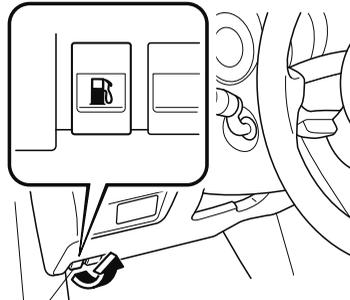


Remote fuel-filler flap release

2. To remove the fuel-filler cap, turn it anticlockwise.

3. Attach the removed cap to the inner side of the fuel-filler flap.

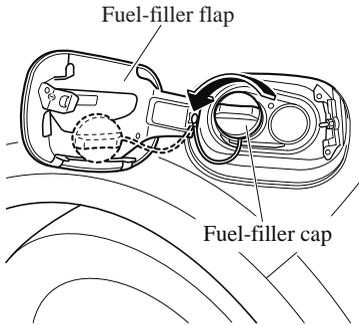

4. Insert the refuelling nozzle all the way and begin refuelling. Pull out the refuelling nozzle after the refuelling stops automatically.
5. To close the fuel-filler cap, turn it clockwise until a click is heard.
6. To close, press the fuel-filler flap until it locks securely.

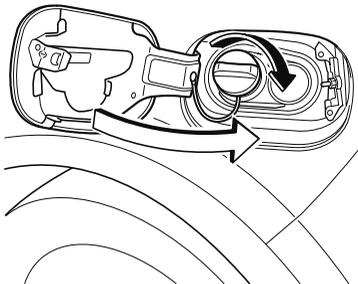

## Mirrors

Before driving, adjust the inside and outside mirrors.

### ▼ Outside Mirrors

#### **WARNING**

**Be sure to look over your shoulder before changing lanes:**


Changing lanes without taking into account the actual distance of the vehicle in the convex mirror is dangerous. You could have a serious accident. What you see in the convex mirror is closer than it appears.

#### **NOTE**

**(Driver's Side Wide Angle Mirror\*)**

· The wide angle mirror has 2 curvatures on its surface separated by a region line into outer and inner regions. The inner region is a standard convex mirror whereas the outer region allows for a wider range of visibility within the same sweep. This combination allows for better assurance when making lane changes.

Region line

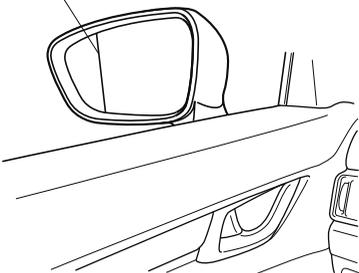


· The perceived distance of objects in the outer and inner regions of the wide angle mirror is different. Objects appearing in the outer region are actually further away than they are in the inner region.

### Power mirror adjustment

The ignition must be switched to ACC or ON position.

To adjust:

1. Rotate the mirror switch to the left **L** or right **R** to choose the left or right side mirror.
2. Press the mirror switch in the appropriate direction.

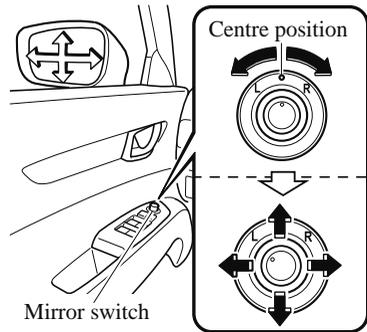

After adjusting the mirror, lock the control by rotating the switch to the centre position.


### Folding outside mirror



**Always return the outside mirrors to the driving position before you start driving:**  
*Driving with the outside mirrors folded in is dangerous. Your rear view will be restricted, and you could have an accident.*

#### **Manual folding outside mirror**

Fold the outside mirror rearward until it is flush with the vehicle.

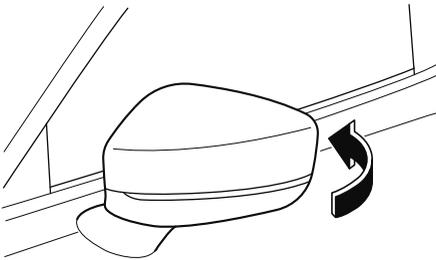

#### **Power folding outside mirror**



**Do not touch a power folding outside mirror while it is moving:**  
*Touching the power folding outside mirror when it is moving is dangerous. Your hand could be pinched and injured or the mirror could be damaged.*


**Use the switch to set the mirror to the on-road position:**  
*Setting the power folding outside mirror to the on-road position by hand is dangerous. The mirror will not lock in position and will prevent effective rearview visibility.*

**Only operate the power folding outside mirror with the vehicle safely parked:**  
*Operating the power folding outside mirror while the vehicle is moving is dangerous. Wind blast on the mirror will cause them to collapse and you will be unable to return it to the on-road position, preventing rearview visibility.*

The ignition must be switched to ACC or ON position.

#### **Type A**

To fold, rotate the outside mirror switch. To return the mirror to the driving position, rotate the switch to the centre position.

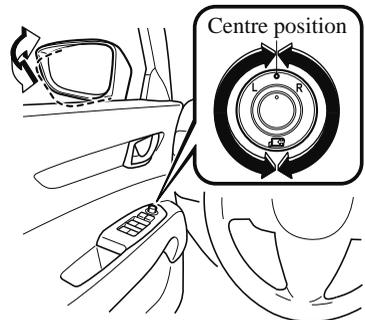


#### **Type B**

To fold the mirrors, press the  $\mathcal{D}$  mark on the outside mirror folding switch.

# Mirrors

To return the mirrors to their on-road positions, press the  mark on the outside mirror folding switch.

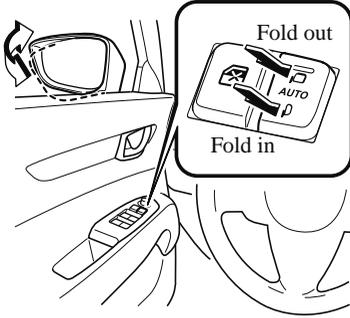

### Automatic folding function\*

The automatic folding function operates when the ignition is switched to ACC or OFF.

When the outside mirror automatic folding switch is pressed to the AUTO position (neutral position), the outside mirrors automatically fold in and out when the doors are locked and unlocked.

Also, when the ignition is switched ON or the engine is started, the outside mirrors fold out automatically.

### **NOTE**

*The outside mirrors may not fold in and out automatically under cold weather conditions.*

*If the outside mirrors do not fold in and out automatically, remove any ice or snow, and then press the upper or lower side of the outside mirror automatic folding switch to fold the outside mirrors in or out.*

### Engine-off outside mirror operation\*

The outside mirrors can be operated for about 40 seconds after the ignition is switched from ON to off.

## ▼ Rearview Mirror




**Do not stack cargo or objects higher than the seatbacks:**

*Cargo stacked higher than the seatbacks is dangerous. It can block your view in the rearview mirror, which might cause you to hit another car when changing lanes.*

### Rearview mirror adjustment

Before driving, adjust the rearview mirror to centre on the scene through the rear window.




### **NOTE**

*For the manual antidazzle mirror, perform the adjustment with the antidazzle lever in the day position.*

## Reducing glare from headlights

### Manual antidazzle mirror

Push the antidazzle lever forward for day driving. Pull it back to reduce glare of headlights from vehicles at the rear.

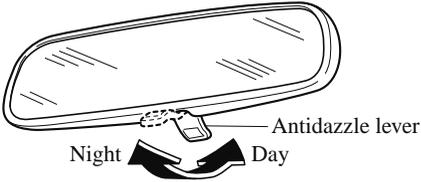


### Auto-dimming mirror

The auto-dimming mirror automatically reduces the glare of headlights from vehicles at the rear when the ignition is switched ON.

#### **(With ON/OFF button)**

Press the ON/OFF button (Ⓞ) to cancel the auto-dimming function. The indicator light will turn off.


To reactivate the auto-dimming function, press the ON/OFF button (Ⓞ). The indicator light will illuminate.

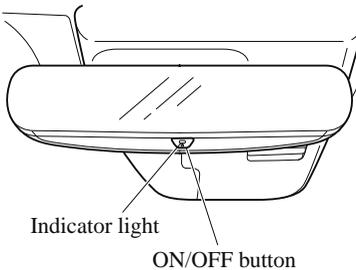


### NOTE

- Do not use glass cleaner or suspend objects on or around the light sensor. Otherwise, light sensor sensitivity will be affected and may not operate normally.

#### Without ON/OFF button



#### With ON/OFF button



- The auto-dimming function is cancelled when the ignition is switched ON and the shift/selector lever is in the R position.

## Power Windows

The windows can be opened/closed by operating the power window switches.



***Make sure the opening is clear before closing a window:***

*Closing a power window is dangerous. A person's hands, head, or even neck could be caught by the window and result in serious injury or even death. This warning applies especially to children.*

***Never allow children to play with power window switches:***

*Power window switches that are not locked with the power window lock switch would allow children to operate power windows unintentionally, which could result in serious injury if a child's hands, head or neck becomes caught by the window.*

***Make sure nothing blocks the window just before it reaches the fully closed position or while fully holding up the power window switch:***

*Blocking the power window just before it reaches the fully closed position or while fully holding up the power window switch is dangerous.*


*In this case, the jam-safe function cannot prevent the window from closing all the way. If fingers are caught, serious injuries could occur.*

***NOTE***

*When driving with only 1 of the rear windows open, your ears might experience a resonating sound. However, this does not indicate a problem. The sound can be reduced by slightly opening a front window or by changing the size of the rear window opening.*

▼ **Opening/Closing Windows**

The window opens while the switch is pressed and it closes while the switch is pulled up with the ignition switched ON. Do not open or close 3 or more windows at the same time. The front passenger's side and rear windows can be opened/closed when the power window lock switch on the driver's door is in the unlock position. Keep this switch in the locked position while children are in the vehicle.

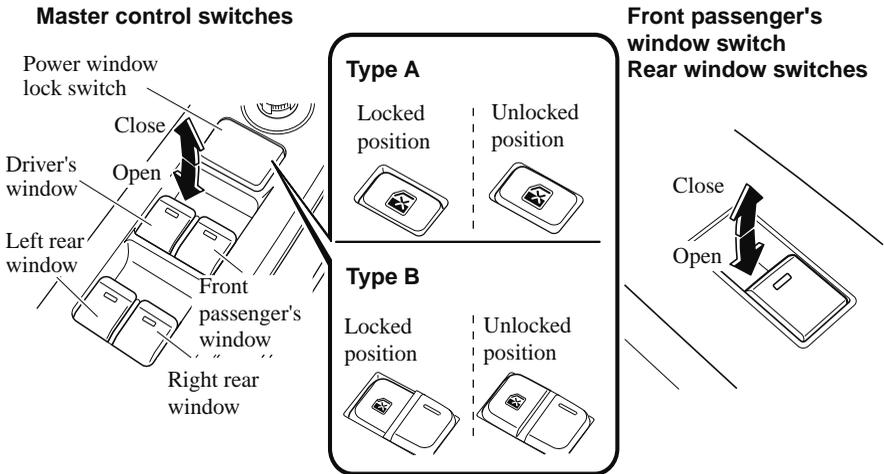

**NOTE**

- A power window may no longer open/close if you continue to press the switch after fully opening/closing the power window. If the power window does not open/close, wait a moment and then operate the switch again.
- The passenger windows may be opened or closed using the master control switches on the driver's door.
- The power window can be operated for about 40 seconds after the ignition is switched from ON to ACC or off with all doors closed. If any door is opened, the power window will stop operating.  
 For engine-off operation of the power window, the switch must be held up firmly throughout window closure because the auto-closing function will be inoperable.
- When the power window lock switch is in the locked position, the light on each power window switch, except for the driver's power window switch, turns off. The light may be difficult to see depending on the surrounding brightness.

# Windows

---

## ▼ Auto-opening/Closing

To fully open the window automatically, press the switch completely down, then release. The window will fully open automatically.

To fully close the window automatically, pull the switch completely up, then release. The window will fully close automatically.

To stop the window partway, pull or press the switch in the opposite direction and then release it.

### **NOTE**

#### ***Power window system initialization procedure***

*If the battery was disconnected during vehicle maintenance, or for other reasons (such as a switch continues to be operated after the window is fully open/closed), the window will not fully open and close automatically.*

*The power window auto function will only resume on a power window that has been reset.*

1. *Switch the ignition ON.*
2. *Make sure that the power window lock switch located on the driver's door is not depressed.*
3. *Press the switch and fully open the window.*
4. *Pull up the switch to fully close the window and continue holding the switch for about 2 seconds after the window fully closed.*
5. *Make sure that the power windows operate correctly using the door switches.*

## ▼ Jam-safe Window

If foreign matter is detected between the window and the window frame while the window is closing automatically (refer to Auto-opening/Closing on page 3-44), the window stops closing and automatically opens partway.

### **NOTE**

- *The jam-safe function may operate under the following conditions:*
  - *A strong impact is detected while the window is closing automatically.*
  - *Window is closing automatically in very low temperatures.*
- *In the event the jam-safe function activates and the power window cannot be closed automatically, pull and hold the switch and the window will close.*
- *The jam-safe window function does not operate until the system has been reset.*

## Sunroof\*

The sunroof can be opened or closed when operating the overhead tilt/slide switch at the front seats.

### **WARNING**

**Do not let passengers stand up or extend part of the body through the open sunroof while the vehicle is moving:**

Extending the head, arms, or other parts of the body through the sunroof is dangerous. The head or arms could hit something while the vehicle is moving. This could cause serious injury or death.

**Never allow children to play with the tilt/slide switch:**

The tilt/slide switch would allow children to operate the sunroof unintentionally, which could result in serious injury if a child's hands, head or neck becomes caught by the sunroof.

**Make sure the opening is clear before closing the sunroof:**

A closing sunroof is dangerous. The hands, head, or even neck of a person, especially a child, could be caught in it as it closes, causing serious injury or even death.

**Make sure nothing blocks the sunroof just before it reaches the fully closed position:**

Blocking the sunroof just before it reaches the closed position is dangerous. In this case, the jam-safe function cannot prevent the sunroof from closing. If fingers are caught, serious injuries could occur.


### **CAUTION**

- Do not sit on or put heavy items on the area where the sunroof opens and closes. Otherwise, the sunroof could be damaged.
- Do not open or close the sunroof forcefully during freezing temperatures or snowfall. Otherwise, the sunroof could be damaged.
- The sunshade does not tilt. To avoid damaging the sunshade, do not push it up.
- Do not close the sunshade while the sunroof is opening. Trying to force the sunshade closed could damage it.

### ▼ Tilt/Slide Operation

The sunroof can be opened or closed electrically only when the ignition is switched ON.

- Before leaving the vehicle or washing your Mazda, make sure the sunroof is completely closed so that water does not get inside the cabin area.
- After washing your Mazda or after it rains, wipe the water off the sunroof before operating it to avoid water penetration which could cause rust and water damage to your headliner.

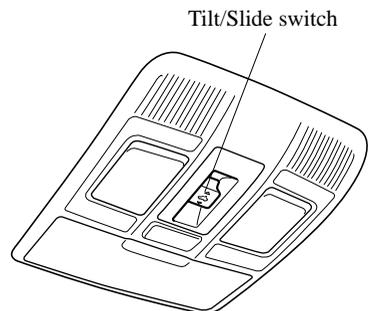

# Windows

## Tilt Operation


The rear of the sunroof can be tilted open to provide more ventilation.

To fully tilt automatically, momentarily press the tilt/slide switch.

To fully close automatically, momentarily press the tilt/slide switch in the forward direction.

To stop tilting partway, press the tilt/slide switch.

When the sunroof is already slid open and you want to tilt it open, first close the sunroof and then do a tilt operation.




## Slide Operation

To fully open automatically, momentarily press the tilt/slide switch in the backward direction.

To fully close automatically, momentarily press the tilt/slide switch in the forward direction.

To stop sliding partway, press the tilt/slide switch.

When the sunroof is already tilted open and you want to slide it open, first close the sunroof and then do a slide operation.



### **NOTE**

*If the sunroof does not operate normally, do the following procedure:*

1. Switch the ignition ON.
2. Press the tilt switch, to partially tilt open the rear of the sunroof.
3. Repeat Step 2. The rear of the sunroof tilts open to the fully open position, then closes a little.

*If the reset procedure is performed while the sunroof is in the slide position (partially open) it will close before the rear tilt opens.*

### **▼ Jam-safe Sunroof**

If a person's hands, head or an object blocks the sunroof while it is closing, the sunroof will stop and move in the open direction.

### **NOTE**


- The jam-safe function may operate under the following conditions:
  - A strong impact is detected while the sunroof is closing automatically.
  - The sunroof is closing automatically during very low temperatures.

- *In the event the jam-safe function activates and the sunroof cannot be closed automatically, press the tilt/slide switch and the sunroof will close.*
- *The jam-safe sunroof function does not operate until the system has been reset.*

### ▼ Sunshade

The sunshade can be opened and closed by hand.

The sunshade opens at the same time as the sunroof slides open, but it must be closed by hand.

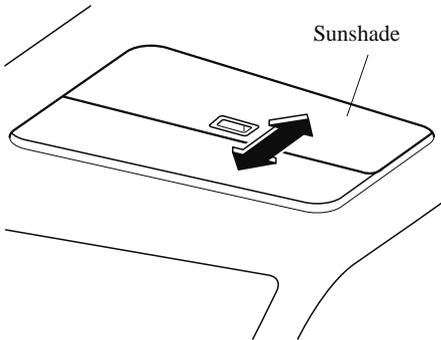

## Security System

---

### Modification and Add-On Equipment

Mazda cannot guarantee the immobilizer and the theft-deterrent systems' operation if the system has been modified or if any add-on equipment has been installed.

#### CAUTION

*To avoid damage to the vehicle, do not modify the system or install any add-on equipment to the immobilizer and the theft-deterrent systems or the vehicle.*

### Immobilizer System

The immobilizer system allows the engine to start only with a key the system recognises.

If someone attempts to start the engine with an unrecognised key, the engine will not start, thereby helping to prevent vehicle theft.

If you have a problem with the immobilizer system or the key, consult an expert repairer (we recommend an Authorised Mazda Repairer).

#### CAUTION

- *Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.*
- *To avoid damage to the key, do not:*
  - *Drop the key.*
  - *Get the key wet.*
  - *Expose the key to any kind of magnetic field.*
  - *Expose the key to high temperatures on places such as the instrument panel or bonnet, under direct sunlight.*
- *If the engine does not start with the correct key, and the security indicator light keeps illuminating or flashing, the system may have a malfunction. Consult an expert repairer (we recommend an Authorised Mazda Repairer).*

## NOTE

- The keys carry a unique electronic code. For this reason, and to assure your safety, obtaining a replacement key requires some waiting time. They are only available through an expert repairer (we recommend an Authorised Mazda Repairer).
- Always keep a spare key in case one is lost. If a key is lost, consult an expert repairer (we recommend an Authorised Mazda Repairer) as soon as possible.
- If you lose a key, an expert repairer (we recommend an Authorised Mazda Repairer), will reset the electronic codes of your remaining keys and immobilizer system. Bring all the remaining keys to the expert repairer (we recommend an Authorised Mazda Repairer) to reset. Starting the vehicle with a key that has not been reset is not possible.

## ▼ Operation

### NOTE

- The engine may not start and security indicator light may illuminate or flash if the key is placed in an area where it is difficult for the system to detect the signal, such as on the instrument panel or in the glove compartment. Move the key to a location within the signal range, switch the ignition off, and then restart the engine.
- Signals from a TV or radio station, or from a transceiver or mobile telephone could interfere with your immobilizer system. If you are using the proper key and the engine fails to start, check the security indicator light.

## Arming

The system is armed when the ignition is switched from ON to off. The security indicator light in the instrument cluster flashes every 2 seconds until the system is disarmed.



## Disarming

The system is disarmed when the ignition is switched ON with the correct programmed key. The security indicator light illuminates for about 3 seconds and then turns off. If the engine does not start with the correct key, and the security indicator light remains illuminated or flashing, try the following: Make sure the key is within the operational range for signal transmission. Switch the ignition off, and then restart the engine. If the engine does not start after 3 or more tries, contact an expert repairer (we recommend an Authorised Mazda Repairer).

### NOTE

- If the security indicator light flashes continuously while you are driving, do not shut off the engine. Go to an expert repairer (we recommend an Authorised Mazda Repairer), and have it checked. If the engine is shut off while the indicator light is flashing, you will not be able to restart it.

## Security System

---

· Because the electronic codes are reset when the immobilizer system is repaired, the keys are needed. Make sure to bring all the keys to an expert repairer (we recommend an Authorised Mazda Repairer), so that they can be programmed.

### Theft-Deterrent System\*

If the theft-deterrent system detects an inappropriate entry into the vehicle or the intrusion sensor detects movement in the vehicle which could result in the vehicle (with the intrusion sensor) or its contents being stolen, the alarm alerts the surrounding area of an abnormality by sounding the siren/horn and flashing the hazard warning lights.

The system will not function unless it's properly armed. So when you leave the vehicle, follow the arming procedure correctly.

#### Intrusion sensor\*

The intrusion sensor uses ultrasonic waves to detect movement inside the vehicle and to raise an alert of an intrusion into the vehicle.

The intrusion sensor detects certain kinds of movement inside the vehicle, however, it may also respond to phenomenon outside the vehicle such as vibrations, loud noise, wind, and air currents.


#### **CAUTION**

*In order for the intrusion sensor to operate appropriately, be aware of the following:*

- *Do not hang clothing or objects from a head restraint or a coat hook.*
- *Return the extension sunvisors to their original positions.*
- *Do not blind the intrusion sensor by covering it or placing objects over it.*
- *Do not allow the intrusion sensor to get soiled or wipe it with a liquid.*


- Do not shock or cause an impact to the intrusion sensor or the intrusion sensor bezel.
- Do not install seats that are not Mazda genuine products.
- To prevent obstruction of intrusion sensor, do not place objects or cargo near the intrusion sensor that are higher than the head restraints.

Type A

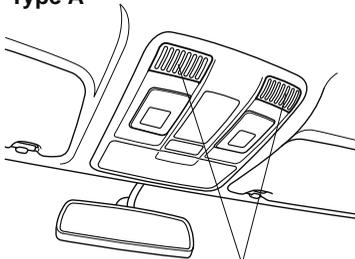

Intrusion sensor and intrusion sensor bezel

Type B



## ▼ Operation

### Siren/Horn triggering conditions

The siren/horn sounds intermittently and the hazard warning lights flash for about 30 seconds when the system is triggered by any one of the following:

- Unlocking a door with the auxiliary key or an inside door-lock knob.
- Forcing open a door, the bonnet or the liftgate.

- Opening the bonnet by operating the bonnet release handle.
- Switching the ignition ON without using the push button start.
- **(With the intrusion sensor)**  
The intrusion sensor detects a movement in the vehicle.

The system will be triggered again (up to 10 times) if one of the above conditions remains.

- **(With the intrusion sensor)**  
Disconnecting the battery terminal (the hazard warning lights do not flash).

The system will be triggered about 10 times.

### **NOTE**

- The liftgate does not open while the theft-deterrent system is operating.
- For vehicles equipped with the power liftgate, the liftgate can be opened even while the theft-deterrent system is operating by pressing the power liftgate button on the transmitter or the electric liftgate opener switch while carrying the key.
- If the battery goes dead while the theft-deterrent system is armed, the siren/horn will activate and the hazard warning lights will flash when the battery is charged or replaced.

# Security System

---

## ▼ How to Arm the System

1. Close the windows and the sunroof\* securely.

### **NOTE**

#### **(With the intrusion sensor)**

*Even with a window or the sunroof\* open, the system can be armed, however, leaving the windows or the sunroof\* even partially open can invite theft, and wind blowing into the vehicle could trigger the alarm. The intrusion sensor function can also be cancelled.*

*Refer to Cancelling the Intrusion Sensor (With Intrusion Sensor) on page 3-53.*

2. Switch the ignition OFF.
3. Make sure the bonnet, the doors, and the liftgate are closed.
4. Press the lock button on the transmitter or lock the driver's door from the outside with the auxiliary key. The hazard warning lights will flash once.

#### **(With the advanced keyless function)**

Press a request switch.

The security indicator light in the instrument cluster flashes twice per second for 20 seconds.



5. After 20 seconds, the system is fully armed.

## **NOTE**

- The theft-deterrent system can also be armed by activating the auto relock function with all the doors, the liftgate and the bonnet closed. Refer to Transmitter on page 3-5.
- The system will disarm if one of the following operations takes place within 20 seconds after pressing the lock button:
  - Unlocking any door.
  - Opening any door.
  - Opening the bonnet.
  - Switching the ignition ON.

*To rearm the system, do the arming procedure again.*

- When the doors are locked by pressing the lock button on the transmitter or using the auxiliary key while the theft-deterrent system is armed, the hazard warning lights will flash once to indicate that the system is armed.

### ▼ Cancelling the Intrusion Sensor (With Intrusion Sensor)

If the theft deterrent system has been armed while any of the following conditions are present, cancel the intrusion sensor to prevent the alarm from triggering unnecessarily.

- Leaving the vehicle with a movable object, passengers or pets remaining inside.
- Leaving an object inside the vehicle that can roll around, such as when the vehicle is placed on a tilting, unstable surface when being shipped.
- Hanging small objects/accessories in the vehicle, hanging clothing on a coat hook, or placing other items which can move easily inside the vehicle.
- Parking in an area where there is strong vibration or loud noise.
- When using a high pressure or automatic car wash.
- Continuous shock and vibration from hail or thunder and lightning is transmitted to the vehicle.
- Doors are locked with a window or the sunroof\* left open.
- An accessory heater or device that produces moving air and vibration operates while the theft deterrent system is armed.

### NOTE

*If any door or the liftgate remains closed for 30 seconds, all the doors and the liftgate automatically re-lock and the theft deterrent system arms even if a window and the sunroof\* is left open.*

To cancel the intrusion sensor, press the intrusion sensor cancel button on the transmitter within 20 seconds after pressing the lock button. The hazard warning lights will flash 3 times.

### NOTE

- *To reactivate the intrusion sensor, turn off the armed theft-deterrent system and then rearm it.*
- *The intrusion sensor is operational when the theft-deterrent system is armed. To cancel the intrusion sensor, press the intrusion sensor cancel button each time the theft-deterrent system is armed.*

### ▼ To Turn Off an Armed System

An armed system can be turned off using any one of the following methods:

- Pressing the unlock button on the transmitter.
- Starting the engine with the push button start.
- **(With the advanced keyless function)**
  - Pressing a request switch on the doors.

The hazard warning lights will flash twice.

# Security System

---

## **NOTE**

*When the doors are unlocked by pressing the unlock button on the transmitter while the theft-deterrent system is turned off, the hazard warning lights will flash twice to indicate that the system is turned off.*

## **▼ To Stop the Alarm**

A triggered alarm can be turned off using any one of the following methods:

- Pressing the unlock button on the transmitter.
- Starting the engine with the push button start.
- **(With the advanced keyless function)**
  - Pressing a request switch on the doors.
  - Pressing the electric liftgate opener while the key is being carried.
  - Pressing the power liftgate button on the transmitter.

The hazard warning lights will flash twice.

## Running-In

No special running-in is necessary, but a few precautions in the first 1,000 km (600 miles) may add to the performance, economy, and life of the vehicle.

- Do not race the engine.
- Do not maintain one constant speed, either slow or fast, for a long period of time.
- Do not drive constantly at full-throttle or high engine rpm for extended periods of time.
- Avoid unnecessary hard stops.
- Avoid full-throttle starts.
- Do not tow a trailer.

## Saving Fuel and Protection of the Environment

How you operate your Mazda determines how far it will travel on a tank of fuel. Use these suggestions to help save fuel and reduce CO<sub>2</sub>.

- Avoid long warm-ups. Once the engine runs smoothly, begin driving.
- Avoid fast starts.
- Drive at lower speeds.
- Anticipate when to apply the brakes (avoid sudden braking).
- Follow the maintenance schedule (page 6-3) and have an expert repairer (we recommend an Authorised Mazda Repairer) perform inspections and servicing.
- Use the air conditioner only when necessary.
- Slow down on rough roads.
- Keep the tyres properly inflated.
- Do not carry unnecessary weight.
- Do not rest your foot on the brake pedal while driving.
- Keep the wheels in correct alignment.
- Keep windows closed at high speeds.
- Slow down when driving in crosswinds and headwinds.

### WARNING

#### ***Never stop the engine when going down a hill:***

*Stopping the engine when going down a hill is dangerous. This causes the loss of power steering and power brake control, and may cause damage to the drivetrain. Any loss of steering or braking control could cause an accident.*

## Hazardous Driving

### **WARNING**

**Be extremely careful if it is necessary to downshift on slippery surfaces:**

*Downshifting into lower gear while driving on slippery surfaces is dangerous. The sudden change in tyre speed could cause the tyres to skid. This could lead to loss of vehicle control and an accident.*

**Avoid sharp turns, excessive speed and abrupt manoeuvres when driving this vehicle:**

*Sharp turns, excessive speed and abrupt manoeuvring of this vehicle are dangerous as it could result in the increased risk of loss of vehicle control, vehicle roll-over, personal injury or death.*

*This vehicle has a higher centre of gravity. Vehicles with a higher centre of gravity such as utility vehicles handle differently than vehicles with a lower centre of gravity. Utility vehicles are not designed for cornering at high speeds any more than low profile sports cars are designed to perform satisfactorily under off-road conditions.*

*In addition, utility vehicles have a significantly higher rollover rate than other types of vehicles.*

*In a rollover crash, an unbelted person is significantly more likely to die than a person wearing a seat belt.*

When driving on ice or in water, snow, mud, sand, or similar hazards:

- Be cautious and allow extra distance for braking.
- Avoid sudden braking and sudden manoeuvring.
- Do not pump the brakes. Continue to press down on the brake pedal. Refer to Antilock Brake System (ABS) on page 4-119.
- If you get stuck, select a lower gear and accelerate slowly. Do not spin the front wheels.
- For more traction in starting on slippery surfaces such as ice or packed snow, use sand, rock salt, chains, carpeting, or other nonslip material under the front wheels.

**NOTE**

*Use snow chains only on the front wheels.*

## Floor Mat

We recommend the use of Genuine Mazda floor mats.

### WARNING

**Make sure the floor mats are secured with the grommets or the retainers to prevent them from bunching up under the foot pedals (Driver's side):**

Using a floor mat that is not secured is dangerous as it will interfere with the accelerator and brake pedal operation (driver's side), which could result in an accident.

Only use a floor mat which conforms to the shape of the floor on the driver's side and make sure it is oriented correctly.

Secure the floor mat using the grommets or retainers.

There are various ways to secure floor mats depending on the type used, therefore secure the mat according to the type.


After installing the floor mat, make sure that it does not slide from side to side or back and forth, and that there is sufficient clearance with the accelerator and brake pedals on the driver's side.

After removing the floor mat for cleaning or some other reason, always securely reinstall it while paying attention to the precautions just mentioned.

**Do not install two floor mats, one on top of the other, on the driver's side:**

Installing two floor mats, one on top of the other, on the driver's side is dangerous as the retention pins can only keep one floor mat from sliding forward.

Loose floor mat(s) will interfere with the foot pedals and could result in an accident. If using an all-weather mat for winter use always remove the original floor mat.

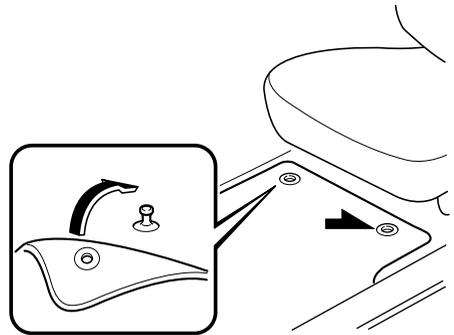

When setting a floor mat, position the floor mat so that its grommets or retainers are inserted over the pointed end of the retention posts.

### Rocking the Vehicle

#### WARNING

***Do not spin the wheels at high speed, and do not allow anyone to stand behind a wheel when pushing the vehicle:***

*When the vehicle is stuck, spinning the wheels at high speed is dangerous. The spinning tyre could overheat and explode. This could cause serious injuries.*

#### CAUTION

*Too much rocking may cause engine overheating, transaxle failure, and tyre damage.*

If you must rock the vehicle to free it from snow, sand or mud, depress the accelerator slightly and slowly move the shift lever/selector lever from I (D) to R position.

### Winter Driving

Carry emergency gear, including tyre chains, window scraper, flares, a small shovel, jumper leads, and a small bag of sand or salt.

Ask an expert repairer (we recommend an Authorised Mazda Repairer) to check the following:

- Have the proper ratio of antifreeze in the radiator.  
Refer to Engine Coolant on page 6-31.
- Inspect the battery and its leads. Cold reduces battery capacity.
- Use an engine oil appropriate for the lowest ambient temperatures that the vehicle will be driven in (page 6-25).
- Inspect the ignition system for damage and loose connections.
- Use washer fluid made with antifreeze—but do not use engine coolant antifreeze for washer fluid (page 6-34).

#### **NOTE**

- *Remove snow before driving. Snow left on the windscreen is dangerous as it could obstruct vision.*
- *Do not apply excessive force to a window scraper when removing ice or frozen snow on the mirror glass and windscreen.*
- *Never use warm or hot water for removing snow or ice from windows and mirrors as it could result in the glass cracking.*

· Drive slowly. Braking performance can be adversely affected if snow or ice adheres to the brake components. If this situation occurs, drive the vehicle slowly, releasing the accelerator pedal and lightly applying the brakes several times until the brake performance returns to normal.

### ▼ Snow Tyres



#### WARNING

**Use only the same size and type tyres (snow, radial, or non-radial) on all 4 wheels:**

Using tyres different in size or type is dangerous. Your vehicle's handling could be greatly affected and result in an accident.



#### CAUTION

Check local regulations before using studded tyres.

#### NOTE

If your vehicle is equipped with the tyre pressure monitoring system, the system may not function correctly when using tyres with steel wire reinforcement in the sidewalls (page 4-325).

#### Use snow tyres on all 4 wheels

Do not exceed the maximum permissible speed for your snow tyres or legal speed limits.

#### Europe

When snow tyres are used, select the specified size and pressure (page 9-10).

### ▼ Tyre Chains

Check local regulations before using tyre chains.



#### CAUTION

- Chains may affect handling.
- Do not go faster than 50 km/h (30 mph) or the chain manufacturer's recommended limit, whichever is lower.
- Drive carefully and avoid bumps, holes, and sharp turns.
- Avoid locked-wheel braking.
- Do not use chains on a temporary spare tyre; it may result in damage to the vehicle and to the tyre. In some models, the vehicle is not equipped with a factory installed temporary spare tyre.
- Do not use chains on roads that are free of snow or ice. The tyres and chains could be damaged.
- Chains may scratch or chip aluminium wheels.

#### NOTE


If your vehicle is equipped with the tyre pressure monitoring system, the system may not function correctly when using tyre chains.

Install the chains on the front tyres only. Do not use chains on the rear tyres.

# Driving Tips

## Tyre chain selection (Europe)

Mazda recommends hexagon type steel ring chains. Select the proper type according to your tyre size.



Tyre size	Tyre chain
225/65R17	Hexagon type
225/55R19	Hexagon type


### **NOTE**

Although Mazda recommends hexagon type steel ring chains, all chains within the installation specifications may be used.

## Installation specification (Europe)

When installing tyre chains, the distance between the tyre tread and the chain must be within the prescribed limits in the following table.

Distance [Unit: mm (in)]	
A	B
MAX 13 (0.51)	MAX 13 (0.51)

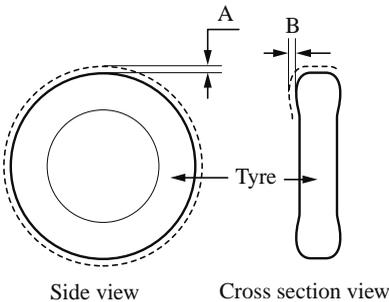

## Installing the chains

1. Secure the chains on the front tyres as tightly as possible. Always follow the chain manufacturer's instructions.
2. Retighten the chains after driving 1/2—1 km (1/4—1/2 mile).

## Driving In Flooded Area

### **WARNING**

***Dry off brakes that have become wet by driving slowly, releasing the accelerator pedal and lightly applying the brakes several times until the brake performance returns to normal:***

*Driving with wet brakes is dangerous. Increased stopping distance or the vehicle pulling to one side when braking could result in a serious accident. Light braking will indicate whether the brakes have been affected.*

### **CAUTION**

*Do not drive the vehicle on flooded roads as it could cause short circuiting of electrical/electronic parts, or engine damage or stalling from water absorption. If the vehicle has been immersed in water, consult an expert repairer (we recommend an Authorised Mazda Repairer).*

### Turbocharger Information (SKYACTIV-G 2.5T, SKYACTIV-D 2.2)

#### CAUTION

- *After driving at freeway speeds or up a long hill, trailer towing for a long time, idle the engine at least 30 seconds before stopping it. Otherwise, the turbocharger could be damaged. However, when i-stop operates, idling is unnecessary.*
- *Racing or over-revving the engine, particularly after it's just been started, can damage the turbocharger.*
- *To protect the engine from damage, the engine is designed so that it cannot be raced just after starting it in extremely cold weather.*

The turbocharger greatly enhances engine power. Its advanced design provides improved operation and requires minimum maintenance.

To get the most from it, observe the following.

1. Change engine oil and filter according to Scheduled Maintenance (page 6-3).
2. Use only recommended engine oil (page 6-25). Extra additives are NOT recommended.

## Towing Caravans and Trailers (Europe/Russia/Turkey/ Israel/South Africa)

Your Mazda was designed and built primarily to carry passengers and cargo. If you tow a trailer, follow these instructions because driver and passenger safety depends on proper equipment and safe driving habits. Towing a trailer will affect handling, braking, durability, performance, and economy. Never overload vehicle or trailer. Consult an expert repairer (we recommend an Authorised Mazda Repairer) if you need further details.



- Do not tow a trailer during the first 1,000 km (600 miles) of your new Mazda. If you do, you may damage the engine, transaxle, differential, wheel bearings, and other power train components.
- Damage caused by towing a trailer/caravan in Turkey is not covered by the vehicle's warranty.

### ▼ Weight Limits


**The total trailer weight, gross combination weight and trailer nose weight must be within the prescribed limits in the Trailer Towing-Load Table.**

#### TOTAL TRAILER WEIGHT:




Sum of weights of the trailer and its load.

#### GROSS COMBINATION WEIGHT:



Sum of total trailer weight and towing vehicle weight; including trailer hitch, vehicle passengers, and vehicle load.

#### TRAILER NOSE WEIGHT:



The weight exerted on the trailer tongue. It is varied by changing the weight distribution when loading the trailer.



Be aware of the towing load weight differences when towing at high altitudes. For altitudes exceeding 1,000 meter (3,280 ft 10 in), always reduce the towing load by 10% for every 1,000 meter (3,280 ft 10 in) increase in altitude from the load indicated under the gross combination weight heading in the maximum trailer towing-load table. If the determined maximum total towing load weight is exceeded, the engine and other power train parts may be damaged.

### Maximum trailer towing-load table

#### Europe/Gradient up to 12%

MODEL				TOTAL TRAILER WEIGHT		GROSS COMBI-NATION WEIGHT
Engine	Transaxle	Emission level	Drive system	Trailer without brake	Trailer with brake	Trailer with brake
SKYACTIV-G 2.0	Manual trans-axle	EURO6	FWD	740 kg (1,631.4 lb)	1,800 kg (3,968.2 lb)	3,820 kg (8,421.5 lb)
SKYACTIV-G 2.0	Automatic transaxle	EURO6	FWD	750 kg (1,653.4 lb)	2,000 kg (4,409.2 lb)	4,035 kg (8,895.5 lb)
SKYACTIV-G 2.0	Manual trans-axle	EURO6	AWD	750 kg (1,653.4 lb)	1,800 kg (3,968.2 lb)	3,880 kg (8,553.8 lb)
SKYACTIV-G 2.0	Automatic transaxle	EURO6	AWD	750 kg (1,653.4 lb)	2,000 kg (4,409.2 lb)	4,115 kg (9,071.9 lb)
SKYACTIV-G 2.5	Automatic transaxle	EURO6	FWD	750 kg (1,653.4 lb)	2,000 kg (4,409.2 lb)	4,070 kg (8,972.7 lb)
SKYACTIV-G 2.5	Automatic transaxle	EURO6	AWD	750 kg (1,653.4 lb)	2,000 kg (4,409.2 lb)	4,140 kg (9,127.0 lb)
SKYACTIV-D 2.2 STANDARD POWER	Manual trans-axle	EURO6	FWD	750 kg (1,653.4 lb)	2,000 kg (4,409.2 lb)	4,143 kg (9,133.6 lb)
SKYACTIV-D 2.2 STANDARD POWER	Automatic transaxle	EURO6	FWD	750 kg (1,653.4 lb)	2,000 kg (4,409.2 lb)	4,143 kg (9,133.6 lb)
SKYACTIV-D 2.2 STANDARD POWER	Manual trans-axle	EURO6	AWD	750 kg (1,653.4 lb)	2,000 kg (4,409.2 lb)	4,220 kg (9,303.4 lb)
SKYACTIV-D 2.2 STANDARD POWER	Automatic transaxle	EURO6	AWD	750 kg (1,653.4 lb)	2,100kg (4,629.6 lb)	4,335 kg (9,556.9 lb)
SKYACTIV-D 2.2 HIGH POWER	Automatic transaxle	EURO6	FWD	750 kg (1,653.4 lb)	2,000 kg (4,409.2 lb)	4,143 kg (9,133.6 lb)
SKYACTIV-D 2.2 HIGH POWER	Manual trans-axle	EURO6	FWD	750 kg (1,653.4 lb)	2,000 kg (4,409.2 lb)	4,143 kg (9,133.6 lb)

MODEL				TOTAL TRAILER WEIGHT		GROSS COMBINATION WEIGHT
Engine	Transaxle	Emission level	Drive system	Trailer without brake	Trailer with brake	Trailer with brake
SKYACTIV-D 2.2 HIGH POWER	Manual transaxle	EURO6	AWD	750 kg (1,653.4 lb)	2,000 kg (4,409.2 lb)	4,220 kg (9,303.4 lb)
SKYACTIV-D 2.2 HIGH POWER	Automatic transaxle	EURO6	AWD	750 kg (1,653.4 lb)	2,100kg (4,629.6 lb)	4,335 kg (9,556.9 lb)

TRAILER NOSE WEIGHT: 84 kg (185.1 lb)

**Germany and Austria/Gradient up to 8%**

MODEL				TOTAL TRAILER WEIGHT		GROSS COMBINATION WEIGHT
Engine	Transaxle	Emission level	Drive system	Trailer without brake	Trailer with brake	Trailer with brake
SKYACTIV-G 2.0	Manual transaxle	EURO6	FWD	740 kg (1,631.4 lb)	1,900 kg (4,188.7 lb)	3,920 kg (8,642.0 lb)
SKYACTIV-G 2.0	Automatic transaxle	EURO6	FWD	750 kg (1,653.4 lb)	2,000 kg (4,409.2 lb)	4,035 kg (8,895.5 lb)
SKYACTIV-G 2.0	Manual transaxle	EURO6	AWD	750 kg (1,653.4 lb)	1,900 kg (4,188.7 lb)	3,980 kg (8,774.3 lb)
SKYACTIV-G 2.0	Automatic transaxle	EURO6	AWD	750 kg (1,653.4 lb)	2,000 kg (4,409.2 lb)	4,115 kg (9,071.9 lb)
SKYACTIV-G 2.5	Automatic transaxle	EURO6	FWD	750 kg (1,653.4 lb)	2,000 kg (4,409.2 lb)	4,070 kg (8,972.7 lb)
SKYACTIV-G 2.5	Automatic transaxle	EURO6	AWD	750 kg (1,653.4 lb)	2,000 kg (4,409.2 lb)	4,140 kg (9,127.0 lb)
SKYACTIV-D 2.2 STANDARD POWER	Manual transaxle	EURO6	FWD	750 kg (1,653.4 lb)	2,000 kg (4,409.2 lb)	4,143 kg (9,133.6 lb)
SKYACTIV-D 2.2 STANDARD POWER	Automatic transaxle	EURO6	FWD	750 kg (1,653.4 lb)	2,000 kg (4,409.2 lb)	4,143 kg (9,133.6 lb)
SKYACTIV-D 2.2 STANDARD POWER	Manual transaxle	EURO6	AWD	750 kg (1,653.4 lb)	2,100 kg (4,629.6 lb)	4,320 kg (9,523.8 lb)
SKYACTIV-D 2.2 STANDARD POWER	Automatic transaxle	EURO6	AWD	750 kg (1,653.4 lb)	2,100 kg (4,629.6 lb)	4,335 kg (9,556.9 lb)

# Towing

---

MODEL				TOTAL TRAILER WEIGHT		GROSS COMBINATION WEIGHT
Engine	Transaxle	Emission level	Drive system	Trailer without brake	Trailer with brake	Trailer with brake
SKYAC-TIV-D 2.2 HIGH POWER	Manual transaxle	EURO6	FWD	750 kg (1,653.4 lb)	2,000 kg (4,409.2 lb)	4,143 kg (9,133.6 lb)
SKYAC-TIV-D 2.2 HIGH POWER	Automatic transaxle	EURO6	FWD	750 kg (1,653.4 lb)	2,000 kg (4,409.2 lb)	4,143 kg (9,133.6 lb)
SKYAC-TIV-D 2.2 HIGH POWER	Manual transaxle	EURO6	AWD	750 kg (1,653.4 lb)	2,100 kg (4,629.6 lb)	4,320 kg (9,523.8 lb)
SKYAC-TIV-D 2.2 HIGH POWER	Automatic transaxle	EURO6	AWD	750 kg (1,653.4 lb)	2,100 kg (4,629.6 lb)	4,335 kg (9,556.9 lb)

TRAILER NOSE WEIGHT: 84 kg (185.1 lb)

**Russia/Gradient up to 12%**

MODEL					TOTAL TRAILER WEIGHT		GROSS COMBINATION WEIGHT
Engine	Transaxle	Emission level	Drive system	i-stop system	Trailer without brake	Trailer with brake	Trailer with brake
SKYAC-TIV-G 2.0	Manual transaxle	EURO5	FWD	—	750 kg (1,653.4 lb)	1,800 kg (3,968.2 lb)	3,780 kg (8,333.3 lb)
SKYAC-TIV-G 2.0	Automatic transaxle	EURO5	FWD	—	750 kg (1,653.4 lb)	1,800 kg (3,968.2 lb)	3,850 kg (8,487.7 lb)
SKYAC-TIV-G 2.0	Automatic transaxle	EURO5	AWD	—	750 kg (1,653.4 lb)	1,800 kg (3,968.2 lb)	3,925 kg (8,653.0 lb)
SKYAC-TIV-G 2.0	Automatic transaxle	EURO5	AWD	×	750 kg (1,653.4 lb)	1,800 kg (3,968.2 lb)	3,925 kg (8,653.0 lb)
SKYAC-TIV-G 2.5	Automatic transaxle	EURO5	AWD	—	750 kg (1,653.4 lb)	1,800 kg (3,968.2 lb)	3,940 kg (8,686.1 lb)
SKYAC-TIV-G 2.5	Automatic transaxle	EURO5	AWD	×	750 kg (1,653.4 lb)	1,800 kg (3,968.2 lb)	3,940 kg (8,686.1 lb)

×: Available

—: Not available

TRAILER NOSE WEIGHT: 84 kg (185.1 lb)

**Israel/Gradient up to 12%**

MODEL				TOTAL TRAILER WEIGHT		GROSS COMBINATION WEIGHT
Engine	Transaxle	Emission level	Drive system	Trailer without brake	Trailer with brake	Trailer with brake
SKYAC-TIV-G 2.0	Automatic transaxle	EURO6	FWD	750 kg (1,653.4 lb)	1,500 kg (3,306.9 lb)	3,560 kg (7,848.3 lb)
SKYAC-TIV-G 2.5	Automatic transaxle	EURO6	FWD	750 kg (1,653.4 lb)	1,500 kg (3,306.9 lb)	3,585 kg (7,903.4 lb)
SKYAC-TIV-G 2.5	Automatic transaxle	EURO6	AWD	750 kg (1,653.4 lb)	1,500 kg (3,306.9 lb)	3,643 kg (8,031.3 lb)

TRAILER NOSE WEIGHT: 84 kg (185.1 lb)

**South Africa/Gradient up to 12%**

MODEL				TOTAL TRAILER WEIGHT		GROSS COMBINATION WEIGHT
Engine	Transaxle	Emission level	Drive system	Trailer without brake	Trailer with brake	Trailer with brake
SKYAC-TIV-G 2.0	Manual transaxle	EURO4	FWD	750 kg (1,653.4 lb)	1,000 kg (2,204.6 lb)	2,995 kg (6,602.7 lb)
SKYAC-TIV-G 2.0	Automatic transaxle	EURO4	FWD	750 kg (1,653.4 lb)	1,000 kg (2,204.6 lb)	3,065 kg (6,757.0 lb)
SKYAC-TIV-G 2.5	Automatic transaxle	EURO4	AWD	750 kg (1,653.4 lb)	1,500 kg (3,306.9 lb)	3,640 kg (8,024.7 lb)
SKYAC-TIV-D 2.2	Automatic transaxle	EURO4	AWD	750 kg (1,653.4 lb)	1,600 kg (3,527.3 lb)	3,743 kg (8,251.8 lb)

TRAILER NOSE WEIGHT: 84 kg (185.1 lb)



**Always keep tow loads within specified limits as indicated in the Trailer Towing-Load Table:** Attempting to tow loads greater than those specified is dangerous as it may cause serious handling and performance problems that could result in personal injury or vehicle damage, or both.

**Always keep the trailer nose weight within the specified limits in the Trailer Towing-Load Table:**

Loading the trailer with more weight in the rear than in the front is dangerous. This could cause loss of vehicle control and an accident.

**NOTE**


- The total trailer weight and nose weight can be determined by weighing the trailer on platform scales at a highway weighing station or a trucking company.
- Appropriate total trailer weight and nose weight may prevent the danger of trailer sway from crosswinds, rough roads, or other causes.

▼ **Trailer Hitch**

When towing a trailer, use an appropriate trailer hitch. We recommend using a genuine Mazda trailer hitch. Use the original holes drilled by the vehicle manufacturer for securing the trailer hitch. Contact your expert repairer (we recommend an Authorised Mazda Repairer), for more information.

Do not install a trailer hitch that is not easy to remove or reposition if there is the possibility that a part of the trailer hitch partially obscures the lighting system and/or rear number plate. If a trailer hitch that is easy to remove or reposition is installed, make sure to remove or reposition it when it is not in use.

**Trailer hitch installation area**





Unit:mm (in)

A:350—420 (13.8—16.5)

B:989.7 (38.96)

C:1046.9 (41.217)

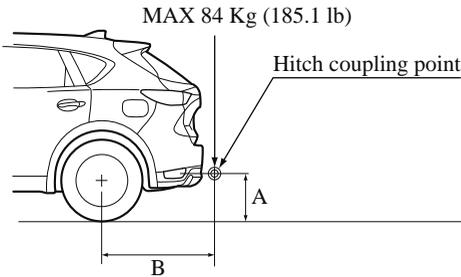

# Towing

---

## ▼ Tyres

When towing a trailer, make sure that the tyre pressures of the rear tyres are at least 20 kPa (0.2 bar, 2.9 psi) higher than the recommended tyre pressures indicated on the tyre pressure chart on the driver's door frame.

Trailer tyre size, load rating, and inflation pressures should conform to tyre manufacturer specifications.



### ***Never use the temporary spare tyre when towing:***

*Using the temporary spare tyre on your vehicle when towing a trailer is dangerous as it could result in tyre failure, loss of control, and injury to vehicle occupants.*

## ▼ Safety Chains

Safety chains must be used as a precautionary measure should the trailer become unintentionally unhitched. They should cross under the trailer tongue and attach to the hitch. Leave enough slack to allow full turns. Consult literature published by your trailer or hitch manufacturer for more details.



### ***Make sure the safety chain is securely attached to both the trailer and the vehicle prior to departure:***

*Towing a trailer without using a safety chain securely attached to both the trailer and the vehicle is dangerous. If damage occurs to the coupling unit or hitch ball, the trailer could wander into another lane and cause a collision.*

## ▼ Trailer Lights



*Do not connect a trailer lighting system directly to the lighting system of your Mazda. This may damage your vehicle's electrical system and lighting systems. To connect the lighting system, consult an expert repairer (we recommend an Authorised Mazda Repairer).*

## ▼ Trailer Brakes

Check the Maximum trailer towing-load table in Weight Limits (page 3-63), and if your trailer weight exceeds the value in the TOTAL TRAILER WEIGHT (Trailer without brake), trailer brakes are required.

If your trailer has brakes, make sure they meet regulations.

 **WARNING****Do not connect a hydraulic trailer-brake system to your vehicle's brake system:**

Connecting a hydraulic trailer-brake system directly to the vehicle brake system is dangerous and will result in inadequate braking and possible injury.

**▼ Trailer Towing Tips****Before driving**

- Verify that your Mazda maintains a near-normal attitude when a loaded or unloaded trailer is connected. Do not drive if it has an abnormal front-up or front-down position. Inspect for incorrect nose weight, worn suspension parts, and trailer overloading. Have the vehicle inspected by an expert repairer (we recommend an Authorised Mazda Repairer).
- Make sure the trailer cargo is secure to prevent it from shifting.
- Make sure the mirrors meet all government regulations. Inspect them.
- Before starting out, inspect the operation of all vehicle and trailer lights and all vehicle-to-trailer connections. Stop and re-inspect all lights and connections after driving a short distance.

**Driving**

- Your Mazda will handle differently with a trailer in tow, so practice turning, backing, and stopping in a traffic-free area.
- Take time to get accustomed to the extra weight and length.
- Do not exceed 100 km/h (62 mph) with a trailer in tow. If the local legal maximum speed with a trailer in tow is less than 100 km/h (62 mph), do not exceed the legal speed.

 **CAUTION**

*If the vehicle exceeds 100 km/h (62 mph) with a trailer in tow, the vehicle could be damaged.*

- When ascending a hill, shift into a lower gear to reduce the possibility of overloading or overheating the engine, or both.
- When descending a hill, shift into a lower gear and use engine compression as a braking effect. Pay constant attention to speed and use the brakes only as needed. Holding the brake pedal down for a prolonged period may cause the brakes to overheat and lose power.

# Towing

---

## **Parking**

Avoid parking on an incline with a trailer. If this must be done, follow these instructions.

### **Parking on an Incline**

1. Set the parking brake and the brakes.
2. Have someone block the wheels of the vehicle and trailer while you apply the brakes.
3. After the wheels are blocked, release the parking brake and the brakes slowly, allowing the blocks to bear the load.
4. Set the parking brake firmly.
5. If the vehicle has an automatic transaxle, put the selector lever in P position. If it has a manual transaxle, place the gear shift in 1 or R position.

### **Starting on an Incline**

1. Start the engine (page 4-5).
2. Release the parking brake and slowly pull away a short distance from the wheel blocks.
3. Stop on the nearest level ground, set the parking brake, and pick up the wheel blocks.

# 4

## When Driving

Information concerning safer driving and stopping.

<b>Start/Stop Engine.....</b>	<b>4-4</b>
Ignition Switch.....	4-4
Starting the Engine.....	4-5
Turning the Engine Off.....	4-11
i-stop* .....	4-12
Cylinder Deactivation* .....	4-20
<b>Instrument Cluster and Display .....</b>	<b>4-21</b>
Instrument Cluster and Display.....	4-21
Instrument Cluster (Type A).....	4-22
Instrument Cluster (Type B).....	4-42
Instrument Cluster (Type C).....	4-61
Active Driving Display* .....	4-75
<b>Manual Transaxle Operation.....</b>	<b>4-78</b>
Manual Transaxle Shift Pattern.....	4-78
<b>Automatic Transaxle.....</b>	<b>4-80</b>
Automatic Transaxle Controls.....	4-80
Shift-Lock System.....	4-81
Transaxle Ranges.....	4-82
Manual Shift Mode.....	4-84
Direct Mode*.....	4-89
Driving Tips.....	4-90
<b>Switches and Controls.....</b>	<b>4-91</b>
Lighting Control.....	4-91
Rear Fog Light*.....	4-97
Turn and Lane-Change Signals.....	4-98
Windscreen Wipers and Washer.....	4-99
Rear Window Wiper and Washer.....	4-103
Headlight Washer* .....	4-103
Rear Window Defogger.....	4-104
Horn.....	4-106
Hazard Warning Flasher.....	4-107
<b>Brake.....</b>	<b>4-108</b>
Brake System.....	4-108
AUTOHOLD.....	4-113
Emergency Stop Signal System.....	4-117
Hill Launch Assist (HLA).....	4-118
<b>ABS/TCS/DSC/Off-Road Traction Assist.....</b>	<b>4-119</b>
Antilock Brake System (ABS).....	4-119
Traction Control System (TCS).....	4-120
Dynamic Stability Control (DSC).....	4-122
Off-Road Traction Assist*.....	4-123
<b>i-ELOOP.....</b>	<b>4-125</b>
i-ELOOP*.....	4-125
<b>Mazda intelligent Drive Select (Mi- Drive).....</b>	<b>4-127</b>
Mazda intelligent Drive Select (Mi- Drive)* .....	4-127

<b>i-ACTIV AWD</b> .....	<b>4-130</b>
i-ACTIV AWD Operation * .....	4-130
<b>Power Steering</b> .....	<b>4-132</b>
Power Steering.....	4-132
<b>i-ACTIVSENSE</b> .....	<b>4-133</b>
i-ACTIVSENSE.....	4-133
Adaptive Front Lighting System (AFS)* .....	4-137
High Beam Control System (HBC)* .....	4-138
Adaptive LED Headlights (ALH)* .....	4-140
Blind Spot Monitoring (BSM)* .....	4-143
Traffic Sign Recognition System (TSR)* .....	4-148
Distance Recognition Support System (DRSS)* .....	4-154
Driver Attention Alert (DAA)* .....	4-158
Rear Cross Traffic Alert (RCTA)* .....	4-160
Mazda Radar Cruise Control (MRCC)* .....	4-164
Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function)* .....	4-177
Cruising & Traffic Support (CTS)* .....	4-192
Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS)* .....	4-212
Adjustable Speed Limiter (ASL)* .....	4-226
Advanced Smart City Brake Support (Advanced SCBS)* .....	4-235

Smart City Brake Support [Forward] (SCBS F)* .....	4-239
Smart City Brake Support [Reverse] (SCBS R)* .....	4-243
Smart Brake Support (SBS)* .....	4-247
360° View Monitor (Mazda Connect (Type A))* .....	4-249
360° View Monitor (Mazda Connect (Type B))* .....	4-276
Forward Sensing Camera (FSC)* .....	4-305
Radar Sensor (Front)* .....	4-311
Radar Sensors (Rear)* .....	4-314
Ultrasonic Sensor (Rear)* .....	4-316
Front Camera/Side Cameras/Rear Camera* .....	4-317

<b>Cruise Control</b> .....	<b>4-318</b>
Cruise Control* .....	4-318

<b>Tyre Pressure Monitoring System</b> .....	<b>4-323</b>
Tyre Pressure Monitoring System* .....	4-323

<b>Diesel Particulate Filter</b> .....	<b>4-327</b>
Diesel Particulate Filter (SKYACTIV-D 2.2).....	4-327

<b>Selective Catalytic Reduction (SCR) System</b> .....	<b>4-329</b>
Selective Catalytic Reduction (SCR) System* .....	4-329

<b>Rear View Monitor (Mazda Connect (Type A))</b> .....	<b>4-332</b>
Rear View Monitor (Mazda Connect (Type A))* .....	4-332

---

<b>Rear View Monitor (Mazda Connect (Type B))</b> .....	<b>4-344</b>
Rear View Monitor (Mazda Connect (Type B))* .....	4-344

<b>Parking Sensor System (Mazda Connect (Type A))</b> .....	<b>4-352</b>
Parking Sensor System (Mazda Connect (Type A))* .....	4-352

<b>Parking Sensor System (Mazda Connect (Type B))</b> .....	<b>4-362</b>
Parking Sensor System (Mazda Connect (Type B))* .....	4-362


# Start/Stop Engine

## Ignition Switch

### ▼ Push Button Start Positions

The system operates only when the key is within operational range.

Each time the push button start is pressed, the ignition switches in the order of off, ACC, and ON. Pressing the push button start again from ON switches the ignition off.

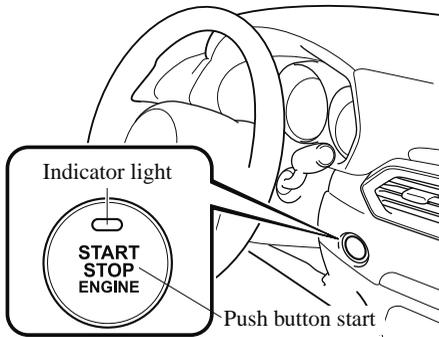

### NOTE

- The engine starts by pressing the push button start while depressing the clutch pedal (manual transaxle) or the brake pedal (automatic transaxle). To switch the ignition position, press the push button start without depressing the pedal.
- Do not leave the ignition switched ON while the engine is not running. Doing so could result in the battery going dead. If the ignition is left in ACC (For automatic transaxle, the selector lever is in the P position, and the ignition is in ACC), the ignition switches off automatically after about 25 minutes.

### Off

The power supply to electrical devices turns off and the push button start indicator light (amber) also turns off. In this position the steering wheel is locked.

### WARNING

**Before leaving the driver's seat, always switch the ignition off, set the parking brake, and make sure the selector lever is in P (automatic transaxle) position or in 1st gear or R (manual transaxle):**

Leaving the driver's seat without switching the ignition off, setting the parking brake, and shifting the selector lever to P (automatic transaxle) position or to 1st gear or R (manual transaxle) is dangerous. Unexpected vehicle movement could occur which could result in an accident.

In addition, if your intention is to leave the vehicle for even a short period, it is important to switch the ignition off, as leaving it in another position will disable some of the vehicle's security systems and run the battery down.

### NOTE

#### (Locked steering wheel)

If the push button start indicator light (green) is flashing and the beep sound is heard, this indicates that the steering wheel is not unlocked. To unlock the steering wheel, press the push button start while moving the steering wheel left and right.

**ACC (Accessory)**

Some electrical accessories will operate and the indicator light (amber) illuminates. In this position the steering wheel is unlocked.

**NOTE**

*The keyless entry system does not function while the push button start has been pressed to ACC, and the doors will not lock/unlock even if they have been locked manually.*

**ON**

This is the normal running position after the engine is started. The indicator light (amber) turns off. (The indicator light (amber) illuminates when the ignition is switched ON and the engine is not running.)

Some indicator lights/warning lights should be inspected before the engine is started (page 4-21).

**NOTE**

**(SKYACTIV-G 2.0, SKYACTIV-G 2.5, SKYACTIV-G 2.5T)**

*When the push button start is pressed to ON, the sound of the fuel pump motor operating near the fuel tank can be heard. This does not indicate an abnormality.*

**Starting the Engine****Radio waves from the key may affect medical devices such as pacemakers:**

*Before using the key near people who use medical devices, ask the medical device manufacturer or your physician if radio waves from the key will affect the device.*

**NOTE**

- *The key must be carried because the key carries an immobilizer chip that must communicate with the engine controls at short range.*
- *The engine can be started when the push button start is pressed from off, ACC, or ON.*
- *The push button start system functions (function which can start the engine by only carrying the key) can be deactivated to prevent any possible adverse effect on a user wearing a pacemaker or other medical device. If the system is deactivated, you will be unable to start the engine by carrying the key. Consult an expert repairer (we recommend an Authorised Mazda Repairer) for details. If the push button start system functions have been deactivated, you can start the engine by following the procedure indicated when the key battery goes dead. Refer to Engine Start Function When Key Battery is Dead on page 4-9.*

# Start/Stop Engine

· After starting a cold engine, the engine speed increases and a whining sound from the engine compartment can be heard.

*This is for improved exhaust gas purification and does not indicate any parts defect.*

1. Make sure you are carrying the key.
2. Occupants should fasten their seat belts.
3. Make sure the parking brake is on.
4. Continue to press the brake pedal firmly until the engine has completely started.
5. **(Manual transaxle)**  
Continue to press the clutch pedal firmly until the engine has completely started.

### **(Automatic transaxle)**

Put the vehicle in park (P). If you must restart the engine while the vehicle is moving, shift into neutral (N).

### **NOTE**


#### · **(Manual transaxle)**

*The starter will not operate if the clutch pedal is not depressed sufficiently.*

#### · **(Automatic transaxle)**

*The starter will not operate if the selector lever is not in P or N position and the brake pedal is not depressed sufficiently.*

6. Verify that the KEY indicator light (green) (if equipped) in the instrument cluster and the push button start indicator light (green) illuminate.

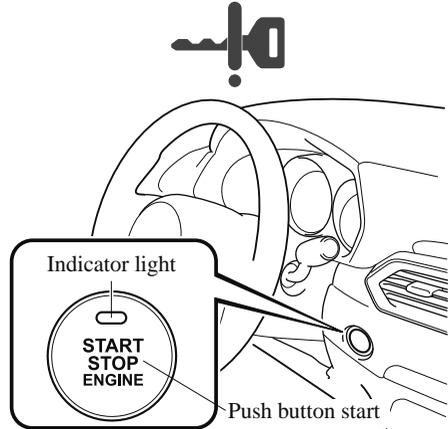

### **NOTE**

- *If the push button start indicator light (green) flashes, make sure that the key is being carried (for vehicles with a type A/type B instrument cluster (page 7-42), messages are displayed in the instrument cluster).*
- *If the push button start indicator light (green) flashes with the key being carried, touch the key to the push button start and start the engine (for vehicles with a type A/type B instrument cluster (page 7-42), messages are displayed in the instrument cluster). Refer to Engine Start Function When Key Battery is Dead on page 4-9.*


**CAUTION**

If the **KEY** warning light (red) illuminates, or the push button start indicator light (amber) flashes, this could indicate a problem with the engine starting system. This may prevent the engine from starting or from switching the ignition to ACC or ON (for vehicles with a type A/type B instrument cluster (page 7-42), messages are displayed in the instrument cluster). Have your vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer) as soon as possible.

**NOTE**

- Under the following conditions, the **KEY** warning light (red) flashes after the push button start is pressed. This informs the driver that the push button start will not switch to ACC, even if it is pressed from off (for vehicles with a type A/type B instrument cluster (page 7-42), messages are displayed in the instrument cluster).
  - The key battery is dead.
  - The key is out of operational range.
  - The key is placed in areas where it is difficult for the system to detect the signal (page 3-8).
  - A key from another manufacturer similar to the key is in the operational range.
- (**Forced engine starting method**)  
If the **KEY** warning light (red) illuminates, or the push button start indicator light (amber) flashes, this could indicate that the engine may not start using the usual starting method (for vehicles with a type A/type B instrument cluster (page 7-42), messages are displayed in the instrument cluster). Have your vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer) as soon as possible. If this occurs, the engine can be force-started. Press and hold the push button start until the engine starts. Other procedures necessary for starting the engine, such as having the key in the cabin, and depressing the clutch pedal (manual transaxle) or the brake pedal (automatic transaxle) are required.
- When the engine is force-started, the **KEY** warning light (red) (if equipped) remains illuminated and the push button start indicator light (amber) remains flashing.
- (**Automatic transaxle**)  
When the selector lever is in the neutral (N) position, the **KEY** indicator light (green) (if equipped) and the push button start indicator light (green) do not illuminate.

## Start/Stop Engine

---

- Press the push button start after both the KEY indicator light (green) (if equipped) in the instrument cluster and the push button start indicator light (green) illuminate.

### NOTE

- After starting the engine, the push button start indicator light (amber) turns off and the ignition switches to the ON position.
- (SKYACTIV-G 2.0, SKYACTIV-G 2.5, SKYACTIV-G 2.5T)  
After pressing the push button start and before the engine starts, the operation sound of the fuel pump motor from near the fuel tank can be heard, however, this does not indicate a malfunction.
- (SKYACTIV-D 2.2)
  - The starter does not rotate until the glow indicator light turns off.



- If the ignition is left switched ON for a long period of time without the engine running after the glow plugs are warmed up, the glow plugs may warm up again which will illuminate the glow indicator light.
- When starting the engine, do not release the clutch pedal (manual transaxle) or the brake pedal (automatic transaxle) until the glow indicator light in the instrument cluster turns off and the engine starts, after pressing the push button start.

- If the clutch pedal (manual transaxle) or the brake pedal (automatic transaxle) is released before the engine starts, depress the clutch pedal (manual transaxle) or the brake pedal (automatic transaxle) again and press the push button start to start the engine.

- After starting the engine, let it idle for about 10 seconds (Prohibited in Germany).

### NOTE

- Do not use high engine speeds until reaching the operating temperature.
- (Germany)  
Drive immediately after start the engine.
- (SKYACTIV-G 2.0, SKYACTIV-G 2.5, SKYACTIV-G 2.5T)
  - Whether the engine is cold or warm, it should be started without the use of the accelerator.
  - If the engine does not start the first time, refer to Starting a Flooded Engine under Emergency Starting. If the engine still does not start, have your vehicle inspected by an expert repairer (we recommend an Authorised Mazda Repairer) (page 7-34).
- (SKYACTIV-D 2.2)  
If the ambient temperature is lower than about  $-10^{\circ}\text{C}$  ( $14^{\circ}\text{F}$ ), the maximum engine speed may not be attained for about 3 minutes after the engine starts to protect the engine.

· **(Manual transaxle vehicle with i-stop function)**

If the engine has stopped due to stalling, it can be restarted by depressing the clutch pedal within 3 seconds of the engine stopping.

The engine cannot be restarted even if the clutch pedal is depressed under the following conditions:

- The driver's door is open.
- The driver's seat belt is unfastened.
- The clutch pedal is not released completely after the engine stalled.
- The clutch pedal is depressed with the engine not stopped completely.

## ▼ Engine Start Function When Key Battery is Dead

### ⚠ CAUTION

When starting the engine by holding the transmitter over the push button start due to a dead key battery or a malfunctioning key, be careful not to allow the following, otherwise the signal from the key will not be received correctly and the engine may not start.

- Metal parts of other keys or metal objects touch the key.




- Spare keys or keys for other vehicles equipped with an immobilizer system touch or come near the key.



- Devices for electronic purchases, or security passage touch or come near the key.

If the engine cannot be started due to a dead key battery, the engine can be started using the following procedure:

1. Continue to depress the brake pedal firmly until the engine has completely started.
2. **(Manual transaxle)**  
Continue to depress the clutch pedal firmly until the engine has completely started.
3. Make sure that the push button start indication light (green) flashes.
4. Align the centre area of the emblem on the transmitter with the centre area of the push button start while the push button start indicator light (green) flashes.

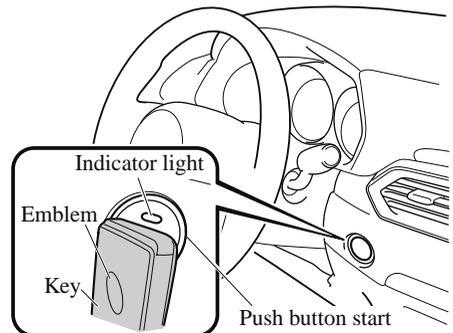

## Start/Stop Engine

---

5. Make sure that the push button start indicator light (green) turns on.
6. Press the push button start to start the engine.

### **NOTE**

- *The engine cannot be started unless the clutch pedal is fully depressed (manual transaxle) or the brake pedal is fully depressed (automatic transaxle).*
- *If there is a malfunction with the push button start function, the push button start indicator light (amber) flashes. In this case, the engine may start, however, have the vehicle checked at an expert repairer (we recommend an Authorised Mazda Repairer) as soon as possible.*
- *If the push button start indicator light (green) does not illuminate, perform the operation from the beginning again. If it does not illuminate, have the vehicle checked at an expert repairer (we recommend an Authorised Mazda Repairer).*
- *To switch the ignition position without starting the engine, perform the following operations after the push button start indicator light (green) turns on.*
  1. *Release the clutch pedal (manual transaxle) or brake pedal (automatic transaxle).*
  2. *Press the push button start to switch the ignition position. The ignition switches in the order of ACC, ON, and off each time the push button start is pressed. To switch the ignition position again, perform the operation from the beginning.*

### **▼ Emergency Operation for Starting the Engine**

If the KEY warning light (red) illuminates, or the push button start indicator light (amber) flashes, this could indicate that the engine may not start using the usual starting method (for vehicles with a type A/type B instrument cluster (page 7-42), messages are displayed in the instrument cluster). Have your vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer) as soon as possible. If this occurs, the engine can be force-started. Press and hold the push button start until the engine starts. Other procedures necessary for starting the engine such as having the key in the cabin, and depressing the clutch pedal (manual transaxle) or the brake pedal (automatic transaxle) are required.

## Turning the Engine Off

### WARNING

#### **Do not stop the engine while the vehicle is moving:**

Stopping the engine while the vehicle is moving for any reason other than in an emergency is dangerous. Stopping the engine while the vehicle is moving will result in reduced braking ability due to the loss of power braking, which could cause an accident and serious injury.

1. Stop the vehicle completely.
2. **(Manual transaxle)**  
Shift into neutral and set the parking brake.
- (Automatic transaxle)**  
Shift the selector lever to the P position and set the parking brake.
3. Press the push button start to turn off the engine. The ignition position is off.

### CAUTION

- When leaving the vehicle, make sure the push button start is off.
- **(SKYACTIV-D 2.2)**  
If the engine is started and stopped repeatedly before it warms up, the engine may speed up while the vehicle is stopped to clean the engine internally. Do not stop the engine until the engine returns to running at its normal speed.

### NOTE

- **(SKYACTIV-G 2.0, SKYACTIV-G 2.5)**  
The cooling fan in the engine compartment could turn on for a few minutes after the ignition is switched from ON to OFF, whether or not the A/C is on or off, to cool the engine compartment quickly.
- If the system detects that the remaining battery power of the key is low when the ignition is switched from ON to ACC or OFF, the following is indicated. Replace with a new battery before the key becomes unusable. Refer to Key Battery Replacement on page 6-47.  
**(Vehicle equipped with Type A/B instrument cluster)**  
A message is indicated in the display of the instrument cluster.  
**(Vehicle equipped with Type C instrument cluster)**  
The KEY indicator light (green) flashes for approximately 30 seconds. Refer to Taking Action on page 7-55.
- **(Automatic transaxle)**  
If the engine is turned off while the selector lever is in a position other than P, the ignition switches to ACC.

### ▼ Emergency Engine Stop

Continuously pressing the push button start or quickly pressing it any number of times while the engine is running or the vehicle is being driven will turn the engine off immediately. The ignition switches to ACC.

# Start/Stop Engine


## i-stop\*

The i-stop function automatically stops the engine when the vehicle is stopped at a traffic light or stuck in traffic, and then restarts the engine automatically to resume driving. The system provides improved fuel economy, reduced exhaust gas emissions, and eliminates idling noise while the engine is stopped.

### Engine idle stopping and restarting

#### **NOTE**

- The i-stop indicator light (green) turns on under the following conditions:
- When engine idling is stopped.

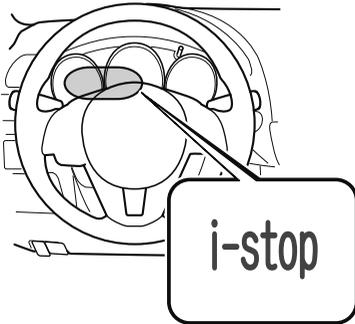

- The i-stop indicator light (green) turns off when the engine is restarted.

### **Manual transaxle**

#### **(AUTOHOLD operation turned off)**

1. Stop the vehicle by depressing the brake pedal and then the clutch pedal.
2. While depressing the clutch pedal, shift the shift lever to the neutral position. Engine idling stops after the clutch pedal is released.

#### **3. (SKYACTIV-G 2.0)**

The engine restarts automatically when you depress the clutch pedal or start to release it.

#### **NOTE**

*The engine restart timing varies depending on the brake pedal depression force.*

#### **(SKYACTIV-D 2.2)**

The engine restarts automatically when the clutch pedal is depressed.

#### **(When the vehicle is stopped by the AUTOHOLD function)**

1. Bring the vehicle to a complete stop by depressing the brake pedal first and then the clutch pedal.
2. While depressing the clutch pedal, shift the shift lever to neutral. After releasing your foot from the clutch pedal, engine idling stops and continues to be stopped even if the brake pedal is released.
3. The engine restarts automatically when the clutch pedal is depressed.

### **Automatic transaxle**

#### **(AUTOHOLD operation turned off and When not using Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function))**

1. Engine idling stops when the brake pedal is depressed while the vehicle is driven (except for driving in the R or M position second gear fixed mode) and the vehicle is stopped.
2. The engine restarts automatically when the brake pedal is released with the selector lever in the D or M position (not in second gear fixed mode).

3. If the selector lever is in the N or P position, the engine does not restart when the brake pedal is released. The engine restarts when the brake pedal is depressed again or the selector lever is shifted to the D, M (not in second gear fixed mode) or the R position. (For the purposes of safety, always keep the brake pedal depressed when shifting the selector lever while engine idling is stopped.)

**(When the vehicle is stopped by the Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) stop hold control)**

1. When the vehicle is stopped by the Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function), engine idling stops and continues to be stopped without depressing the brake pedal.
2. When the accelerator pedal is depressed or the RES switch is operated while the vehicle is kept stopped by the Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function), the engine automatically restarts. The engine restarts automatically when the accelerator pedal is depressed with the selector lever in the D/M position (not in second gear fixed mode).

**(When the vehicle is stopped by the AUTOHOLD function)**

1. When the brake pedal is depressed while the vehicle is being driven (except for driving in the R or M position second gear fixed mode) and the vehicle is brought to a stop, the i-stop function will operate and it continues to operate even if the brake is released.

2. The engine restarts automatically when the accelerator pedal is depressed with the selector lever in the D/M position (not in second gear fixed mode).
3. If the selector lever is in the N or P position, the engine does not restart when the brake pedal is released. The engine restarts when the brake pedal is depressed again or the selector lever is shifted to the D, M (not in second gear fixed mode) or the R position. (For the purposes of safety, always keep the brake pedal depressed when shifting the selector lever while engine idling is stopped.)

**Operation conditions**

**When the system is operable**

Under the following conditions, engine idling stops and the i-stop indicator light (green) turns on.

- **(SKYACTIV-G 2.0, SKYACTIV-G 2.5, SKYACTIV-G 2.5T)**  
The engine is warmed up.
- **(SKYACTIV-D 2.2)**
  - The engine is not cold.
  - The engine has been started and the vehicle is driven for a certain period.
  - The engine is started with the bonnet closed.
  - The battery is in good condition.
  - All doors, liftgate, and bonnet are closed.
  - The driver's seat belt is fastened.
  - The air conditioner is not operating with the airflow mode in the  position.

## Start/Stop Engine

---

- **(Automatic air-conditioning system)**

- The temperature setting dial of the air conditioner is in a position other than maximum heating or maximum cooling (A/C ON) position.
- The vehicle's interior temperature and the set temperature for the air conditioner are nearly the same.
- The i-stop warning light (amber) is not turned on/flashing.
- The keyless entry & push button start system functions are normal.
- The brake vacuum is sufficiently high.
- The steering wheel is not being operated.

- **(Manual transaxle)**

- The vehicle speed is 3 km/h (1.8 mph) or less.
- The shift lever is in the neutral position.
- The clutch pedal is not depressed.

- **(Automatic transaxle)**

- The vehicle is stopped.
- The selector lever is in the D or M position (not in second gear fixed mode).
- The automatic transaxle fluid has warmed up sufficiently.
- The automatic transaxle fluid temperature is not abnormally high.
- The steering wheel is almost in the straight-ahead position (idling may not stop even with the steering wheel in the straight-ahead position if force is applied to the steering wheel. Release the force applied to the steering wheel to stop engine idling).
- The vehicle is stopped by depressing the brake pedal.
- Emergency braking is not applied.

- When the vehicle is stopped by the Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) stop hold control (vehicles with Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function)).

### When the system is not operable

Engine idling does not stop in the following conditions:

- The vehicle is stopped but the engine is kept idling.
- The air conditioner is operating with the airflow mode in the  position.
- **(Automatic air-conditioning system)**
  - The temperature setting dial of the air conditioner is in the maximum heating or maximum cooling (A/C ON) position.
  - There is a large difference between the cabin temperature and the set temperature of the air conditioner.
- The ambient temperature is extremely high or low.
- The atmospheric pressure is low (when driving at high altitudes).
- **(Automatic transaxle)**
  - The vehicle is stopped on a steep incline.
  - The steering wheel is not in the straight-ahead position while the vehicle is stopped.
- **(SKYACTIV-D 2.2)**
  - The particulate matter (PM) is being removed by the diesel particulate filter (DPF).

**NOTE**

**Under the following conditions, a period of time is required to stop engine idling**

- The battery power is depleted for some reasons such as the vehicle has not been driven for a long period.
- The ambient temperature is high or low.
- After the battery terminals are disconnected for some reasons such as for battery replacement.
- (SKYACTIV-D 2.2)  
After PM removal is performed by the diesel particulate filter (DPF).

**Engine does not restart**

If the following operations are performed while the idling is stopped, the engine will not restart for safety reasons. In such cases, start the engine using the normal method.

- (European model)
  - The bonnet is opened.
  - The driver's seat belt is unfastened and the driver's door is opened.

**Engine-stop period is short or time until next engine idle stop is long**

- The ambient temperature is high or low.
- The battery power is depleted.
- Power consumption by the vehicle's electrical parts is high.

**Engine restarts automatically while engine idling is stopped**

Under the following conditions, the engine restarts automatically.

- The i-stop OFF switch is pressed until the beep sounds.
- The air conditioner is operated with the airflow mode in the  position.

**(Automatic air-conditioning system)**

- The temperature setting dial of the air conditioner is in the maximum heating or maximum cooling (A/C ON) position.
- The cabin temperature is largely different from the set temperature of the air conditioner.
- The brakes are released slightly on a slope and the vehicle begins to move.
- Two minutes have elapsed since the idling was stopped.
- The battery power is depleted.

**(Automatic transaxle)**

- The accelerator pedal is depressed with the selector lever in the D or M (not in second gear fixed mode) position.
- The selector lever is shifted to the R position.
- The selector lever is shifted from N or P position to D or M (not in second gear fixed mode) position.
- The steering wheel is operated with the selector lever in the D or M (not in second gear fixed mode) position.
- The selector lever is in the M position and the second gear fixed mode is selected.

## Start/Stop Engine

· **(Except European model)**

· **(Manual transaxle)**

With the shift lever in the neutral position, the driver's seat belt is unfastened, the driver's door is opened, or the bonnet is opened.

· **(Automatic transaxle)**

With the selector lever in the P or N position, or the D/M range, the driver's seat belt is unfastened, the driver's door is opened, or the bonnet is opened.

**Selector lever is operated while engine idling is stopped (automatic transaxle)**

If the selector lever is shifted from D or M (not in second gear fixed mode) position to N or P position while engine idling is stopped, the engine does not restart even when the brake pedal is released. The engine will restart if the brake pedal is depressed again or the selector lever is shifted to the D, M (not in second gear fixed mode), or R position. (For the purposes of safety, always keep the brake pedal depressed when shifting the selector lever while engine idling is stopped.)

· **(European model)**

If the selector lever is shifted from the D or M (not in second gear fixed mode) position to the N or P position, and the driver's seat belt is unfastened and the driver's door is opened, the engine does not restart. Start the engine using the normal method.


· **(Except European model)**

If the selector lever is shifted from the D or M (not in second gear fixed mode) to the N or P position, and the driver's seat belt is unfastened or the driver's door is opened, the engine restarts.

**Battery terminals are disconnected**

Engine idling may not stop right after the battery terminals are disconnected. In addition, if the battery is replaced, the i-stop functions must be verified. Consult an expert repairer (we recommend an Authorised Mazda Repairer).

▼ **i-stop OFF Switch**

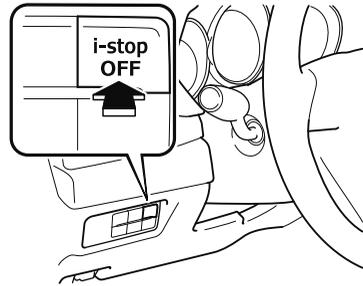

By pressing the switch until a beep sounds, the i-stop function is turned off and the i-stop warning light (amber) in the instrument cluster turns on. By pressing the switch again until the beep sounds, the i-stop function becomes operational and the i-stop warning light (amber) turns off.





**NOTE**

If the engine is stopped with the i-stop function cancelled, the i-stop function becomes operational when the engine is started the next time.

**▼ Vehicle Roll Prevention Function (Automatic transaxle)**

Vehicles with the i-stop function are equipped with a vehicle roll prevention function. This function prevents the vehicle from rolling, such as when releasing the brake pedal while on a slope under the following conditions:

- While engine idling is stopped (prevents the vehicle from rolling back)
- When the engine restarts after releasing the brake pedal (prevents the vehicle's sudden movement due to vehicle creep), sudden movement of the vehicle is prevented by controlling the brakes.

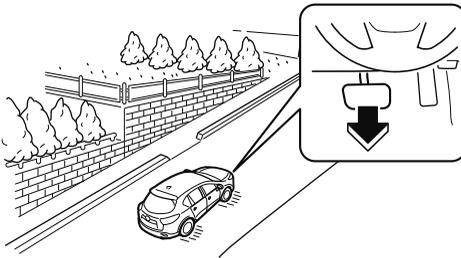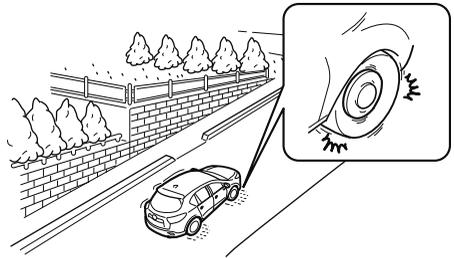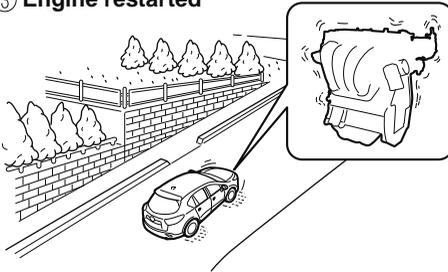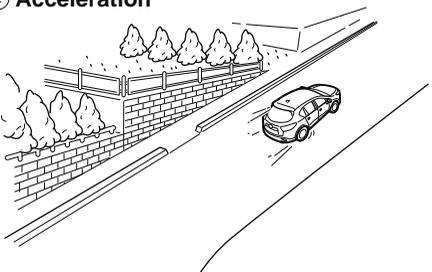**① Release foot from brake pedal****② Vehicle brake force maintained****③ Engine restarted****④ Acceleration****⚠ WARNING**

**Do not rely completely on the vehicle roll prevention function.**

- *The vehicle roll prevention function is a supplementary function which operates for a maximum of 2 seconds after releasing the brake pedal from an engine idling stop condition. Over reliance on the system may result in an unexpected accident if the vehicle were to suddenly accelerate. Before starting to drive the vehicle, always confirm the safety of the surroundings and operate the selector lever, brake pedal, and accelerator pedal appropriately. Note that the vehicle may move suddenly depending on the vehicle's load or if it is towing something.*

## Start/Stop Engine

---

- Note that the vehicle may move suddenly after the vehicle roll prevention function is released while the vehicle is under the following conditions:
  - The selector lever is in the N position.
  - If the selector lever is shifted to the N position and the brake pedal is released while the i-stop function is operating, the brake force is gradually released. To accelerate the vehicle, release the brake pedal after the engine restarts and shift the selector lever to a position other than the N position.

### NOTE

- When the vehicle is stopped on a steep grade, the vehicle roll prevention function does not operate because engine idling is not stopped.
- The brake pedal response may change, sound may occur from the brakes, or the brake pedal could vibrate from the operation of the vehicle roll prevention function. However, this does not indicate a malfunction.

### ▼ i-stop Warning Light (Amber)/i-stop Indicator Light (Green)

## i-stop

To ensure safe and comfortable use of the vehicle, the i-stop system constantly monitors the driver's operations, the vehicle's interior and exterior environment, and the operational status of the vehicle, and uses the i-stop warning light (amber) and i-stop indicator light (green) to inform the driver of various cautions and warnings.

### NOTE

*On vehicles equipped with the centre display, the i-stop operation status is displayed in the fuel monitor control status display.*

*Refer to the Information section in the Mazda Connect Owner's Manual.*

### i-stop warning light (amber)

#### When the light is turned on

- The light turns on when the ignition is switched ON and turns off when the engine is started.
- The light turns on when the i-stop OFF switch is pressed and the system is turned off.
- **(European model)**  
The light turns on if the following operations are performed while engine idling is stopped. In such cases, the engine does not restart automatically to ensure safety. Start the engine using the normal method.
  - The bonnet is opened.
  - The driver's seat belt is unfastened and the driver's door is opened.

- **(Except European model)**
  - **(Manual transaxle)**  
A sound is activated when the door is opened while the engine idling is stopped with the shift lever in a position other than neutral. In this case, the engine does not restart automatically to ensure safety. Shift the shift lever to neutral and start the engine.
  - If the i-stop warning light (amber) remains on while the engine is running, the battery performance may have decreased. Have your vehicle inspected by an expert repairer (we recommend an Authorised Mazda Repairer).

**NOTE**

*A problem in the system may be indicated under the following conditions. Have your vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).*

- *The light does not turn on when the ignition is switched ON.*
- *The light continues to remain on even though the i-stop OFF switch has been pressed while the engine is running.*

**When the light is flashing**

The light continues to flash if the system has a malfunction. Have your vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).

**i-stop indicator light (green)****When the light is turned on**

- The light turns on while engine idling is stopped and turns off when the engine is restarted.

**When the light is flashing**

- **(Manual transaxle)**
  - The light flashes when the shift lever is shifted to a position other than the neutral while engine idling is stopped to notify the driver that engine idling is stopped.
  - By depressing the clutch pedal, the engine restarts automatically and the light turns off.
- **(European model)**  
The light flashes when the driver's door is opened while engine idling is stopped to notify the driver that engine idling is stopped. It turns off when the driver's door is closed.

## Cylinder Deactivation\*

The cylinder deactivation is a function designed to reduce fuel consumption and improve fuel economy by deactivating 2 out of the 4 cylinders while driving. The function constantly determines which is better for driving; 4 cylinders or 2 cylinders, regardless of the driver's operations, and it performs the switching automatically.

### **When the cylinder deactivation function does not operate**


The cylinder deactivation function does not operate under the following conditions.

- The selector lever is in the P, N, or R position, or 1st gear.
- The engine oil temperature or engine coolant temperature is low.
- After disconnecting the battery terminals for some reason, such as for battery replacement.


# Instrument Cluster and Display

## Instrument Cluster and Display


**Instrument Cluster**  
**Type A**

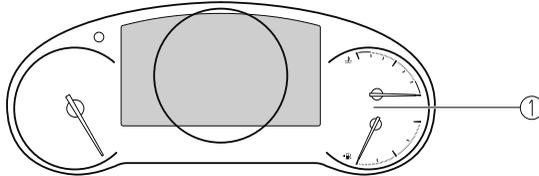


**Type B**

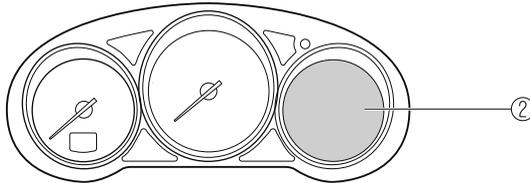

**Type C**

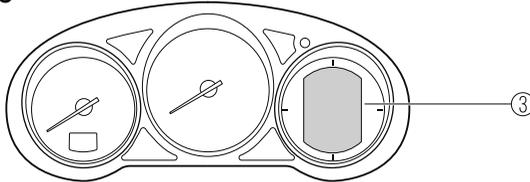


**Active Driving Display**

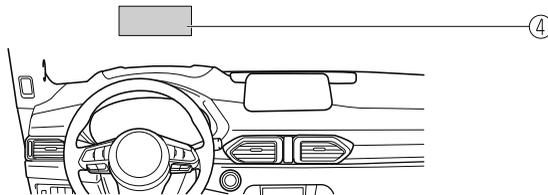

① Instrument Cluster (Type A).....	page 4-22
② Instrument Cluster (Type B).....	page 4-42
③ Instrument Cluster (Type C).....	page 4-61
④ Active Driving Display.....	page 4-75

# Instrument Cluster and Display

## Instrument Cluster (Type A)

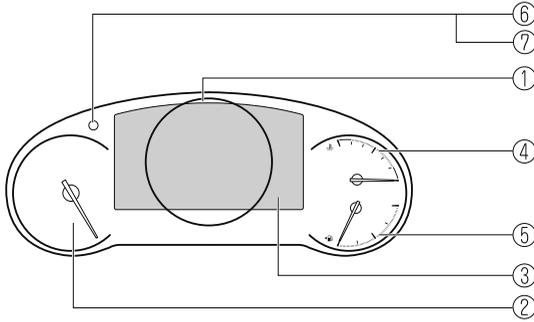

- ① Speedometer..... page 4-22
- ② Tachometer..... page 4-22
- ③ Multi-information Display (Type A)..... page 4-23
- ④ Engine Coolant Temperature Gauge..... page 4-26
- ⑤ Fuel Gauge..... page 4-27
- ⑥ Instrument Panel Illumination..... page 4-27
- ⑦ Speed Unit Selector..... page 4-28

### ▼ Speedometer

The speedometer indicates the speed of the vehicle.


### ▼ Tachometer

The tachometer shows engine speed in thousands of revolutions per minute (rpm).



*Do not run the engine with the tachometer needle in the RED ZONE.*

*This may cause severe engine damage.*




\*1 The range varies depending on the type of gauge.

### NOTE

*When the tachometer needle enters the STRIPED ZONE, this indicates to the driver that the gears should be shifted before entering the RED ZONE.*

# Instrument Cluster and Display

## ▼ Multi-information Display (Type A)

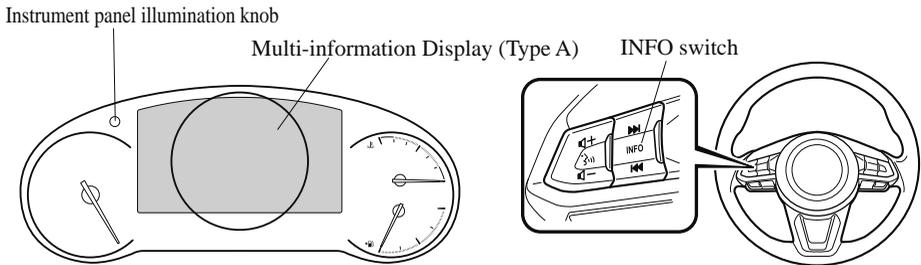


The multi-information display indicates the following information.

- Speedometer
- Odometer
- Trip meter
- Outside temperature
- Distance-to-empty
- Average fuel economy
- Current fuel economy
- Maintenance Monitor (Without Selective Catalytic Reduction (SCR) System)
- Remaining AdBlue® and Maximum Driving Distance Display (With Selective Catalytic Reduction (SCR) System)
- Mazda intelligent Drive Select (Mi-Drive) Display
- Blind Spot Monitoring (BSM) Display
- Distance Recognition Support System (DRSS) Display
- Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) System Display
- Mazda Radar Cruise Control (MRCC) Display
- Cruising & Traffic Support (CTS) Display
- Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS) Display
- Adjustable Speed Limiter (ASL) Display
- Cruise Control Display
- Vehicle Speed Alarm
- Door-Ajar/Liftgate-Ajar Warning Indication
- Message Display

# Instrument Cluster and Display


The screen content changes each time the INFO switch is pressed.

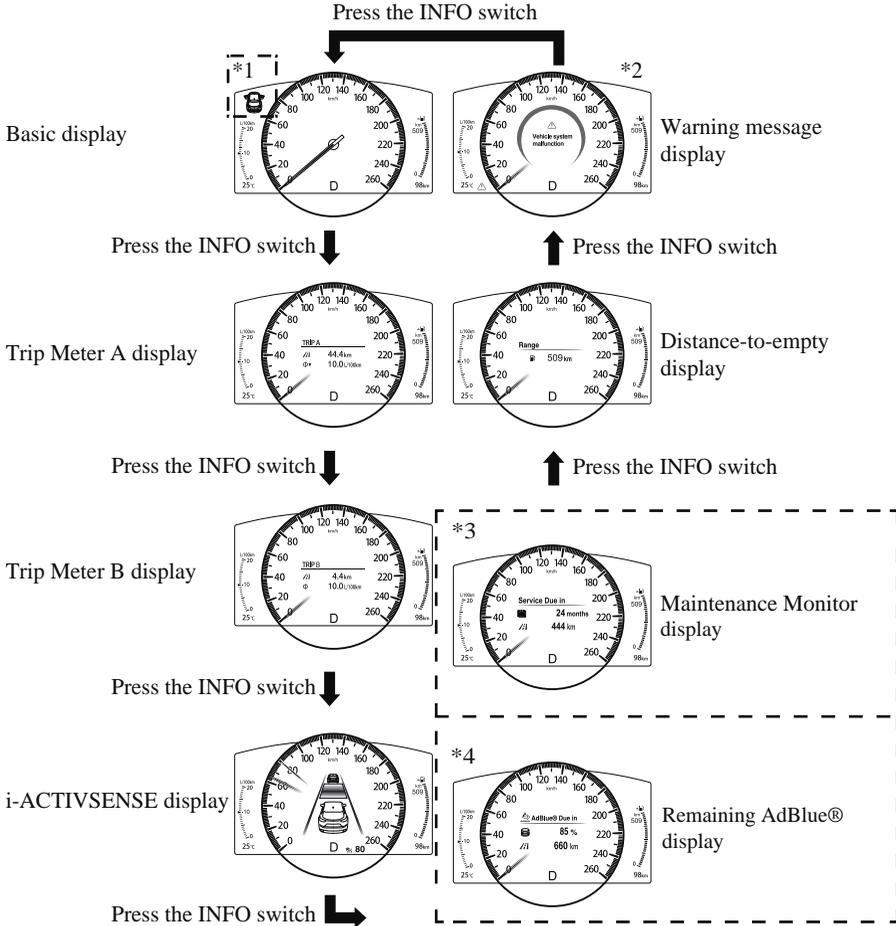

- \*1: Displayed when opening/closing door/Liftgate.
- \*2: Displayed only when a warning occurs.
- \*3: Without Selective Catalytic Reduction (SCR) System
- \*4: With Selective Catalytic Reduction (SCR) System

# Instrument Cluster and Display


The screen content changes each time the instrument panel illumination knob is pressed and held.

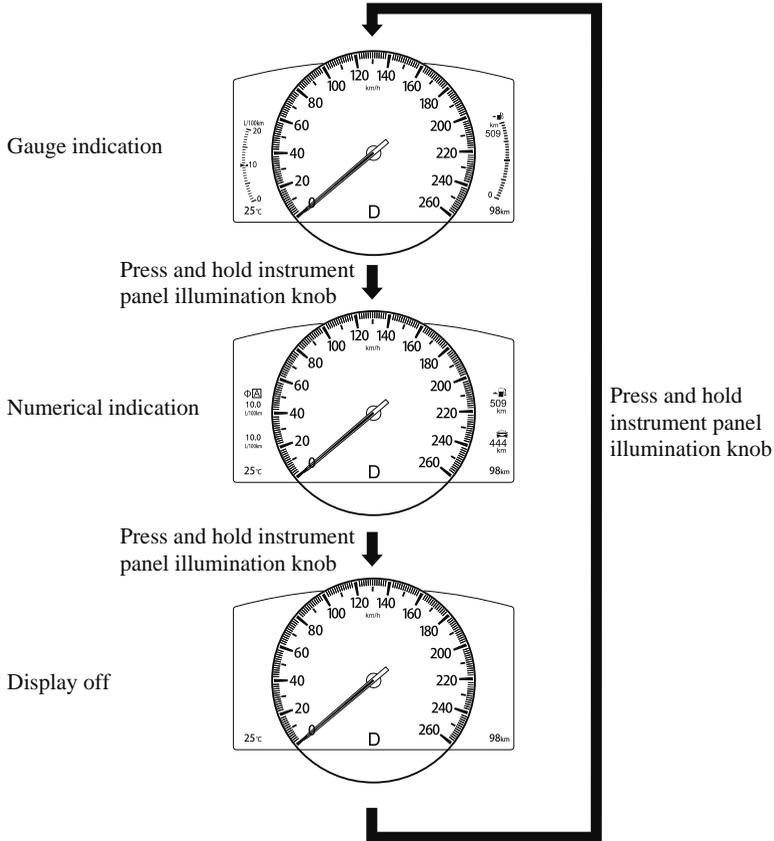


# Instrument Cluster and Display

## ▼ Odometer, Trip Meter and Trip Meter Selector

The odometer is constantly displayed on the screen when the ignition is switched ON, and the TRIP A or TRIP B screen can be displayed by operating the INFO switch.



Trip Meter A display



Press the INFO switch ↓

Trip Meter B display



## Odometer

The odometer records the total distance the vehicle has been driven.

## Trip meter

The driving distance for a specified interval is indicated. Two types (TRIP A, TRIP B) of interval distance and the average fuel economy for each can be measured.

For instance, trip meter A can record the distance from the point of origin, and trip meter B can record the distance from where the fuel tank is filled.

When trip meter A is selected, TRIP A will be displayed. When trip meter B is selected, TRIP B will be displayed.


The trip meter and average fuel economy can be reset by pressing the INFO switch for 1.5 seconds or more while in each mode.

## **NOTE**

- Only the trip meters record tenths of kilometres (miles).
- The trip record will be erased when:
  - The power supply is interrupted (blown fuse or the battery is disconnected).
  - The vehicle is driven over 9999.9 km (mile).

## ▼ Engine Coolant Temperature Gauge

Displays the engine coolant temperature. The blue range of the gauge indicates that the engine coolant temperature is low, and the red range of the gauge indicates that the engine coolant temperature is high and overheating.



# Instrument Cluster and Display

## CAUTION


If the engine coolant temperature gauge needle is in the red range, there is the possibility of overheating. Drive slowly to reduce engine load until you can find a safe place to stop the vehicle and wait for the engine to cool down.

Refer to Overheating on page 7-36.


## ▼ Fuel Gauge

The fuel gauge shows approximately how much fuel is remaining in the tank when the ignition is switched ON. We recommend keeping the tank over 1/4 full.


Full



1/4 Full



Empty



If the low fuel warning light illuminates or the fuel level is very low, refuel as soon as possible.

If inconsistency in engine performance or stalling occurs due to low fuel level conditions, refuel the vehicle as soon as possible and add at least 10 L (2.7 US gal, 2.2 Imp gal) of fuel.

Refer to Taking Action on page 7-55.

## NOTE

- After refuelling, it may require some time for the indicator to stabilize. In addition, the indicator may deviate while driving on a slope or curve since the fuel moves in the tank.
- The direction of the arrow () indicates that the fuel-filler flap is on the left side of the vehicle.

## ▼ Instrument Panel Illumination

When the lights are turned on with the ignition switched ON, the brightness of the instrument panel illumination is dimmed. However, when the light sensor detects that the surrounding area is bright such as when the lights are turned on in the daytime, the instrument panel illumination does not dim.


## NOTE

- When the ignition is switched ON in the early evening or at dusk, the instrument panel illumination is dimmed for several seconds until the light sensor detects the brightness of the surrounding area, however, the dimming may cancel after the brightness is detected.
- When the lights are turned on, the lights-on indicator light in the instrument cluster turns on. Refer to Headlights on page 4-91.

# Instrument Cluster and Display

The brightness of the instrument cluster and instrument panel illuminations can be adjusted by rotating the knob.

- The brightness decreases by rotating the knob to the left. A beep sound will be heard when the knob has been rotated to the maximum dim position.
- The brightness increases by rotating the knob to the right.

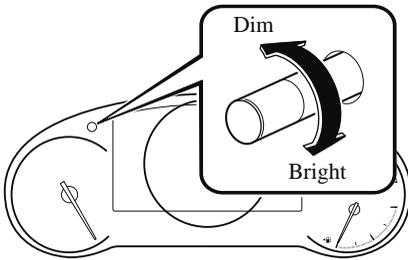

## Function for cancelling illumination dimmer

The illumination dimmer can be cancelled by rotating the instrument panel illumination knob to the right until a beep sound is heard while the instrument cluster is dimmed with the ignition switched ON. If the instrument cluster's visibility is reduced due to glare from surrounding brightness, cancel the illumination dimmer.

### **NOTE**


- The illumination dimmer can be cancelled by pressing the instrument panel illumination knob. (Without speed unit selector)
- When the illumination dimmer is cancelled, the instrument cluster cannot be dimmed even if the lights are turned on.

- When the illumination dimmer is cancelled, the screen in the centre display switches to constant display of the daytime screen.

### ▼ Speed Unit Selector\*

In some countries, you may have to change the speed units between km/h and mph.

When pressing the instrument panel illumination knob, the speed units in the instrument cluster will change.

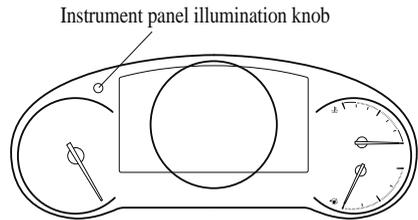

### ▼ Outside Temperature Display

When the ignition is switched ON, the outside temperature is displayed.

25°C

### **NOTE**

- Under the following conditions, the outside temperature display may differ from the actual outside temperature depending on the surroundings and vehicle conditions:
  - Significantly cold or hot temperatures.
  - Sudden changes in outside temperature.
  - The vehicle is parked.
  - The vehicle is driven at low speeds.

# Instrument Cluster and Display

## Changing the Temperature Unit of the Outside Temperature Display (Vehicles with Mazda Connect)

The outside temperature unit can be switched between Celsius and Fahrenheit. Settings can be changed by operating the centre display screen.

Refer to the Settings section in the Mazda Connect Owner's Manual.

### **NOTE**

When the temperature unit indicated in the outside temperature display is changed, the temperature unit indicated in the engine coolant gauge display changes in conjunction with it.

## Outside Temperature Warning\*

When the outside temperature is low, the indication flashes and a beep sound is heard to warn the driver of the possibility of icy roads.

If the outside temperature is lower than about 4 °C (39 °F), the outside temperature display and the ❄️ mark flashes for about ten seconds and a beep sound is heard once.


### **NOTE**

If the outside temperature is lower than -20 °C (-4 °F), the beep sound does not operate. However, the ❄️ mark illuminates.

## ▼ Distance-to-empty

This displays the approximate distance you can travel on the remaining fuel based on the fuel economy.

The distance-to-empty will be calculated and displayed every second.




### **NOTE**

- Even though the distance-to-empty display may indicate a sufficient amount of remaining driving distance before refuelling is required, refuel as soon as possible if the fuel level is very low or the low fuel warning light illuminates.
- The display will not change unless you add more than approximately 9 L (2.3 US gal, 1.9 Imp gal) of fuel.
- The distance-to-empty is the approximate remaining distance the vehicle can be driven until all the graduation marks in the fuel gauge indicating the remaining fuel supply disappear.
- If there is no past fuel economy information such as after first purchasing your vehicle or the information is deleted when the battery leads are disconnected, the actual distance-to-empty/range may differ from the amount indicated.

# Instrument Cluster and Display

## ▼ Average Fuel Economy


The average fuel economy is calculated every minute from the total travelled distance on the trip meter and the total fuel consumption, and the average fuel economy for either TRIP A or TRIP B is displayed.



The average fuel economy and trip meters can be reset by pressing the INFO switch for 1.5 seconds or more while in each mode. After the data is cleared, the fuel consumption is recalculated and the --- L/100 km (--- mpg) for the 1 minute prior to it being displayed is indicated.

## ▼ Current Fuel Economy

This displays the current fuel economy by calculating the amount of fuel consumption and the distance travelled.



### NOTE

- Indicates the 0 position when the vehicle speed is about 5 km/h (3 mph) or slower.
- The arrow on the scale indicates the average fuel economy.

## ▼ Maintenance Monitor\*

The following maintenance period notifications can be displayed by turning the Maintenance Monitor on.

- Scheduled Maintenance
- Tyre Rotation
- Oil Change

When the remaining days to the maintenance period is 15 days or less, or the remaining distance is 1,000 km (600 miles) or shorter, a message is indicated when the ignition is switched ON.



### Service Soon

/:/ 500 km

For the setting method and indications for the maintenance monitor, refer to the Maintenance Monitor.

Refer to the Information section in the Mazda Connect Owner's Manual.


## ▼ Remaining AdBlue® and Maximum Driving Distance Display\*

The remaining amount of AdBlue® and the remaining-distance-to-empty indications are displayed when the ignition is switched ON.

 **AdBlue® Due in**  
 **85 %**  
 /:/ **9660 km**

# Instrument Cluster and Display

If the remaining amount of AdBlue® is low or there is a problem with the Selective Catalytic Reduction (SCR) system and there is less maximum remaining driving distance, the remaining-distance-to-empty indication is continuously displayed.




If the remaining amount of AdBlue® is low or there is a problem with the SCR system, the SCR warning light turns on/ flashes and a warning message is displayed.

Refer to Selective Catalytic Reduction (SCR) System Indications on page 4-329.


## ▼ Mazda intelligent Drive Select (Mi-Drive) Display\*

The display changes depending on the driving mode.

### Sport mode



### Off-road mode



## ▼ Vehicle Speed Alarm\*

In this mode, the current setting for the vehicle speed alarm is displayed. You can change the vehicle speed setting at which the warning is triggered.

### **NOTE**

*The vehicle speed alarm display is activated at the same time the beep sound is heard.*



## Speed Warning 100 km/h

The vehicle speed alarm can be set using the centre display.


### **NOTE**

*Always set the vehicle speed according to the laws and regulations of the country/ city in which the vehicle is driven. In addition, always verify the speed of the vehicle using the speedometer.*

# Instrument Cluster and Display

## ▼ Blind Spot Monitoring (BSM) Display\*


Displays the system status.



Refer to Blind Spot Monitoring (BSM) on page 4-143.

## ▼ Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS) Display\*


Displays the system status.



Refer to Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS) on page 4-212.

## ▼ Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) Display\*


Displays the currently set system status.



Refer to Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) on page 4-177.

## ▼ Mazda Radar Cruise Control (MRCC) Display\*

Displays the currently set system status.




Refer to Mazda Radar Cruise Control (MRCC) on page 4-164.

# Instrument Cluster and Display

## ▼ Cruising & Traffic Support (CTS) Display\*

Displays the currently set system status.



Refer to Cruising & Traffic Support (CTS) on page 4-192.

## ▼ Distance Recognition Support System (DRSS) Display\*


Displays the distance between your vehicle and the vehicle ahead.



Refer to Distance Recognition Support System (DRSS) on page 4-154.

## ▼ Adjustable Speed Limiter (ASL) Display\*


The setting status of the Adjustable Speed Limiter (ASL) is displayed.



Refer to Adjustable Speed Limiter (ASL) on page 4-226.

## ▼ Cruise Control Set Vehicle Speed Display\*

The vehicle speed preset using the cruise control is displayed.



Refer to Cruise Control on page 4-318.

## ▼ Message Display

A message such as the system operation status, a malfunction, or an abnormality is indicated.

**Warning/indicator light in instrument cluster turns on/flashes or symbol is**

## **Instrument Cluster and Display**

---

### **indicated on display at same time as message**

Check the information regarding the warning/indicator light or indicated symbol.

Refer to If a Warning Indication/Warning Lights on page 4-35.

Refer to If a Indication/Indicator Lights on page 4-37.

### **Message only is indicated on display**

Follow the instructions indicated on the display. For the display content, refer to the next page.


Refer to If a Message Indicated on Multi-information Display on page 7-60.

# Instrument Cluster and Display


## ▼ Warning/Indicator Lights

Instrument Cluster varies depending on model and specifications.

### Instrument Cluster

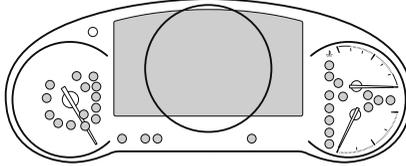

### Centre of Instrument panel



Warning lights will appear in any of the highlighted areas

## ▼ Warning Indication/Warning Lights


These lights turn on or flash to notify the user of the system operation status or a system malfunction.

Signal	Warning	Page
	Brake System Warning Light* <sup>1</sup>	7-42
	ABS Warning Light* <sup>1</sup>	Electronic Brake Force Distribution System Warning 7-42
		ABS warning 7-46
	Charging System Warning Indication/Warning Light* <sup>1</sup>	7-42
	Engine Oil Warning Light* <sup>1</sup>	7-42
	High Engine Coolant Temperature Warning Indication	7-42
	Power Steering Malfunction Indication	7-42
	Master Warning Indication	7-46

# Instrument Cluster and Display

Signal	Warning	Page
	Electric Parking Brake (EPB) Warning Indication/Warning Light* <sup>1</sup>	7-46
	Check Engine Light* <sup>1</sup>	7-46
<b>i-stop</b> (Amber)	*i-stop Warning Light* <sup>1</sup>	7-46
<b>i-ELOOP</b>	*i-ELOOP Warning Indication	7-46
	*Selective Catalytic Reduction (SCR) system Warning Indication/Warning Light* <sup>1</sup>	7-46
<b>AT</b>	*Automatic Transaxle Warning Indication	7-46
<b>4WD</b>	*AWD Warning Indication	7-46
	Air Bag/Seat Belt Pretensioner System Warning Light* <sup>1</sup>	7-46
	*Tyre Pressure Monitoring System Warning Light* <sup>1</sup>	Flashing 7-46
		Turns on 7-55
 (Amber/White)	KEY Warning Indication	Amber 7-46
		White 7-55
 (Amber)	*High Beam Control System (HBC) Warning Indication/Warning Light* <sup>1</sup>	7-46
	*Adaptive LED Headlights (ALH) Warning Indication/Warning Light* <sup>1</sup>	7-46
	*Blind Spot Monitoring (BSM) Warning Indication	7-46
 (Amber)	*Driver Attention Alert (DAA) Warning Indication	7-46
 (Amber)	*Mazda Radar Cruise Control (MRCC) Warning Indication	7-46
	*Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) Warning Indication	7-46
	*Cruising & Traffic Support (CTS) Warning Indication	7-46
	*Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS) Warning Indication	7-46
	LED Headlight Warning Light* <sup>1</sup>	7-46

# Instrument Cluster and Display

Signal	Warning	Page
	Smart Brake Support/Smart City Brake Support (SBS/SCBS) Warning Indication	7-55
	Low Fuel Warning Indication/Warning Light	7-55
	Engine Oil Level Warning Light*1	7-55
<b>120</b> km/h	*120 km/h Warning Light*1	7-55
	Seat Belt Warning Light (Front seat)	7-55
<b>REAR</b>  (Red)	Seat Belt Warning Light (Rear seat)	7-55
	*Low Washer Fluid Level Warning Indication	7-55
	Door-Ajar Warning Indication	7-55
	Liftgate-Ajar Warning Indication	7-55
	Door-Ajar Warning Light	7-55

\*1 The light turns on when the ignition is switched on for an operation check, and turns off a few seconds later or when the engine is started. If the light does not turn on or remains turned on, have the vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).

## ▼ Indication/Indicator Lights

These lights turn on or flash to notify the user of the system operation status or a system malfunction.

Signal	Indicator	Page
<b>REAR</b>  (Green)	Seat Belt Indicator Light (Rear seat)	2-30
<b>PASSENGER AIRBAG</b> 	*Front Passenger Air Bag Deactivation Indicator Light*1	2-69

# Instrument Cluster and Display

Signal	Indicator	Page
<b>i-stop</b> (Green)	*i-stop Indicator Light	4-18
	Security Indicator Light* <sup>1</sup>	3-49
	*Vehicle Speed Alarm Indication	4-31
	Wrench Indication	4-41
	*Glow Indicator Light* <sup>1</sup>	4-41
<b>DPF</b>	*Diesel Particulate Filter Indication	4-327
	Shift Position Indication	4-83
	Lights-On Indication/Indicator Light	4-91
	Headlight High-Beam Indicator Light	Headlight High-Low Beam 4-95
		Flashing the Headlights 4-95
	*Rear Fog Light Indicator Light	4-97
	Direction Indicator/Hazard Warning Indicator Lights	Turn and Lane-Change Signals 4-98
		Hazard Warning Flasher 4-107
	Electric Parking Brake (EPB) Indication/Indicator Light* <sup>1</sup> * <sup>2</sup>	7-46
<b>HOLD</b>	AUTOHOLD Active Indicator Light* <sup>1</sup>	4-115
	*Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) indicator Light	4-188
	*Cruising & Traffic Support (CTS) Indicator Light	4-209

# Instrument Cluster and Display

Signal	Indicator	Page
	TCS/DSC Indicator Light* <sup>1</sup>	Traction Control System (TCS) 4-120
		Dynamic Stability Control (DSC) 4-122
		Turns on 7-46
<b>TCS OFF</b>	*TCS OFF Indicator Light* <sup>1</sup>	4-121
	*Off-Road Traction Assist Indicator Light* <sup>1</sup>	4-123
<b>SPORT</b>	*Select Mode Indication	4-127
 (Green)	*High Beam Control System (HBC) Indicator Light	4-139
	*Adaptive LED Headlights (ALH) Indicator Light	4-142
	*Blind Spot Monitoring (BSM) OFF Indicator Light* <sup>1</sup>	Except malfunction 4-147
		Malfunction 7-46
 (White)	*Driver Attention Alert (DAA) Indication	4-159
 (White)	*Mazda Radar Cruise Control (MRCC) Main Indication	4-167
	*Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) Main Indication	4-181
	*Cruising & Traffic Support (CTS) Standby Indication	4-200
 (Green)	*Mazda Radar Cruise Control (MRCC) Set Indication	4-167
	*Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) Set Indication	4-181
	*Cruising & Traffic Support (CTS) Set Indication	4-200
	*Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS) Indication	4-214
	*Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS) OFF Indicator Light* <sup>1</sup>	4-225

# Instrument Cluster and Display

Signal	Indicator	Page
	*Smart City Brake Support (SCBS) Indication	Advanced Smart City Brake Support (Advanced SCBS) 4-237
		Smart City Brake Support [Reverse] (SCBS R) 4-246
	*Smart Brake Support/Smart City Brake Support (SBS/SCBS) OFF Indicator Light* <sup>1</sup>	Advanced Smart City Brake Support (Advanced SCBS) 4-237
		Smart City Brake Support [Reverse] (SCBS R) 4-246
		Smart Brake Support (SBS) System 4-248
 (White)	*Adjustable Speed Limiter (ASL) Main Indication	4-228
 (Green)	*Adjustable Speed Limiter (ASL) Set Indication	4-228
 (White)	*Cruise Main Indication	4-319
 (Green)	*Cruise Set Indication	4-319

\*1 The light turns on when the ignition is switched on for an operation check, and turns off a few seconds later or when the engine is started. If the light does not turn on or remains turned on, have the vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).

\*2 The light turns on continuously when the parking brake is applied.

# Instrument Cluster and Display

## ▼ Wrench Indicator Light



The wrench indication is displayed under the following conditions.

- When the preset maintenance period has arrived.  
Refer to the Information section in the Mazda Connect Owner's Manual.
- When the engine oil replacement period has arrived.
- **(SKYACTIV-D 2.2)**
  - When the engine oil is deteriorated or exceeds the specified amount.
  - When fuel filter (sedimentor) draining is required. Consult an expert repairer (we recommend an Authorised Mazda Repairer).

### **NOTE**

- *The wrench indication may display earlier than the preset period depending on vehicle usage conditions.*
- *Whenever the engine oil is replaced, a reset of the vehicle engine control unit is necessary.  
An expert repairer (we recommend an Authorised Mazda Repairer), will be able to reset the engine control unit or see page 6-29 for the Vehicle engine control unit reset procedure.*

## ▼ Glow Indicator Light (SKYACTIV-D 2.2)



When the ignition is switched ON, the glow indicator light turns on. The glow indicator light turns off when preheating is finished.

The maintenance period for the glow plug or a problem in the system may be indicated under the following conditions. Have your vehicle inspected by an expert repairer (we recommend an Authorised Mazda Repairer).


- The glow indicator light does not turn on when the ignition is switched ON or it remains on.
- The glow indicator light is flashing.

### **NOTE**

*If the vehicle is left with the ignition switched ON without starting the engine and a long period of time has elapsed since preheating finished, the preheating may be performed again and the glow indicator light may turn on.*

# Instrument Cluster and Display

## Instrument Cluster (Type B)

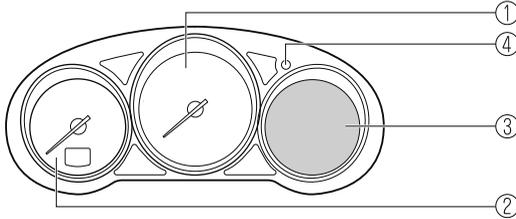

- ① Speedometer..... page 4-42
- ② Tachometer..... page 4-42
- ③ Multi-information Display (Type B)..... page 4-43
- ④ Instrument Panel Illumination..... page 4-47

### ▼ Speedometer

The speedometer indicates the speed of the vehicle.

### ▼ Tachometer

The tachometer shows engine speed in thousands of revolutions per minute (rpm).




*Do not run the engine with the tachometer needle in the RED ZONE.*

*This may cause severe engine damage.*

### NOTE


*When the tachometer needle enters the STRIPED ZONE, this indicates to the driver that the gears should be shifted before entering the RED ZONE.*

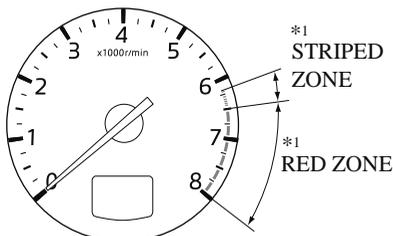

\*1 The range varies depending on the type of gauge.

# Instrument Cluster and Display

## ▼ Multi-information Display (Type B)

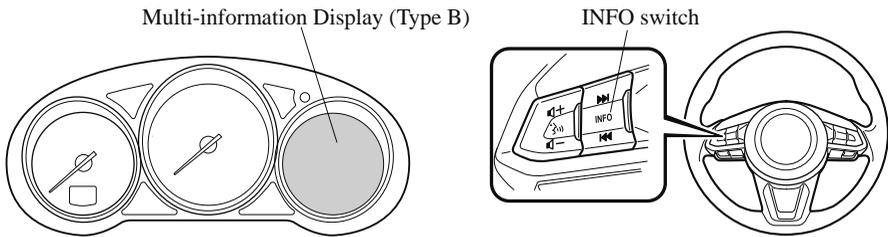


The multi-information display indicates the following information.

- Odometer
- Trip meter
- Engine coolant temperature gauge
- Fuel gauge
- Outside temperature
- Distance-to-empty
- Average fuel economy
- Current fuel economy
- Maintenance Monitor (Without Selective Catalytic Reduction (SCR) System)
- Remaining AdBlue<sup>®</sup> and Maximum Driving Distance Display (With Selective Catalytic Reduction (SCR) System)
- Blind Spot Monitoring (BSM) Display
- Distance Recognition Support System (DRSS) Display
- Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) System Display
- Mazda Radar Cruise Control (MRCC) Display
- Cruising & Traffic Support (CTS) Display
- Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS) Display
- Adjustable Speed Limiter (ASL) Display
- Cruise Control Display
- Vehicle Speed Alarm
- Message Display

# Instrument Cluster and Display


The screen content changes each time the INFO switch is pressed.

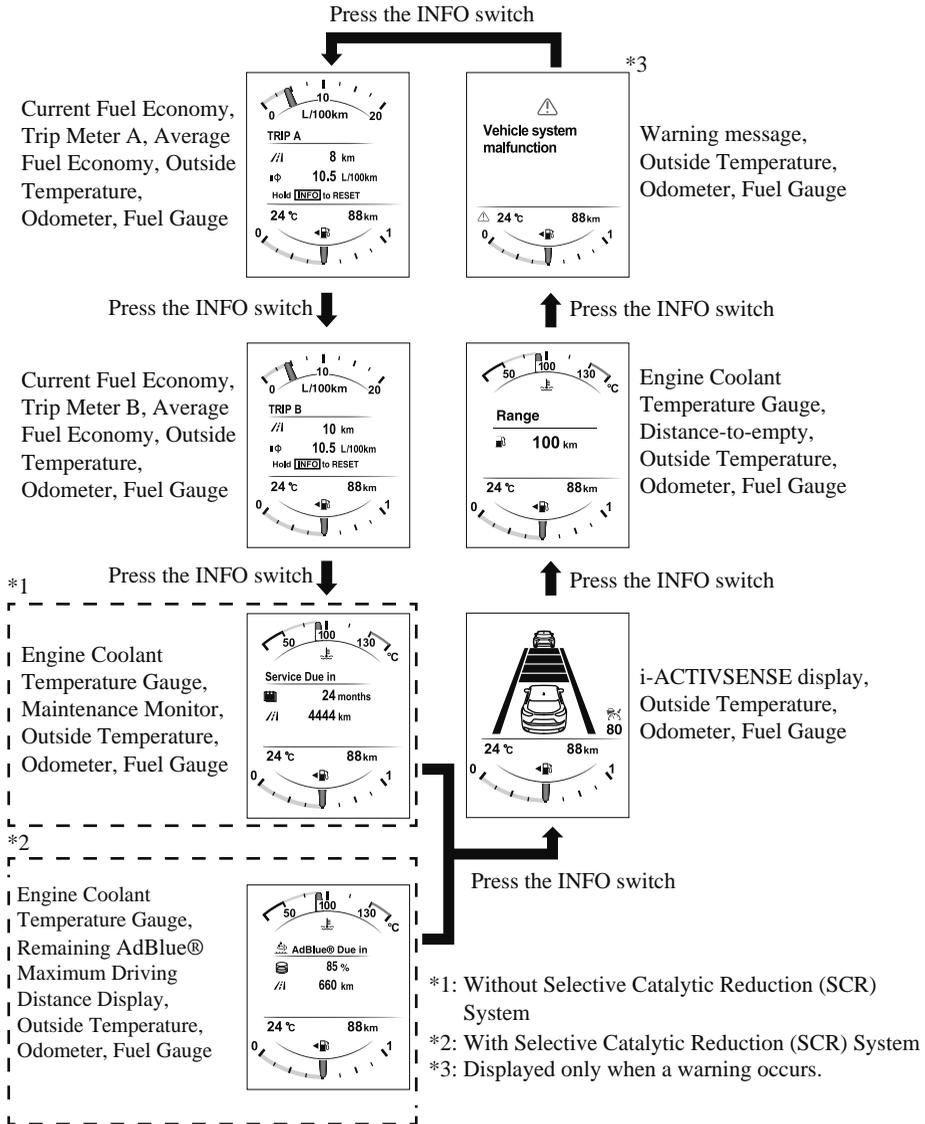

# Instrument Cluster and Display

## ▼ Odometer, Trip Meter and Trip Meter Selector

The odometer is constantly displayed on the screen when the ignition is switched ON, and the TRIP A or TRIP B screen can be displayed by operating the INFO switch.



Odometer,  
Trip meter A

TRIP A	
//l	8 km
lφ	10.5 L/100km
Hold <b>INFO</b> to RESET	
<b>88 km</b>	

Press the INFO switch ↓

Odometer,  
Trip meter B

TRIP B	
//l	10 km
lφ	10.5 L/100km
Hold <b>INFO</b> to RESET	
<b>88 km</b>	

For instance, trip meter A can record the distance from the point of origin, and trip meter B can record the distance from where the fuel tank is filled.

When trip meter A is selected, TRIP A will be displayed. When trip meter B is selected, TRIP B will be displayed.

The trip meter and average fuel economy can be reset by pressing the INFO switch for 1.5 seconds or more while in each mode.

### NOTE

- Only the trip meters record tenths of kilometres (miles).
- The trip record will be erased when:
  - The power supply is interrupted (blown fuse or the battery is disconnected).
  - The vehicle is driven over 9999.9 km (mile).

## Odometer

The odometer records the total distance the vehicle has been driven.


## Trip meter

The driving distance for a specified interval is indicated. Two types (TRIP A, TRIP B) of interval distance and the average fuel economy for each can be measured.

## Instrument Cluster and Display

### ▼ Engine Coolant Temperature Gauge

Displays the engine coolant temperature. The blue range of the gauge indicates that the engine coolant temperature is low, and the red range of the gauge indicates that the engine coolant temperature is high and overheating.



#### **CAUTION**

If the high engine coolant temperature warning light (red) flashes, there is a possibility of overheating. Drive slowly to reduce engine load until you can find a safe place to stop the vehicle and wait for the engine to cool down.

Refer to *Overheating* on page 7-36.



#### NOTE

- The temperature unit (Centigrade/ Fahrenheit) of the engine coolant gauge display changes in conjunction with the temperature unit of the outside temperature display.

Refer to the *Settings* section in the *Mazda Connect Owner's Manual*.

### ▼ Fuel Gauge

The fuel gauge shows approximately how much fuel is remaining in the tank when the ignition is switched ON. We recommend keeping the tank over 1/4 full.

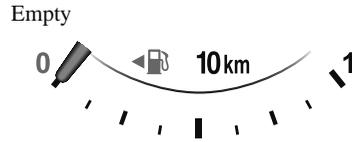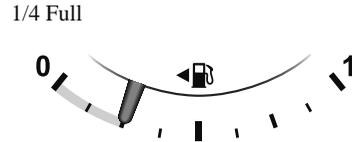

If the fuel level is low, (◀🚰) and (0) turn an amber colour. Refuel as soon as possible. If inconsistency in engine performance or stalling occurs due to low fuel level conditions, refuel the vehicle as soon as possible and add at least 10 L (2.7 US gal, 2.2 Imp gal) of fuel.

Refer to *Taking Action* on page 7-55.

#### NOTE

- After refuelling, it may require some time for the indicator to stabilize. In addition, the indicator may deviate while driving on a slope or curve since the fuel moves in the tank.

# Instrument Cluster and Display

- The direction of the arrow (↶) indicates that the fuel-filler flap is on the left side of the vehicle.

## ▼ Instrument Panel Illumination

### (Without auto-light control)

When the lights are turned on with the ignition switched ON, the brightness of the instrument panel illumination is dimmed.

### (With auto-light control)

When the lights are turned on with the ignition switched ON, the brightness of the instrument panel illumination is dimmed. However, when the light sensor detects that the surrounding area is bright such as when the lights are turned on in the daytime, the instrument panel illumination does not dim.


## NOTE

- **(With auto-light control)**  
When the ignition is switched ON in the early evening or at dusk, the instrument panel illumination is dimmed for several seconds until the light sensor detects the brightness of the surrounding area, however, the dimming may cancel after the brightness is detected.
- When the lights are turned on, the lights-on indicator light in the instrument cluster turns on.  
Refer to *Headlights* on page 4-91.

The brightness of the instrument cluster and instrument panel illuminations can be adjusted by rotating the knob.

- The brightness decreases by rotating the knob to the left. A beep sound will be heard when the knob has been rotated to the maximum dim position.

- The brightness increases by rotating the knob to the right.

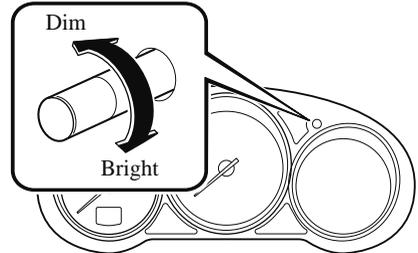

## Function for cancelling illumination dimmer

The illumination dimmer can be cancelled by rotating the instrument panel illumination knob to the right until a beep sound is heard while the instrument cluster is dimmed with the ignition switched ON. If the instrument cluster's visibility is reduced due to glare from surrounding brightness, cancel the illumination dimmer.

## NOTE

- The illumination dimmer can be cancelled by pressing the instrument panel illumination knob.
- When the illumination dimmer is cancelled, the instrument cluster cannot be dimmed even if the lights are turned on.
- When the illumination dimmer is cancelled, the screen in the centre display switches to constant display of the daytime screen.

## Instrument Cluster and Display

---

### ▼ Outside Temperature Display

When the ignition is switched ON, the outside temperature is displayed.

---

4 °C ❄

#### NOTE

- Under the following conditions, the outside temperature display may differ from the actual outside temperature depending on the surroundings and vehicle conditions:
  - Significantly cold or hot temperatures.
  - Sudden changes in outside temperature.
  - The vehicle is parked.
  - The vehicle is driven at low speeds.

### Changing the Temperature Unit of the Outside Temperature Display (Vehicles with Mazda Connect)

The outside temperature unit can be switched between Celsius and Fahrenheit. Settings can be changed by operating the centre display screen.

Refer to the Settings section in the Mazda Connect Owner's Manual.

#### NOTE

When the temperature unit indicated in the outside temperature display is changed, the temperature unit indicated in the engine coolant gauge display changes in conjunction with it.

### Outside Temperature Warning\*

When the outside temperature is low, the indication flashes and a beep sound is heard to warn the driver of the possibility of icy roads.

If the outside temperature is lower than about 4 °C (39 °F), the outside temperature display and the ❄ mark flashes for about ten seconds and a beep sound is heard once.

#### NOTE

If the outside temperature is lower than -20 °C (-4 °F), the beep sound does not operate. However, the ❄ mark illuminates.

### ▼ Distance-to-empty

This displays the approximate distance you can travel on the remaining fuel based on the fuel economy.

The distance-to-empty will be calculated and displayed every second.

## Range

---

 100 km

#### NOTE


- Even though the distance-to-empty display may indicate a sufficient amount of remaining driving distance before refuelling is required, refuel as soon as possible if the fuel level is very low or the low fuel warning light illuminates.
- The display will not change unless you add more than approximately 9 L (2.3 US gal, 1.9 Imp gal) of fuel.
- The distance-to-empty is the approximate remaining distance the vehicle can be driven until all the graduation marks in the fuel gauge indicating the remaining fuel supply disappear.

# Instrument Cluster and Display

· If there is no past fuel economy information such as after first purchasing your vehicle or the information is deleted when the battery leads are disconnected, the actual distance-to empty/range may differ from the amount indicated.

## ▼ Average Fuel Economy


The average fuel economy is calculated every minute from the total travelled distance on the trip meter and the total fuel consumption, and the average fuel economy for either TRIP A or TRIP B is displayed.



The average fuel economy and trip meters can be reset by pressing the INFO switch for 1.5 seconds or more while in each mode. After the data is cleared, the fuel consumption is recalculated and the - - - L/100 km (- - - mpg) for the 1 minute prior to it being displayed is indicated.

## ▼ Current Fuel Economy

This displays the current fuel economy by calculating the amount of fuel consumption and the distance travelled.



### NOTE

Indicates the 0 position when the vehicle speed is about 5 km/h (3 mph) or slower.

## ▼ Maintenance Monitor\*

The following maintenance period notifications can be displayed by turning the Maintenance Monitor on.

- Scheduled Maintenance
- Tyre Rotation
- Oil Change

When the remaining days to the maintenance period is 15 days or less, or the remaining distance is 1,000 km (600 miles) or shorter, a message is indicated when the ignition is switched ON.



## Service Soon

500 km

For the setting method and indications for the maintenance monitor, refer to the Maintenance Monitor.

Refer to the Information section in the Mazda Connect Owner's Manual.

# Instrument Cluster and Display

## ▼ Remaining AdBlue® and Maximum Driving Distance Display\*

The remaining amount of AdBlue® and the remaining-distance-to-empty indications are displayed when the ignition is switched ON.



If the remaining amount of AdBlue® is low or there is a problem with the Selective Catalytic Reduction (SCR) system and there is less maximum remaining driving distance, the remaining-distance-to-empty indication is continuously displayed.



If the remaining amount of AdBlue® is low or there is a problem with the SCR system, the SCR warning light turns on/ flashes and a warning message is displayed.

Refer to Selective Catalytic Reduction (SCR) System Indications on page 4-329.

## ▼ Vehicle Speed Alarm\*

In this mode, the current setting for the vehicle speed alarm is displayed. You can change the vehicle speed setting at which the warning is triggered.

### NOTE

The vehicle speed alarm display is activated at the same time the beep sound is heard.



## Speed Warning 100 km/h

The vehicle speed alarm can be set using the centre display.

### NOTE

Always set the vehicle speed according to the laws and regulations of the country/ city in which the vehicle is driven. In addition, always verify the speed of the vehicle using the speedometer.

## ▼ Blind Spot Monitoring (BSM) Display\*

Displays the system status.




Refer to Blind Spot Monitoring (BSM) on page 4-143.

# Instrument Cluster and Display

## ▼ Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS) Display\*


Displays the system status.



Refer to Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS) on page 4-212.

## ▼ Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) Display\*


Displays the currently set system status.



Refer to Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) on page 4-177.

## ▼ Mazda Radar Cruise Control (MRCC) Display\*


Displays the currently set system status.



Refer to Mazda Radar Cruise Control (MRCC) on page 4-164.

## ▼ Cruising & Traffic Support (CTS) Display\*


Displays the currently set system status.



Refer to Cruising & Traffic Support (CTS) on page 4-192.

## ▼ Distance Recognition Support System (DRSS) Display\*

Displays the distance between your vehicle and the vehicle ahead.



# Instrument Cluster and Display

---

Refer to Distance Recognition Support System (DRSS) on page 4-154.

## ▼ Cruise Control Set Vehicle Speed Display\*

The vehicle speed preset using the cruise control is displayed.



Refer to Cruise Control on page 4-318.

## ▼ Adjustable Speed Limiter (ASL) Display\*

The setting status of the Adjustable Speed Limiter (ASL) is displayed.



Refer to Adjustable Speed Limiter (ASL) on page 4-226.

## ▼ Message Display

A message such as the system operation status, a malfunction, or an abnormality is indicated.

### Warning/indicator light in instrument cluster turns on/ flashes or symbol is indicated on display at same time as message

Check the information regarding the warning/indicator light or indicated symbol.

Refer to If a Warning Indication/Warning Lights on page 4-53.

Refer to If a Indication/Indicator Lights on page 4-55.

### Message only is indicated on display

Follow the instructions indicated on the display. For the display content, refer to the next page.


Refer to If a Message Indicated on Multi-information Display on page 7-60.

# Instrument Cluster and Display


## ▼ Warning/Indicator Lights

Instrument Cluster varies depending on model and specifications.

### Instrument Cluster

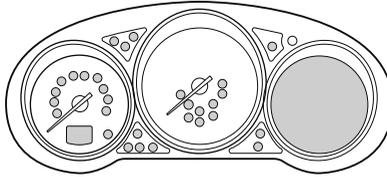

### Centre of Instrument panel



Warning lights will appear in any of the highlighted areas

## ▼ Warning Indication/Warning Lights


These lights turn on or flash to notify the user of the system operation status or a system malfunction.

Signal	Warning	Page
	Brake System Warning Light* <sup>1</sup>	7-42
	ABS Warning Light* <sup>1</sup>	Electronic Brake Force Distribution System Warning 7-42 ABS warning 7-46
	Charging System Warning Indication/Warning Light* <sup>1</sup>	7-42
	Engine Oil Warning Light* <sup>1</sup>	7-42
 (Red)	High Engine Coolant Temperature Warning Light* <sup>1</sup>	7-42
	Power Steering Malfunction Indication	7-42

# Instrument Cluster and Display

Signal	Warning	Page
	Master Warning Indication	7-46
	Electric Parking Brake (EPB) Warning Indication/Warning Light* <sup>1</sup>	7-46
	Check Engine Light* <sup>1</sup>	7-46
<b>i-stop</b> (Amber)	*i-stop Warning Light* <sup>1</sup>	7-46
<b>i-ELOOP</b>	*i-ELOOP Warning Indication	7-46
	*Selective Catalytic Reduction (SCR) system Warning Indication/Warning Light* <sup>1</sup>	7-46
<b>AT</b>	*Automatic Transaxle Warning Indication	7-46
<b>4WD</b>	*AWD Warning Indication	7-46
	Air Bag/Seat Belt Pretensioner System Warning Light* <sup>1</sup>	7-46
	*Tyre Pressure Monitoring System Warning Light* <sup>1</sup>	Flashing 7-46
		Turns on 7-55
 (Amber/White)	KEY Warning Indication	Amber 7-46
		White 7-55
 (Amber)	*High Beam Control System (HBC) Warning Indication/Warning Light* <sup>1</sup>	7-46
	*Adaptive LED Headlights (ALH) Warning Indication/Warning Light* <sup>1</sup>	7-46
	*Blind Spot Monitoring (BSM) Warning Indication	7-46
 (Amber)	*Driver Attention Alert (DAA) Warning Indication	7-46
 (Amber)	*Mazda Radar Cruise Control (MRCC) Warning Indication	7-46
	*Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) Warning Indication	7-46
	*Cruising & Traffic Support (CTS) Warning Indication	7-46
	*Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS) Warning Indication	7-46

# Instrument Cluster and Display

Signal	Warning	Page
	LED Headlight Warning Light* <sup>1</sup>	7-46
	*Smart Brake Support/Smart City Brake Support (SBS/SCBS) Warning Indication	7-55
	Low Fuel Warning Indication	7-55
	Engine Oil Level Warning Light* <sup>1</sup>	7-55
<b>120</b> km/h	*120 km/h Warning Light* <sup>1</sup>	7-55
 PASSENGER	Seat Belt Warning Light (Front seat)	7-55
<b>REAR</b> (Red) 	Seat Belt Warning Light (Rear seat)	7-55
	*Low Washer Fluid Level Warning Indication	7-55
	Door-Ajar Warning Indication	7-55
	Liftgate-Ajar Warning Indication	7-55

\*1 The light turns on when the ignition is switched on for an operation check, and turns off a few seconds later or when the engine is started. If the light does not turn on or remains turned on, have the vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).

## ▼ Indication/Indicator Lights

These lights turn on or flash to notify the user of the system operation status or a system malfunction.

Signal	Indicator	Page
<b>REAR</b>  (Green)	Seat Belt Indicator Light (Rear seat)	2-30
PASSENGER AIRBAG 	*Front Passenger Air Bag Deactivation Indicator Light* <sup>1</sup>	2-69

# Instrument Cluster and Display

Signal	Indicator	Page
	*i-stop Indicator Light	4-18
	Security Indicator Light* <sup>1</sup>	3-49
	*Vehicle Speed Alarm Indication	4-50
	Wrench Indication	4-59
	Low Engine Coolant Temperature Indicator Light	4-59
	*Glow Indicator Light* <sup>1</sup>	4-60
<b>DPF</b>	*Diesel Particulate Filter Indication	4-327
	Shift Position Indication	4-83
	Lights-On Indication/Indicator Light	4-91
	Headlight High-Beam Indicator Light	Headlight High-Low Beam 4-95
		Flashing the Headlights 4-95
	*Rear Fog Light Indicator Light	4-97
	Direction Indicator/Hazard Warning Indicator Lights	Turn and Lane-Change Signals 4-98
		Hazard Warning Flasher 4-107
	Electric Parking Brake (EPB) Indication/Indicator Light* <sup>1</sup> * <sup>2</sup>	7-46
<b>HOLD</b>	AUTOHOLD Active Indicator Light* <sup>1</sup>	4-115
	*Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) indicator Light	4-188
	*Cruising & Traffic Support (CTS) Indicator Light	4-209

# Instrument Cluster and Display

Signal	Indicator	Page
	TCS/DSC Indicator Light* <sup>1</sup>	Traction Control System (TCS) 4-120
		Dynamic Stability Control (DSC) 4-122
		Turns on 7-46
<b>TCS OFF</b>	*TCS OFF Indicator Light* <sup>1</sup>	4-121
	*Off-Road Traction Assist Indicator Light* <sup>1</sup>	4-123
<b>SPORT</b>	*Select Mode Indication	4-127
 (Green)	*High Beam Control System (HBC) Indicator Light	4-139
	*Adaptive LED Headlights (ALH) Indicator Light	4-142
	*Blind Spot Monitoring (BSM) OFF Indicator Light* <sup>1</sup>	Except malfunction 4-147
		Malfunction 7-46
 (White)	*Driver Attention Alert (DAA) Indication	4-159
 (White)	*Mazda Radar Cruise Control (MRCC) Main Indication	4-167
	*Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) Main Indication	4-181
	*Cruising & Traffic Support (CTS) Standby Indication	4-200
 (Green)	*Mazda Radar Cruise Control (MRCC) Set Indication	4-167
	*Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) Set Indication	4-181
	*Cruising & Traffic Support (CTS) Set Indication	4-200
	*Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS) Indication	4-214
	*Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS) OFF Indicator Light* <sup>1</sup>	4-225

# Instrument Cluster and Display

Signal	Indicator	Page
	*Smart City Brake Support (SCBS) Indication	Advanced Smart City Brake Support (Advanced SCBS) 4-237
		Smart City Brake Support [Forward] (SCBS F) 4-241
		Smart City Brake Support [Reverse] (SCBS R) 4-246
	*Smart Brake Support/Smart City Brake Support (SBS/SCBS) OFF Indicator Light* <sup>1</sup>	Advanced Smart City Brake Support (Advanced SCBS) 4-237
		Smart City Brake Support [Forward] (SCBS F) 4-242
		Smart City Brake Support [Reverse] (SCBS R) 4-246
		Smart Brake Support (SBS) System 4-248
 (White)	*Adjustable Speed Limiter (ASL) Main Indication	4-228
 (Green)	*Adjustable Speed Limiter (ASL) Set Indication	4-228
 (White)	*Cruise Main Indication	4-319

# Instrument Cluster and Display

Signal	Indicator	Page
 (Green)	*Cruise Set Indication	4-319

- \*1 The light turns on when the ignition is switched on for an operation check, and turns off a few seconds later or when the engine is started. If the light does not turn on or remains turned on, have the vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).
- \*2 The light turns on continuously when the parking brake is applied.

## ▼ Wrench Indicator Light



The wrench indication is displayed under the following conditions.

- When the preset maintenance period has arrived.  
Refer to the Information section in the Mazda Connect Owner's Manual.
- When the engine oil replacement period has arrived.
- **(SKYACTIV-D 2.2)**
  - When the engine oil is deteriorated or exceeds the specified amount.
  - When fuel filter (sedimentor) draining is required. Consult an expert repairer (we recommend an Authorised Mazda Repairer).

## NOTE

- The wrench indication may display earlier than the preset period depending on vehicle usage conditions.
- Whenever the engine oil is replaced, a reset of the vehicle engine control unit is necessary.  
An expert repairer (we recommend an Authorised Mazda Repairer), will be able to reset the engine control unit or see page 6-29 for the Vehicle engine control unit reset procedure.

## ▼ Low Engine Coolant Temperature Indicator Light (Blue)




The light illuminates continuously when the engine coolant temperature is low and turns off after the engine is warm.

## Instrument Cluster and Display

---

### ▼ Glow Indicator Light (SKYACTIV-D 2.2)



When the ignition is switched ON, the glow indicator light turns on. The glow indicator light turns off when preheating is finished.


The maintenance period for the glow plug or a problem in the system may be indicated under the following conditions. Have your vehicle inspected by an expert repairer (we recommend an Authorised Mazda Repairer).

- The glow indicator light does not turn on when the ignition is switched ON or it remains on.
- The glow indicator light is flashing.

#### **NOTE**

*If the vehicle is left with the ignition switched ON without starting the engine and a long period of time has elapsed since preheating finished, the preheating may be performed again and the glow indicator light may turn on.*

## Instrument Cluster (Type C)

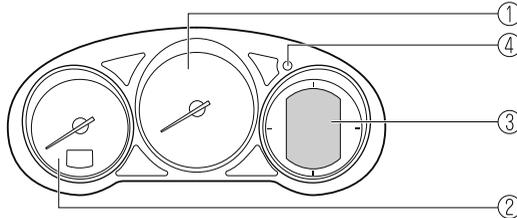

- ① Speedometer..... page 4-61
- ② Tachometer..... page 4-61
- ③ Multi-information Display (Type C)..... page 4-62
- ④ Instrument Panel Illumination..... page 4-65

### ▼ Speedometer

The speedometer indicates the speed of the vehicle.


### ▼ Tachometer

The tachometer shows engine speed in thousands of revolutions per minute (rpm).



*Do not run the engine with the tachometer needle in the RED ZONE.*

*This may cause severe engine damage.*

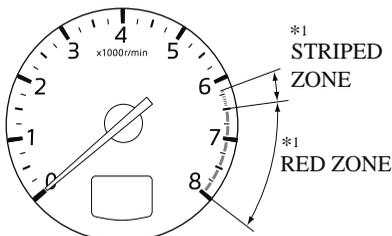

\*1 The range varies depending on the type of gauge.


### NOTE

*When the tachometer needle enters the STRIPED ZONE, this indicates to the driver that the gears should be shifted before entering the RED ZONE.*

# Instrument Cluster and Display

---

## ▼ Multi-information Display (Type C)

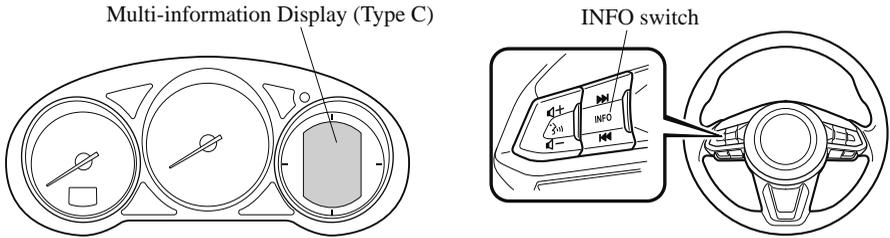


The multi-information display indicates the following information.

- Odometer
- Trip meter
- Engine coolant temperature gauge
- Fuel gauge
- Outside temperature
- Trip Computer
- Vehicle Speed Alarm
- Adjustable Speed Limiter (ASL) Display
- Cruise Control Display

# Instrument Cluster and Display

## ▼ Odometer, Trip Meter and Trip Meter Selector

The display mode can be changed from odometer to trip meter A to trip meter B and then back to odometer by pressing the selector while one of them is displayed. The selected mode will be displayed.

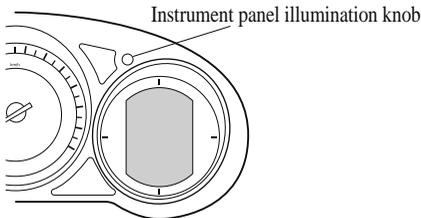

Odometer

8 km

Press the instrument panel illumination knob ↓

Trip meter A

TRIP A 70 km

Press the instrument panel illumination knob ↓

Trip meter B

TRIP B 50 km

Press the instrument panel illumination knob

### Odometer

The odometer records the total distance the vehicle has been driven.

### Trip meter

The trip meter can record the total distance of two trips. One is recorded in trip meter A, and the other is recorded in trip meter B.

For instance, trip meter A can record the distance from the point of origin, and trip meter B can record the distance from where the fuel tank is filled.

When trip meter A is selected, pressing the selector again within 1 second will change to trip meter B mode.

When trip meter A is selected, TRIP A will be displayed. When trip meter B is selected, TRIP B will be displayed.

The trip meter records the total distance the vehicle is driven until the meter is again reset. Return it to “0.0” by depressing and holding the selector for 1 second or more. Use this meter to measure trip distances and to compute fuel consumption.


### **NOTE**

- **(Vehicles with Mazda Connect)**  
If TRIP A is reset using the trip meter when the function which synchronizes (resets) the fuel economy monitor and the trip meter (TRIP A) is on, the fuel economy data resets in conjunction with TRIP A.  
Refer to the Information section in the Mazda Connect Owner's Manual.
- Only the trip meters record tenths of kilometres (miles).
- The trip record will be erased when:
  - The power supply is interrupted (blown fuse or the battery is disconnected).
  - The vehicle is driven over 9999.9 km (mile).

## Instrument Cluster and Display

### ▼ Engine Coolant Temperature Gauge

Displays the engine coolant temperature. The white range of the gauge indicates that the engine coolant temperature is low, and the red range of the gauge indicates that the engine coolant temperature is high and overheating.



#### ⚠ CAUTION

If the engine coolant temperature gauge needle (white) flashes, there is a possibility of overheating. Drive slowly to reduce engine load until you can find a safe place to stop the vehicle and wait for the engine to cool down.

Refer to Overheating on page 7-36.




#### NOTE

- The temperature unit (Centigrade/ Fahrenheit) of the engine coolant gauge display changes in conjunction with the temperature unit of the outside temperature display.

Refer to the Settings section in the Mazda Connect Owner's Manual.

### ▼ Fuel Gauge

The fuel gauge shows approximately how much fuel is remaining in the tank when the ignition is switched ON. We recommend keeping the tank over 1/4 full.



If the low fuel warning light illuminates or the fuel level is very low, refuel as soon as possible.

If inconsistency in engine performance or stalling occurs due to low fuel level conditions, refuel the vehicle as soon as possible and add at least 10 L (2.7 US gal, 2.2 Imp gal) of fuel.

Refer to Taking Action on page 7-55.

#### NOTE

- After refuelling, it may require some time for the indicator to stabilize. In addition, the indicator may deviate while driving on a slope or curve since the fuel moves in the tank.

# Instrument Cluster and Display

- The display indicating a quarter or less remaining fuel has more segments to show the remaining fuel level in greater detail.
- The direction of the arrow (🚘) indicates that the fuel-filler flap is on the left side of the vehicle.

## ▼ Instrument Panel Illumination

### (Without auto-light control)

When the lights are turned on with the ignition switched ON, the brightness of the instrument panel illumination is dimmed.

### (With auto-light control)


When the lights are turned on with the ignition switched ON, the brightness of the instrument panel illumination is dimmed. However, when the light sensor detects that the surrounding area is bright such as when the lights are turned on in the daytime, the instrument panel illumination does not dim.

### NOTE

- **(With auto-light control)**  
When the ignition is switched ON in the early evening or at dusk, the instrument panel illumination is dimmed for several seconds until the light sensor detects the brightness of the surrounding area, however, the dimming may cancel after the brightness is detected.
- When the lights are turned on, the lights-on indicator light in the instrument cluster turns on.  
Refer to Headlights on page 4-91.

The brightness of the instrument cluster and instrument panel illuminations can be adjusted by rotating the knob.

- The brightness decreases by rotating the knob to the left. A beep sound will be heard when the knob has been rotated to the maximum dim position.
- The brightness increases by rotating the knob to the right.

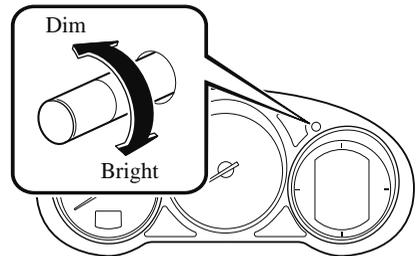

### Function for cancelling illumination dimmer

The illumination dimmer can be cancelled by rotating the instrument panel illumination knob to the right until a beep sound is heard while the instrument cluster is dimmed with the ignition switched ON. If the instrument cluster's visibility is reduced due to glare from surrounding brightness, cancel the illumination dimmer.

### NOTE

- When the illumination dimmer is cancelled, the instrument cluster cannot be dimmed even if the lights are turned on.
- When the illumination dimmer is cancelled, the screen in the centre display switches to constant display of the daytime screen.

## Instrument Cluster and Display

### ▼ Outside Temperature Display

When the ignition is switched ON, the outside temperature is displayed.



#### NOTE

- Under the following conditions, the outside temperature display may differ from the actual outside temperature depending on the surroundings and vehicle conditions:
  - Significantly cold or hot temperatures.
  - Sudden changes in outside temperature.
  - The vehicle is parked.
  - The vehicle is driven at low speeds.

### Changing the Temperature Unit of the Outside Temperature Display

The outside temperature unit can be switched between Celsius and Fahrenheit using the following procedure.

#### **(Vehicles with Mazda Connect)**

Refer to the Settings section in the Mazda Connect Owner's Manual.

#### **(Vehicles with Mazda Connect)**

1. Press the INFO switch with the ignition switched off and continue pressing the INFO switch for 5 seconds or longer while switching the ignition ON. The outside temperature display flashes.
2. Press the INFO switch to change the outside temperature unit.

3. Press and hold the INFO switch for 3 seconds or longer while the outside temperature display is flashing. The outside temperature display illuminates.

#### NOTE

When the temperature unit indicated in the outside temperature display is changed, the temperature unit indicated in the engine coolant gauge display changes in conjunction with it.

### Outside Temperature Warning\*

When the outside temperature is low, the indication flashes and a beep sound is heard to warn the driver of the possibility of icy roads.

If the outside temperature is lower than about 4 °C (39 °F), the outside temperature display and the ❄ mark flashes for about ten seconds and a beep sound is heard once.

#### NOTE

If the outside temperature is lower than -20 °C (-4 °F), the beep sound does not operate. However, the ❄ mark illuminates.

### ▼ Trip Computer

The following information can be selected by pressing the INFO switch with the ignition switched ON.

- Distance-to-empty mode
- Average fuel economy mode
- Current fuel economy mode

If you have any problems with your trip computer, consult an expert repairer (we recommend an Authorised Mazda Repairer).

# Instrument Cluster and Display

## Distance-to-empty mode

This mode displays the approximate distance you can travel on the remaining fuel based on the fuel economy.

The distance-to-empty will be calculated and displayed every second.

### (European model)

 160 km

### (Except European model)

RANGE  
160 km

### **NOTE**

- Even though the distance-to-empty display may indicate a sufficient amount of remaining driving distance before refuelling is required, refuel as soon as possible if the fuel level is very low or the low fuel warning light illuminates.
- The display may not change unless you add more than approximately 9 L (2.3 US gal, 1.9 Imp gal) of fuel.
- The distance-to-empty is the approximate remaining distance the vehicle can be driven until all the graduation marks in the fuel gauge (indicating the remaining fuel supply) disappear.
- If there is no past fuel economy information such as after first purchasing your vehicle or the information is deleted when the battery leads are disconnected, the actual distance-to-empty/range may differ from the amount indicated.

## Average fuel economy mode

This mode displays the average fuel economy by calculating the total travelled distance and the total fuel consumption since the vehicle was purchased or the past data was reset. The average fuel economy is calculated and displayed every minute.

### (European model)

∅ 105 L/100km

### (Except European model)

#### Type A

AVG  
105 L/100km

#### Type B

∅ 95 km/L

To reset the displayed past data, press the INFO switch for 1.5 seconds or longer.

### **NOTE**

#### **(Vehicles with Mazda Connect)**

If TRIP A is reset using the trip meter when the function which synchronizes (resets) the fuel economy monitor and the trip meter (TRIP A) is on, the displayed past data is reset.

After resetting the data, - - - L/100 km (- - - mpg) or - - - km/L is displayed for one minute before the fuel economy is recalculated and displayed.

# Instrument Cluster and Display

## Current fuel economy mode

This mode displays the current fuel economy by calculating the amount of fuel consumption and the distance travelled.

Current fuel economy will be calculated and displayed every 2 seconds.

### (European model)

10.5 L/100km

### (Except European model)

#### Type A

CURRENT  
10.5 L/100km

#### Type B

9.5 km/L

When you've slowed to about 5 km/h (3 mph), - - - L/100 km (- - - mpg) or - - - km/L will be displayed.

## ▼ Vehicle Speed Alarm

In this mode, the current setting for the vehicle speed alarm is displayed. You can change the vehicle speed setting at which the warning is triggered.

### NOTE

*The vehicle speed alarm display is activated at the same time the beep sound is heard.*



100 km/h

The vehicle speed alarm can be set using the centre display.

### NOTE

*Always set the vehicle speed according to the laws and regulations of the country/city in which the vehicle is driven. In addition, always verify the speed of the vehicle using the speedometer.*

## ▼ Cruise Control Set Vehicle Speed Display\*

The vehicle speed preset using the cruise control is displayed.

### (European model)

80 km/h

### (Except European model)

80 km/h

Refer to Cruise Control on page 4-318.

## ▼ Adjustable Speed Limiter (ASL) Display\*

The setting status of the adjustable speed limiter (ASL) is displayed.

LIM 100 km/h


Refer to Adjustable Speed Limiter (ASL) on page 4-226.

# Instrument Cluster and Display


## ▼ Warning/Indicator Lights

Instrument Cluster varies depending on model and specifications.

### Instrument Cluster

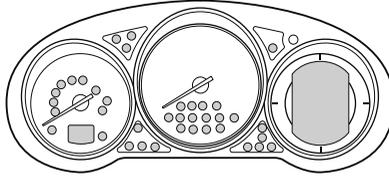

### Centre of Instrument panel




Warning lights will appear in any of the highlighted areas

## ▼ Warning Indication/Warning Lights

These lights turn on or flash to notify the user of the system operation status or a system malfunction.

Signal	Warning	Page
	Brake System Warning Light* <sup>1</sup>	7-42
	ABS Warning Light* <sup>1</sup>	Electronic Brake Force Distribution System Warning 7-42
		ABS warning 7-46
	Charging System Warning Light* <sup>1</sup>	7-42
	Engine Oil Warning Light* <sup>1</sup>	7-42
	Power Steering Malfunction Indicator Light* <sup>1</sup>	7-42
	Master Warning Light* <sup>1</sup>	7-46
	Electric Parking Brake (EPB) Warning Light* <sup>1</sup>	7-46

# Instrument Cluster and Display

Signal	Warning	Page
 (Red)	Brake Pedal Operation Demand Warning Light* <sup>1</sup>	Flashing 4-113 Buzzer & Flashing 7-46
	Check Engine Light* <sup>1</sup>	7-46
<b>i-stop</b> (Amber)	*i-stop Warning Light* <sup>1</sup>	7-46
<b>AT</b>	*Automatic Transaxle Warning Light* <sup>1</sup>	7-46
<b>4WD</b>	*AWD Warning Light* <sup>1</sup>	7-46
	Air Bag/Seat Belt Pretensioner System Warning Light* <sup>1</sup>	7-46
	*Tyre Pressure Monitoring System Warning Light* <sup>1</sup>	Flashing 7-46 Turns on 7-55
 (Red)	KEY Warning Light* <sup>1</sup>	Turns on 7-46 Flashing 7-55
	LED Headlight Warning Light* <sup>1</sup>	7-46
 (Amber)	*Smart City Brake Support (SCBS) Warning Light* <sup>1</sup>	7-55
	Low Fuel Warning Light	7-55
	Engine Oil Level Warning Light* <sup>1</sup>	7-55
<b>120</b> km/h	*120 km/h Warning Light* <sup>1</sup>	7-55
 PASSENGER	Seat Belt Warning Light (Front seat)	7-55
<b>REAR</b> (Red)	Seat Belt Warning Light (Rear seat)	7-55
	*Low Washer Fluid Level Warning Light	7-55

# Instrument Cluster and Display

Signal	Warning	Page
	Door-Ajar Warning Light	7-55

\*1 The light turns on when the ignition is switched on for an operation check, and turns off a few seconds later or when the engine is started. If the light does not turn on or remains turned on, have the vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).

## ▼ Indication/Indicator Lights

These lights turn on or flash to notify the user of the system operation status or a system malfunction.

Signal	Indicator	Page
REAR  (Green)	Seat Belt Indicator Light (Rear seat)	2-30
	*Front Passenger Air Bag Deactivation Indicator Light* <sup>1</sup>	2-69
 (Green)	*i-stop Indicator Light	4-18
	Security Indicator Light* <sup>1</sup>	3-49
	*Vehicle Speed Alarm Indication	4-68
	Wrench Indicator Light* <sup>1</sup>	4-74
	*Glow Indicator Light* <sup>1</sup>	4-74
<b>DPF</b>	*Diesel Particulate Filter Indication/Indicator Light* <sup>1</sup>	4-327
	Shift Position Indication	4-83
	Lights-On Indicator Light	4-91
	Headlight High-Beam Indicator Light	Headlight High-Low Beam 4-95
		Flashing the Headlights 4-95
	*Rear Fog Light Indicator Light	4-97

# Instrument Cluster and Display

Signal	Indicator	Page
	Direction Indicator/Hazard Warning Indicator Lights	Turn and Lane-Change Signals 4-98
		Hazard Warning Flasher 4-107
	Electric Parking Brake (EPB) Indicator Light* <sup>1</sup> * <sup>2</sup>	7-46
<b>HOLD</b>	AUTOHOLD Active Indicator Light* <sup>1</sup>	4-115
 (Green)	Brake Pedal Operation demand Indicator Light* <sup>1</sup>	4-109
	TCS/DSC Indicator Light* <sup>1</sup>	Traction Control System (TCS) 4-120
		Dynamic Stability Control (DSC) 4-122
		Turns on 7-46
<b>TCS OFF</b>	*TCS OFF Indicator Light* <sup>1</sup>	4-121
	*Off-Road Traction Assist Indicator Light* <sup>1</sup>	4-123
<b>SPORT</b>	*Select Mode Indication	4-127
	*Blind Spot Monitoring (BSM) OFF Indicator Light* <sup>1</sup>	Except malfunction 4-147
		Malfunction 7-46

# Instrument Cluster and Display

Signal	Indicator	Page
 (Red)	*Smart City Brake Support (SCBS) Indicator Light	Advanced Smart City Brake Support (Advanced SCBS) 4-237
		Smart City Brake Support [Forward] (SCBS F) 4-241
	*Smart City Brake Support (SCBS) OFF Indicator Light* <sup>1</sup>	Advanced Smart City Brake Support (Advanced SCBS) 4-237
		Smart City Brake Support [Forward] (SCBS F) 4-242
 (White)	*Adjustable Speed Limiter (ASL) Main Indication	4-228
 (Green)	*Adjustable Speed Limiter (ASL) Set Indication	4-228
 (White)	*Cruise Main Indication	4-319
 (Green)	*Cruise Set Indication	4-319

\*1 The light turns on when the ignition is switched on for an operation check, and turns off a few seconds later or when the engine is started. If the light does not turn on or remains turned on, have the vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).

\*2 The light turns on continuously when the parking brake is applied.

# Instrument Cluster and Display

---

## ▼ Wrench Indicator Light



When the ignition is switched ON, the wrench indicator light turns on and then turns off after a few seconds.

The wrench indicator light turns on under the following conditions:

- When the preset maintenance period has arrived.
- When it's time to replace the engine oil.

Refer to the Information section in the Mazda Connect Owner's Manual.

### SKYACTIV-D 2.2

The engine computer monitors the condition of the engine oil, and the wrench indicator light turns on when the oil replacement period has come.

Check the engine oil. Refer to Inspecting Engine Oil Level on page 6-30.

Replace the engine oil if the wrench indicator light does not turn off even though the engine oil level is in the normal range.

#### **NOTE**

- *Depending on the vehicle use conditions, the wrench indicator light may turn on for reasons other than the preset maintenance period.*


#### **NOTE**

- *The wrench indicator light turns on earlier than the preset period depending on vehicle usage conditions.*

- *Whenever the engine oil is replaced, a reset of the vehicle engine control unit is necessary.*

*An expert repairer (we recommend an Authorised Mazda Repairer), will be able to reset the engine control unit or see page 6-29 for the Vehicle engine control unit reset procedure.*

## ▼ Glow Indicator Light (SKYACTIV-D 2.2)



When the ignition is switched ON, the glow indicator light turns on. The glow indicator light turns off when preheating is finished.

A problem in the system might be indicated under the following conditions. Have your vehicle inspected by an expert repairer (we recommend an Authorised Mazda Repairer).


- The glow indicator light does not turn on when the ignition is switched ON or it remains on.
- The glow indicator light is flashing.

#### **NOTE**

*If the vehicle is left with the ignition switched ON without starting the engine and a long period of time has elapsed since preheating finished, the preheating may be performed again and the glow indicator light may turn on.*

# Instrument Cluster and Display

## Active Driving Display\*

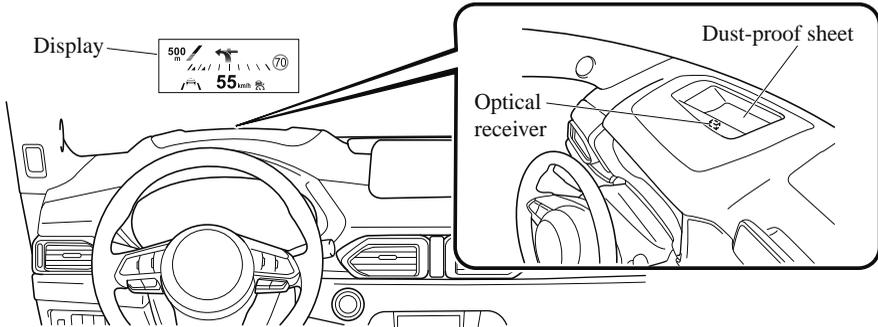

### **⚠ WARNING**

#### **Always adjust the display brightness and position with the vehicle stopped:**

Adjusting the display brightness and position while driving the vehicle is dangerous as doing so could distract your attention from the road ahead and lead to an accident.

### **⚠ CAUTION**

- Do not place beverages near the active driving display. If water or other liquids are splashed on the active driving display, it could cause damage.
- Do not place objects above the active driving display or apply stickers to the dust-proof sheet/optical receiver as they will cause interference.
- A sensor is integrated to control the display's luminosity. If the optical receiver is covered, the display's luminosity will lower making the display difficult to view.
- Do not allow intense light to hit the optical receiver. Otherwise, it could cause damage.

### **NOTE**

- Wearing polarized sunglasses will reduce the visibility of the active driving display due to the characteristics of the display.
- If the battery has been removed and re-installed or the battery voltage is low, the adjusted position may deviate.
- The display may be difficult to view or temporarily affected by weather conditions such as rain, snow, light, and temperature.
- If the audio system is removed, the active driving display cannot be operated.

## Instrument Cluster and Display

---

The active driving display indicates the following information:

- Blind Spot Monitoring (BSM) Operation Conditions and Warnings  
Refer to Blind Spot Monitoring (BSM) on page 4-143.
- Traffic Sign Recognition System (TSR) traffic signs and Warnings  
Refer to Traffic Sign Recognition System (TSR) on page 4-148.
- Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) Operation Conditions and Warnings  
Refer to Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) on page 4-177.
- Mazda Radar Cruise Control (MRCC) Operation Conditions and Warnings  
Refer to Mazda Radar Cruise Control (MRCC) on page 4-164.
- Cruising & Traffic Support (CTS) Operation Conditions and Warnings  
Refer to Cruising & Traffic Support (CTS) on page 4-192.
- Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS) Operation Conditions and Warnings  
Refer to Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS) on page 4-212.
- Advanced Smart City Brake Support (Advanced SCBS) Warnings  
Refer to Advanced Smart City Brake Support (Advanced SCBS) on page 4-235.
- Smart City Brake Support (SCBS) Warnings  
Refer to Smart City Brake Support (SCBS) on page 4-239.
- Smart City Brake Support [Reverse] (SCBS R) Operation Conditions  
Refer to Smart City Brake Support [Reverse] (SCBS R) on page 4-243.
- Smart Brake Support (SBS) Operation Conditions and Warnings  
Refer to Smart Brake Support (SBS) on page 4-247.
- Adjustable Speed Limiter (ASL) Operation Conditions and Warnings  
Refer to Adjustable Speed Limiter (ASL) on page 4-226.
- Cruise Control Operation Conditions  
Refer to Cruise Control on page 4-318.
- Navigation Guidance (vehicles with navigation system)
- Speed limit indicator (vehicles with navigation system)
- Vehicle Speed

The active driving display settings can be changed or adjusted.


Refer to the Settings section in the Mazda Connect Owner's Manual.

**NOTE**

- *The desired driving position (display position, brightness level, display information) can be called up after programming the position.  
Refer to Driving Position Memory on page 2-11.*

# Manual Transaxle Operation


## Manual Transaxle Shift Pattern

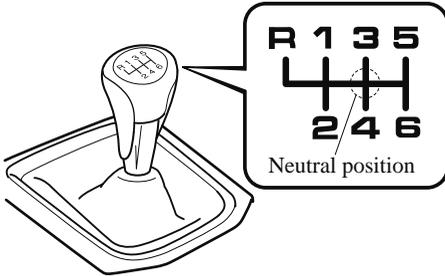

The shift pattern of the transaxle is conventional, as shown.

Depress the clutch pedal all the way down while shifting; then release it slowly.

Your vehicle is equipped with a device to prevent shifting to R (reverse) by mistake. Push the shift lever downward and shift to R.



## **WARNING**

**Do not use sudden engine braking on slippery road surfaces or at high speeds:** Shifting down while driving on wet, snowy, or frozen roads, or while driving at high speeds causes sudden engine braking, which is dangerous. The sudden change in tyre speed could cause the tyres to skid. This could lead to loss of vehicle control and an accident.

**Always leave the shift lever in 1 or R position and set the parking brake when leaving the vehicle unattended:** Otherwise the vehicle could move and cause an accident.

## **CAUTION**

- Keep your foot off the clutch pedal except when shifting gears. Also, do not use the clutch to hold the vehicle on an upgrade. Riding the clutch will cause needless clutch wear and damage.
- Do not apply any excessive lateral force to the shift lever when changing from 5th to 4th gear. This could lead to the accidental selection of 2nd gear, which could result in damage to the transaxle.
- Make sure the vehicle comes to a complete stop before shifting to R. Shifting to R while the vehicle is still moving may damage the transaxle.

## **NOTE**

- If shifting to R is difficult, shift back into neutral, release the clutch pedal, and try again.

# Manual Transaxle Operation

## · (With i-stop function)

If the engine has stopped due to stalling, it can be restarted by depressing the clutch pedal within 3 seconds of the engine stopping.

The engine cannot be restarted even if the clutch pedal is depressed under the following conditions:

- The driver's door is open.
- The driver's seat belt is unfastened.
- The clutch pedal is not released completely after the engine stalled.
- The clutch pedal is depressed with the engine not stopped completely.

## · (With parking sensor system)


When the shift lever is shifted to the R position with the ignition switched ON, the parking sensor system is activated and a beep sound is heard.

Refer to Parking Sensor System on page 4-352.


## ▼ Gear Shift Indicator (GSI)

The GSI supports you to obtain optimum fuel economy and smooth driving. It displays the selected gear position in the instrument cluster as well as notifies the driver to change to the most suitable gear position corresponding to the actual driving condition.

### Instrument Cluster (Type A)

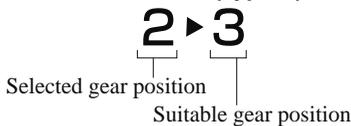

### Instrument Cluster (Type B/C)

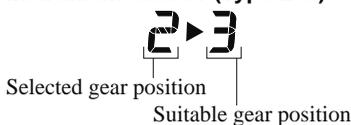

Indication	Condition
Numeral	The selected gear position is displayed.
▶ and numeral	Shift up or down to the indicated gear position is recommended.

## ⚠ CAUTION

Do not rely solely on the shift-up/shift-down recommendations by indications. The actual driving situation might require shift operations different from indication. To avoid the risk of accidents, the road and traffic conditions have to be judged correctly by the driver before shifting.


## NOTE

The GSI turns off when the following operations are performed.

- The vehicle is stopped.
- The vehicle is put in neutral.
- The vehicle is driven in reverse.
- The clutch is not fully engaged when accelerating from a stop.
- The clutch pedal remains depressed for 2 seconds or longer while driving.

# Automatic Transaxle

## Automatic Transaxle Controls

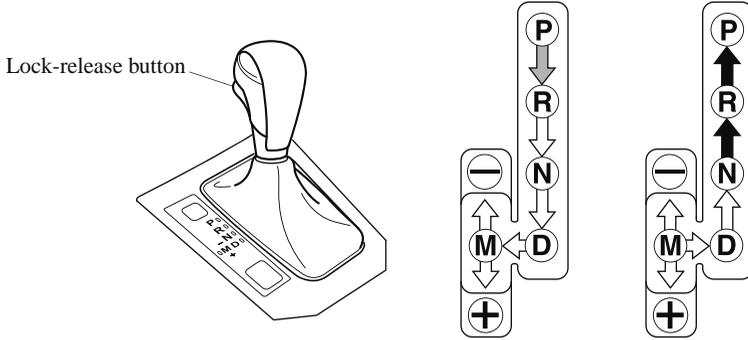

### Various Lockouts:



Indicates that you must depress the brake pedal and hold in the lock-release button to shift (The ignition must be switched ON).



Indicates the selector lever can be shifted freely into any position.



Indicates that you must hold in the lock-release button to shift.

### NOTE

*The Sport AT has an option that is not included in the traditional automatic transaxle that gives the driver the option of selecting each gear instead of leaving it to the transaxle to shift gears. Even if you intend to use the automatic transaxle functions as a traditional automatic, you should also be aware that you can inadvertently shift into manual shift mode and an inappropriate gear may be retained as the vehicle speed increases. If you notice the engine speed going higher or hear the engine racing, confirm you have not accidentally slipped into manual shift mode (page 4-84).*

## Shift-Lock System

The shift-lock system prevents shifting out of P unless the brake pedal is depressed.

To shift from P:

1. Depress and hold the brake pedal.
2. Start the engine.
3. Press and hold the lock-release button.
4. Move the selector lever.

### NOTE


- When the ignition is switched to ACC or the ignition is switched off, the selector lever cannot be shifted from P position.
- The ignition cannot be switched to OFF if the selector lever is not in P position.

### ▼ Shift-Lock Override

If the selector lever will not move from P position using the proper shift procedure, continue to hold down the brake pedal.

#### Type A

1. Remove the shift-lock override cover using a cloth-wrapped flat head screwdriver.
2. Insert a screwdriver and push it down.

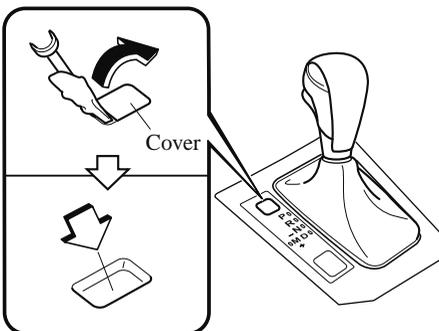


3. Press and hold the lock-release button.
4. Move the selector lever.

Take the vehicle to an expert repairer (we recommend an Authorised Mazda Repairer) to have the system checked.

#### Type B

1. Press the lock-release button with the button pressed.



2. Move the selector lever.
- Take the vehicle to an expert repairer (we recommend an Authorised Mazda Repairer) to have the system checked.

# Automatic Transaxle

---

## Transaxle Ranges

- The shift position indication in the instrument cluster illuminates. Refer to Indication/Indicator Lights on page 4-37, 4-55, 4-71.
- The selector lever must be in P or N position to operate the starter.

### P (Park)

P locks the transaxle and prevents the front wheels from rotating.



**Always set the selector lever to P position and set the parking brake:**

Only setting the selector lever to the P position without using the parking brake to hold the vehicle is dangerous. If P fails to hold, the vehicle could move and cause an accident.



- Shifting into P, N or R while the vehicle is moving can damage your transaxle.
- Shifting into a driving gear or reverse when the engine is running faster than idle can damage the transaxle.

### R (Reverse)

In position R, the vehicle moves only backward. You must be at a complete stop before shifting to or from R, except under rare circumstances as explained in Rocking the Vehicle (page 3-58).

### **NOTE**

**(With parking sensor system)**

When the selector lever is shifted to the R position with the ignition switched ON, the parking sensor system is activated and a beep sound is heard.

Refer to Parking Sensor System on page 4-352.

### N (Neutral)

In N, the wheels and transaxle are not locked. The vehicle will roll freely even on the slightest incline unless the parking brake or brakes are on.



**If the engine is running faster than idle, do not shift from N or P into a driving gear:**

It's dangerous to shift from N or P into a driving gear when the engine is running faster than idle. If this is done, the vehicle could move suddenly, causing an accident or serious injury.

**Do not shift into N when driving the vehicle:**

Shifting into N while driving is dangerous. Engine braking cannot be applied when decelerating which could lead to an accident or serious injury.



Do not shift into N when driving the vehicle. Doing so can cause transaxle damage.

**NOTE**

Apply the parking brake or depress the brake pedal before moving the selector lever from N position to prevent the vehicle from moving unexpectedly.

**D (Drive)**

D is the normal driving position. From a stop, the transaxle will automatically shift through a 6-gear sequence.

**M (Manual)**

M is the manual shift mode position. Gears can be shifted up or down by operating the selector lever. Refer to Manual Shift Mode on page 4-84.

**▼ Shift Position Indication****Instrument Cluster (Type A)****Instrument Cluster (Type B/C)**

The selector position is indicated when the ignition is switched ON.

**Gear position indication**

In manual shift mode, the “M” of the shift position indication illuminates and the numeral for the selected gear is displayed.

**▼ Active Adaptive Shift (AAS)**


Active Adaptive Shift (AAS) automatically controls the transaxle shift points to best suit the road conditions and driver input. This improves driving feel. The transaxle may switch to AAS mode when driving up and down slopes, cornering, driving at high elevations, or depressing the accelerator pedal quickly while the selector lever is in the D position. Depending on the road and driving conditions/vehicle operations, gear shifting could be delayed or not occur, however, this does not indicate a problem because the AAS mode will maintain the optimum gear position.

# Automatic Transaxle

## Manual Shift Mode

The manual shift mode gives you the feel of driving a manual transaxle vehicle by allowing you to operate the selector lever manually. This allows you to control engine rpm and torque to the drive wheels much like a manual transaxle when more control is desired.

To change to manual shift mode, shift the lever from D to M.



### NOTE

Changing to manual shift mode while driving will not damage the transaxle.

To return to automatic shift mode, shift the lever from M to D.

### NOTE

- If you change to manual shift mode when the vehicle is stopped, the gear will shift to M1.
- If you change to manual shift mode without depressing the accelerator pedal when driving in D range, 5th gear/6th gear, the gear will shift to M4/M5.

## ▼ Indications


### Manual shift mode indication

In manual shift mode, the “M” of the shift position indication in the instrument panel illuminates.


### Gear position indication

The numeral for the selected gear illuminates.

#### Instrument Cluster (Type A)



#### Instrument Cluster (Type B/C)



### NOTE

- If the gears cannot be shifted down when driving at higher speeds, the gear position indication will flash twice to signal that the gears cannot be shifted down (to protect the transaxle).
- If the automatic transaxle fluid (ATF) temperature becomes too high, there is the possibility that the transaxle will switch to automatic shift mode, cancelling manual shift mode and turning off the gear position indication illumination. This is a normal function to protect the AT. After the ATF temperature has decreased, the gear position indication illumination turns back on and driving in manual shift mode is restored.

### ▼ Gear Shift Indicator (GSI)\*

The GSI supports you to obtain optimum fuel economy and smooth driving. It displays the selected gear position in the instrument cluster as well as notifies the driver to change to the most suitable gear position corresponding to the actual driving condition.

#### Instrument Cluster (Type A)

M 2 ▶ 3

Selected gear position

Suitable gear position

#### Instrument Cluster (Type B/C)

M 2 ▶ 3

Selected gear position

Suitable gear position

Indication	Condition
Numeral	The selected gear position is displayed.
▶ and numeral	Shift up or down to the indicated gear position is recommended.

### ⚠ CAUTION

Do not rely solely on the shift-up/shift-down recommendations by indications. The actual driving situation might require shift operations different from indication. To avoid the risk of accidents, the road and traffic conditions have to be judged correctly by the driver before shifting.

### NOTE

The GSI turns off when the following operations are performed.

- The vehicle is stopped.
- Manual shift mode is cancelled.


### ▼ Manually Shifting Up

You can shift gears up by operating the selector lever or the steering shift switches\*.

M1 → M2 → M3 → M4 → M5 → M6


#### Using selector lever

To shift up to a higher gear, tap the selector lever back + once.



#### Using steering shift switch\*

To shift up to a higher gear with the steering shift switches, pull the UP switch (+/OFF) toward you once with your fingers.

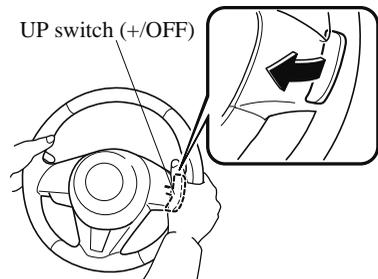

# Automatic Transaxle

## **WARNING**

**Keep your hands on the steering wheel rim when using fingers on the steering shift switches:**

Putting your hands inside the rim of the steering wheel when using the steering shift switches is dangerous. If the driver's air bag were to deploy in a collision, your hands could be impacted causing injury.

### NOTE

- When driving slowly, the gears may not shift up.
- Do not drive the vehicle with the tachometer needle in the RED ZONE while in manual shift mode. In addition, manual shift mode switches to automatic shift mode while the accelerator pedal is completely depressed.
- This function is cancelled while the TCS is turned off or the Off-Road Traction Assist is turned on. However, if the vehicle is continuously driven at a high rpm, the gears may automatically shift up to protect the engine.
- The steering shift switch can be used temporarily even if the selector lever is in the D position while driving. In addition, it returns to automatic shift mode when the UP switch (+/OFF) is pulled rearward for a sufficient amount of time.


### ▼ Manually Shifting Down

You can shift gears down by operating the selector lever or the steering shift switches\*.

M6 → M5 → M4 → M3 → M2 → M1


### Using selector lever

To shift down to a lower gear, tap the selector lever forward — once.



### Using steering shift switch\*

To shift down to a lower gear with the steering shift switches, pull the DOWN switch — toward you once with your fingers.

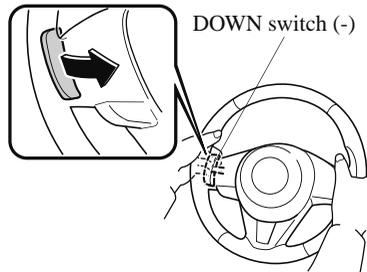

## **WARNING**

**Do not use engine braking on slippery road surfaces or at high speeds:**

Shifting down while driving on wet, snowy, or frozen roads, or while driving at high speeds causes sudden engine braking, which is dangerous. The sudden change in tyre speed could cause the tyres to skid. This could lead to loss of vehicle control and an accident.

**Keep your hands on the steering wheel rim when using fingers on the steering shift switches:**

Putting your hands inside the rim of the steering wheel when using the steering shift switches is dangerous. If the driver's air bag were to deploy in a collision, your hands could be impacted causing injury.

**NOTE**

- When driving at high speeds, the gear may not shift down.
- During deceleration, the gear may automatically shift down depending on vehicle speed.
- When depressing the accelerator fully, the transaxle will shift to a lower gear, depending on vehicle speed. However, the gears do not kickdown while the TCS is turned off or the Off-Road Traction Assist is operating.

**▼ Second Gear Fixed Mode**

When the selector lever is moved back + while the vehicle speed is about 10 km/h (6.2 mph) or less, the transaxle is set in the second gear fixed mode. The gear is fixed in second while in this mode for easier acceleration from a stop and driving on slippery roads such as snow-covered roads.


If the selector lever is moved back + or forward - while in the second gear fixed mode, the mode will be cancelled.

# Automatic Transaxle

---

## ▼ Shift Gear (Shifting) Speed Limit

For each gear position while in the manual mode, the speed limit is set as follows: When the selector lever is operated within the range of the speed limit, the gear is shifted.

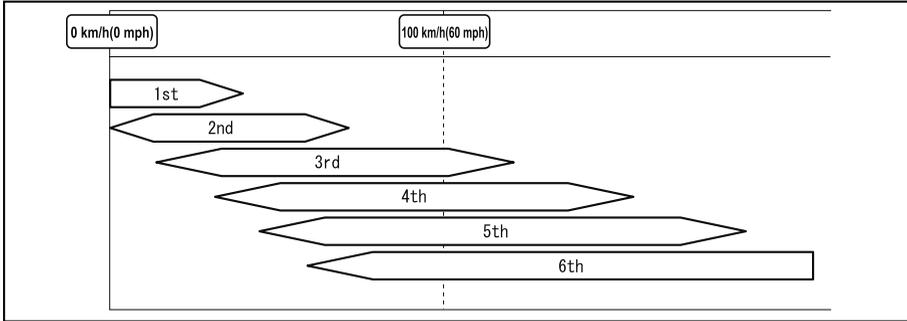

### Shift up

The gear does not shift up while the vehicle speed is lower than the speed limit.

### Shift down

The gear does not shift down while the vehicle speed exceeds the speed limit. If the vehicle speed exceeds the speed limit and the gear does not shift down, the gear position indication flashes 2 times to notify the driver that the gear cannot be shifted.

### Kickdown

When the accelerator pedal is depressed fully while driving, the gear shifts down. However, the gears do not kickdown while the TCS is turned off or the Off-Road Traction Assist is operating.

### **NOTE**

*The gear also shifts down using kickdown while in the second gear fixed mode.*

### Auto-shift down

The gear shifts down automatically depending on the vehicle speed during deceleration.

### **NOTE**

*If the vehicle comes to a stop while in the second gear fixed mode, the gear remains in second.*

## Direct Mode\*


Direct mode can be used for temporarily switching gears by operating the steering shift switch while the vehicle is being driven with the selector lever in the D position.

While in direct mode, the D and M indication illuminate and the gear position in use is illuminated.


Direct mode is cancelled (released) under the following conditions.

- The UP switch (**+ / OFF**) is pulled rearward for a certain amount of time or longer.
- The vehicle is driven for a certain amount of time or longer (time differs depending on the driving conditions while operating).
- The vehicle is stopped or moving at a slow speed.

### Instrument Cluster (Type A)



### Instrument Cluster (Type B/C)



### NOTE

*Shifting up and down while in direct mode may not be possible depending on the vehicle speed. In addition, because direct mode is cancelled (released) depending on the rate of acceleration or if the accelerator is fully depressed, use of the manual shift mode is recommended if you need to drive the vehicle in a particular gear for long periods.*

## Driving Tips

### **WARNING**

**Do not let the vehicle move in a direction opposite to the direction selected by the selector lever:**

*Do not let the vehicle move backward with the selector lever in a forward position, or do not let the vehicle move forward with the selector lever in the reverse position. Otherwise, the engine may stop, causing the loss of the power brake and power steering functions, and make it difficult to control the vehicle which could result in an accident.*

### **Passing**

For extra power when passing another vehicle or climbing steep grades, depress the accelerator fully. The transaxle will shift to a lower gear, depending on vehicle speed.

### **NOTE**

- The accelerator pedal may initially feel heavy as it is being depressed, then feel lighter as it is depressed further. This change in pedal force aids the engine control system in determining how much the accelerator pedal has been depressed for performing kickdown, and functions to control whether or not kickdown should be performed.*
- While the selector lever is in the M position and the TCS is turned off, manual shift mode does not switch to automatic shift mode even if the accelerator pedal is completely depressed. Operate the selector lever.*

### **Climbing steep grades from a stop**

To climb a steep grade from a stopped position:

1. Depress the brake pedal.
2. Shift to D or M1, depending on the load weight and grade steepness.
3. Release the brake pedal while gradually accelerating.

### **Descending steep grades**

When descending a steep grade, shift to lower gears, depending on load weight and grade steepness. Descend slowly, using the brakes only occasionally to prevent them from overheating.

## Lighting Control

### ▼ Headlights


Turn the headlight switch to turn the headlights and other exterior lights on or off. When the tail lights, position lights, number plate lights are turned on, the lights-on indicator light in the instrument cluster turns on.



#### NOTE

- To prevent discharging the battery, do not leave the lights on while the engine is off unless safety requires them.
- Headlights do not blind drivers approaching in the opposite direction no matter what side of the road you must drive your vehicle (left-hand or right-hand traffic). Therefore, it is not necessary to adjust the optical axis of the headlights when switching temporarily to driving on the opposite side of the road (left-hand or right-hand traffic).

#### Without auto-light control

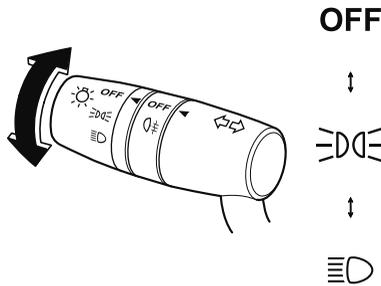

Switch Position	OFF		☰☑☰		☰☑	
Ignition Position	ON	ACC or OFF	ON	ACC or OFF	ON	ACC or OFF
Headlights	Off	Off	Off	Off	On	Off
Running lights*	On*1	Off	Off	Off	Off	Off
Tail lights Position lights Number plate lights	Off	Off	On	On	On	On*2


\*1 The lights are turned on while the vehicle is driven.

# Switches and Controls

\*2 The lights are turned on continuously if the ignition is switched from ON to any other position with the lights turned on. The lights are turned off when the driver's door is opened or 30 seconds have elapsed since the lights turned on.

## With auto-light control

(Except Taiwan)

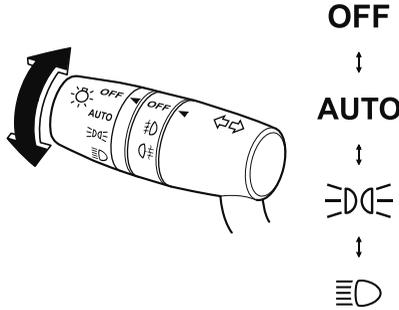

Switch Position	OFF		AUTO		≡D≡		≡D	
Ignition Position	ON	ACC or OFF	ON	ACC or OFF	ON	ACC or OFF	ON	ACC or OFF
Headlights	Off	Off	Auto*2	Off	Off	Off	On	Off
Running lights*	On*1	Off	On*3	Off	Off	Off	Off	Off
Tail lights								
Position lights	Off	Off	Auto*2	On*4	On	On	On	On*4
Number plate lights								

\*1 The lights are turned on while the vehicle is driven.


\*2 The lights are turned on by the auto light function.

\*3 The lights are turned on while the vehicle is driven, and turned off when the headlights are turned on by the auto light function.

\*4 The lights are turned on continuously if the ignition is switched from ON to any other position with the lights turned on. The lights are turned off when the driver's door is opened or 30 seconds have elapsed since the lights turned on.

# Switches and Controls

(Taiwan)

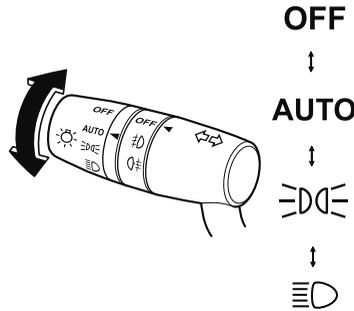

Ignition Position	ACC or OFF				ON			
	OFF*1	AUTO	☰☑☒	☰☑	OFF*1	AUTO	☰☑☒	☰☑
Headlights	Off	Off	Off	Off	Auto*2*4	Auto*3*4	Auto*3*4	On
Running lights	Off	Off	Off	Off				Off
Tail lights Position lights Number plate lights	Off	On*5	On	On*5				On

\*1 The light switch returns to the AUTO position automatically.

\*2 During the daytime, the running lights turn on automatically. During the nighttime, the headlights, position lights, tail lights, and the number plate lights turn on automatically.

\*3 During the daytime, the running lights, position lights, tail lights, and the number plate lights turn on automatically. During the nighttime, the headlights, position lights, tail lights, and the number plate lights turn on automatically.

\*4 When the light switch is switched to the OFF position while the vehicle is stopped, all of the lights that are turned on turn off. When the light switch is switched from a position other than ☰☑☒ to the ☰☑☒ position while the vehicle is stopped, the running lights or the headlights turn off. When starting to drive the vehicle, the lights that are turned off turn on again.

\*5 The lights are turned on continuously if the ignition is switched from ON to any other position with the lights turned on. The lights are turned off when the driver's door is opened or 30 seconds have elapsed since the lights turned on.

## Auto-light control\*

(Except Taiwan)

When the headlight switch is in the AUTO position and the ignition is switched ON, the light sensor senses the surrounding lightness or darkness and automatically turns the headlights and other exterior lights on or off.

(Taiwan)


When the headlight switch is in a position other than ☰☑ and the ignition is switched ON, the light sensor senses the surrounding lightness or darkness and automatically turns the headlights and other exterior lights on or off.

## Switches and Controls

---



- Do not shade the light sensor by adhering a sticker or a label on the windscreen. Otherwise the light sensor will not operate correctly.

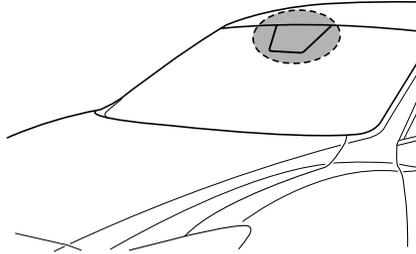

- The light sensor also works as a rain sensor for the auto-wiper control. Keep hands and scrapers clear of the windscreen when the wiper lever is in the AUTO position and the ignition is switched ON as fingers could be pinched or the wipers and wiper blades damaged when the wipers activate automatically. If you are going to clean the windscreen, be sure the wipers are turned off completely — this is particularly important when clearing ice and snow — when it is particularly tempting to leave the engine running.


### NOTE

- The headlights and other exterior lights may not turn off immediately even if the surrounding area becomes well-lit because the light sensor determines that it is night time if the surrounding area is continuously dark for several minutes such as inside long tunnels, traffic jams inside tunnels, or in indoor parking lots. In this case, the lights turn off if the light switch is turned to the OFF position.
- The sensitivity of the auto-light control may be changed. Refer to Settings section in the Mazda Connect Owner's Manual.

# Switches and Controls

## ▼ Headlight High-Low Beam

The headlights switch between high and low beams by moving the lever forward or backward.

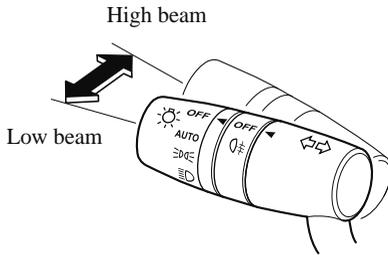


When the headlight high-beams are on, the headlight high-beam indicator light is turned on.



## ▼ Flashing the Headlights

Can be used when the ignition is switched ON.

To flash the headlights, pull the lever fully towards you (the headlight switch does not need to be on).

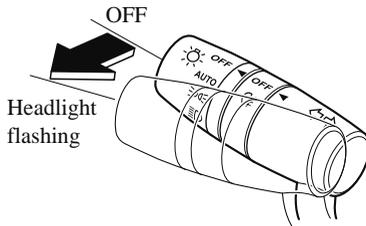

The headlight high-beam indicator light in the instrument cluster illuminates simultaneously. The lever will return to the normal position when released.




## ▼ Coming Home Light

The coming home light turns on the headlights (low beams) when the lever is operated.

### To turn on the lights

When the lever is pulled with the ignition switched to ACC or OFF, the low beam headlights turn on.

The headlights turn off after a certain period of time has elapsed after all of the doors are closed.

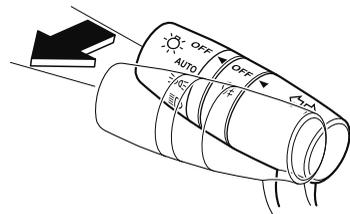

### **NOTE**

- The time until the headlights turn off after all of the doors are closed can be changed.  
Refer to the Settings section in the Mazda Connect Owner's Manual.
- If no operations are done for 3 minutes after the lever is pulled, the headlights turn off.
- The headlights turn off if the lever is pulled again while the headlights are illuminated.



## Rear Fog Light\*

The rear fog light can be used when the ignition is switched ON.

The rear fog light helps your vehicle to be seen.

When the lights are turned on, the rear fog lights indicator light in the instrument cluster turns on.




### ▼ With Front Fog Lights

The headlight switch must be in the  $\text{D}$  or  $\text{D}$  position before turning on the rear fog light.

To turn the rear fog light on, rotate the fog light switch to the  $\text{O}$  position (the fog light switch returns to the  $\text{D}$  position automatically).

The rear fog light indicator light in the instrument cluster illuminates while the rear fog light is on.



OFF



To turn the rear fog light off, do any of the following:

- Rotate the fog light switch to the  $\text{O}$  position again (the fog light switch returns to the  $\text{D}$  position automatically).

### (Except Taiwan)

- Turn the headlight switch to the OFF position.

### NOTE

- The front fog lights turn on when the rear fog light is turned on.
- If the fog light switch is rotated to the  $\text{O}$  position (the fog light switch returns to the  $\text{D}$  position automatically), the front fog light indicator light in the instrument cluster will also illuminate.
- **(With auto-light control)**  
When the headlight switch is in the AUTO position, and the headlights and exterior lights are illuminated, the rear fog light turns on when the rear fog light switch is turned on.


# Switches and Controls

## ▼ Without Front Fog Lights

The headlights must be turned on to turn on the rear fog light.


To turn the rear fog light on, rotate the fog light switch to the  position (the fog light switch returns to its original position automatically).

The rear fog light indicator light in the instrument cluster illuminates while the rear fog light is on.



Fog light switch

OFF



To turn the rear fog light off, do any of the following:

- Rotate the fog light switch to the  position again (the fog light switch returns to its original position automatically).

### (Except Taiwan)

- Turn the headlight switch to the OFF position.

The rear fog light indicator light in the instrument cluster goes off when the rear fog light is turned off.

### NOTE

#### (With auto-light control)

When the headlight switch is in the AUTO position, and the headlights and exterior lights are illuminated, the rear fog light turns on when the rear fog light switch is turned on.


## Turn and Lane-Change Signals

The ignition must be switched ON to use the turn and lane-change signals.

### ▼ Direction Indicators

Move the signal lever down (for a left turn) or up (for a right turn) to the stop position. The signal will self-cancel after the turn is completed.

If the indicator light continues to flash after a turn, manually return the lever to its original position.

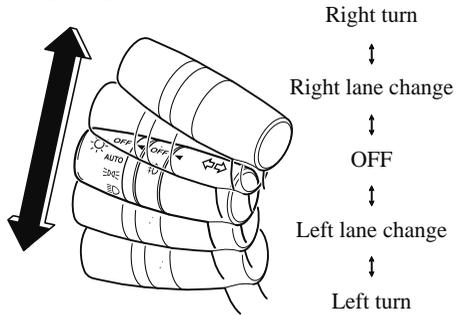

The direction indicators in the instrument cluster flash according to the operation of the direction indicator lever to show which signal is working.



**NOTE**

- If an indicator light stays on without flashing or if it flashes abnormally, one of the direction indicator bulbs may be burned out.
- A personalised function is available to change the turn indicator sound volume. Refer to the Settings section in the Mazda Connect Owner's Manual.

**▼ Lane-Change Signals**

Move the lever halfway toward the direction of the lane change—until the indicator flashes—and hold it there. It will return to the off position when released.

**▼ Three-Flash Turn Signal**

After releasing the direction indicator lever, the direction indicator flashes 3 times. The operation can be cancelled by moving the lever in the direction opposite to which it was operated.

**NOTE**

The three-flash turn signal function can be switched to operable/inoperable using the personalisation function. Refer to the Settings section in the Mazda Connect Owner's Manual.

## Windscreen Wipers and Washer

The ignition must be switched ON to use the wipers.

### **WARNING**

#### **Use only windscreen washer fluid or plain water in the reservoir:**

Using radiator antifreeze as washer fluid is dangerous. If sprayed on the windscreen, it will dirty the windscreen, affect your visibility, and could result in an accident.

#### **Only use windscreen washer fluid mixed with anti-freeze protection in freezing weather conditions:**

Using windscreen washer fluid without anti-freeze protection in freezing weather conditions is dangerous as it could freeze on the windscreen and block your vision which could cause an accident. In addition, make sure the windscreen is sufficiently warmed using the defroster before spraying the washer fluid.

### **CAUTION**

- When the wipers are not used during freezing temperatures or for a long time, the wiper rubber may adhere to the glass. If the wipers are operated while adhered to the glass, it could damage the wiper rubber and motor.
- If the wipers are operated while the glass is dry, the glass could be scratched and the wiper rubber damaged. When the glass is dry, spray washer fluid before operating the wipers.

# Switches and Controls

➤ If the amount of washer fluid spray is insufficient, do not use the washer switch. If the washer switch continues to be operated with no washer fluid being sprayed, it could lead to pump damage.


**NOTE**

If the windscreen wipers are operated under cold weather conditions or during snowfall, they could stop due to accumulated snow on the windscreen. If the windscreen wipers stop due to accumulated snow on the windscreen, park the vehicle in a safe place, turn the wiper switch off, and then remove the accumulated snow. If the wiper switch is turned to another position other than OFF, the wipers will operate. If the wipers do not operate even though the wiper switch is turned to a position other than OFF, consult an expert repairer (we recommend an Authorised Mazda Repairer) as soon as possible.

▼ **Windscreen Wipers**

Turn the wipers on by pressing the lever up or down.

With intermittent wiper




- ①
- ↑ ↓
- OFF
- ↑ ↓
- ②
- ↑ ↓
- ③
- ↑ ↓
- ④


Switch Position			Wiper operation
No.	Type A	Type B	
①	∧	MIST	Operation while pulling up lever
OFF			Stop
②	---	INT	Intermittent
③	—	LO	Low speed
④	≡	HI	High speed

**Variable-speed intermittent wipers**

Set the lever to the intermittent position and choose the interval timing by rotating the ring.

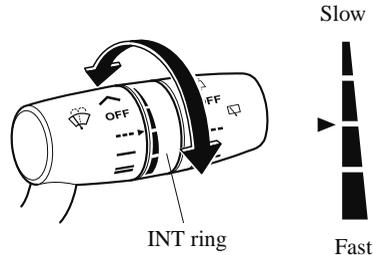

With auto-wiper control



- ①
- ↑ ↓
- OFF
- ↑ ↓
- ②
- ↑ ↓
- ③
- ↑ ↓
- ④

Switch Position			Wiper operation
No.	Type A	Type B	
①	∧	MIST	Operation while pulling up lever

# Switches and Controls


Switch Position			Wiper operation
No.	Type A	Type B	
	OFF		Stop
②	AU-TO	AU-TO	Auto control
③	—	LO	Low speed
④	≡	HI	High speed

## Auto-wiper control\*

When the wiper lever is in the AUTO position, the rain sensor senses the amount of rainfall on the windscreen and turns the wipers on or off automatically (off—intermittent—low speed—high speed).


The sensitivity of the rain sensor can be adjusted by turning the switch on the wiper lever.

From the centre position (normal), rotate the switch upward for higher sensitivity (faster response) or rotate it downward for less sensitivity (slower response).

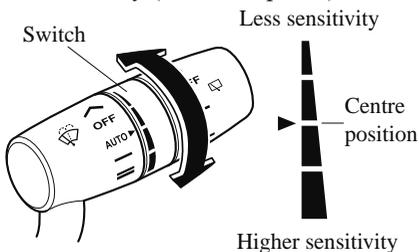

## ⚠ CAUTION

- Do not shade the rain sensor by adhering a sticker or a label on the windscreen. Otherwise the rain sensor will not operate correctly.

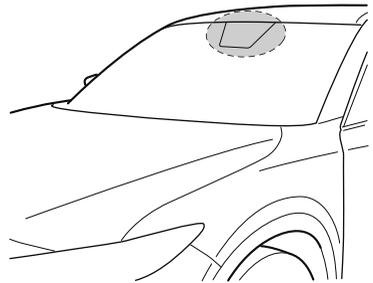

- When the ignition is switched ON and the wiper lever is in the AUTO position, the windscreen wipers may operate automatically in the following cases:
  - The area of the windscreen above the rain sensor is touched or wiped with a cloth.
  - The windscreen or the rain sensor area in the cabin is hit.

When the ignition is switched ON and the wiper lever is in the AUTO position, do not touch the windscreen or the windscreen wipers. Otherwise, the windscreen wipers will operate automatically which could catch your fingers or damage the windscreen wipers.

When removing ice or snow, or cleaning the windscreen, always make sure the wiper lever is in the OFF position.

## Switches and Controls

---

### NOTE


- Switching the auto-wiper lever from the OFF to the AUTO position while driving activates the windscreen wipers once, after which they operate according to the rainfall amount.
- The auto-wiper control may not operate when the rain sensor temperature is about  $-10^{\circ}\text{C}$  ( $14^{\circ}\text{F}$ ) or lower, or about  $85^{\circ}\text{C}$  ( $185^{\circ}\text{F}$ ) or higher.
- If the windscreen is coated with water repellent, the rain sensor may not be able to sense the amount of rainfall correctly and auto-wiper control may not operate properly.
- If dirt or foreign matter (Such as ice or matter containing salt water) adheres to the windscreen above the rain sensor or if the windscreen is iced, it could cause the wipers to move automatically. However, if the wipers cannot remove this ice, dirt or foreign matter, the auto-wiper control will stop operation. In this case, set the wiper lever to the low speed position or high speed position for manual operation, or remove the ice, dirt or foreign matter by hand to restore the auto-wiper operation.
- If the auto-wiper lever is left in the AUTO position, the wipers could operate automatically from the effect of strong light sources, electromagnetic waves, or infrared light because the rain sensor uses an optical sensor. It is recommended that the auto-wiper lever be switched to the OFF position other than when driving the vehicle under rainy conditions.

- The auto-wiper control functions can be turned off.

Refer to the Settings section in the Mazda Connect Owner's Manual.

### ▼ Windscreen Washer

Pull the lever toward you and hold it to spray washer fluid.

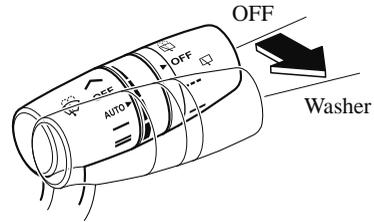

### NOTE


If the windscreen washer is turned on when the windscreen wipers are not operating, the windscreen wipers operate a few times.

If the washer does not work, inspect the fluid level (page 6-34). If the fluid level is normal, consult an expert repairer (we recommend an Authorised Mazda Repairer).

## Rear Window Wiper and Washer

The ignition must be switched ON to use the wiper.

### ▼ Rear Window Wiper

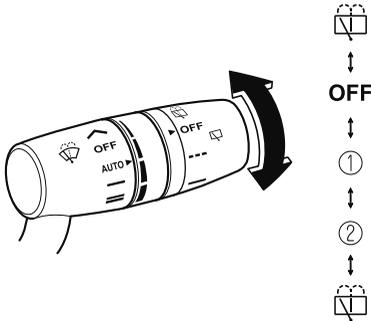

Turn the wiper on by turning the rear wiper/washer switch.

Switch Position			Wiper operation
No.	Type A	Type B	
	OFF		Stop
①	---	INT	Intermittent
②	—	ON	Normal

### ▼ Rear Window Washer


To spray washer fluid, turn the rear wiper/washer switch to either of the  position. After the switch is released, the washer will stop.

If the washer does not work, inspect the fluid level (page 6-34). If the fluid level is normal and the washer still does not work, consult an expert repairer (we recommend an Authorised Mazda Repairer).

## Headlight Washer\*

The engine must be started and the headlights must be turned on.

If you want to operate headlight washers, double flick the wiper lever.

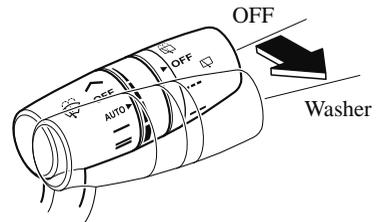

### NOTE

- When the windscreen washer is operated for the first time after turning on the headlights, the headlight washers operate automatically.
- If air enters the headlight washer fluid pipe under conditions such as when the vehicle is brand-new or after an empty washer tank is replenished with washer fluid, washer fluid will not spray even when the wiper lever is operated. If this occurs, perform the following procedure:
  1. Start the engine.
  2. Turn on the headlights.
  3. Double flick the wiper lever several times until the washer fluid sprays.

## Switches and Controls

### Rear Window Defogger

The rear window defogger clears fog from the rear window.


The ignition must be switched ON to use the defogger.

Press the switch to turn on the rear window defogger. The rear window defogger operates for about 15 minutes and then turns off automatically.


The indicator light illuminates when the defogger is operating.

To turn off the rear window defogger before the 15 minutes has elapsed, press the switch again.

### Manual Air-Conditioning System

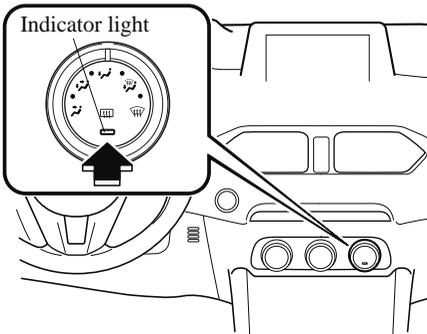

### Fully Automatic Air-Conditioning System

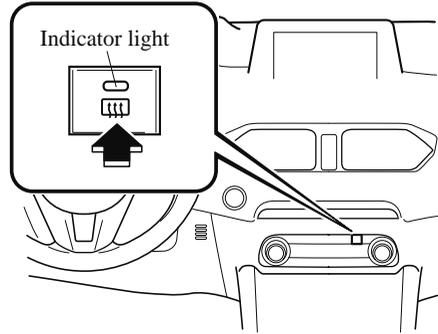

### CAUTION

- Do not use sharp instruments or window cleaners with abrasives to clean the inside of the rear window surface. They may damage the defogger grid inside the window.

### NOTE

- This defogger is not designed for melting snow. If there is an accumulation of snow on the rear window, remove it before using the defogger.
- The rear window defogger setting can be changed. After changing the setting, the rear window defogger stops automatically after 15 minutes have elapsed and when the ambient temperature is high. When the ambient temperature is low, it continues to operate until the switch is pressed again.  
Refer to the Settings section in the Mazda Connect Owner's Manual.

# Switches and Controls


## ▼ Mirror Defogger\*

The mirror defoggers defrost the outside mirrors.


The mirror defoggers operate in conjunction with the rear window defogger.

To turn on the mirror defoggers, switch the ignition ON and press the rear window defogger switch (page 4-104).

### Manual Air-Conditioning System

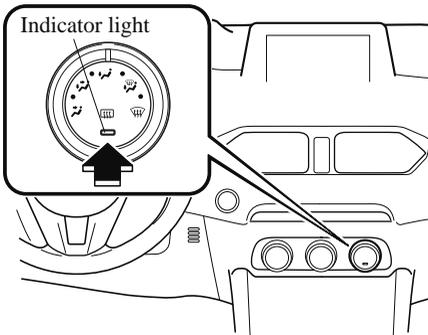


### Fully Automatic Air-Conditioning System

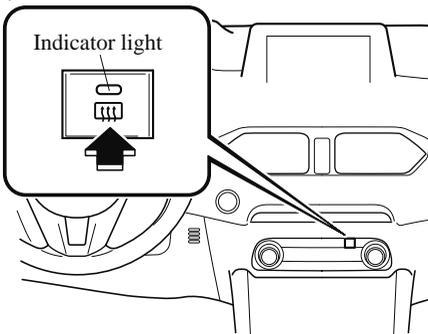


## ▼ Windscreen Wiper De-icer\*

The thermal filaments at the following positions heat up and facilitate the removal of snow accumulated on the windscreen.

### Left-Hand Drive Model

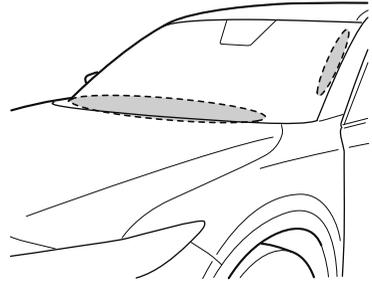

### Right-Hand Drive Model

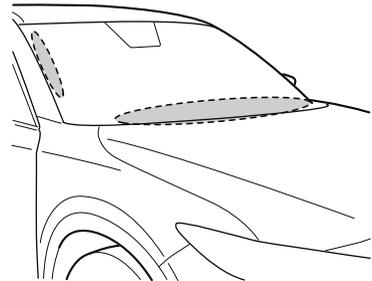


The windscreen wiper de-icer operates in conjunction with the rear window defogger.

To turn on the windscreen wiper de-icer, switch the ignition ON and press the rear window defogger switch (page 4-104).


# Switches and Controls

---

## Manual Air-Conditioning System

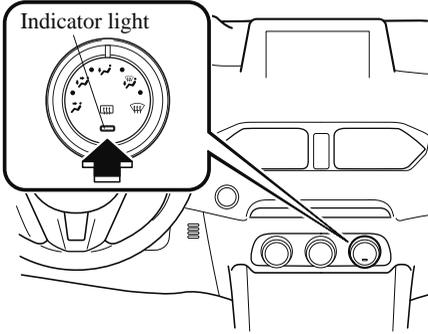

## Fully Automatic Air-Conditioning System

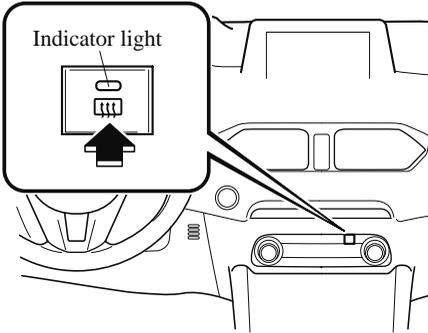


## Horn

To sound the horn, press the  mark on the steering wheel.

## Hazard Warning Flasher

The hazard warning lights should always be used when you stop on or near a roadway in an emergency.



The hazard warning lights warn other drivers that your vehicle is a traffic hazard and that they must take extreme caution when near it.



Depress the hazard warning flasher and all the direction indicators will flash. The hazard warning indicator lights in the instrument cluster flash simultaneously.

### NOTE

- The direction indicators do not work when the hazard warning lights are on.
- Check local regulations about the use of hazard warning lights while the vehicle is being towed to verify that it is not in violation of the law.

- If the brake pedal is depressed while driving on slippery roads, the emergency stop signal system could operate causing all the turn and lane change signals to flash. Refer to Emergency Stop Signal System on page 4-117.
- While the emergency stop signal system is operating, all the direction indicators automatically flash rapidly to caution the driver of a vehicle following behind your vehicle of a sudden braking situation. Refer to Emergency Stop Signal System on page 4-117.

## Brake System

### ▼ Foot Brake

This vehicle has power-assisted brakes that adjust automatically through normal use.

Should power-assist fail, you can stop by applying greater force than normal to the brake pedal. But the distance required to stop will be greater than usual.

### WARNING

**Do not coast with the engine stalled or turned off, find a safe place to stop:**

*Coasting with the engine stalled or turned off is dangerous. Braking will require more effort, and the brake's power-assist could be depleted if you pump the brake. This will cause longer stopping distances or even an accident.*

**Shift to a lower gear when going down steep hills:**


*Driving with your foot continuously on the brake pedal or steadily applying the brakes for long distances is dangerous. This causes overheated brakes, resulting in longer stopping distances or even total brake failure. This could cause loss of vehicle control and a serious accident. Avoid continuous application of the brakes.*

**Dry off brakes that have become wet by driving slowly, releasing the accelerator pedal and lightly applying the brakes several times until the brake performance returns to normal:**

*Driving with wet brakes is dangerous. Increased stopping distance or the vehicle pulling to one side when braking could result in a serious accident. Light braking will indicate whether the brakes have been affected.*

### CAUTION


- Do not drive with your foot held on the clutch pedal or brake pedal, or hold the clutch pedal depressed halfway unnecessarily. Doing so could result in the following:
  - The clutch and brake parts will wear out more quickly.
  - The brakes can overheat and adversely affect brake performance.
- Always depress the brake pedal with the right foot. Applying the brakes with the unaccustomed left foot could slow your reaction time to an emergency situation resulting in insufficient braking operation.

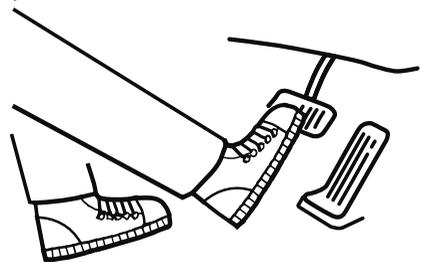

➤ *Wear shoes appropriate for driving in order to avoid your shoe contacting the brake pedal when depressing the accelerator pedal.*

### ▼ **Electric Parking Brake (EPB)**

The EPB equipment applies the parking brake using an electric motor. When the parking brake is applied, the EPB switch indicator light turns on.

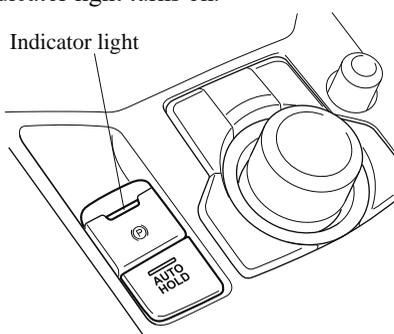

### **⚠ WARNING**

#### **Do not drive the vehicle with the parking brake applied:**

*If the vehicle is driven with the parking brake applied, the brake parts may generate heat and the brake system may not operate, leading to an accident. Before driving, release the parking brake and verify that the EPB indicator light is turned off.*

#### **NOTE**

- The parking brake cannot be applied or released while the vehicle battery is dead.*

- If the EPB is repeatedly applied and released it may stop operating to prevent overheating of the motor. If this occurs, wait approx. 1 minute before operating the EPB switch again.*
- An operation sound occurs when applying or releasing the parking brake, however, this does not indicate a malfunction.*
- If the EPB is not used for long periods, an automatic inspection of the system is performed while the vehicle is parked. An operation sound can be heard, however, this does not indicate a problem.*
- When the parking brake is applied and the ignition is switched OFF, an operation sound can be heard, however, this does not indicate a problem.*
- The brake pedal may move while the parking brake is being applied or released, however, this does not indicate a problem.*
- If the EPB switch is continually pulled while driving the vehicle, the parking brake will be applied and the EPB warning beep will be activated. When the switch is released, the parking brake is released and the beep stops.*
- If the parking brake is applied with the ignition switched off or in ACC, the EPB indicator light in the instrument cluster and the indicator light in the switch may turn on for 15 seconds.*
- When running the vehicle through an automatic car wash, it may be necessary to switch the ignition off with the parking brake released depending on the type of automatic car wash.*


# Brake

## When applying the parking brake

The parking brake can be applied regardless of the ignition switch position. Securely depress the brake pedal and pull up the EPB switch.

The parking brake is applied and the EPB indicator light and the EPB switch indicator light turn on.

Refer to If a Warning Light Turns On or Flashes on page 7-42.

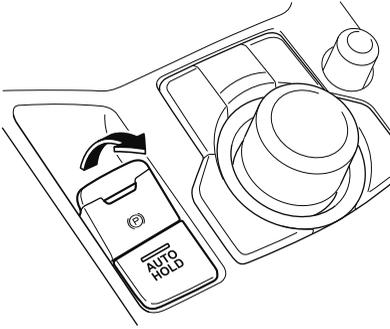


## When releasing the parking brake

The parking brake can be released while the ignition is switched ON or the engine is running. When the parking brake is released, the EPB indicator light and the EPB switch indicator light turn off.

## Parking brake manual release

Firmly depress the brake pedal and press the EPB switch.

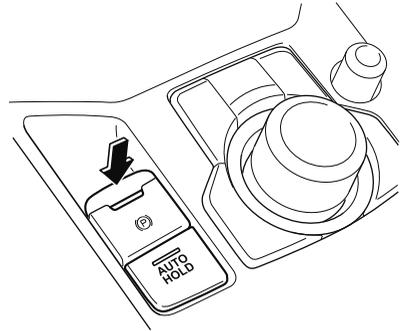

If the EPB switch is pressed without depressing the brake pedal, the display or indicator light in the instrument cluster notifies the driver that the brake is not depressed.


### **(Type A/B instrument cluster)**

A message is displayed on the multi-information display in the instrument cluster.

Refer to Message Indicated in Multi-information Display on page 7-60.

### **(Type C instrument cluster)**

The brake pedal operation demand indicator light (green) in the instrument cluster turns on.



**Parking brake automatic release**

If the accelerator pedal is depressed with the parking brake applied and all of the following conditions met, the parking brake is released automatically.

- The engine is running.
- The driver's door is closed.
- The driver's seat belt is fastened.

**(Manual transaxle)**

- The change lever is in a position other than neutral.
- The clutch pedal is depressed halfway

**(Automatic transaxle)**

- Selector lever is in the D, M, or R position

**NOTE**

*If something such as the driver's foot contacts the accelerator pedal with the engine running and the parking brake applied, the parking brake may be released automatically. If you do not intend to drive immediately, shift the change lever (manual transaxle) to the neutral position, or shift the selector lever (automatic transaxle) to the P or N position.*


**▼ Warning Light**

The warning light turns on when the system has a malfunction.

Contact an expert repairer (we recommend an Authorised Mazda Repairer) and Have Vehicle Inspected on page 7-46.

**▼ Brake Pad Wear Indicator**

When the disc brake pads become worn, the built-in wear indicators contact the disc plates. This causes a screeching noise to warn that the pads should be replaced.

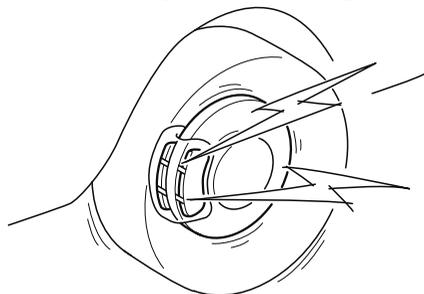

When you hear this noise, consult an expert repairer (we recommend an Authorised Mazda Repairer) as soon as possible.

**⚠ WARNING****Do not drive with worn disc pads:**

*Driving with worn disc pads is dangerous. The brakes could fail and cause a serious accident. As soon as you hear a screeching noise consult an expert repairer (we recommend an Authorised Mazda Repairer).*

**NOTE**

*In high humidity weather conditions, brake noises, such as brake squeak or brake squeal can be heard. It does not indicate a malfunction.*

# Brake

---

## ▼ Brake Assist

During emergency braking situations when it is necessary to depress the brake pedal with greater force, the brake assist system provides braking assistance, thus enhancing braking performance.

When the brake pedal is depressed hard or depressed more quickly, the brakes apply more firmly.

### **NOTE**

- *When the brake pedal is depressed hard or depressed more quickly, the pedal will feel softer but the brakes will apply more firmly. This is a normal effect of the brake assist operation and does not indicate a malfunction.*
- *When the brake pedal is depressed hard or depressed more quickly, a motor/pump operation noise may be heard. This is a normal effect of the brake assist and does not indicate a malfunction.*
- *The brake assist equipment does not supersede the functionality of the vehicle's main braking system.*

## AUTOHOLD

The AUTOHOLD function automatically holds the vehicle stopped, even if you take your foot off the brake pedal. This function can be best used while stopped in traffic or at a traffic light. The brakes are released when you start driving the vehicle.

### **WARNING**

**Do not rely completely on the AUTOHOLD function:**

*The AUTOHOLD function is only designed to assist the brake operation while the vehicle is stopped. Neglecting to operate the brakes and relying only on the AUTOHOLD system is dangerous and could result in an unexpected accident if the vehicle were to suddenly move. Operate the brakes appropriately in accordance with the road and surrounding conditions. Note that the vehicle may move suddenly depending on the vehicle's load or if it is towing something.*

**Do not release your foot from the brake pedal while the vehicle is stopped on a steep grade:**

*Because there is a possibility of the vehicle not being held in the stopped position by the AUTOHOLD function, the vehicle may move unexpectedly and result in an accident.*

**Do not use the AUTOHOLD function on slippery roads such as icy or snow-covered roads, or unpaved roads:**

*Even if the vehicle is held in the stopped position by the AUTOHOLD function, the vehicle may move unexpectedly and result in an accident. Operate the accelerator pedal, brakes, or steering wheel appropriately as necessary.*

**Immediately depress the brake pedal in the following cases:**

*Because the AUTOHOLD function is cancelled forcibly, the vehicle may move unexpectedly and result in an accident.*

- *The brake pedal operation demand warning light (red) flashes and the warning sound is activated at the same time.*



(Red)

- *[Brake Hold Unavailable Depress Brake to Hold Position] is displayed in the multi-information display and the warning sound is activated at the same time.*

# Brake

## **Always apply the parking brake when parking the vehicle:**

Not applying the parking brake when parking the vehicle is dangerous as the vehicle may move unexpectedly and result in an accident. When parking the vehicle, shift the selector lever to the P position (automatic transaxle vehicle) and apply the parking brake.


### **CAUTION**

If you stop operating the accelerator pedal before the vehicle starts moving, the force holding the vehicle in the stopped position may weaken. Firmly depress the brake pedal or depress the accelerator pedal to accelerate the vehicle.

### **NOTE**

- Under the following conditions, a problem with the AUTOHOLD is occurring. Have your vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer) as soon as possible.
- The brake pedal operation demand warning light (red) in the instrument cluster flashes and the warning sound is activated for about 5 seconds while the AUTOHOLD is operating or when you press the AUTOHOLD switch.
- A message is indicated on the multi-information display and a warning sound is activated for about 5 seconds while the AUTOHOLD is operating or when you press the AUTOHOLD switch.
- If you switch the ignition OFF while the AUTOHOLD is operating, the parking brake is applied automatically to assist you with parking the vehicle.
- The AUTOHOLD is cancelled when the selector lever/shift lever is shifted to R position while the vehicle is on level ground, or facing up a hill or grade (as shown below).


← : Driving in reverse (selector lever/shift lever in R)

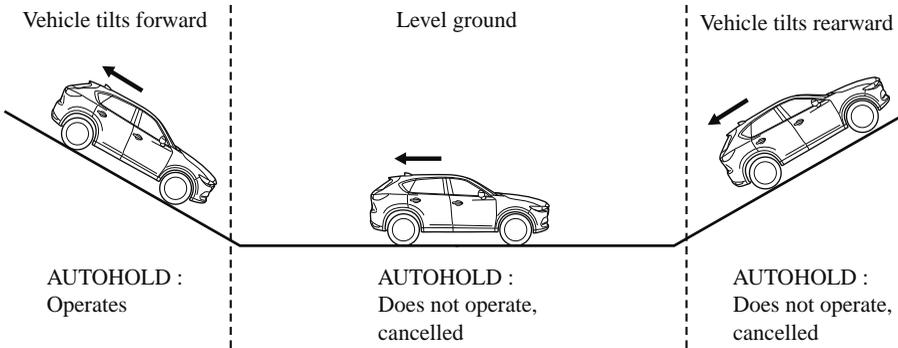

- The brake pedal response may change, sound may occur from the brakes, or the brake pedal could vibrate from the operation of the AUTOHOLD function. However, this does not indicate a malfunction.

### ▼ To Turn On AUTOHOLD System

Press the AUTOHOLD switch and when the AUTOHOLD standby indicator light turns on, the AUTOHOLD function turns on.

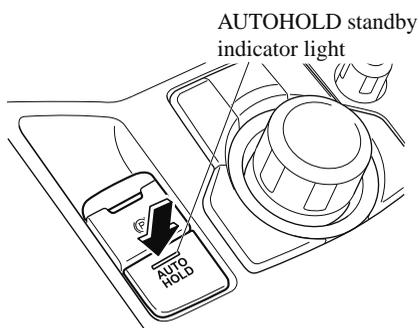

#### **NOTE**

When all of the following conditions are met, the AUTOHOLD standby indicator light turns on when the AUTOHOLD switch is pressed and the AUTOHOLD function turns on.

- The ignition is switched ON (engine is running or stopped by i-stop).
- The driver's seat belt is fastened.
- The driver's door is closed.
- There is no problem with the AUTOHOLD function.

### To operate AUTOHOLD and hold the brakes

1. Depress the brake pedal and bring the vehicle to a complete stop.
2. The AUTOHOLD active indicator light in the instrument cluster turns on and the brakes are held.

# HOLD

3. The vehicle is held in its stopped position even with the brake pedal released.

#### **NOTE**

When all of the following conditions are met, the AUTOHOLD operates and the brakes are held.

- The ignition is switched ON (engine is running or stopped by i-stop).
- The vehicle is stopped.
- The brake pedal is being depressed.
- The AUTOHOLD active indicator light turns on.
- The accelerator pedal is not depressed.
- The driver's seat belt is fastened.
- The driver's door is closed.
- There is no problem with the AUTOHOLD function.
- The parking brake is released.
- There is no problem with the Electric Parking Brake (EPB) function.
- (Automatic transaxle vehicle)

# Brake

The selector lever is in a position other than R position or the vehicle tilts forward with the selector lever in the R position.

## To release AUTOHOLD and start driving the vehicle

If you try to resume driving the vehicle, the brakes release automatically and the AUTOHOLD active indicator light turns off.


### NOTE

- If the Electric Parking Brake (EPB) switch is pulled while the AUTOHOLD is operating, the parking brake is applied and the AUTOHOLD is released. In addition, if the parking brake is released under this condition, the AUTOHOLD operates to hold the brakes.
- Under the following conditions, the parking brake is automatically applied and the AUTOHOLD is released. The AUTOHOLD is re-enabled when the conditions before the AUTOHOLD is released are restored.
  - The driver's seat belt is unfastened.
  - The driver's door is opened.
- When about 10 minutes or longer have passed since the AUTOHOLD operation started, the parking brake is automatically applied. Because the AUTOHOLD is restored when releasing the parking brake, the hold on the brakes by AUTOHOLD function resumes.
- (Manual transaxle vehicle)

When starting to drive the vehicle forward or in reverse on a down slope, depress the clutch pedal and shift the shift lever to the appropriate position for driving in the desired direction, and then depress the accelerator pedal to release the AUTOHOLD.

## ▼ To Turn Off AUTOHOLD System

Depress the brake pedal and press the AUTOHOLD switch. The AUTOHOLD is turned off and the AUTOHOLD standby indicator light turns off.

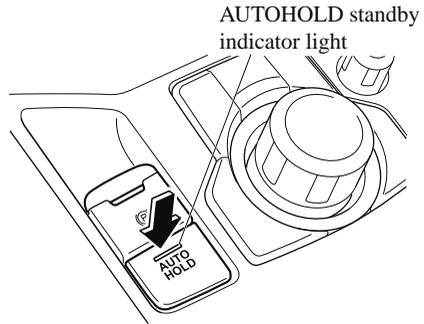

### NOTE

- When the brakes are not held such as while driving the vehicle, the AUTOHOLD can be turned off only by pressing the AUTOHOLD switch.
- (Type A/B instrument cluster)  
If the AUTOHOLD switch is pressed without depressing the brake pedal while AUTOHOLD is operating (AUTOHOLD active indicator light in instrument cluster is turned on), the message Brake Pedal Must Be Depressed to Deactivate Auto Hold System is indicated on the multi-information display to notify the driver to depress the brake pedal.

- **(Type C instrument cluster)**

If the AUTOHOLD switch is pressed without depressing the brake pedal while the AUTOHOLD is operating (AUTOHOLD active indicator light is turned on), the brake pedal operation demand indicator light (green) in the instrument cluster turns on to notify the driver that it is necessary to depress the brake pedal.



(Green)

- If any of the following conditions occurs while the AUTOHOLD function is operating (AUTOHOLD active indicator light is turned on), the parking brake is applied automatically and the AUTOHOLD function turns off. For the Electric Parking Brake (EPB) operation, refer to the Electric Parking Brake (EPB) on page 4-109.

- The ignition is switched OFF.
- There is a problem with the AUTOHOLD function.
- Turn off the AUTOHOLD before switching OFF the ignition so that the parking brake is not applied automatically.

## Emergency Stop Signal System

If you apply the brakes suddenly while driving at a speed of about 55 km/h (34 mph) or faster, the emergency stop signal system automatically and rapidly flashes all the direction indicator lights to caution drivers behind your vehicle of the sudden braking situation.

### NOTE

- **Flashing**

When you bring your vehicle to a complete stop while all the direction indicator lights are flashing rapidly, the rapid flashing of all the direction indicator lights changes back to the normal flashing pattern. When the hazard warning light switch is pressed, all of the direction indicator lights turn off.

- **Operation**

- When the ABS operates, the emergency stop signal system is more likely to operate. Therefore, if the brake pedal is depressed on a slippery road, all of the direction indicator lights may flash.
- The emergency stop signal system does not operate when the hazard warning light switch is pressed.

## Hill Launch Assist (HLA)

HLA is a function which assists the driver in accelerating from a stop while on a slope. When the driver releases the brake pedal and depresses the accelerator pedal while on a slope, the function prevents the vehicle from rolling. The braking force is maintained automatically after the brake pedal is released on a steep grade.

For vehicles with a manual transaxle, HLA operates on a downward slope when the shift lever is in the reverse (R) position, and on an upward slope when the shift lever is in a position other than the reverse (R) position.

For vehicles with an automatic transaxle, HLA operates on a downward slope when the selector lever is in the reverse (R) position, and on an upward slope when the selector lever is in a forward gear.

### WARNING

#### **Do not rely completely on HLA:**

*HLA is an auxiliary device for accelerating from a stop on a slope. The system only operates for about 2 seconds and therefore, relying only on the system, when accelerating from a stop is dangerous because the vehicle may move (roll) unexpectedly and cause an accident. The vehicle could roll depending on the vehicle's load or if it is towing something. In addition, for vehicles with a manual transaxle, the vehicle could still roll depending on how the clutch pedal or the accelerator pedal is operated. Always confirm the safety around the vehicle before starting to drive the vehicle.*

#### **NOTE**

- *HLA does not operate on a gentle slope. In addition, the gradient of the slope on which the system will operate changes depending on the vehicle's load.*
- *HLA does not operate if the parking brake is applied, the vehicle has not stopped completely, or the clutch pedal is released.*
- *While HLA is operating, the brake pedal may feel stiff and vibrate, however, this does not indicate a malfunction.*
- *HLA does not operate while the TCS/DSC indicator light is illuminated. Contact an expert repairer (we recommend an Authorised Mazda Repairer) and Have Vehicle Inspected on page 7-46.*
- *HLA does not turn off even if the TCS OFF switch is pressed to turn off the TCS.*

## **Antilock Brake System (ABS)**

The ABS control unit continuously monitors the speed of each wheel. If one wheel is about to lock up, the ABS responds by automatically releasing and reapplying that wheel's brake.

The driver will feel a slight vibration in the brake pedal and may hear a chattering noise from the brake system. This is normal ABS system operation. Continue to depress the brake pedal without pumping the brakes.

The warning light turns on when the system has a malfunction.

Contact an expert repairer (we recommend an Authorised Mazda Repairer) and Have Vehicle Inspected on page 7-46.

### **WARNING**

***Do not rely on ABS as a substitute for safe driving:***

*The ABS cannot compensate for unsafe and reckless driving, excessive speed, tailgating (following another vehicle too closely), driving on ice and snow, and hydroplaning (reduced tyre friction and road contact because of water on the road surface). You can still have an accident.*

### **NOTE**

- *Braking distances may be longer on loose surfaces (snow or gravel, for example) which usually have a hard foundation. A vehicle with a normal braking system may require less distance to stop under these conditions because the tyres will build up a wedge of surface layer when the wheels skid.*
- *The sound of the ABS operating may be heard when starting the engine or immediately after starting the vehicle, however, it does not indicate a malfunction.*

## Traction Control System (TCS)

The Traction Control System (TCS) enhances traction and safety by controlling engine torque and braking. When the TCS detects driving wheel slippage, it lowers engine torque and operates the brakes to prevent loss of traction.

This means that on a slick surface, the engine adjusts automatically to provide optimum power to the drive wheels, limiting wheel spin and loss of traction.

The warning light turns on when the system has a malfunction.

Contact an expert repairer (we recommend an Authorised Mazda Repairer) and Have Vehicle Inspected on page 7-46.



**Do not rely on the Traction Control System (TCS) as a substitute for safe driving:** *The Traction Control System (TCS) cannot compensate for unsafe and reckless driving, excessive speed, tailgating (following another vehicle too closely), and hydroplaning (reduced tyre friction and road contact because of water on the road surface). You can still have an accident.*

**Use snow tyres or tyre chains and drive at reduced speeds when roads are covered with ice and/or snow:**

*Driving without proper traction devices on snow and/or ice-covered roads is dangerous. The Traction Control System (TCS) alone cannot provide adequate traction and you could still have an accident.*

### NOTE

*To turn off the TCS, press the TCS OFF switch (page 4-121).*

### ▼ TCS/DSC Indicator Light



This indicator light stays on for a few seconds when the ignition is switched ON. If the TCS or DSC is operating, the indicator light flashes.

If the light stays on, the TCS, DSC or the brake assist system may have a malfunction and they may not operate correctly. Take your vehicle to an expert repairer (we recommend an Authorised Mazda Repairer).

### NOTE

- In addition to the indicator light flashing, a slight labouring sound will come from the engine. This indicates that the TCS/DSC is operating properly.*
- On slippery surfaces, such as fresh snow, it will be impossible to achieve high rpm when the TCS is on.*

## ▼ TCS OFF Indicator Light\*


# TCS OFF

This indicator light stays on for a few seconds when the ignition is switched ON. It also illuminates when the TCS OFF switch is pressed and TCS is switched off. Refer to TCS OFF Switch on page 4-121.

If the light remains illuminated and the TCS is not switched off, take your vehicle to an expert repairer (we recommend an Authorised Mazda Repairer). The DSC may have a malfunction.

## ▼ TCS OFF Switch\*

Press the TCS OFF switch to turn off the TCS. The TCS OFF indicator light in the instrument cluster will illuminate.

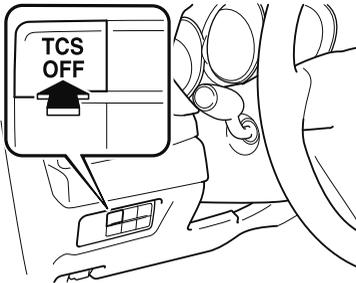

Press the switch again to turn the TCS back on. The TCS OFF indicator light will turn off.

## NOTE

- When TCS is on and you attempt to free the vehicle when it is stuck, or drive it out of freshly fallen snow, the TCS (part of the DSC system) will activate. Depressing the accelerator will not increase engine power and freeing the vehicle may be difficult. When this happens, turn off the TCS.
- If the TCS is off when the engine is turned off, it automatically activates when the ignition is switched ON.
- Leaving the TCS on will provide the best traction.
- If the TCS OFF switch is pressed and held for 10 seconds or more, the TCS OFF switch malfunction detection function operates and the TCS system activates automatically. The TCS OFF indicator light turns off while the TCS system is operative.

### Dynamic Stability Control (DSC)

The Dynamic Stability Control (DSC) automatically controls braking and engine torque in conjunction with systems such as ABS and TCS to help control side slip when driving on slippery surfaces, or during sudden or evasive manoeuvring, enhancing vehicle safety.

Refer to ABS (page 4-119) and TCS (page 4-120).

DSC operation is possible at speeds greater than 20 km/h (12 mph).

The warning light turns on when the system has a malfunction.

Contact an expert repairer (we recommend an Authorised Mazda Repairer) and Have Vehicle Inspected on page 7-46.

### WARNING

**Do not rely on the Dynamic Stability Control as a substitute for safe driving:** *The Dynamic Stability Control (DSC) cannot compensate for unsafe and reckless driving, excessive speed, tailgating (following another vehicle too closely), and hydroplaning (reduced tyre friction and road contact because of water on the road surface). You can still have an accident.*

### CAUTION

- The DSC may not operate correctly unless the following are observed:
  - Use tyres of the correct size specified for your Mazda on all 4 wheels.
  - Use tyres of the same manufacturer, brand and tread pattern on all 4 wheels.
  - Do not mix worn tyres.
- The DSC may not operate correctly when tyre chains are used or a temporary spare tyre is installed because the tyre diameter changes.

### ▼ TCS/DSC Indicator Light



This indicator light stays on for a few seconds when the ignition is switched ON. If the TCS or DSC is operating, the indicator light flashes.

If the light stays on, the TCS, DSC or the brake assist system may have a malfunction and they may not operate correctly. Take your vehicle to an expert repairer (we recommend an Authorised Mazda Repairer).

## Off-Road Traction Assist\*

When the vehicle tyres become embedded in mud, sand, or deep snow, the Off-Road Traction Assist functions to prevent drive-wheel spinning and to assist in freeing tyres that are stuck.

Do not drive over rough rocky roads and river beds.



### WARNING

#### **Do not rely completely on the Off-Road Traction Assist.**

The Off-Road Traction Assist has limitations. Always drive the vehicle safely according to the road conditions. Do not drive the vehicle recklessly, otherwise it may result in an accident. In addition, do not drive the vehicle under the following conditions while the Off-Road Traction Assist is operating. Otherwise, it could negatively affect the drivetrain parts which could result in an accident.

- Vehicle is driven on paved roads.
- Temporary spare tyre or tyres of a different specified size are used.
- Tyre chains are used.



### CAUTION

The Off-Road Traction Assist is a function to assist in freeing tyres that are stuck. When it is not necessary to use this function, avoid driving the vehicle continuously with the Off-Road Traction Assist on.

#### **(Vehicle equipped with Type A/B instrument cluster)**

If the vehicle is driven continuously with the Off-Road Traction Assist on, the AWD warning indication may be displayed.

#### **(Vehicle equipped with Type C instrument cluster)**

If the vehicle is driven continuously with the Off-Road Traction Assist on, the AWD warning light may flash.

Refer to If a Warning Light Turns On or Flashes on page 7-42.

#### **NOTE**

The vehicle may vibrate or you might hear an operation sound while the Off-Road Traction Assist is operating or is operational, however, this does not indicate a problem.

#### **▼ Off-Road Traction Assist Indicator Light**



- When the ignition is switched ON, the indicator light turns on and then turns off after a few seconds.
- When pressing the Off-Road Traction Assist switch to operate the Off-Road Traction Assist, the indicator light turns on.
- A problem in the system might be indicated under the following conditions. Have your vehicle inspected by an expert repairer (we recommend an Authorised Mazda Repairer).
  - The indicator light does not turn on when the ignition is switched ON or it remains on.

## ABS/TCS/DSC/Off-Road Traction Assist


---

- The indicator light turns on even though the Off-Road Traction Assist was not operated.

### ▼ Off-Road Traction Assist Switch

When the switch is pressed after stopping the vehicle, the Off-Road Traction Assist becomes operational.

The Off-Road Traction Assist indicator light in the instrument cluster turn on.

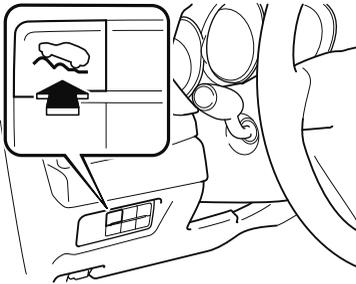


If the switch is pressed again, the Off-Road Traction Assist is stopped and the Off-Road Traction Assist indicator light turn off.

### **NOTE**

*If the engine is stopped with the Off-Road Traction Assist operational, the Off-Road Traction Assist is stopped when the engine is started the next time.*

## i-ELOOP\*

The i-ELOOP system suppresses engine load used for generating power and improves driveability and fuel economy by generating electricity with the kinetic energy that is generated when the vehicle slows down by applying the brakes or during engine braking. Stores large amounts of electricity instantly and efficiently uses the electricity for electrical devices and accessories.

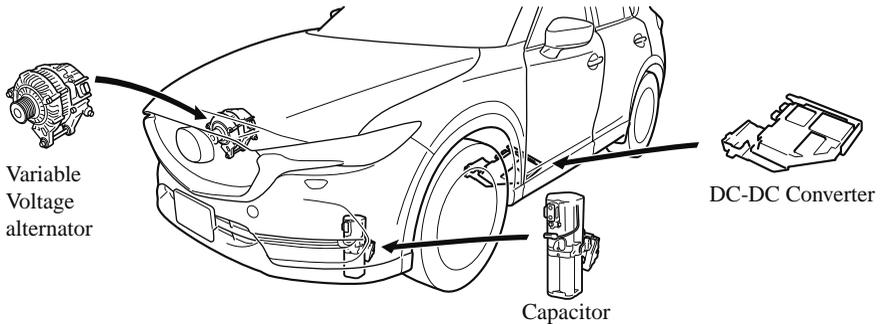

### **⚠ CAUTION**

- *High-current electricity flows through the following parts, therefore do not touch them.*
  - *Variable voltage alternator*
  - *DC-DC converter*
  - *Capacitor*
- *If the capacitor is to be disposed of, always consult an expert repairer (we recommend an Authorised Mazda Repairer).*  
*For details, go to the following URL.*  
*<http://www.mazda.com/csr/environment/recycling>*

## i-ELOOP

---

### ▼ i-ELOOP Control Status Display

The driver is notified of the i-ELOOP power generating status and the vehicle conditions by the control status display.

The i-ELOOP power generating status is displayed in the centre display.

Refer to the Information section in the Mazda Connect Owner's Manual.

### ▼ i-ELOOP Charging Display

If the engine is started after the vehicle has not been driven for a long period of time, an “i-ELOOP charging” message may be indicated in the display.

Leave the engine idling and wait until the message disappears.

#### **NOTE**

*If the vehicle is driven while the message is displayed, a beep sound is heard.*

*If you turn the steering wheel while the message is displayed, it will feel heavier than normal, but this does not indicate an abnormality. Stop the vehicle in a safe location with the engine running and do not attempt to turn the steering wheel. The steering operation will return to normal after the message is no longer displayed.*

**i-ELOOP**

i-ELOOP charging

# Mazda intelligent Drive Select (Mi-Drive)

## Mazda intelligent Drive Select (Mi-Drive)\*

### ▼ Mazda intelligent Drive Select (Mi-Drive)

Mi-drive is a system that switches the drive modes depending on the driving conditions, road conditions and vehicle conditions.

The mode can be switched from normal to sport or off-road.

#### Sport mode\*

This mode enhances vehicle responsiveness when the accelerator pedal is depressed.

This provides additional quick acceleration which may be needed to safely make manoeuvres such as lane changes, merging onto freeways, or passing other vehicles.

#### Off-road mode\*

This mode helps prevent drive-wheel spinning during off-road driving and improves driving performance.

Use this mode to drive the vehicle on slippery roads such as muddy, sandy, or deep-snowy roads.

### Warnings and cautions when using Mi-Drive

#### WARNING

- Do not rely completely on the Mi-Drive system.
- Vehicle stability is limited even when Mi-drive is activated.

- Always drive the vehicle safely. Do not drive the vehicle recklessly, otherwise it may result in an accident.
- Do not drive the vehicle on paved roads while the Off-road mode is operating. Otherwise, it could negatively affect the drivetrain parts which could result in an accident.

#### CAUTION


- Do not use the sport mode when driving on slippery roads such as wet or snow-covered roads. It may cause tyre slipping.
- Heed the following cautions so that the system can operate normally.
  - Always use tyres of the specified size, same manufacturer, brand, and pattern (tread pattern) for the front and rear wheels.
  - Do not use tyres with significantly different wear patterns on the same vehicle.
- Drive carefully when using tyre chains. Because the diameter of the tyres differs, the system may not operate normally.
- If the vehicle is driven continuously with the Off-road mode on, the AWD warning light may flash.

# Mazda intelligent Drive Select (Mi-Drive)


## How to use Mi-Drive

### Type A

1. Push the Mi-Drive switch forward or pull it toward you.

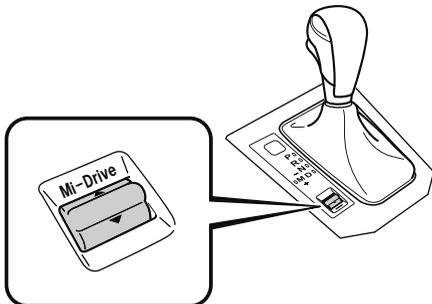


2. While checking the list displayed in the instrument cluster, push the Mi-Drive switch forward or pull it toward you to select a drive mode.



When the drive mode is set, the display in the instrument cluster changes. Refer to Mazda intelligent Drive Select (Mi-Drive) Display on page 4-23.

### Type B

1. Press the Mi-Drive switch forward (SPORT) to select the sport mode.

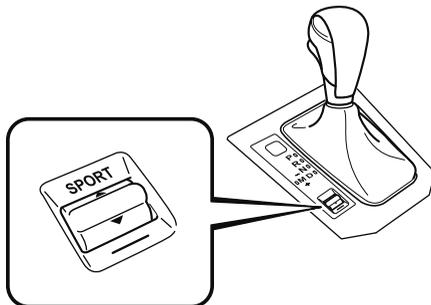

2. **Instrument Cluster (Type A)**

When the drive mode is set, the display in the instrument cluster changes. Refer to Mazda intelligent Drive Select (Mi-Drive) Display on page 4-23.

#### **Instrument Cluster (Type B/C)**

When the sport mode is selected, the select mode indication turns on in the instrument cluster.

# SPORT

3. Pull the Mi-Drive switch back (OFF) to cancel the sport mode.

### **NOTE**

- Depending on the driving conditions when sport mode is selected, the vehicle may perform shift-down or slightly accelerate.
- When the sport mode is selected, driving at higher engine speeds increases and it may increase fuel consumption. Mazda recommends that you cancel the sport mode on normal driving.
- **Instrument Cluster (Type A)**  
The driving mode in which the display in the instrument cluster is grayed out cannot be selected.

## Mazda intelligent Drive Select (Mi-Drive)

---

- *When the ignition is switched OFF, the mode returns to normal mode.*
- *In the following cases, the sport mode is cancelled.*
  - *The ignition is switched OFF.*
  - *Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) System/Mazda Radar Cruise Control (MRCC) system/cruise control is set.*
  - *Cruising & Traffic Support (CTS) is set.*
- *The vehicle may vibrate or you might hear an operation sound while the Off-road mode is operating or is operational, however, this does not indicate a problem.*

## i-ACTIV AWD Operation\*

AWD provides excellent drivability on snow-covered and ice-packed roads, sand and mud, as well as on steep slopes and other slippery surfaces.

A system malfunction or operation conditions are indicated by a warning.

Contact an expert repairer (we recommend an Authorised Mazda Repairer) and Have Vehicle Inspected on page 7-46.

### WARNING

#### **Never spin a wheel that is off the ground:**

*Spinning a wheel that is off the ground as a result of the vehicle being stuck or in a ditch is dangerous. The drive assembly could be seriously damaged which could lead to an accident or could even lead to overheating, oil leakage, and a fire.*

#### ▼ AWD Driving

### WARNING

#### **Avoid sharp turns, excessive speed and abrupt manoeuvres when driving this vehicle:**

*Sharp turns, excessive speed and abrupt manoeuvring of this vehicle is dangerous as it could result in the increased risk of loss of vehicle control, vehicle roll-over, personal injury or death.*

*This vehicle has a higher centre of gravity. Vehicles with a higher centre of gravity such as utility and AWD vehicles handle differently than vehicles with a lower centre of gravity.*

*Utility and AWD vehicles are not designed for cornering at high speeds any more than low profile sports cars are designed to perform satisfactorily under off-road conditions. In addition, utility vehicles have a significantly higher rollover rate than other types of vehicles.*

#### **Drive carefully when the vehicle is loaded by lowering vehicle speed and applying the brakes earlier:**

*Abrupt manoeuvring and sudden braking when driving a loaded vehicle is dangerous as the driving behaviour of a vehicle with a high centre of gravity is different when it is loaded compared to when it is not, and could result in the loss of vehicle control and an accident.*

#### ▼ Tyres and Tyre Chains

The condition of the tyres plays a large role in the performance of the vehicle. Moreover, to prevent adverse effects to the drive assembly, please note the following:

#### Tyres

- When replacing tyres, always replace all front and rear tyres at the same time.
- All tyres must be of the same size, manufacture, brand and tread pattern. Pay particular attention when equipping snow or other types of winter tyres.
- Do not mix tread-worn tyres with normal tyres.
- Inspect tyre inflation pressures at the specified periods adjust to the specified pressures, and initialize the tyre pressure monitoring system. Refer to Tyre Pressure Monitoring System Initialization on page 4-323.

**NOTE**

*Check the tyre inflation pressure label attached to driver's door frame for the correct tyre inflation pressure.*

- Make sure to equip the vehicle with genuine tyres of the specified size, on all wheels. With AWD, the system is calibrated for all 4 wheels being of the same dimensions.

**Tyre chains**

- Install tyre chains to the front tyres.
- Do not use tyre chains on the rear wheels.
- Do not drive the vehicle faster than 30 km/h (19 mph) with the tyre chains installed.
- Do not drive the vehicle with tyre chains on road conditions other than snow or ice.

**▼ Towing**

If the vehicle requires towing, have it towed with all 4 wheels completely off the ground.

Refer to Towing Description on page 7-38.

## Power Steering

---

### Power Steering

- Power steering is only operable when the engine is running. If the engine is off or if the power steering system is inoperable, you can still steer, but it requires more physical effort. If the steering feels stiffer than usual during normal driving or the steering vibrates, consult an expert repairer (we recommend an Authorised Mazda Repairer).
- The warning indication/warning light notifies the driver of system abnormalities and operation conditions. In addition, the buzzer may also activate depending on the system abnormality or operation condition.  
Refer to Stop Vehicle in Safe Place Immediately on page 7-42.  
Refer to Power Steering Warning Buzzer on page 7-68.



*Never hold the steering wheel to the extreme left or right for more than 5 seconds with the engine running. This could damage the power steering system.*

**i-ACTIVSENSE**

i-ACTIVSENSE is a collective term covering a series of advanced safety and driver support systems which make use of a Forward Sensing Camera (FSC) and radar sensors. These systems consist of active safety and pre-crash safety systems.

These systems are designed to assist the driver in safer driving by reducing the load on the driver and helping to avert collisions or reduce their severity. However, because each system has its limitations, always drive carefully and do not rely solely on the systems.

**▼ Active Safety Technology**

Active Safety Technology supports safer driving by helping the driver to recognise potential hazards and avert accidents.

**Driver awareness support systems****Nighttime visibility**

Adaptive Front Lighting System (AFS).....	page 4-137
Adaptive LED Headlights (ALH).....	page 4-140
High Beam Control System (HBC).....	page 4-138

**Left/right side and rear side detection**

Lane Departure Warning System (LDWS).....	page 4-212
Blind Spot Monitoring (BSM).....	page 4-143

**Road sign recognition**

Traffic Sign Recognition System (TSR).....	page 4-148
--	------------

**Inter-vehicle distance recognition**

Distance Recognition Support System (DRSS).....	page 4-154
---	------------

**Driver fatigue detection**

Driver Attention Alert (DAA).....	page 4-158
-----------------------------------	------------

**Rear obstruction detection when leaving a parking space**

Rear Cross Traffic Alert (RCTA).....	page 4-160
--------------------------------------	------------

**Full-surround recognition**

360°View Monitor (Mazda Connect (Type A)).....	page 4-249
360°View Monitor (Mazda Connect (Type B)).....	page 4-276

**Driver support systems**

**Inter-vehicle distance**

Mazda Radar Cruise Control (MRCC)..... page 4-164  
Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function)..... page 4-177

**Lane departure**

Lane-keep Assist System (LAS)..... page 4-212

**Inter-vehicle distance and lane keeping**

Cruising & Traffic Support (CTS)..... page 4-192

**Speed control**

Adjustable Speed Limiter (ASL)..... page 4-226

**▼ Pre-Crash Safety Technology**

Pre-crash safety technology is designed to assist the driver in averting collisions or reduce their severity in situations where they cannot be avoided.

**Collision damage reduction in low vehicle speed range**

**Forward driving**

Smart City Brake Support [Forward] (SCBS F)..... page 4-239  
Advanced Smart City Brake Support (Advanced SCBS)..... page 4-235

**Reverse driving**

Smart City Brake Support [Reverse] (SCBS R)..... page 4-243

**Collision damage reduction in medium/high speed range**

Smart Brake Support (SBS)..... page 4-247

## ▼ Camera and Sensors

### **Forward Sensing Camera (FSC)**

The Forward Sensing Camera (FSC) detects lane indications and recognises headlights, tail lights and city lights during nighttime driving. In addition, it also detects the vehicle ahead, pedestrians, or obstructions. The following systems also use the Forward Sensing Camera (FSC).

- High Beam Control System (HBC)
- Adaptive LED Headlights (ALH)
- Driver Attention Alert (DAA)
- Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS)
- Cruising & Traffic Support (CTS)
- Traffic Sign Recognition System (TSR)
- Advanced Smart City Brake Support (Advanced SCBS)
- Smart City Brake Support [Forward] (SCBS F)
- Smart Brake Support (SBS)
- Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function)

The Forward Sensing Camera (FSC) is installed at the top of the windscreen near the rearview mirror.

Refer to Forward Sensing Camera (FSC) on page 4-305.

### **Radar sensor (front)**

The radar sensor (front) functions by detecting the radio waves reflected off a vehicle ahead sent from the radar sensor. The following systems also use the radar sensor (front).

- Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function)
- Mazda Radar Cruise Control (MRCC)
- Distance Recognition Support System (DRSS)
- Cruising & Traffic Support (CTS)
- Smart Brake Support (SBS)

The radar sensor (front) is mounted behind the radiator grille.

Refer to Radar Sensor (Front) on page 4-311.

## **Radar sensors (rear)**

The radar sensors (rear) function by detecting the radio waves reflected off a vehicle approaching from the rear or an obstruction sent from the radar sensors. The following systems also use the radar sensors (rear).

- Blind Spot Monitoring (BSM)
- Rear Cross Traffic Alert (RCTA)

The radar sensors (rear) are installed inside the rear bumper, one each on the left and right sides.

Refer to Radar Sensors (Rear) on page 4-314.

## **Ultrasonic sensors (rear)**

The ultrasonic sensors (rear) function by detecting the ultrasonic waves reflected off obstructions at the rear sent from the ultrasonic sensors. The following systems also use the ultrasonic sensors (rear).

- Smart City Brake Support [Reverse] (SCBS R)

The ultrasonic sensors (rear) are mounted in the rear bumper.

Refer to Ultrasonic Sensors (Rear) on page 4-316.

## **Front camera/side cameras/rear view camera**

The front camera, side cameras, and rear camera shoot images of the area surrounding the vehicle. The 360° View Monitor uses each camera.

Cameras are installed to the front bumper, door mirrors, and liftgate.

Refer to Front Camera/Side Cameras/Rear Camera on page 4-317.

## Adaptive Front Lighting System (AFS)\*

The adaptive front lighting system (AFS) automatically adjusts the headlight beams to the left or right in conjunction with the operation of the steering wheel after the headlights have been turned on.

### **NOTE**

- *Headlights do not blind drivers approaching in the opposite direction no matter what side of the road you must drive your vehicle (left-hand or right-hand traffic). Therefore, it is not necessary to adjust the optical axis of the headlights when switching temporarily to driving on the opposite side of the road (left-hand or right-hand traffic).*
- *The Adaptive Front Lighting System (AFS) function can be switched to operable/inoperable using the personalisation function. Refer to Refer to the Settings section in the Mazda Connect Owner's Manual.*

## High Beam Control System (HBC)\*


The HBC determines the conditions in front of the vehicle using the Forward Sensing Camera (FSC) while driving in darkness to automatically switch the headlights between high and low beams.

Refer to Forward Sensing Camera (FSC) on page 4-305.

While driving the vehicle at a speed of about 30 km/h (19 mph) or more, the headlights are switched to high beams when there are no vehicles ahead or approaching in the opposite direction.

The system switches the headlights to low beams when one of the following occurs:

- The system detects a vehicle or the headlights/lights of a vehicle approaching in the opposite direction.
- The vehicle is driven on roads lined with streetlamps or on roads in well-lit cities and towns.
- The vehicle is driven at less than about 20 km/h (12 mph).

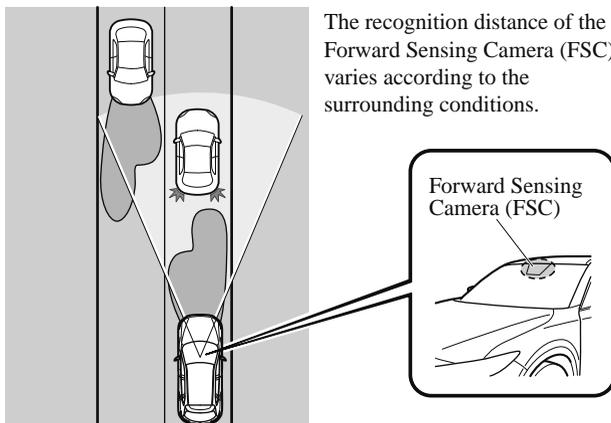

The warning light turns on when the system has a malfunction.

Refer to Contact expert repairer (we recommend an Authorised Mazda Repairer) and Have Vehicle Inspected on page 7-46.



- Do not adjust the vehicle height, modify the headlight units, or remove the camera, otherwise the system will not operate normally.
- Do not rely excessively on the HBC and drive the vehicle while paying sufficient attention to safety. Switch the headlights between the high beams and low beams manually if necessary.

**NOTE**

The timing in which the system switches the headlights changes under the following conditions. If the system does not switch the headlights appropriately, manually switch between high and low beams according to the visibility as well as road and traffic conditions.

- When there are sources of light in the area such as streetlamps, illuminated signboards, and traffic signals.
- When there are reflective objects in the surrounding area such as reflective plates and signs.
- When visibility is reduced under rain, snow and foggy conditions.
- When driving on roads with sharp turn or hilly terrain.
- When the headlights/rear lamps of vehicles in front of you or in the opposite lane are dim or not illuminated.
- When there is insufficient darkness such as at dawn or dusk.
- When the luggage compartment is loaded with heavy objects or the rear passenger seats are occupied.
- When visibility is reduced due to a vehicle in front of you spraying water from its tyres onto your windscreen.

**▼ To Operate the System**

The HBC operates to switch the headlights automatically between high and low beams after the ignition is switched ON and the headlight switch is in the AUTO and high beam position.

The HBC determines that it is dark based on the brightness of the surrounding area. At the same time, the HBC indicator light (green) in the instrument cluster illuminates.

**NOTE**

- When the vehicle speed is about 30 km/h (19 mph) or more, the headlights automatically switch to high beams when there are no vehicles ahead or approaching in the opposite direction. When the vehicle speed is less than about 20 km/h (12 mph), the HBC switches the headlights to low beams.
- The low beams may not switch to high beams when cornering.
- Operation of the HBC function can be disabled. Refer to the Settings section in the Mazda Connect Owner's Manual.

## ▼ Manual Switching

### Switching to low beams

Shift the lever to the low beam position.  
The HBC indicator light (green) turns off.

### Switching to high beams

Turn the headlight switch to the  position.  
The HBC indicator light (green) turns off and the  is illuminated.

## Adaptive LED Headlights (ALH)\*


The ALH are a system which uses the Forward Sensing Camera (FSC) to determine the situation of a vehicle ahead or a vehicle approaching in the opposite direction while driving at night to automatically switch the illumination range of the headlights, the illuminated area, or the illumination brightness. Refer to Forward Sensing Camera (FSC) on page 4-305.

The ALH are controlled between high and low beams as follows to assure the driver's visibility without dazzling a vehicle ahead or a vehicle approaching in the opposite direction.

### Glare-Free High Beam

This feature dims only the high-beam light shone on the vehicle ahead.

The high beams will dim while driving at a speed of about 40 km/h (25 mph) or faster. When the vehicle speed is less than about 30 km/h (19 mph), the beams switch to the low beams.

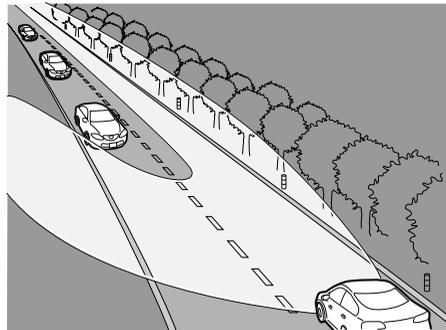


### **NOTE**


*The headlight high-beam indicator light turns on while the high beams are on.*

**Wide-Range Low Beam**

This feature extends the illumination range of the light cast by the low beams while driving at a speed less than about 40 km/h (25 mph).

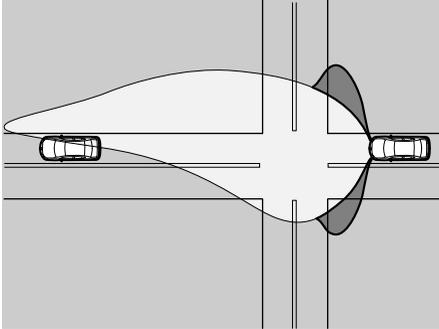**Highway Mode**

This feature shifts the illumination angle of the light cast by the headlights upward while driving on highways.



The distance in which the ALH can detect objects varies depending on the surrounding conditions.


**CAUTION**

- Do not modify the suspensions or headlight units, or remove the camera. Otherwise, the ALH may not operate normally.
- Do not rely excessively on the ALH and drive the vehicle while paying sufficient attention to safety. Switch the headlights between the high beams and low beams manually if necessary.

**NOTE**

*Under the following conditions, the ALH may not operate normally. Manually switch between the high and low beams according to the visibility, and the road and traffic conditions.*

- *When there are other sources of light in the area such as streetlamps, illuminated signboards, and traffic signals.*
- *When there are reflective objects in the surrounding area such as reflective plates and signs.*
- *When visibility is reduced under rain, snow and foggy conditions.*
- *When driving on roads with sharp curves or undulations.*
- *When the headlights/rear lamps of vehicles ahead or in the opposite lane are dim or not illuminated.*
- *When there is insufficient darkness such as at dawn or dusk.*
- *When the luggage compartment is loaded with heavy objects or the rear passenger seats are occupied.*
- *When visibility is reduced due to a vehicle ahead spraying water from its tyres onto your windscreen.*

## ▼ To Operate the System

The system switches the headlights to the high beams after the ignition is switched ON and the headlight switch is in the **AUTO** position. The ALH indicator light (green) in the instrument cluster turns on simultaneously.



The ALH determine that it is nighttime based on the brightness of the surrounding area.

The system cancels operation when the headlight switch is turned to a position other than **AUTO**, the headlights are manually switched to low beams, or the high beams are flashed on and off.

### **NOTE**

*The system can be changed so that the ALH do not operate.*

*Refer to the Settings section in the Mazda Connect Owner's Manual.*

## ▼ Manual Switching

### **Switching to low beams**

Shift the lever to the low beam position. The ALH indicator light (green) turns off.

### **Switching to high beams**

Turn the headlight switch to the  position.

The ALH indicator light (green) turns off and the  is illuminated.


## Blind Spot Monitoring (BSM)\*

The BSM is designed to assist the driver in checking the area to the rear of the vehicle on both sides during lane changes by notifying the driver of the presence of vehicles approaching from the rear in an adjacent lane.

The BSM detects vehicles approaching from the rear while travelling in the forward direction at a speed of 30 km/h (19 mph) or faster and notifies the driver by turning on the BSM warning indicator light and displaying the vehicle detection screen (vehicles with instrument cluster (Type A/B) and active driving display).

If the direction indicator lever is operated to signal a turn in the direction in which the BSM warning indicator light is illuminated while the approaching vehicle is detected, the BSM notifies the driver of possible danger by turning on the BSM warning indicator light, and by activating the warning sound and the warning screen indicator display (vehicles with instrument cluster (Type A/B) and active driving display).

The detection area on this system covers the driving lanes on both sides of the vehicle and from the rear part of the front doors to about 50 m (164 ft) behind the vehicle.

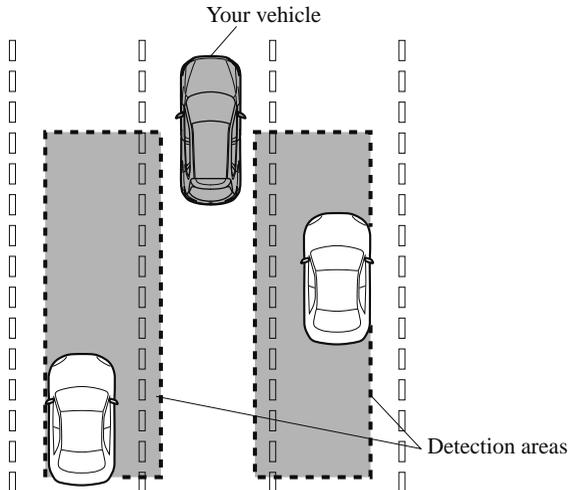

### **WARNING**

**Always check the surrounding area visually before making an actual lane change:**

The system is only designed to assist you in checking for vehicles at your rear when making a lane change. Due to certain limitations with the operation of this system, the BSM warning indicator light, the warning sound and the warning screen indicator display may not activate or they might be delayed even though a vehicle is in an adjacent driving lane. Always make it your responsibility as a driver to check the rear.


**NOTE**

- *The BSM will operate when all of the following conditions are met:*
  - *The ignition is switched ON.*
  - *The BSM OFF indicator light in the instrument cluster is turned off.*
  - *The vehicle speed is about 30 km/h (19 mph) or faster.*
- *The BSM will not operate under the following circumstances.*
  - *The vehicle speed falls below about 25 km/h (15 mph) even though the BSM OFF switch indicator light is turned off.*
  - *The shift lever (manual transaxle)/selector lever (automatic transaxle) is shifted to R position and the vehicle is reversing.*
  - *The turning radius is small (making a sharp turn, turning at intersections).*
- *In the following cases, the BSM OFF indicator light turns on and operation of the system is stopped. If the BSM OFF indicator light remains illuminated, have the vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer) as soon as possible.*
  - *Some problem with the system including the BSM warning indicator lights is detected.*
  - *A large deviation in the installation position of a radar sensor (rear) on the vehicle has occurred.*
  - *There is a large accumulation of snow or ice on the rear bumper near a radar sensor (rear). Remove any snow, ice or mud on the rear bumper.*
  - *Driving on snow-covered roads for long periods.*
  - *The temperature near the radar sensors (rear) becomes extremely hot due to driving for long periods on slopes during the summer.*
  - *The battery voltage has decreased.*
- *Under the following conditions, the radar sensors (rear) cannot detect target objects or it may be difficult to detect them.*
  - *A vehicle is in the detection area at the rear in an adjacent driving lane but it does not approach. The BSM determines the condition based on radar detection data.*
  - *A vehicle is travelling alongside your vehicle at nearly the same speed for an extended period of time.*
  - *Vehicles approaching in the opposite direction.*
  - *A vehicle in an adjacent driving lane is attempting to pass your vehicle.*
  - *A vehicle is in an adjacent lane on a road with extremely wide driving lanes. The detection area of the radar sensors (rear) is set at the road width of expressways.*
- *In the following case, the flashing of the BSM warning indicator light, and the activation of the warning sound and the warning screen indicator display may not occur or they may be delayed.*
  - *A vehicle makes a lane change from a driving lane 2 lanes over to an adjacent lane.*
  - *Driving on steep slopes.*
  - *Crossing the summit of a hill or mountain pass.*

- When there is a difference in the height between your driving lane and the adjacent lane.
- Directly after the BSM system becomes operable by changing the setting.
- If the road width is extremely narrow, vehicles 2 lanes over may be detected. The detection area of the radar sensors (rear) is set according to the road width of expressways.
- The BSM warning indicator light may turn on and the vehicle detection screen may be displayed in the display in reaction to stationary objects (guardrails, tunnels, sidewalks, and parked vehicles) on the road or the roadside.

Objects such as guardrails and concrete walls running alongside the vehicle.

Places where the width between guardrails or walls on each side of the vehicle narrows.

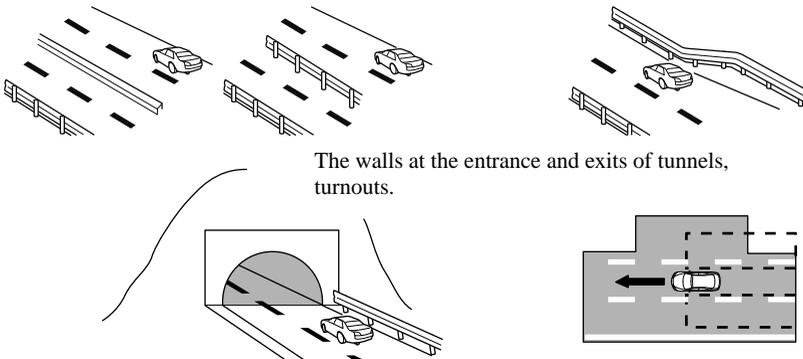

- A BSM warning indicator light may flash or the warning beep and the warning screen indicator display may be activated several times when making a turn at a city intersection.
- Turn off the BSM while pulling a trailer or while an accessory such as a bicycle carrier is installed to the rear of the vehicle. Otherwise, the radar's radio waves will be blocked causing the system to not operate normally.
- In the following cases, it may be difficult to view the illumination/flash of the BSM warning indicator lights equipped on the door mirrors.
  - Snow or ice is adhering to the door mirrors.
  - The front door glass is fogged or covered in snow, frost or dirt.
- The system switches to the Rear Cross Traffic Alert function when the shift lever (manual transaxle) or the selector lever (automatic transaxle) is shifted to the reverse (R) position. Refer to Rear Cross Traffic Alert (RCTA) on page 4-160.

## i-ACTIVSENSE


---

### ▼ Blind Spot Monitoring (BSM) Warning Indicator Lights/Blind Spot Monitoring (BSM) Warning Beep

The BSM or Rear Cross Traffic Alert (RCTA) system notifies the driver of the presence of vehicles in adjacent lanes or at the rear of the vehicle using the BSM warning indicator light, the warning sound and the display indicator (vehicles with instrument cluster (Type A/B) and active driving display) (BSM) while the systems are operational.

#### BSM warning indicator lights

The BSM warning indicator lights are equipped on the left and right door mirrors. The warning indicator lights turn on when a vehicle approaching from the rear in an adjacent lane is detected.

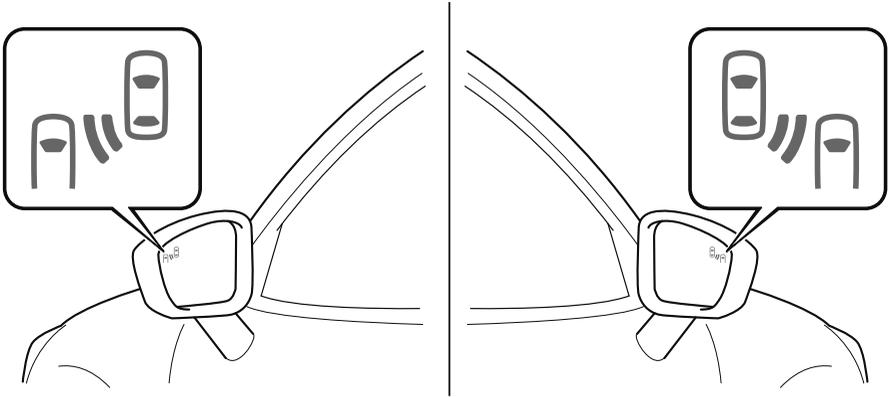

When the ignition is switched ON, the warning indicator light turns on momentarily and then turns off after a few seconds.

#### **Forward driving (BSM operation)**

The BSM detects vehicles approaching from the rear and turns on the BSM warning indicator lights equipped on the door mirrors according to the conditions. Additionally, while a BSM warning indicator light is illuminated, if the direction indicator lever is operated to signal a turn in the direction in which the BSM warning indicator light is illuminated, the BSM warning indicator light flashes.

#### **Reverse driving (Rear Cross Traffic Alert (RCTA) system operation)**

The Rear Cross Traffic Alert (RCTA) system detects a vehicle approaching from the rear of the vehicle and flashes the BSM warning indicator lights.

#### **Function for cancelling illumination dimmer**


If the BSM warning indicator lights turn on when the position lights are turned on, the brightness of the BSM warning indicator lights is dimmed.

If the BSM warning indicator lights are difficult to see due to glare from surrounding brightness when travelling on snow-covered roads or under foggy conditions, press the dimmer cancellation button to cancel the dimmer and increase the brightness of BSM warning indicator lights when they turn on.

Refer to Instrument Panel Illumination on page 4-27, 4-47, 4-65.

### **Display indicator (Vehicles with multi-information display and active driving display)**

The detected approaching vehicle and warning are displayed in the multi-information display and active driving display when the vehicle is moving forward (BSM operational).

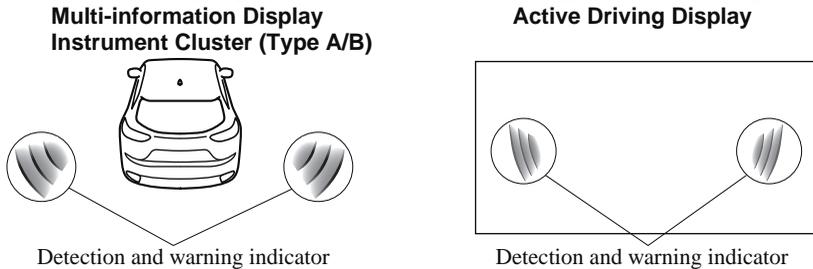

The detected direction is displayed with a detection indicator (white) when an approaching vehicle is detected. In addition, if the direction indicator lever is operated to signal a lane change while the vehicle is detected, the display changes the colour (amber) of the warning indicator.

### **BSM warning beep**

The BSM warning beep is activated simultaneously with the flashing of a BSM warning indicator light.

### **▼ Cancelling Operation of Blind Spot Monitoring (BSM)**

The BSM system can be set to inoperable. Refer to the Settings section in the Mazda Connect Owner's Manual.

When the BSM is set to inoperable, the BSM and Rear Cross Traffic Alert (RCTA) systems are turned off and the BSM OFF indicator light in the instrument cluster turns on.



### ***NOTE***

*When the ignition is switched OFF, the system status before it was turned off is maintained. For example, if the ignition is switched OFF while the BSM and Rear Cross Traffic Alert (RCTA) systems are operational, the BSM and Rear Cross Traffic Alert (RCTA) systems remain operational the next time the ignition is switched ON.*

## Traffic Sign Recognition System (TSR)\*


The TSR helps prevent the driver from overlooking traffic signs, and provides support for safer driving by displaying traffic signs on the active driving display which are recognised by the Forward Sensing Camera (FSC) or recorded in the navigation system while the vehicle is driven.

The TSR displays the speed limit (including auxiliary signs), do not enter, and passing prohibited signs (windscreen type).

If the vehicle speed exceeds the speed limit sign indicated in the active driving display while the vehicle is driven, the system notifies the driver using the indication in the active driving display and a warning sound.

### NOTE

- The TSR is not supported in some countries or regions. For information concerning the supported countries or regions, consult an expert repairer (we recommend an Authorised Mazda Repairer).
- The TSR operates only if the navigation system SD card (Mazda genuine) is inserted in the SD card slot. Consult an expert repairer (we recommend an Authorised Mazda Repairer) for details.

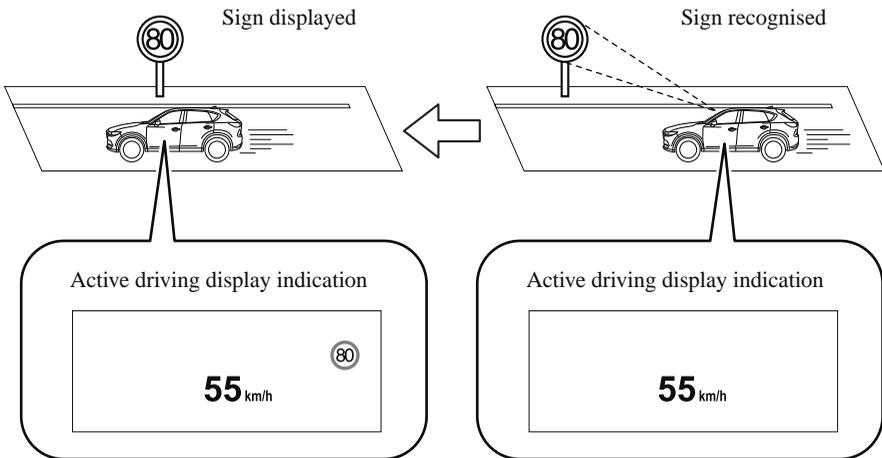

 **WARNING****Always check the traffic signs visually while driving.**

The TSR helps prevent the driver from overlooking traffic signs and provides support for safer driving. Depending on the weather conditions or problems with traffic signs, a traffic sign may not be recognised or a traffic sign different from the actual traffic sign may be displayed. Always make it your responsibility as a driver to check the actual traffic signs. Otherwise, it could result in an accident.

**NOTE**

- The TSR does not operate if there is a malfunction in the Forward Sensing Camera (FSC).
- Under the following conditions, the TSR may not operate normally.
  - An object placed on the instrument panel is reflected in the windscreen and picked up by the camera.
  - Heavy luggage is loaded in the luggage compartment or on the rear seat and the vehicle is tilted.
  - The tyre pressures are not adjusted to the specified pressure.
  - Tyres other than standard tyres are equipped.
  - The vehicle is driven on the ramp and surrounding area to or from a rest area or a tollgate on a highway.
  - When surrounding brightness suddenly changes such as when entering or exiting a tunnel.
  - The illumination of the headlights is weakened because of dirt or the optical axis is deviated.
  - The windscreen is dirty or foggy.
  - The windscreen and camera are fogged (water droplets).
  - Strong light is directed at the front of the vehicle (such as backlight or high-beam headlights of on-coming vehicles).
  - The vehicle is making a sharp turn.
  - Strong light reflects off the road.
  - A traffic sign is in a position which makes it difficult to reflect the light from the vehicle's headlights, such as when the vehicle is driven at night or in a tunnel.
  - The vehicle is driven under weather conditions such as rain, fog, or snow.
  - The stored map data for the navigation system is not current.
  - A traffic sign is obscured by mud or snow.
  - A traffic sign is concealed by trees or a vehicle.
  - A traffic sign is partially shaded.
  - A traffic sign is bent or warped.
  - A traffic sign is too low or too high.


# i-ACTIVSENSE

- A traffic sign is too bright or too dark (including electronic traffic signs).
  - A traffic sign is too big or too small.
  - There is an object similar to the traffic sign being read (such as another traffic sign or other signs resembling it).
  - The TSR does not operate if the active driving display is set to non-display.
  - The TSR can be set to inoperable.
- Refer to the Settings section in the Mazda Connect Owner's Manual.

## ▼ Traffic Sign Display Indication

The following traffic signs are displayed on the active driving display.

### Speed limit signs (including auxiliary signs)



If the Forward Sensing Camera (FSC) cannot classify an auxiliary sign (such as time restrictions, turning restrictions, end of section) correctly, the following screen is displayed.



### Inclement weather speed limit sign



### Do not enter signs



## Passing prohibited sign (windscreen type)



The TSR can display a passing prohibited sign and a speed limit sign at the same time.



If the Forward Sensing Camera (FSC) cannot correctly recognise a traffic sign while the vehicle is driven, the following screen is displayed.



### NOTE

#### Speed limit signs (including auxiliary signs)

- When the vehicle speed is about 1 km/h (0.6 mph) or faster, the speed limit sign is displayed when any one of the following conditions are met.
- The Forward Sensing Camera (FSC) recognises a speed limit sign as a sign targeted for your vehicle and the vehicle passes it.

- *The speed limit sign stored in the navigation system is read (if the Forward Sensing Camera (FSC) does not recognise a speed limit sign).*
- *Inclement weather speed limit signs are displayed when all of the following conditions are met.*
  - *The vehicle speed is about 1 km/h (0.6 mph) or more.*
  - *The Forward Sensing Camera (FSC) recognises an inclement weather speed limit sign as a sign targeted for your vehicle and the vehicle passes it.*
  - *The inclement weather speed limit sign is lower than the currently displayed speed limit sign.*
  - *The windscreen wipers are operated.*
- *In the following cases, display of the speed limit sign stops.*
  - *The Forward Sensing Camera (FSC) recognises the speed limit sign and the vehicle is driven for a certain distance after passing the sign.*
  - *Each sensor determines that the vehicle has changed direction of travel. (The display of a speed limit sign does not stop even if the vehicle changes lanes while a "ZONE" auxiliary sign is displayed.)*
  - *The Forward Sensing Camera (FSC) recognises a new speed limit sign which differs from the previous one (displays the new speed limit sign).*
  - *The speed limit sign stored in the navigation system is not read within a certain period of time (if the Forward Sensing Camera (FSC) does not recognise a speed limit sign, the speed limit sign stored in the navigation system is displayed).*

- *The vehicle speed exceeds the displayed speed limit sign by 30 km/h (19 mph) or more after a certain period of time has elapsed since the speed limit sign was displayed. (Except when there is information for the speed limit sign in the navigation system)*

### **Do not enter signs**


- *A do not enter sign is displayed when all of the following conditions are met.*
  - *The vehicle speed is about 80 km/h (50 mph) or slower.*
  - *The Forward Sensing Camera (FSC) recognises a do not enter sign as a sign targeted for your vehicle and the vehicle passes it.*
- *When the Forward Sensing Camera (FSC) recognises the do not enter sign and a certain period of time has elapsed since the vehicle passed the sign, display of the do not enter sign stops.*

### **Passing prohibited sign (windscreen type)**

- *A passing prohibited sign is displayed when all of the following conditions are met.*
  - *The vehicle speed is about 1 km/h (0.6 mph) or more.*
  - *The Forward Sensing Camera (FSC) recognises a passing prohibited sign as a sign targeted for your vehicle and the vehicle passes it.*
- *In the following cases, the display of the passing prohibited sign stops.*
  - *The Forward Sensing Camera (FSC) recognises a passing prohibited sign and you drive a certain distance after passing the sign.*
  - *You have changed vehicle lanes.*

**▼ Excessive Speed Warning**

If the vehicle speed exceeds the speed limit sign displayed in the active driving display, the area around the speed limit sign flashes 3 times in amber and the warning sound is activated 3 times at the same time. If the vehicle speed continues to exceed the displayed speed limit sign, the indication stops flashing and remains on. Check the surrounding conditions and adjust the vehicle speed to the legal speed using the appropriate operation such as depressing the brake pedal.

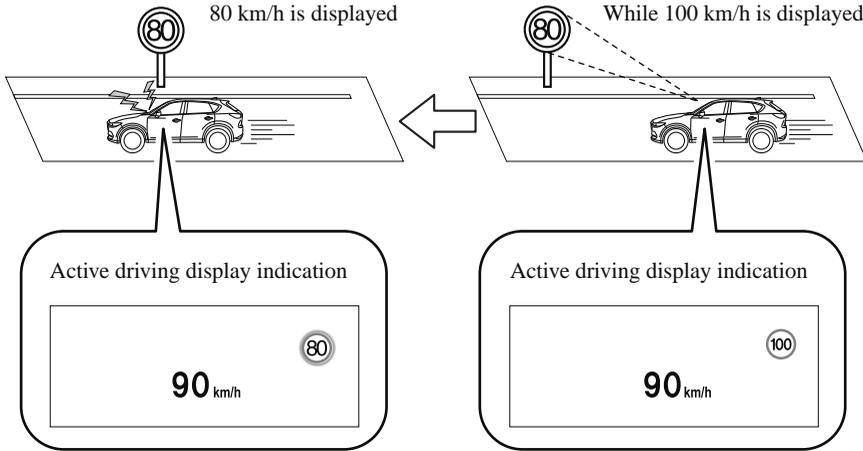

The excessive speed warning is initially set to inoperable. If you want to activate the excessive speed warning, change the setting in the personalisation features. In addition, the warning pattern and the warning activation timing differ depending on the setting contents. Refer to the Settings section in the Mazda Connect Owner's Manual.

**Warning pattern**

- Off: The excessive speed warning is not activated.
- Visual: The area around the speed limit sign displayed in the display flashes 3 times in amber, and if the vehicle speed continues to exceed the displayed speed limit sign, the indication stops flashing and remains on.
- Audio & Visual: The area around the speed limit sign displayed in the display flashes 3 times in amber and the warning sound is activated 3 times at the same time. If the vehicle speed continues to exceed the displayed speed limit sign, the indication stops flashing and remains on.

**Warning activation timing**

- + 0: If the vehicle speed exceeds the speed limit sign displayed in the display, the excessive speed warning is activated.
- + 5: If the vehicle speed exceeds the speed limit sign displayed in the display by 5 km/h (3 mph), the excessive speed warning is activated.

- **+ 10:** If the vehicle speed exceeds the speed limit sign displayed in the display by 10 km/h (5 mph), the excessive speed warning is activated.

**NOTE**

- *In the following cases, the excessive speed warning stops operating.*
  - *The vehicle speed is less than the speed of the displayed speed limit sign. (If the activation timing for the excessive speed warning is changed in the personalisation features, the excessive speed warning stops operating when the vehicle speed is less than the changed vehicle speed.*
  - *A speed limit sign indication has been updated and the vehicle speed is lower than the updated indication.*
  - *Display of the speed limit sign stops.*
- *The warning indication is displayed at the same time the excessive speed warning sound is activated if the vehicle speed exceeds the speed indicated on the speed limit sign. Refer to Warning Sound is Activated on page 7-65.*
- *The TSR can recognise a speed limit sign with an auxiliary sign and display it, but it cannot determine the indication on the auxiliary sign (such as time restrictions, turning restrictions, end of section). Therefore, the excessive speed warning is activated when the vehicle speed exceeds the displayed speed limit sign even if the conditions indicated on the auxiliary sign do not apply to the vehicle.*
- *If the Forward Sensing Camera (FSC) incorrectly recognises the actual speed limit sign at a lower speed, the excessive speed alarm is activated even if the vehicle is driven at the legal speed.*

## Distance Recognition Support System (DRSS)\*

The DRSS measures the distance between your vehicle and a vehicle ahead using a radar sensor (front) while the vehicle speed is about 30 km/h (19 mph) or faster, and if your vehicle approaches a vehicle ahead more closely than what is appropriate for maintaining distance between the vehicles according to the vehicle speed, a notification in the multi-information display is indicated to advise you to keep a safe distance from the vehicle ahead.



### **Do not rely completely on the DRSS and always drive carefully:**

*The ability to detect a vehicle ahead is limited depending on the type of vehicle ahead, the weather conditions, and the traffic conditions. Therefore, if the accelerator and brake pedals are not operated correctly it could lead to an accident. Always verify the safety of the surrounding area and depress the brake pedal or accelerator pedal while keeping a safer distance from vehicles ahead or on-coming vehicles.*

### **NOTE**


- *The DRSS operates when all of the following conditions are met:*
  - *The ignition is switched ON.*
  - *The DRSS is on.*
  - *The selector lever is in a position other than reverse (R).*
  - *The vehicle speed is 30 km/h or faster (19 mph or faster).*
- *The objects which activate the system are 4-wheeled vehicles.*
- *The DRSS may also operate in the presence of motorcycles and bicycles.*
- *The DRSS may not operate normally under the following conditions:*
  - *The Dynamic Stability Control (DSC) has a malfunction.*
  - *The vehicle ahead is travelling at an extremely slow speed.*
- *The system does not operate with the following objects:*
  - *Vehicles approaching in the opposite direction.*
  - *Stationary objects (stopped vehicles, obstructions)*

### ▼ Indication on Display





The DRSS operation status is indicated in the multi-information display. Regarding malfunctions, check the vehicle conditions or have it inspected by an expert repairer (we recommend an Authorised Mazda Repairer) according to the content of the displayed message.





#### **NOTE**

- When the ignition is switched off, the operation status before the system was turned off is maintained. For example, if the ignition is switched off with the DRSS operable, the system will be operable when the ignition is switched ON the next time.
- The DRSS can be turned on/off and the system's sensitivity can be changed. Refer to the Settings section in the Mazda Connect Owner's Manual.

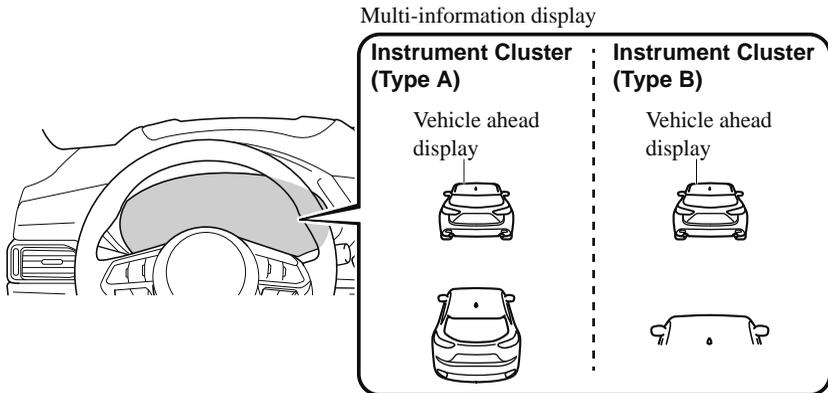

**Distance-between-vehicles guide lines\*1**

Indication on display		Distance between vehicles guide lines (During travel at about 40 km/h (25 mph))	Distance between vehicles guide lines (During travel at about 80 km/h (50 mph))
Multi-information display			
Instrument cluster (Type A)	Instrument cluster (Type B)		
		About 25 m (82 ft)	About 50 m (164 ft)
			
			
			
		About 15 m (49 ft)	About 30 m (98 ft)

Indication on display		Distance between vehicles guide lines (During travel at about 40 km/h (25 mph))	Distance between vehicles guide lines (During travel at about 80 km/h (50 mph))
Multi-information display			
Instrument cluster (Type A)	Instrument cluster (Type B)		
		About 10 m (33 ft)	About 20 m (66 ft)
 <p>Illuminated in amber*2</p>	 <p>Illuminated in amber*2</p>	About 10 m (32 ft) or less	About 20 m (65 ft) or less

\*1 The distance between vehicles differs depending on vehicle speed.

\*2 Indication when the distance setting for notifying the driver that the vehicle approaches a vehicle ahead is Near.


## Driver Attention Alert (DAA)\*

The DAA is a system which detects driver fatigue and decreased attentiveness, and encourages the driver to take a rest.

When the vehicle is driven inside traffic lane lines at about 65 to 140 km/h (40 to 87 mph), the DAA estimates the amount of accumulated fatigue and decreased attentiveness of the driver based on the information from the Forward Sensing Camera (FSC) and other vehicle information, and encourages the driver to take a rest using an indication on the multi-information display and a warning sound.

Use the DAA on expressways or highways.

Refer to Forward Sensing Camera (FSC) on page 4-305.

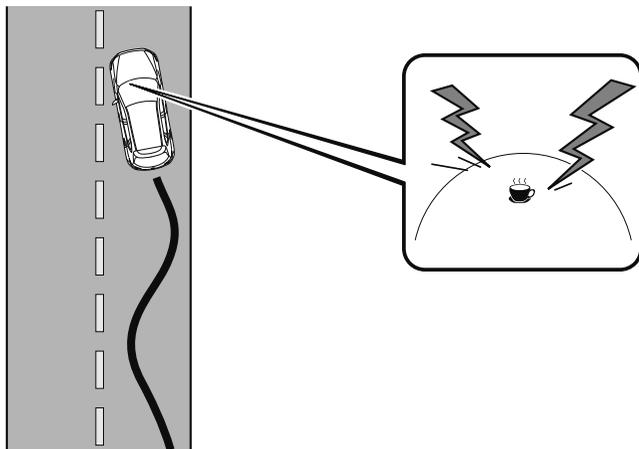

### **WARNING**

#### ***Do not rely completely on DAA and always drive carefully:***

*The DAA detects driver fatigue and decreased attentiveness and encourages the driver to take a rest, however, it is not designed to prevent the vehicle from straying. If you rely too much on the DAA it could lead to an accident. Drive carefully and operate the steering wheel appropriately.*

*In addition, the system may not be able to detect driver fatigue and decreased attentiveness correctly depending on the traffic and driving conditions. The driver must take sufficient rest in consideration of safer driving.*

**NOTE**

- The DAA operates when all of the following conditions are met.
  - The vehicle speed is about 65 to 140 km/h (40 to 87 mph).
  - The system detects white (yellow) lane lines.
  - The system has completed learning of the driver's driving data.
- The DAA does not operate under the following conditions.
  - The vehicle speed is less than about 65 km/h (40 mph).
  - The vehicle speed exceeds about 140 km/h (87 mph)
  - The vehicle is making a sharp turn.
  - The vehicle is changing lanes.
  - The system cannot detect white (yellow) lane lines.
- The DAA may not operate normally under the following conditions.
  - White (yellow) lane lines are less visible because of dirt or fading/patchiness.
  - The vehicle is jolted or swayed continuously by strong winds or rough roads.
  - The vehicle is driven aggressively.
  - When making frequent lane changes.
- The DAA detects driver fatigue and decreased attentiveness based on the driving data when the vehicle is driven at about 65 to 140 km/h (40 to 87 mph) for about 20 minutes. The driving data will be reset under the following conditions.
  - The vehicle is stopped for 15 minutes or longer.
  - The vehicle is driven at less than about 65 km/h (40 mph) for about 30 minutes.
  - The ignition is switched off.
- After the DAA has displayed the first message encouraging rest, it does not display the next one until 45 minutes have passed.

### ▼ Driver Attention Alert (DAA) Display (White)

When the system detects driver fatigue or decreased attentiveness, it activates the warning sound and displays an alert in the multi-information display.



## Driver Attention Alert Time for a break


### ▼ Cancelling Driver Attention Alert (DAA)

The DAA can be set to not activate. Refer to the Settings section in the Mazda Connect Owner's Manual.

## Rear Cross Traffic Alert (RCTA)\*

The RCTA system is designed to assist the driver in checking the area to the rear of the vehicle on both sides while the vehicle is reversing by alerting the driver to the presence of vehicles approaching the rear of the vehicle.

The RCTA system detects vehicles approaching from the rear left and right sides of the vehicle, and the rear of the vehicle while the vehicle is being reversed out of a parking space, and notifies the driver of possible danger using the Blind Spot Monitoring (BSM) warning indicator lights and the warning buzzer.

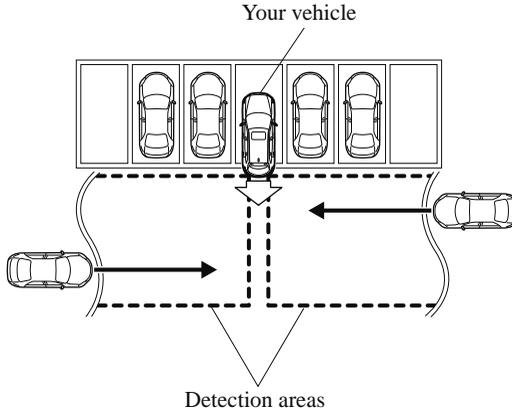

**RCTA operation**


1. The RCTA system operates when the shift lever (manual transaxle) or the selector lever (automatic transaxle) is shifted to the reverse (R) position.
2. If there is the possibility of a collision with an approaching vehicle, the Blind Spot Monitoring (BSM) warning indicator lights flashes and the warning beep is activated simultaneously.

**(With rear view monitor)**

The RCTA warning indication in the rearview monitor also synchronizes with the Blind Spot Monitoring (BSM) warning indicator light on the door mirrors.

**(With 360° view monitor)**

The RCTA warning indication in the 360° view monitor also synchronizes with the Blind Spot Monitoring (BSM) warning indicator light on the door mirrors.

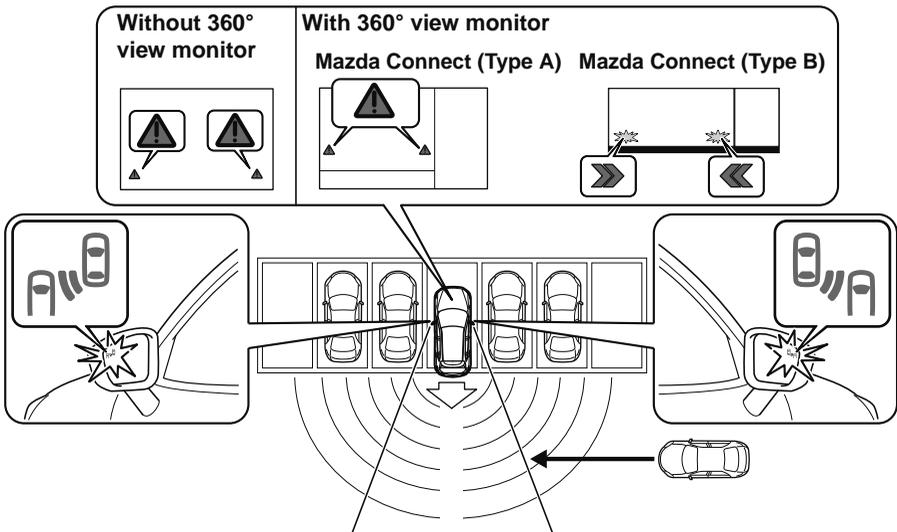


**⚠ WARNING****Always check the surrounding area visually before actually putting the vehicle in reverse:**


The system is only designed to assist you in checking for vehicles at the rear when putting the vehicle in reverse. Due to certain limitations with the operation of this system, the Blind Spot Monitoring (BSM) warning indicator lights may not flash or it might be delayed even though a vehicle is behind your vehicle. Always make it your responsibility as a driver to check the rear.

**NOTE**


- In the following cases, the Blind Spot Monitoring (BSM) OFF Indicator Light turns on and operation of the system is stopped. If the Blind Spot Monitoring (BSM) OFF Indicator Light remains illuminated, have the vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer) as soon as possible.
  - Some problem with the system including the Blind Spot Monitoring (BSM) warning indicator lights has occurred.
  - A large deviation in the installation position of a radar sensor (rear) on the vehicle has occurred.
  - There is a large accumulation of snow or ice on the rear bumper near a radar sensor (rear).
  - Driving on snow-covered roads for long periods.
  - The temperature near the radar sensors becomes extremely hot due to driving for long periods on slopes during the summer.
  - The battery voltage has decreased.
- Under the following conditions, the radar sensors (rear) cannot detect target objects or it may be difficult to detect them.
  - The vehicle speed when reversing is about 15 km/h (9 mph) or faster.
  - The radar sensor (rear) detection area is obstructed by a nearby wall or parked vehicle. (Reverse the vehicle to a position where the radar sensor detection area is no longer obstructed.)

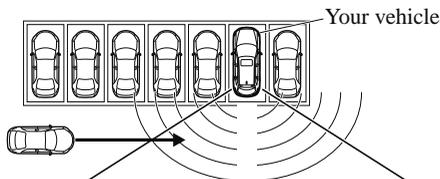

- A vehicle is approaching directly from the rear of your vehicle.

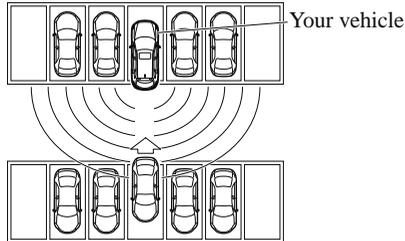

- The vehicle is parked at an angle.

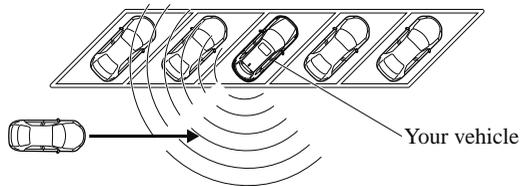

- Directly after the Blind Spot Monitoring (BSM) system becomes operable using the personalisation feature.
- Radio wave interference from a radar sensor equipped on a nearby parked vehicle.
- In the following cases, it may be difficult to view the illumination/flashing of the Blind Spot Monitoring (BSM) warning indicator lights equipped on the door mirrors.
  - Snow or ice adheres to the door mirrors.
  - The front door glass is fogged or covered in snow, frost or dirt.
- Turn off the RCTA system while pulling a trailer or while an accessory such as a bicycle carrier is installed to the rear of the vehicle. Otherwise, the radio waves emitted by the radar will be blocked causing the system to not operate normally.

## Mazda Radar Cruise Control (MRCC)\*

The MRCC system is designed to maintain headway control\*<sup>1</sup> with a vehicle ahead according to your vehicle's speed using a radar sensor (front) to detect the distance to the vehicle ahead and a preset vehicle speed without you having to use the accelerator or brake pedals.

\*1 Headway Control: Control of the distance between your vehicle and the vehicle ahead detected by the MRCC system.

Additionally, if your vehicle starts closing in on the vehicle ahead such as if the vehicle ahead brakes suddenly, a warning sound and a warning indication in the display are activated simultaneously to alert you to maintain a sufficient distance between the vehicles. Also refer to the following before using the MRCC.

- Radar sensor (front) (page 4-311)



### **Do not rely completely on the MRCC:**

*The MRCC system has detection limitations depending on the type of vehicle ahead and its conditions, the weather conditions, and the road conditions. Additionally, the system may be unable to decelerate sufficiently to avoid hitting the vehicle ahead if the vehicle ahead applies the brakes suddenly or another vehicle cuts into the driving lane, which could result in an accident.*

*Always drive carefully and verify the surrounding conditions and depress the brake pedal or accelerator pedal while keeping a safer distance from vehicles ahead or on-coming vehicles.*

### **Do not use the MRCC system in the following locations, using the MRCC system at the following locations may result in an unexpected accident:**

- *General roads other than highways (Driving under these conditions using the MRCC system is not possible.)*
- *Roads with sharp curves and where vehicle traffic is heavy and there is insufficient space between vehicles.*
- *Roads where frequent and repetitive acceleration and deceleration occur (Driving under these conditions using the MRCC system is not possible).*
- *When entering and exiting interchanges, service areas, and parking areas of highways (If you exit a highway while headway control is in use, the vehicle ahead will no longer be tracked and your vehicle may accelerate to the set speed).*
- *Slippery roads such as ice or snow-bound roads (Tyres could spin causing you to lose vehicle control, or the stop hold control may not operate.)*
- *Long, descending slopes (to maintain distance between vehicles, the system automatically and continuously applies the brakes which could result in the loss of brake power.)*

- *Slopes with a steep gradient (The vehicle ahead may not be detected correctly, your vehicle may slide while stopped by the stop hold control, and it may accelerate suddenly after it starts moving.)*

**For safety purposes, switch the MRCC system off when it is not being used.**




*If your vehicle is towed or you are towing something, switch the MRCC system off to prevent a miss-operation.*

#### **NOTE**

- *The MRCC system does not detect the following as physical objects.*
  - *Vehicles approaching in the opposite direction*
  - *Pedestrians*
  - *Stationary objects (stopped vehicles, obstructions)*
  - *If a vehicle ahead is travelling at an extremely low speed, the system may not detect it correctly.*
- *During headway control travel, do not set the system for detection of two-wheeled vehicles such as motorcycles and bicycles.*
- *Do not use the MRCC system under conditions in which close proximity warnings are frequently activated.*
- *During headway control travel, the system accelerates and decelerates your vehicle in conjunction with the speed of the vehicle ahead. However, if it is necessary to accelerate for a lane change or if the vehicle ahead brakes suddenly causing you to close in on the vehicle rapidly, accelerate using the accelerator pedal or decelerate using the brake pedal depending on the conditions.*
- *While the MRCC system is in use, it does not cancel even if the selector lever (automatic transaxle)/shift lever (manual transaxle) is operated and any intended engine braking will not occur. If deceleration is required, lower the vehicle speed setting or depress the brake pedal.*
- *The sound of the automatic brakes operating may be heard, however, it does not indicate a problem.*
- *The brake lights turn on while the MRCC automatic braking is operating, however, they may not turn on while the vehicle is on a downslope at the set vehicle speed or travelling at a constant speed and following a vehicle ahead.*

## ▼ Mazda Radar Cruise Control (MRCC) Display Indication

The MRCC setting status and operation conditions are indicated on the multi-information display and the active driving display.

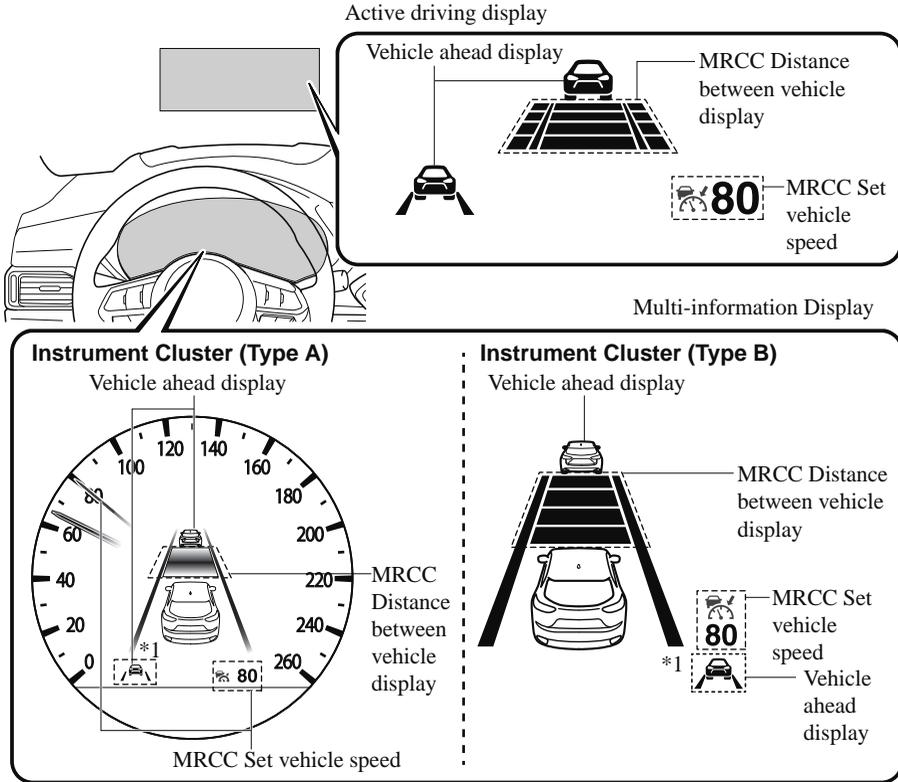

\*1: Displayed on the basic display.

If there is a problem with the MRCC system, a message is displayed on the multi-information display. Check the centre display to verify the problem and then have your vehicle inspected by an expert repairer (we recommend an Authorised Mazda Repairer).

Refer to Message Indicated on Display on page 7-63.

### ▼ Close Proximity Warning

If your vehicle rapidly closes in on the vehicle ahead because the vehicle ahead applies the brakes suddenly while you are travelling in headway control, the warning sound activates and the brake warning is indicated in the display. Always verify the safety of the surrounding area and depress the brake pedal while keeping a safer distance from the vehicle ahead. Additionally, keep a safer distance from the vehicles behind you.

**BRAKE!**

#### **NOTE**

*In the following cases, the warnings and brakes may not operate even if your vehicle starts closing in on the vehicle ahead.*

- *You are driving your vehicle at the same speed as the vehicle ahead.*
- *Directly after the MRCC system has been set.*
- *Directly after the accelerator pedal is released.*
- *Another vehicle cuts into the driving lane.*

### ▼ Setting the System

The MRCC system operates when all of the following conditions are met.

- The vehicle speed is as follows:
  - **(European models)**  
About 30 km/h (19 mph) to 200 km/h (124 mph)
  - **(Except European models)**  
About 30 km/h (19 mph) to 145 km/h (90 mph)
- The MRCC is turned on.
- The brake pedal is not depressed.
- The electric parking brake (EPB) is released (electric parking brake (EPB) indicator light is turned off).
- There is no problem with the DSC.
- All the doors are closed.
- The driver's seat belt is fastened.



#### **(Manual transaxle)**

- The shift lever is in a position other than reverse (R) or neutral (N).
- The clutch pedal is not depressed.

#### **(Automatic transaxle)**

- The selector lever is in the drive (D) position or manual (M) position (manual mode).

## Turning on the system

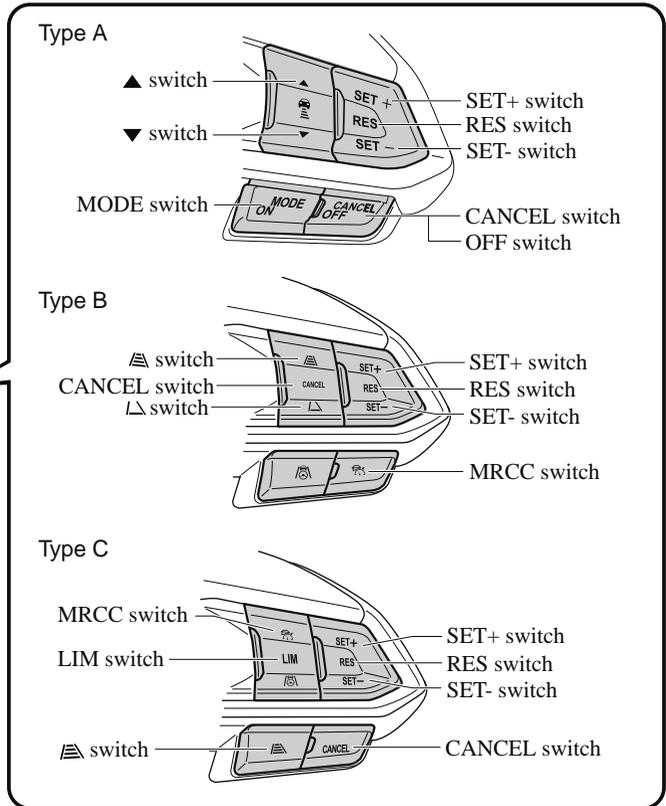

### **Steering wheel (Type A)**

When the MODE switch is pressed once, the MRCC system turns on, and the MRCC main indication (white) turns on and the vehicle speed and the distance between the vehicles while in headway control can be set.

**Steering wheel (Type B/Type C)**

When the MRCC switch is pressed once, the MRCC system turns on, and the MRCC main indication (white) turns on and the vehicle speed and the distance between the vehicles while in headway control can be set.



In addition, the MRCC system display indication is displayed on the multi-information display and the active driving display at the same time.




**NOTE**

- *If the ignition is switched off while the MRCC system is operating, the system will be operable when the ignition is switched ON the next time.*
- **(European models)**  
*The MRCC can switch to the Adjustable Speed Limiter (ASL).  
 Refer to Adjustable Speed Limiter (ASL) on page 4-226.*
- **(Except European models)**  
*The MRCC can switch to the Cruise Control Function.  
 Refer to Cruise Control Function on page 4-174.*

**How to set the speed**

1. Adjust the vehicle speed to the desired setting using the accelerator pedal.
2. Headway control begins when the SET+ or SET- switch is pressed.  
 The set speed and the inter-vehicle distance display filled with white lines is displayed.  
 The MRCC main indication (white) switches to the MRCC set indication (green) at the same time.



Travel status	Indication on multi-information display		Indication on active driving display
	Type A	Type B	
During travel at constant speed			
During travel under headway control			

**NOTE**

- If a vehicle ahead is detected while travelling at a constant speed, the vehicle-ahead indication is displayed and headway control is performed. Additionally, when a vehicle ahead is no longer detected, the vehicle-ahead indication turns off and the system switches back to travel at constant speed.
- The lowest possible speed which can be set on the MRCC system is 30 km/h (19 mph).
- Headway control is not possible if the vehicle ahead is driving faster than your vehicle's set speed. Adjust the system to the desired vehicle speed using the accelerator pedal.

**How to set the distance-between-vehicles during headway control**

**Steering wheel (Type A)**

The distance-between-vehicles is set to a shorter distance by pressing the ▼ switch. The distance-between-vehicles is set to a longer distance by pressing the ▲ switch. The distance-between-vehicles can be set to 4 levels; Long, medium, short, and extremely short distance.

**Steering wheel (Type B)**






The distance-between-vehicles can be set to 4 levels; Long, medium, short, and extremely short distance.

The distance-between-vehicles is set to a shorter distance by pressing the  switch. The distance-between-vehicles is set to a longer distance by pressing the  switch.

### Steering wheel (Type C)

The distance-between-vehicles can be set to 4 levels; Long, medium, short, and extremely short distance.

The distance-between-vehicles is set to a shorter distance each time the  switch is pressed. However, when the  switch is pressed while the distance-between-vehicles is set to extremely short, the distance-between-vehicles is set to long.

Distance-between-vehicles guideline (at 80 km/h (50 mph) vehicle speed)	Indication on multi-information display		Indication on active driving display*1
	Type A	Type B	
Long (about 50 m (164 ft))			
Medium (about 40 m (131 ft))			
Short (about 30 m (98 ft))			
Extremely short (about 25 m (82 ft))			

\*1 Displays a pop-up image in the active driving display only when the driver operates the switch.

### NOTE

- The distance-between-vehicles differs depending on the vehicle speed, and the slower the vehicle speed, the shorter the distance.

- When the ignition is switched to ACC or OFF and then the engine is started again, the system automatically sets the distance-between-vehicles to the previous setting.

### **How to change the set vehicle speed**

#### **To accelerate/decelerate using the SET switch**

When you press the SET+ switch, the vehicle accelerates and when you press the SET- switch, it decelerates.

	European models	Except European models
Short press	1 km/h (1 mph)	5 km/h (5 mph)
Long press	10 km/h (5 mph)	

#### **NOTE**

For example, the set vehicle speed is changed by pressing the SET switch four times as follows:

##### **(European models)**

The vehicle speed accelerates or decelerates by 4 km/h (4 mph).

##### **(Except European models)**

The vehicle speed accelerates or decelerates by 20 km/h (20 mph).

#### **To increase speed using accelerator pedal**

Depress the accelerator pedal and press and release the SET+ switch or SET- switch at the desired speed. If the switch is not operated, the system returns to the set speed after you release your foot from the accelerator pedal.



The warnings and brake control do not operate while the accelerator pedal is depressed.

#### **NOTE**

- When accelerating using the SET+ switch while in headway control, the set vehicle speed can be adjusted but acceleration is not possible. If there is no longer a vehicle ahead, acceleration continues until reaching the set vehicle speed. For the set vehicle speed, check the set vehicle speed indication in the display.
- When depressing the accelerator pedal, the inter-vehicle distance indication in the display changes to the white-line indication.
- **(European models)**  
When switching to a passing lane and operating the direction indicator, the system provides more acceleration automatically if it determines that more acceleration is required. Drive while being careful of the road ahead because you could approach the vehicle ahead too closely.

#### **Cancelling the system**

When the following operations are performed, the MRCC system is cancelled, and the MRCC set indication (green) switches to the MRCC main indication (white) at the same time.

- The CANCEL switch is pressed.
- The brake pedal is depressed.
- The electric parking brake (EPB) is applied.
- **(Manual transaxle)**  
The shift lever is in the reverse (R) position.
- **(Automatic transaxle)**

The selector lever is in the P (Park), N (Neutral), or R (Reverse) position.

Under the following conditions, the MRCC cancel indication is displayed in the multi-information display and a single beep sound is heard.

- The DSC has operated.
- The Smart Brake Support (SBS) has operated.
- The Smart City Brake Support [Forward] (SCBS F) or Advanced Smart City Brake Support (Advanced SCBS) has operated.
- When travelling on a downslope for a long period of time.
- There is a problem with the system.
- The radar sensor (front) cannot detect target objects (during rain, fog, snow or other inclement weather conditions, or when the radiator grille is dirty).
- The vehicle speed decreases to less than 25 km/h (16 mph).
- Any of the doors is opened.
- The driver's seat belt is unfastened.
- **(Manual transaxle)**
  - The shift lever is shifted to neutral (N) for a certain period of time.
  - The clutch is depressed for a certain period of time.
  - The engine stalls.

### **Resuming control**

If the MRCC system is cancelled, you can resume control at the previously set speed by pressing the RES switch and after all of the operation conditions have been met.

### ***NOTE***

*If the set speed is not indicated in the display, the control does not resume even if the RES switch is pressed.*

### **Turning off the system**

Press the CANCEL switch two times while the MRCC system is operating to switch off the system.

**▼ Shift-up/Shift-down Request Display (Manual Transaxle)**

The shift-up or shift-down request display in the active driving display or multi-information display may be indicated while the MRCC is operating. When this occurs, shift gears because the gear position is not appropriate.

Request	Indication on display	
	Multi-information display	Active driving display
Shift up	 Shift Up	
Shift down	 Shift Down	

**NOTE**

*If the gears are not shifted up/down even though the shift-up/down request indication is displayed, load will be applied to the engine and the MRCC system may be automatically cancelled or engine damage could occur.*

**▼ Cruise Control Function**

While this function is operating, the headway control operation is cancelled and only the cruise control function operates.

The vehicle speed can be set more than about 25 km/h (16 mph).

Use the cruise control function on expressways and other highways which do not require a lot of repeated acceleration and deceleration.



**Do not use the cruise control function in the following locations:**

*Otherwise, it could lead to an accident.*

- Roads with sharp curves and where vehicle traffic is heavy and there is insufficient space between vehicles. (Driving under these conditions using the cruise control function is not possible)
- Steep down slopes (Set speed may be exceeded because sufficient engine braking cannot be applied)
- Slippery roads such as ice or snow-bound roads (Tyres could spin causing you to lose vehicle control)

***Always drive carefully:***

*The warnings and brake control will not operate after the headway control function is cancelled and the system is switched to only the cruise control function. Depress the brake pedal to decelerate according to the surrounding conditions while keeping a safer distance from the vehicle ahead and always driving carefully.*

**Switching to cruise control function****Steering wheel (Type A)**

When the MODE switch is pressed until the system switches to the cruise main indication (white) while the MRCC system is turned on, the system switches to the cruise control function.

**Steering wheel (Type B/Type C)**

Use Mazda Connect to switch to the cruise control function.

Refer to the Settings section in the Mazda Connect Owner's Manual.

When the system switches to the cruise control function, the indicator and multi-information display notify the driver as follows:

- The MRCC set indication (green) or the MRCC main indication (white) is turned off, and the cruise main indication (white) is turned on.
- A message is displayed in the multi-information display.



***Always turn off the cruise control function when it is not in use:***

*Leaving the cruise control function turned on when it is not in use is dangerous as it could operate unexpectedly, resulting in an accident.*

**How to set the speed**

Adjust the system to the desired vehicle speed using the accelerator pedal. When the SET+ or SET- switch is pressed, the cruise set indication (green) is turned on and headway control begins.

***NOTE***

- *The system may not be able to maintain the set speed constantly depending on driving conditions such as steep up or down slopes.*
- *The speed will continue increasing while the SET+ switch is pressed and held. The speed will continue decreasing while the SET- switch is pressed and held.*

**How to increase the set speed**

The set speed can be increased using the following operations:

**To increase speed using the SET+ switch**

Press and hold the SET+ switch and release the switch at the desired speed. The set speed can be adjusted incrementally (1 km/h (1 mph) increments) by pressing the switch and releasing it immediately. For example, if the switch is pressed 4 times, the set speed increases by about 4 km/h (4 mph).

## **To increase speed using accelerator pedal**

Depress the accelerator pedal and press the SET+ or SET- switch at the desired speed.

If the switch is not operated, the system returns to the set speed after you release your foot from the accelerator pedal.

## **How to Decrease the Set Speed**

Press the SET- switch continuously and release the switch at the desired speed.

The set speed can be adjusted incrementally (1 km/h (1 mph) increments) by pressing the switch and releasing it immediately. For example, if the switch is pressed 4 times, the set vehicle speed decreases by about 4 km/h (4 mph).

## **Cancelling the function**

### **Cancelling using CANCEL switch**

When the CANCEL switch is pressed once, the cruise control function is cancelled.

### **Cancelling using MODE switch**

When the MODE switch is pressed, the cruise control function is cancelled and the headway control function is made available for operation.

The cruise control function is cancelled automatically in the following cases. If the RES switch is pressed while the vehicle speed is 25 km/h (16 mph) or higher, the speed returns to the original set speed.

- The CANCEL switch is pressed once.
- The brake pedal is depressed.
- The parking brake is applied.

## **(Manual transaxle)**

- The clutch pedal is depressed.
- The shift lever is shifted to neutral position.

## **(Automatic transaxle)**

- The selector lever is shifted to P or N position.

## ***NOTE***

- *If the vehicle speed decreases by about 15 km/h (9.4 mph) or more than the set speed, the cruise control function may be cancelled.*
- *When the vehicle speed is less than 21 km/h (13 mph), the cruise control function is cancelled. In this case, the vehicle speed will not return to the original set speed even if the vehicle is accelerated to 25 km/h (16 mph) or higher and the RES switch is pressed. Reset the cruise control function.*

## Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function)\*

The MRCC with Stop & Go function system is designed to maintain headway control\*1 with a vehicle ahead according to your vehicle's speed using a radar sensor (front) to detect the distance to the vehicle ahead and a preset vehicle speed without you having to use the accelerator or brake pedals.

\*1 Headway Control: Control of the distance between your vehicle and the vehicle ahead detected by the Mazda Radar Cruise Control (MRCC) system.

Additionally, if your vehicle starts closing in on the vehicle ahead such as if the vehicle ahead brakes suddenly, a warning sound and a warning indication in the display are activated simultaneously to alert you to maintain a sufficient distance between the vehicles. If the vehicle ahead stops while you are following behind it, your vehicle will stop and be held stopped automatically (stop hold control), and headway control will resume when you resume driving the vehicle such as by pressing the RES switch.

Also refer to the following before using the MRCC with Stop & Go function.

- i-stop (page 4-12)
- AUTOHOLD (page 4-113)
- Forward Sensing Camera (FSC) (page 4-305)
- Radar sensor (front) (page 4-311)

### **WARNING**

#### **Do not rely completely on the MRCC with Stop & Go function:**

*The MRCC with Stop & Go function system has detection limitations depending on the type of vehicle ahead and its conditions, the weather conditions, and the road conditions.*

*Additionally, the system may be unable to decelerate sufficiently to avoid hitting the vehicle ahead if the vehicle ahead applies the brakes suddenly or another vehicle cuts into the driving lane, which could result in an accident.*

*Always drive carefully and verify the surrounding conditions and depress the brake pedal or accelerator pedal while keeping a safer distance from vehicles ahead or on-coming vehicles.*

#### **Do not use the MRCC with Stop & Go function system in the following locations, using the MRCC with Stop & Go function system at the following locations may result in an unexpected accident:**

- *General roads other than highways (Driving under these conditions using the MRCC with Stop & Go function system is not possible.)*
- *Roads with sharp curves and where vehicle traffic is heavy and there is insufficient space between vehicles.*

- Roads where frequent and repetitive acceleration and deceleration occur (Driving under these conditions using the MRCC with Stop & Go function system is not possible).
- When entering and exiting interchanges, service areas, and parking areas of highways (If you exit a highway while headway control is in use, the vehicle ahead will no longer be tracked and your vehicle may accelerate to the set speed).
- Slippery roads such as ice or snow-bound roads (Tyres could spin causing you to lose vehicle control, or the stop hold control may not operate.)
- Long, descending slopes (to maintain distance between vehicles, the system automatically and continuously applies the brakes which could result in the loss of brake power.)
- Slopes with a steep gradient (The vehicle ahead may not be detected correctly, your vehicle may slide while stopped by the stop hold control, and it may accelerate suddenly after it starts moving.)

**For safety purposes, switch the MRCC with Stop & Go function system off when it is not being used.**

**Do not get out of the vehicle while the stop hold control is operating:**

Getting out of the vehicle while the stop hold control is operating is dangerous as the vehicle may move unexpectedly and result in an accident. Before getting out of the vehicle, switch the MRCC with Stop & Go function system off, shift the selector lever to the P position, and apply the parking brake.



If your vehicle is towed or you are towing something, switch the MRCC with Stop & Go function system off to prevent a mis-operation.


**NOTE**

- The MRCC with Stop & Go function system does not detect the following as physical objects.
  - Vehicles approaching in the opposite direction
  - Pedestrians
  - Stationary objects (stopped vehicles, obstructions)
  - If a vehicle ahead is travelling at an extremely low speed, the system may not detect it correctly.
- During headway control travel, do not set the system for detection of two-wheeled vehicles such as motorcycles and bicycles.
- Do not use the MRCC with Stop & Go function system under conditions in which close proximity warnings are frequently activated.

- *During headway control travel, the system accelerates and decelerates your vehicle in conjunction with the speed of the vehicle ahead. However, if it is necessary to accelerate for a lane change or if the vehicle ahead brakes suddenly causing you to close in on the vehicle rapidly, accelerate using the accelerator pedal or decelerate using the brake pedal depending on the conditions.*
- *While the MRCC with Stop & Go function system is in use, it does not cancel even if the selector lever is operated and any intended engine braking does not occur. If deceleration is required, lower the set speed or depress the brake pedal.*
- *The sound of the automatic brakes operating may be heard, however, it does not indicate a problem.*
- *The brake lights turn on while the MRCC with Stop & Go function automatic braking is operating, however, they may not turn on while the vehicle is on a downslope at the set vehicle speed or travelling at a constant speed and following a vehicle ahead.*

## ▼ Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) Display Indication

The MRCC with Stop & Go function setting status and operation conditions are indicated on the multi-information display and the active driving display.

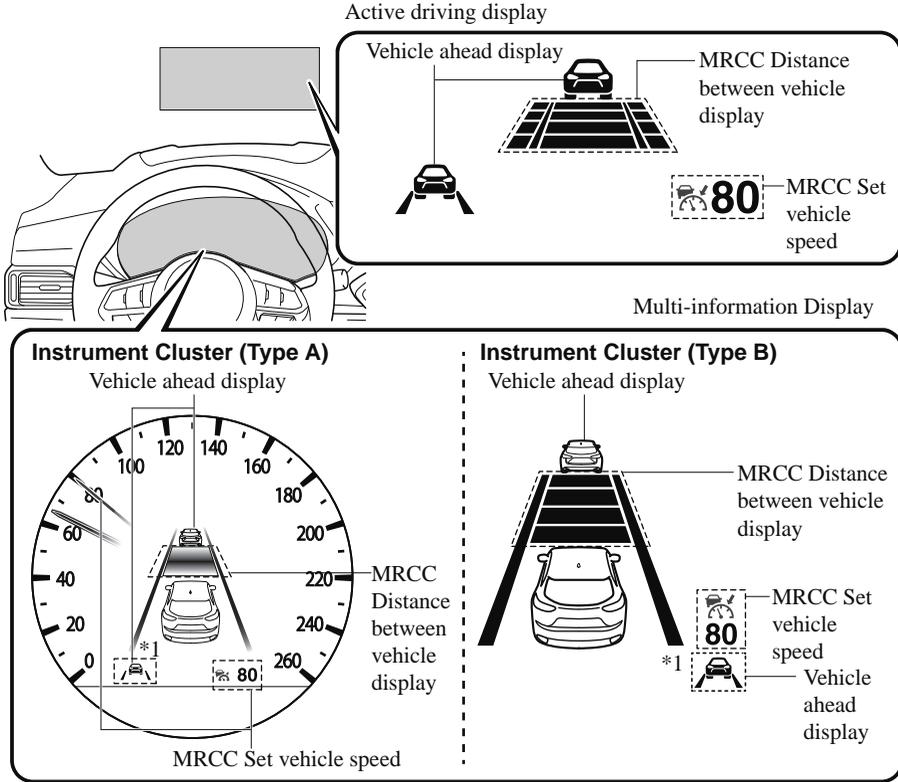

\*1: Displayed on the basic display.

If there is a problem with the MRCC with Stop & Go function system, a message is displayed on the multi-information display. Check the centre display to verify the problem and then have your vehicle inspected by an expert repairer (we recommend an Authorised Mazda Repairer).

Refer to Message Indicated on Display on page 7-63.

**▼ Close Proximity Warning**

If your vehicle rapidly closes in on the vehicle ahead because the vehicle ahead applies the brakes suddenly while you are travelling in headway control, the warning sound activates and the brake warning is indicated in the display. Always verify the safety of the surrounding area and depress the brake pedal while keeping a safer distance from the vehicle ahead. Additionally, keep a safer distance from the vehicles behind you.

**BRAKE!****NOTE**

*In the following cases, the warnings and brakes may not operate even if your vehicle starts closing in on the vehicle ahead.*

- *You are driving your vehicle at the same speed as the vehicle ahead.*
- *Directly after the MRCC with Stop & Go function system has been set.*
- *Directly after the accelerator pedal is released.*
- *Another vehicle cuts into the driving lane.*

**▼ Setting the System**

The MRCC with Stop & Go function system operates when all of the following conditions are met.

- The vehicle speed is as follows:
  - **(European models)**  
About 0 km/h (0 mph) to 200 km/h (124 mph)
  - **(Except European models)**  
About 0 km/h (0 mph) to 145 km/h (90 mph)
- The MRCC with Stop & Go function is turned on.
- The brake pedal is not depressed.
- The parking brake is released (Electric Parking Brake (EPB) indicator light is turned off).
- There is no problem with the DSC.
- All the doors are closed.
- The driver's seat belt is fastened.
- The selector lever is in the drive (D) position or manual (M) position (manual mode).

**NOTE**


- *In the following cases, the MRCC with Stop & Go function system is cancelled when the vehicle is travelling at 30 km/h (20 mph) or less and “Mazda Radar Cruise Control disabled under 30 km/h (20 mph)” is displayed in the multi-information display.*
- *The Forward Sensing Camera (FSC) cannot detect target objects (There is problem with the Forward Sensing Camera (FSC) or windscreen is dirty).*

# i-ACTIVSENSE

- There is a problem with the stop hold control function.
- There is a problem with the Electric Parking Brake (EPB).
- It may not be possible to set the MRCC with Stop & Go function system directly after starting the engine, while the DSC operation is being checked.
- **(With Selective Catalytic Reduction (SCR) system)**

It is not possible to set the MRCC with Stop & Go function system while the vehicle speed is limited by the Selective Catalytic Reduction (SCR) system.

## Turning on the system

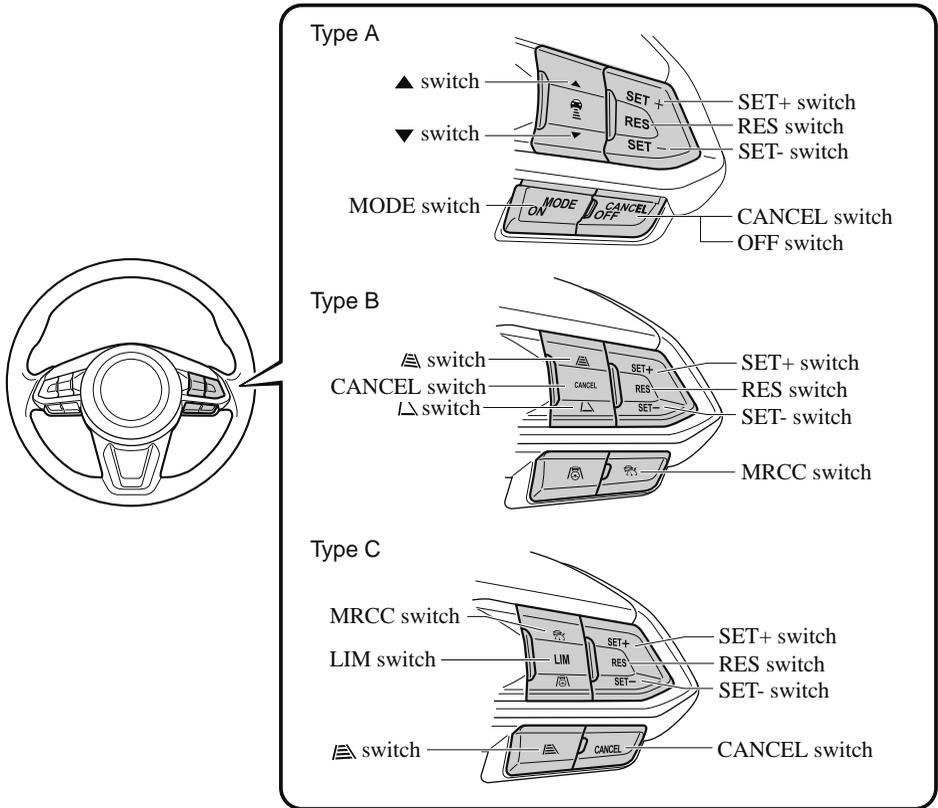

### Steering wheel (Type A)

When the MODE switch is pressed once, the MRCC with Stop & Go function system turns on, and the MRCC with Stop & Go function main indication (white) turns on and the vehicle speed and the distance between the vehicles while in headway control can be set.

**Steering wheel (Type B/Type C)**

When the MRCC switch is pressed once, the MRCC with Stop & Go function system turns on, and the MRCC with Stop & Go function main indication (white) turns on and the vehicle speed and the distance between the vehicles while in headway control can be set.



In addition, the MRCC with Stop & Go function system display indication is displayed on the multi-information display and the active driving display at the same time.





**NOTE**

- *If the ignition is switched off while the MRCC with Stop & Go function system is operating, the system will be operable when the ignition is switched ON the next time.*
- **(European models)**  
*The MRCC with Stop & Go function can switch to the Adjustable Speed Limiter (ASL). Refer to Adjustable Speed Limiter (ASL) on page 4-226.*
- **(Except European models)**  
*The MRCC with Stop & Go function can switch to the cruise control function. Refer to Cruise Control Function on page 4-189.*

**How to set the speed**

1. Adjust the vehicle speed to the desired setting using the accelerator pedal.
2. Headway control begins when the SET+ or SET- switch is pressed.  
The set speed and the inter-vehicle distance display filled with white lines is displayed.  
The MRCC with Stop & Go function main indication (white) switches to the MRCC with Stop & Go function set indication (green) at the same time.



Travel status	Indication on multi-information display		Indication on active driving display
	Type A	Type B	
During travel at constant speed			
During travel under headway control			

**NOTE**

- If a vehicle ahead is detected while travelling at a constant speed, the vehicle-ahead indication is displayed and headway control is performed. Additionally, when a vehicle ahead is no longer detected, the vehicle-ahead indication turns off and the system switches back to travel at constant speed.
- The lowest possible speed which can be set on the MRCC with Stop & Go function system is 30 km/h (19 mph).
- Headway control is not possible if the vehicle ahead is driving faster than your vehicle's set speed. Adjust the system to the desired vehicle speed using the accelerator pedal.

**How to set the distance-between-vehicles during headway control**

**Steering wheel (Type A)**

The distance-between-vehicles is set to a shorter distance by pressing the ▼ switch. The distance-between-vehicles is set to a longer distance by pressing the ▲ switch. The distance-between-vehicles can be set to 4 levels; Long, medium, short, and extremely short distance.

**Steering wheel (Type B)**








The distance-between-vehicles can be set to 4 levels; Long, medium, short, and extremely short distance.

The distance-between-vehicles is set to a shorter distance by pressing the  switch. The distance-between-vehicles is set to a longer distance by pressing the  switch.

### Steering wheel (Type C)

The distance-between-vehicles can be set to 4 levels; Long, medium, short, and extremely short distance.

The distance-between-vehicles is set to a shorter distance each time the  switch is pressed. However, when the  switch is pressed while the distance-between-vehicles is set to extremely short, the distance-between-vehicles is set to long.

Distance-between-vehicles guideline (at 80 km/h (50 mph) vehicle speed)	Indication on multi-information display		Indication on active driving display* <sup>1</sup>
	Type A	Type B	
Long (about 50 m (164 ft))			
Medium (about 40 m (131 ft))			
Short (about 30 m (98 ft))			
Extremely short (about 25 m (82 ft))			

\*1 Displays a pop-up image in the active driving display only when the driver operates the switch.

#### NOTE

- The distance-between-vehicles differs depending on the vehicle speed, and the slower the vehicle speed, the shorter the distance.
- When the ignition is switched to ACC or OFF and then the engine is started again, the system automatically sets the distance-between-vehicles to the previous setting.

**How to change the set vehicle speed****To accelerate/decelerate using the SET switch**

When you press the SET+ switch, the vehicle accelerates and when you press the SET- switch, it decelerates.

	European models	Except European models
Short press	1 km/h (1 mph)	5 km/h (5 mph)
Long press	10 km/h (5 mph)	

**NOTE**

For example, the set vehicle speed is changed by pressing the SET switch 4 times as follows:

**(European models)**

The vehicle speed accelerates or decelerates by 4 km/h (4 mph).

**(Except European models)**

The vehicle speed accelerates or decelerates by 20 km/h (20 mph).

**To increase speed using accelerator pedal**

Depress the accelerator pedal and press and release the SET+ switch or SET- switch at the desired speed. If the switch is not operated, the system returns to the set speed after you release your foot from the accelerator pedal.



The warnings and brake control do not operate while the accelerator pedal is depressed.

**NOTE**

- The setting speed can be changed by operating the SET+ switch or SET- switch during stop hold control.
- When accelerating using the SET+ switch while in headway control, the set vehicle speed can be adjusted but acceleration is not possible. If there is no longer a vehicle ahead, acceleration continues until reaching the set vehicle speed. For the set vehicle speed, check the set vehicle speed indication in the display.
- When depressing the accelerator pedal, the inter-vehicle distance indication in the display changes to the white-line indication.
- **(European models)**  
When switching to a passing lane and operating the direction indicator, the system provides more acceleration automatically if it determines that more acceleration is required. Drive while being careful of the road ahead because you could approach the vehicle ahead too closely.

**Cancelling the system**

When the following operations are performed, the MRCC with Stop & Go function system is cancelled, and the MRCC with Stop & Go function set indication (green) switches to the MRCC with Stop & Go function main indication (white) at the same time.

- The CANCEL switch is pressed.
- The brake pedal is depressed.
- The parking brake is applied.

- The selector lever is in the P (Park), N (Neutral), or R (Reverse) position.

Under the following conditions, the MRCC with Stop & Go function cancel indication is displayed in the multi-information display and a single beep sound is heard.

- The DSC has operated.
- The Smart Brake Support (SBS) has operated.
- The Smart City Brake Support [Forward] (SCBS F) or Advanced Smart City Brake Support (Advanced SCBS) has operated.
- When travelling on a downslope for a long period of time.
- There is a problem with the system.
- The engine has stalled.
- Any of the doors is opened.
- The driver's seat belt is unfastened.
- The parking brake is automatically applied during stop hold control.
- The radar sensor (front) cannot detect target objects (during rain, fog, snow or other inclement weather conditions, or when the radiator grille is dirty).
- **(With Selective Catalytic Reduction (SCR) system)**  
The vehicle speed is limited by the Selective Catalytic Reduction (SCR) system.

### **Resuming control**

If the MRCC with Stop & Go function system is cancelled, you can resume control at the previously set speed by pressing the RES switch and after all of the operation conditions have been met.

### ***NOTE***

*If the set speed is not indicated in the display, the control does not resume even if the RES switch is pressed.*

### **Turning off the system**

Press the CANCEL switch 2 times while the MRCC with Stop & Go function system is operating to switch off the system.

**▼ Stop Hold Control**

While in headway control using the MRCC with Stop & Go function system, your vehicle will stop when a vehicle ahead stops. When the vehicle is stopped and the stop hold control operates, the MRCC with Stop & Go function indicator light turns on.

# HOLD

**NOTE**

- *If the MRCC with Stop & Go function system is cancelled during stop hold control, the vehicle is held in its stopped position. The stop hold control can be cancelled by performing one the following actions.*
  - *Press the accelerator pedal and resume driving the vehicle.*
  - *While forcefully depressing the brake, switch the MRCC with Stop & Go function system off.*
- *The parking brake is automatically applied and the vehicle is held in its stopped position when 10 minutes have elapsed since the stop hold control operated. At this time, the MRCC with Stop & Go function system is cancelled.*
- *If the i-stop operation conditions are met during stop hold control, the engine stops even though the brake pedal is not depressed.*  
*Refer to i-stop on page 4-12.*
- *The brake lights turn on during stop hold control.*

**To resume driving**

After the vehicle ahead starts moving while your vehicle is stopped under stop hold control, press the RES switch or depress the accelerator pedal to cancel the stop hold control and resume driving.

**NOTE**

- *When you resume driving by pressing the RES switch, your vehicle does not start moving until the distance between your vehicle and the vehicle ahead lengthens to the specified distance or farther.*
- *The engine restarts automatically when any of the actions to resume driving are performed while i-stop is operating.*
- *If the MRCC with Stop & Go function is temporarily cancelled during stop hold control, you cannot resume driving by pressing the RES switch when there are no vehicles in front of your vehicle. Depress the accelerator pedal and resume driving the vehicle.*

- If the vehicle ahead starts moving within 3 seconds after your vehicle is stopped by the stop hold control, headway control will resume even if you do not resume driving your vehicle, such as by depressing the accelerator pedal.

### **Resume driving information**

If you do not resume driving within a few seconds after the vehicle ahead starts moving, the multi-information display vehicle-ahead indication flashes to urge the driver to resume driving.

### **▼ Cruise Control Function**

While this function is operating, the headway control operation is cancelled and only the cruise control function operates.

The vehicle speed can be set more than about 25 km/h (16 mph).

Use the cruise control function on expressways and other highways which do not require a lot of repeated acceleration and deceleration.



### ***Do not use the cruise control function in the following locations:***

*Otherwise, it could lead to an accident.*

- *Roads with sharp curves and where vehicle traffic is heavy and there is insufficient space between vehicles. (Driving under these conditions using the cruise control function is not possible)*
- *Steep down slopes (Set speed may be exceeded because sufficient engine braking cannot be applied)*
- *Slippery roads such as ice or snow-bound roads (Tyres could spin causing you to lose vehicle control)*

### ***Always drive carefully:***

*The warnings and brake control will not operate after the headway control function is cancelled and the system is switched to only the cruise control function. Depress the brake pedal to decelerate according to the surrounding conditions while keeping a safer distance from the vehicle ahead and always driving carefully.*

### **Switching to cruise control function**

#### **Steering wheel (Type A)**

When the MODE switch is pressed until the system switches to the cruise main indication (white) while the MRCC with Stop & Go function system is turned on, the system switches to the cruise control function.

#### **Steering wheel (Type B/Type C)**

Use Mazda Connect to switch to the cruise control function.  
Refer to the Settings section in the Mazda Connect Owner's Manual.

When the system switches to the cruise control function, the indicator and multi-information display notify the driver as follows:

- The MRCC with Stop & Go function set indication (green) or the MRCC with Stop & Go function main indication

(white) is turned off, and the cruise main indication (white) is turned on.

- A message is displayed in the multi-information display.



**Always turn off the cruise control function when it is not in use:**

*Leaving the cruise control function turned on when it is not in use is dangerous as it could operate unexpectedly, resulting in an accident.*

**How to set the speed**

Adjust the system to the desired vehicle speed using the accelerator pedal.

When the SET+ or SET- switch is pressed, the cruise set indication (green) is turned on and headway control begins.

**NOTE**

- *The system may not be able to maintain the set speed constantly depending on driving conditions such as steep up or down slopes.*
- *The speed will continue increasing while the SET+ switch is pressed and held. The speed will continue decreasing while the SET- switch is pressed and held.*

**How to increase the set speed**

The set speed can be increased using the following operations:

**To increase speed using the SET+ switch**

Press and hold the SET+ switch and release the switch at the desired speed.

The set speed can be adjusted incrementally (1 km/h (1 mph) increments) by pressing the switch and releasing it immediately. For example, if the switch is pressed 4 times, the set speed increases by about 4 km/h (4 mph).

**To increase speed using accelerator pedal**

Depress the accelerator pedal and press the SET+ or SET- switch at the desired speed.

If the switch is not operated, the system returns to the set speed after you release your foot from the accelerator pedal.

**How to Decrease the Set Speed**

Press the SET- switch continuously and release the switch at the desired speed.

The set speed can be adjusted incrementally (1 km/h (1 mph) increments) by pressing the switch and releasing it immediately. For example, if the switch is pressed 4 times, the set vehicle speed decreases by about 4 km/h (4 mph).

**Cancelling the function**

When the cruise control function is cancelled and the RES switch is pressed while the vehicle speed is 25 km/h (16 mph) or faster, the speed returns to the original set speed.

**Cancelling using CANCEL switch**

When the CANCEL switch is pressed once, the cruise control function is cancelled.

**Automatically cancel**

The cruise control function is cancelled automatically in the following cases.

- The brake pedal is depressed.
- The parking brake is applied.
- The selector lever is shifted to P or N position.

**NOTE**

- *If the vehicle speed decreases by about 15 km/h (9.4 mph) or more than the set speed, the cruise control function may be cancelled.*
- *When the vehicle speed is less than 21 km/h (13 mph), the cruise control function is cancelled. In this case, the vehicle speed will not return to the original set speed even if the vehicle is accelerated to 25 km/h (16 mph) or higher and the RES switch is pressed. Reset the cruise control function.*

## Cruising & Traffic Support (CTS)\*

The CTS is a system which consists of a headway control function and a steering assist function for reducing driver fatigue during traffic jams when driving on expressways or highways.

This system performs headway control to maintain a constant distance between your vehicle and a vehicle ahead at a preset vehicle speed without you having to use the accelerator or brake pedal. Even further, with the steering assist function, when vehicle lane lines are detected, the function assists the driver in keeping the vehicle within the lane lines. If lane lines are not detected, the function provides the driver driving assistance in keeping the vehicle along the motion path with the vehicle ahead.



### **Do not rely completely on CTS:**

- *The CTS is not an automated driving system. In addition, the functions have limitations. Do not rely completely on the system and always stay on course using the steering wheel.*
- *Set a vehicle speed within the speed limit according to the road conditions and the weather conditions.*
- *The CTS may not be able to detect a vehicle ahead depending on the type of vehicle ahead and its conditions, the weather conditions, and the road conditions. Additionally, the system might be unable to decelerate sufficiently if a vehicle ahead applies the brakes suddenly, another vehicle cuts into the driving lane, or the difference in vehicle speed between your vehicle and the vehicle ahead is larger, which could result in an accident. Check the surrounding conditions and always drive carefully while keeping a safe distance from vehicles ahead and on-coming vehicles.*

### **For the purposes of safety, switch the CTS off when it is not being used.**

*Leaving the CTS turned on when it is not in use is dangerous as it could operate unexpectedly, resulting in an accident.*

### **Do not use the CTS under the following conditions. Otherwise, it may result in an accident.**

- *General roads other than expressways or highways (Driving under these conditions using the CTS is not possible.)*
- *Roads with sharp curves and where vehicle traffic is heavy with insufficient space between vehicles, or roads where frequent and repetitive acceleration and deceleration occur (Driving under these conditions using the CTS is not possible).*

- *When entering and exiting interchanges, service areas, and parking areas of expressways (If you exit an expressway while headway control is in use, the vehicle ahead will no longer be tracked and your vehicle may accelerate to the set speed).*
- *Slippery roads such as icy or snow-covered roads and unpaved roads (Tyres could spin causing you to lose vehicle control, or the stop hold control may not operate.)*
- *Long, descending slopes (to maintain distance between vehicles, the system automatically and continuously applies the brakes which could result in the loss of brake power.)*
- *Two-wheeled vehicles such as motorcycles or bicycles are ahead.*
- ***(Vehicles with Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) and automatic transaxle vehicle)***
  - Slopes with a steep gradient (The vehicle ahead may not be detected correctly, your vehicle may slip while stopped by the stop hold control, or it may accelerate suddenly after it starts moving.)*
- *Driving under bad weather conditions (rain, fog, and snow).*
- *Tyres of a different specified size are used, such as a temporary spare tyre.*
- *Tyres with insufficient tread are used.*
- *The tyre pressures are not adjusted to the specified pressure.*
- *The vehicle is being used to tow a camper or boat trailer.*
- *Tyre chains are used.*
- *The vehicle is driven on roads with lane lines other than white (yellow) lines, such as an expressway.*

***Do not get out of the vehicle while the stop hold control is operating.***

***(Vehicles with Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) and automatic transaxle vehicle)***

*Getting out of the vehicle while the stop hold control is operating is dangerous as the vehicle may move unexpectedly and result in an accident. Before getting out of the vehicle, switch the CTS off, apply the parking brake, and then shift the selector lever to the P position.*



*Heed the following cautions so that the CTS can operate normally.*

- *Turn the system off when the vehicle is running on a chassis roller.*
- *Do not modify the vehicle's suspensions.*
- *Always use wheels of the specified size for the front and rear wheels. Consult an expert repairer (we recommend an Authorised Mazda Repairer) for tyre replacement.*

**NOTE**

- *The headway control does not detect the following as physical objects.*
  - *Vehicles approaching in the opposite direction*
  - *Pedestrians*
  - *Stationary objects (stopped vehicles, obstructions)*
- *If a vehicle ahead is travelling at an extremely low speed, the system may not detect it correctly.*
- *If there is a structure on the road or an object (such as a monorail) at a low height off the ground in front of the vehicle, the system may operate. Therefore, do not use the CTS.*
- *Do not use the CTS under conditions in which close proximity warnings are frequently activated.*
- *If it is necessary to accelerate for a lane change or the vehicle ahead brakes suddenly causing you to close in on the vehicle rapidly, accelerate using the accelerator pedal or decelerate using the brake pedal depending on the conditions.*
- *While the CTS is in use, any intended engine braking does not occur even if you shift the shift lever (manual transaxle) or the selector lever (automatic transaxle). If deceleration is required, lower the vehicle speed setting or depress the brake pedal.*
- *While braking by the CTS control is operating, you might hear an operation sound, however, this does not indicate a problem.*
- *The brake lights turn on while braking by the CTS control is operating, however, they may not turn on while the vehicle is on a down slope at the set vehicle speed or travelling at a constant speed and following a vehicle ahead.*
- *Under the following conditions, the CTS may not be able to detect white (yellow) lines or vehicles ahead correctly and the CTS may not operate normally.*
  - *The forward sensing camera (FSC) cannot recognise the area in front of the vehicle due to soiling or fog.*
  - *The white (yellow) lane lines are less visible because of dirt or paint flaking.*
  - *White (yellow) lane lines or vehicles ahead are less visible because of bad weather (rain, fog, or snow).*
  - *The vehicle is driven on a temporary lane or section with a closed lane resulting from construction where there might be multiple white (yellow) lane lines, or they are interrupted.*
  - *The camera picks up an obscure line, such as a temporary line being used for construction, or because of shade, unmelted snow, or grooves filled with water.*
  - *The road surface is wet and shiny after rain, or there are puddles on the road.*
  - *Heavy luggage is loaded in the luggage compartment or on the rear seat causing the vehicle to tilt.*
  - *A vehicle in front of your vehicle is running near a white (yellow) lane line making it less visible.*
  - *The windscreen is dirty or foggy.*

- *The vehicle is driven through an intersection, a junction, or a fork in the road.*
- *While white (yellow) lane lines cannot be detected due to road or weather conditions.*
- *The surrounding brightness suddenly changes such as when entering or exiting a tunnel.*
- *The illumination of the headlights is weakened because of dirt or the optical axis is deviated at night.*
- *Back-light is reflected off the road surface or the road surface is wet and shiny after rain.*
- *The shade of a guardrail parallel to a white (yellow) lane line is cast on the road.*
- *The width of a lane is excessively narrow or wide.*
- *The road is excessively uneven.*
- *The vehicle is shaken after hitting a road bump.*
- *There are various road markings or division lines (lane markings) of various shapes near an intersection.*
- *The area in front of the forward sensing camera (FSC) is soiled or an object that obstructs the field of view is installed.*
- *Exhaust gas from the vehicle in front, sand, snow, and water vapour rising from manholes and grating, and water splashed into the air.*
- *The surroundings are dark such as during the early evening or early morning.*
- *A vehicle ahead with a certain tail light shape.*
- *A vehicle ahead veers off course from your vehicle's line of travel.*
- *A vehicle ahead is driving erratically.*
- *The vehicle is driven on roads with tight curves.*

### **Headway control function**

If a vehicle ahead is detected while travelling at a constant speed, the vehicle-ahead indication is displayed and headway control is performed.

### **Steering assist function**


When lane lines are detected, the function assists the driver in keeping the vehicle within the lane lines. If lane lines are not detected, the function provides the driver driving assistance in keeping the vehicle along the motion path with the vehicle ahead.

**NOTE**


**Steering assist limit warning**

If the steering assist function cannot keep the vehicle within the lane lines while the steering assist function is operating, a warning sound is activated and a warning is displayed on the multi-information display to urge the driver to operate the steering wheel.

**Instrument Cluster (Type A)**




**Instrument Cluster (Type B)**



\*1: Displayed on the basic display.

▼ **Cruising & Traffic Support (CTS) Display Indication**

The CTS setting status and operation conditions are indicated on the multi-information display and the active driving display.

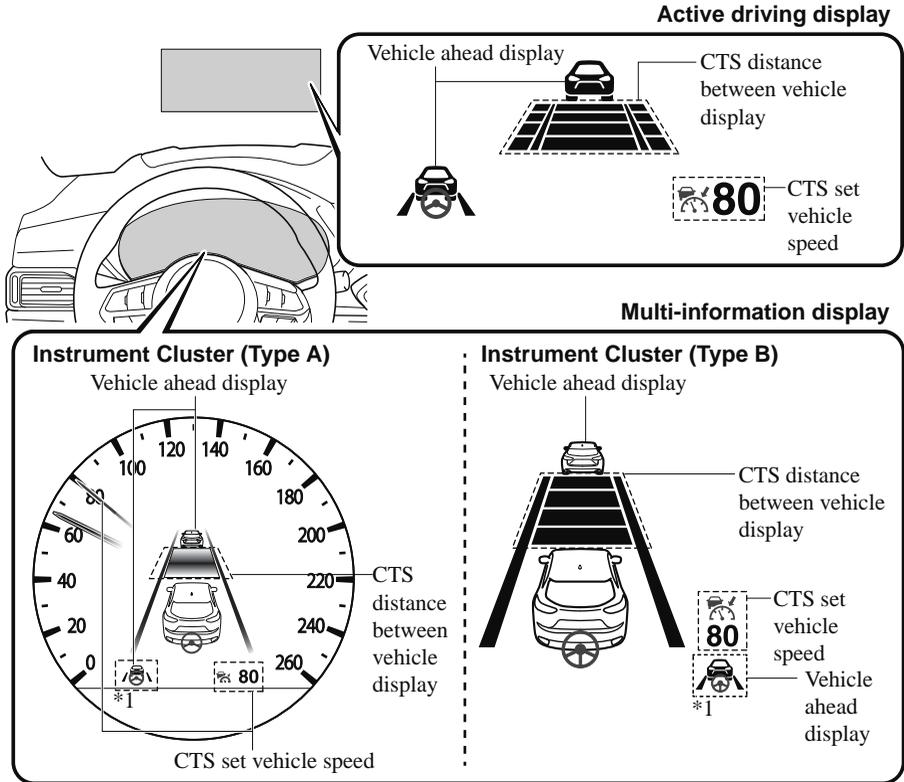

\*1: Displayed on the basic display.


**Steering assist function display**

When the steering assist function operates, the steering assist operation display on the display changes from white to green.

# i-ACTIVSENSE


## Multi-information display

### Instrument Cluster (Type A)



Steering assist operation display


### Instrument Cluster (Type B)



Steering assist operation display

\*1: Displayed on the basic display.

## Active driving display

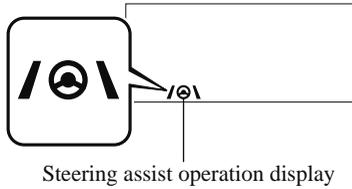


## NOTE

You can view the multi-information display to check whether the steering assist is performing controls in conjunction with the traffic lane lines or a vehicle ahead.


## Inactive

### Instrument Cluster (Type A)




Steering assist operation display (white)

### Instrument Cluster (Type B)




Steering assist operation display (white)

\*1: Displayed on the basic display.


**Active (vehicle ahead)****Instrument Cluster (Type A)**

Steering assist operation display (green)

\*1: Displayed on the basic display.


**Instrument Cluster (Type B)**

Steering assist operation display (green)

**Active (lane line)****Instrument Cluster (Type A)**

Steering assist operation display (green)

\*1: Displayed on the basic display.

**Instrument Cluster (Type B)**

Steering assist operation display (green)

If there is a problem with the CTS, a message is displayed on the display. Check the details of the problem and then have your vehicle inspected by an expert repairer (we recommend an Authorised Mazda Repairer).

**▼ Close Proximity Warning**

If your vehicle rapidly closes in on the vehicle ahead because the vehicle ahead applies the brakes suddenly while you are travelling in headway control, the warning sound activates and the brake warning is indicated in the display. Always verify the safety of the

surrounding area and depress the brake pedal while keeping a safer distance from the vehicle ahead. Additionally, keep a safer distance from the vehicles behind you.

## **BRAKE!**

### **NOTE**

*In the following cases, the warnings and brakes may not operate even if your vehicle starts closing in on the vehicle ahead.*

- *You are driving your vehicle at the same speed as the vehicle ahead.*
- *Directly after the CTS has been set.*
- *Directly after the accelerator pedal is released.*
- *Another vehicle cuts into the driving lane.*

### **▼ Setting the System**

#### **Operation conditions**

#### **Headway control function**

The CTS operates when all of the following conditions are met.

- **(Automatic transaxle vehicle)**
- **(Vehicles with Mazda Radar Cruise Control (MRCC))**
  - Vehicle speed is 30 km/h (19 mph) to 145 km/h (90 mph)
  - The headway control function of the Mazda Radar Cruise Control (MRCC) is set to operable (if it was set to inoperable, set it to operable using the personalisation function).
- **(Vehicles with Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function))**
  - The vehicle speed is as follows:
    - **(European models)**  
About 0 km/h (0 mph) to 200 km/h (124 mph)
    - **(Except European models)**  
About 0 km/h (0 mph) to 145 km/h (90 mph)
  - The headway control function of the Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) is set to operable (if it was set to inoperable, set it to operable using the personalisation function).
  - The selector lever is in the D or M position (manual mode).
- **(Manual transaxle vehicle)**
  - Vehicle speed is 30 km/h (19 mph) to 200 km/h (124 mph)

- The headway control function of the Mazda Radar Cruise Control (MRCC) is set to operable (if it was set to inoperable, set it to operable using the personalisation function).
- The shift lever is in a position other than the R or N position.
- The clutch pedal is not depressed.
- The CTS is operating.
- The brake pedal is not depressed.
- The parking brake is released (Electric Parking Brake (EPB) indicator light is turned off).
- There is no problem with the DSC.
- All the doors are closed.
- The driver's seat belt is fastened.

**NOTE**

- ***(Vehicles with Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) and automatic transaxle vehicle)***

*Under the following conditions, the CTS cannot be used when the vehicle speed is 30 km/h (19 mph) or slower.*

- *The Forward Sensing Camera (FSC) cannot detect target objects (There is problem with the Forward Sensing Camera (FSC) or windscreen is dirty).*
- *There is a problem with the stop hold control function.*
- *There is a problem with the Electric Parking Brake (EPB).*
- *The CTS may not launch directly after the engine starts.*
- ***(With Selective Catalytic Reduction (SCR) system)***

*It is not possible to set the CTS while the vehicle speed is limited by the Selective Catalytic Reduction (SCR) system.*

**Steering assist function**

The steering assist function operates when all of the following conditions are met.

- **(European models)**
  - The vehicle is being driven at a speed of less than about 55 km/h (34 mph).
  - When driving near the centre of the lane and the white (yellow) lane lines on both sides are detected clearly, or a vehicle ahead is detected clearly in front of your vehicle.
- **(Except European models)**
  - When driving near the centre of the lane and the white (yellow) lane lines on both sides are detected clearly, or a vehicle ahead is detected clearly in front of your vehicle and your vehicle speed is less than about 55 km/h (34 mph).

# i-ACTIVSENSE


- The steering wheel is not turned sharply.
- The direction indicator lever is not operated.
- The headway control function is operating.
- The Off-Road Traction Assist is not operating.
- When Off-road mode is not selected using Mazda intelligent Drive Select (Mi-Drive).
- **(Vehicles with Mazda Radar Cruise Control (MRCC) or manual transaxle vehicle)**  
The vehicle speed is about 30 km/h (19 mph) or faster.

## NOTE


- The function assisting your steering operation to follow the trajectory of the vehicle ahead does not operate at a vehicle speed of about 55 km/h (34 mph) or faster.
- The steering assist function operates so that the vehicle remains near the centre of the driving lane, however, depending on conditions such as the road curvature, road slope and undulations, and vehicle speed, the function might not be able to keep the vehicle near the centre of the driving lane.

## Setting method

### Steering wheel (Type A)

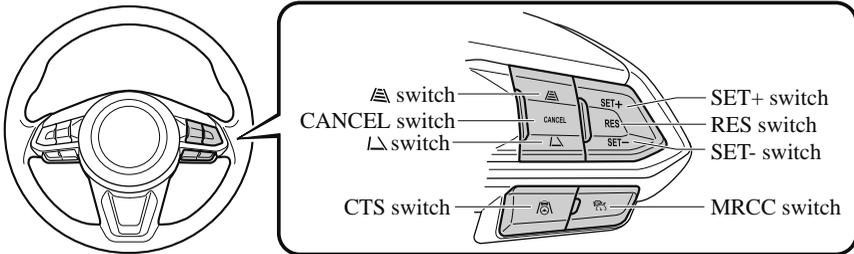


### Steering wheel (Type B)

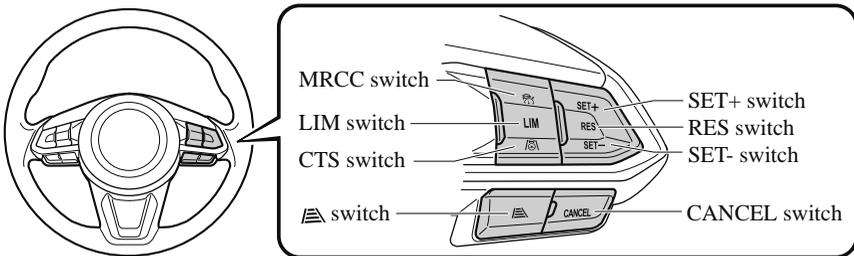


1. Press the CTS switch.

The CTS standby indication (white) turns on. In addition, the CTS display indication is displayed on the multi-information display at the same time.



- Adjust the vehicle speed to the desired setting using the accelerator pedal and press the SET+ switch or SET- switch to start headway control. The set speed is indicated on the display. At the same time, the CTS standby indication (white) changes to the CTS set indication (green).



- The headway control is operable when all of the conditions for it to operate are met, or the steering assist function is operable when all of the conditions for it to operate are met.

### **NOTE**

- If a vehicle ahead is detected while travelling at a constant speed, the vehicle-ahead indication is displayed and headway control is performed. Additionally, when a vehicle ahead is no longer detected, the vehicle-ahead indication turns off and the system switches back to travel at constant speed.
- The lowest possible speed which can be set on the CTS is 30 km/h (19 mph).
- Headway control is not possible if the vehicle ahead is driving faster than your vehicle's set speed. Adjust the system to the desired vehicle speed using the accelerator pedal.
- When the ignition is switched OFF, the system status before it was turned off is maintained. For example, if the ignition is switched OFF with the CTS operable, the CTS remains operational the next time the ignition is switched ON.

- When the CTS switch is pressed while the Mazda Radar Cruise Control (MRCC) or the Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) system is operating, the CTS operates. In addition, when the MRCC switch is pressed while the CTS is operating, the Mazda Radar Cruise Control (MRCC) or the Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) system operates.

## **Changing the set vehicle speed**

### **To accelerate/decelerate using the SET switch**

When you press the SET+ switch, the vehicle accelerates and when you press the SET- switch, it decelerates.

	European models	Except European models
Short press	1 km/h (1 mph)	5 km/h (5 mph)
Long press	10 km/h (5 mph)	

### **NOTE**

For example, the set vehicle speed is changed by pressing the SET switch 4 times as follows: (**European models**)

The vehicle speed accelerates or decelerates by 4 km/h (4 mph).

(**Except European models**)

The vehicle speed accelerates or decelerates by 20 km/h (20 mph).

### **To increase speed using accelerator pedal**

Depress the accelerator pedal and press and release the SET+ switch or SET- switch at the desired speed. If the switch is not operated, the system returns to the set speed after you release your foot from the accelerator pedal.



The warnings and brake control do not operate while the accelerator pedal is depressed.

### **NOTE**

- When accelerating using the SET+ switch while in headway control, the set vehicle speed can be adjusted but acceleration is not possible. If there is no longer a vehicle ahead, acceleration continues until reaching the set vehicle speed. For the set vehicle speed, check the set vehicle speed indication in the display.
- When depressing the accelerator pedal, the inter-vehicle distance indication in the display changes to the white-line indication.

· **(European models)**

When switching to a passing lane and operating the direction indicator, the system provides more acceleration automatically if it determines that more acceleration is required. Drive while being careful of the road ahead because you could approach the vehicle ahead too closely.

· **(Vehicles with Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) and automatic transaxle vehicle)**

The setting speed can be changed by operating the SET+ switch or SET- switch during stop hold control.

### Changing the distance between vehicles during headway control

#### **Steering wheel (Type A)**





The distance-between-vehicles can be set to 4 levels; Long, medium, short, and extremely short distance.





The distance-between-vehicles is set to a shorter distance by pressing the  $\triangleleft$  switch. The distance-between-vehicles is set to a longer distance by pressing the  $\triangleright$  switch.

#### **Steering wheel (Type B)**

The distance-between-vehicles can be set to 4 levels; Long, medium, short, and extremely short distance.

The distance-between-vehicles is set to a shorter distance each time the  $\triangleright$  switch is pressed. However, when the  $\triangleright$  switch is pressed while the distance-between-vehicles is set to extremely short, the distance-between-vehicles is set to long.

Distance-between-vehicles guideline (at 80 km/h (50 mph) vehicle speed)	Indication on multi-information display		Indication on active driving display*1
	Type A	Type B	
Long (about 50 m (164 ft))			
Medium (about 40 m (131 ft))			

Distance-between-vehicles guideline (at 80 km/h (50 mph) vehicle speed)	Indication on multi-information display		Indication on active driving display*1
	Type A	Type B	
Short (about 30 m (98 ft))			
Extremely short (about 25 m (82 ft))			

\*1 Displays a pop-up image in the active driving display only when the driver operates the switch.

### NOTE

- The distance-between-vehicles differs depending on the vehicle speed, and the slower the vehicle speed, the shorter the distance.
- When the ignition is switched to ACC or OFF and then the engine is started again, the system automatically sets the distance-between-vehicles to the previous setting.

### The function is temporarily cancelled

#### Headway control function

When the following operations are performed, the headway control function is temporarily cancelled and the CTS set indication (green) changes to the CTS standby indication (white) at the same time.

- The CANCEL switch is pressed.
- The brake pedal is depressed.
- The parking brake is applied.
- **(Automatic transaxle vehicle)**  
The selector lever is in the P, N, or R position.
- **(Manual transaxle vehicle)**  
The shift lever is in the R position.

Under the following conditions, the CTS cancel indication is displayed in the multi-information display and a single beep sound is heard.

- The DSC has operated.
- The Smart Brake Support (SBS) has operated.
- The Smart City Brake Support [Forward] (SCBS F) or Advanced Smart City Brake Support (Advanced SCBS) has operated.
- When travelling on a downslope for a long period of time.
- There is a problem with the system.
- The engine has stalled.
- Any of the doors is opened.
- The driver's seat belt is unfastened.
- The radar sensor (front) cannot detect target objects (during rain, fog, snow or other inclement weather conditions, or when the radiator grille is dirty).
- **(With Selective Catalytic Reduction (SCR) system)**  
The vehicle speed is limited by the Selective Catalytic Reduction (SCR) system.
- **(Vehicles with Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) and automatic transaxle vehicle)**  
The parking brake is automatically applied during stop hold control.
- **(Vehicles with Mazda Radar Cruise Control (MRCC) and automatic transaxle vehicle)**  
The vehicle speed decreases below 25 km/h (15 mph).
- **(Manual transaxle vehicle)**
  - The vehicle speed decreases below 25 km/h (15 mph).
  - The shift lever is in the neutral position for a certain period of time.
  - The clutch pedal is depressed for a certain period of time.

### **Steering assist function**

If any of the following conditions occurs, the steering assist function is temporarily cancelled.

- The headway control function is cancelled.
- White (yellow) lane lines cannot be detected or a vehicle ahead cannot be recognised.
- **(European models)**
  - The vehicle speed is about 60 km/h (37 mph) or faster.
- **(Except European models)**
  - The system cannot detect white (yellow) lane lines and the vehicle speed is about 55 km/h (34 mph) or faster.
- The accelerator pedal is operated.
- The direction indicator lever is operated.
- The Off-Road Traction Assist has operated.
- When Off-road mode is selected using Mazda intelligent Drive Select (Mi-Drive).
- The vehicle is being driven on a sharp curve.

# i-ACTIVSENSE


---

- The width of a lane is excessively narrow or wide.
- The vehicle crosses a lane line.
- The driver takes his/her hands off the steering wheel.
- The steering wheel is operated abruptly.
- There is a problem with the system.
- The temperature in the Forward Sensing Camera (FSC) is too high or too low.
- The windscreen around the Forward Sensing Camera (FSC) is foggy.
- The windscreen around the Forward Sensing Camera (FSC) is blocked by an obstruction, causing poor forward visibility.


## **NOTE**

- *The function assisting your steering operation to follow the trajectory of the vehicle ahead is cancelled when your vehicle speed is about 55 km/h (34 mph) or faster.*
- *If you take your hands off the steering wheel, a warning is indicated on the multi-information display and the active driving display. Then, if you continue to leave your hands off the steering wheel, a warning is indicated on the multi-information display and the active driving display and a warning sound is activated.*

### **Multi-information Display**



### **Active Driving Display**



- *If the steering wheel is held lightly, or depending on the road conditions, the system determines that you have released the steering wheel (not holding the steering wheel) even if you are holding it, and an alert is indicated on the multi-information display and the active driving display.*

## **To resume operation**

If the CTS is temporarily cancelled, it will resume operation at the previously set speed by pressing the RES switch after all of the operation conditions have been met.

**NOTE**

- If the set speed is not indicated on the display, the system does not operate even if the RES switch is pressed.
- After the operation, the steering assist operation may not operate for a period of 5 seconds at the most until the lane lines are detected or a vehicle ahead is recognised.

**Turning off**

When the CTS switch is pressed while the CTS is operating, the CTS turns off.

▼ **Stop Hold Control (Vehicles with Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) and Automatic Transaxle Vehicle)**

While in headway control using the CTS, your vehicle will stop when a vehicle ahead stops. When the vehicle is stopped and the stop hold control operates, the CTS indicator light turns on.

**NOTE**

- If the CTS system is cancelled during stop hold control, the vehicle is held in its stopped position. The stop hold control can be cancelled by performing one the following actions.
  - Press the accelerator pedal and resume driving the vehicle.
  - While forcefully depressing the brake, switch the CTS system off.

- The parking brake is automatically applied and the vehicle is held in its stopped position when 10 minutes have elapsed since the stop hold control operated. At this time, the CTS system is cancelled.
- If the i-stop operation conditions are met during stop hold control, the engine stops even though the brake pedal is not depressed.  
Refer to i-stop on page 4-12.
- The brake lights turn on during stop hold control.

**To resume driving**

After the vehicle ahead starts moving while your vehicle is stopped under stop hold control, press the RES switch or depress the accelerator pedal to cancel the stop hold control and start driving.

**NOTE**

- When you resume driving by pressing the RES switch, your vehicle does not start moving until the distance between your vehicle and the vehicle ahead lengthens to the specified distance or farther.

## **i-ACTIVSENSE**

---

- The engine restarts automatically when any of the actions to resume driving are performed while i-stop is operating.*
- If the CTS is temporarily cancelled during stop hold control, you cannot resume driving by pressing the RES switch when there are no vehicles in front of your vehicle. Depress the accelerator pedal and resume driving the vehicle.*
- If the vehicle ahead starts moving within 3 seconds after your vehicle is stopped by the stop hold control, headway control will resume even if you do not resume driving your vehicle, such as by depressing the accelerator pedal.*

### **Resume driving information**

If you do not resume driving within a few seconds after the vehicle ahead starts moving, the multi-information display vehicle-ahead indication flashes to urge the driver to resume driving.

### ▼ Shift-up/Shift-down Request Display (Manual Transaxle)

The shift-up or shift-down request display in the active driving display or multi-information display may be indicated while the CTS is operating. When this occurs, shift gears because the gear position is not appropriate.

Request	Indication on display	
	Multi-information display	Active driving display
Shift up	 Shift Up	
Shift down	 Shift Down	


#### **NOTE**

*If the gears are not shifted up/down even though the shift-up/down request indication is displayed, load will be applied to the engine and the CTS system may be automatically cancelled or engine damage could occur.*

## Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS)\*

The LAS & LDWS alerts the driver that the vehicle may be deviating from its lane and it provides steering assistance to help the driver stay within the vehicle lanes.

The Forward Sensing Camera (FSC) detects the white lines (yellow lines) of the vehicle lane in which the vehicle is travelling and if the system determines that the vehicle may deviate from its lane, it operates the electric power steering to assist the driver's steering operation. The system also alerts the driver by activating a lane departure warning sound, vibrating the steering wheel, and indicating an alert in the display. Use the system when you drive the vehicle on roads with white (yellow) lines such as expressways and highways. Refer to Forward Sensing Camera (FSC) on page 4-305.

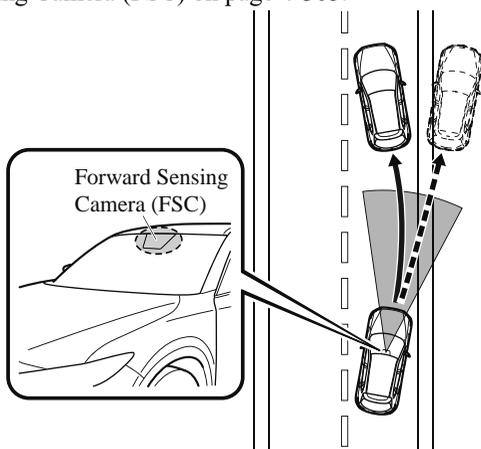

### **WARNING**

#### **Do not rely completely on the LAS & LDWS:**

- *The LAS & LDWS is not an automatic driving system. In addition, the system is not designed to compensate for a driver's lack of caution, and over-reliance on the system could lead to an accident.*
- *The detection ability of the LAS & LDWS is limited. Always stay on course using the steering wheel and drive with care.*

#### **Do not use the LAS & LDWS in the following cases:**

*The system may not operate adequately according to the actual driving conditions, resulting in an accident.*

- Driving on roads with tight curves.
- Driving under bad weather conditions (rain, fog, and snow).
- Slippery roads such as ice or snow-bound roads.
- Roads with heavy traffic and insufficient distance between vehicles.
- Roads with no white (yellow) lane lines.
- Narrow roads resulting from road construction or lane closures.
- The vehicle is driven on a temporary lane or section with a closed lane resulting from road construction where there may be multiple white (yellow) lane lines or they are interrupted.
- Vehicle is driven on roads other than expressways and highways.
- The tyre pressures are not adjusted to the specified pressure.
- The vehicle is being used to tow a camper or boat trailer.
- Tyres of a different specified size are used, such as an emergency spare tyre.



Heed the following cautions so that the LAS & LDWS can operate normally.

- Do not modify the suspensions.
- Always use wheels of the specified type and size for the front and rear wheels. Consult an expert repairer (we recommend an Authorised Mazda Repairer) for tyre replacement.

#### **NOTE**

- When the direction indicator lever is operated for a lane change, the LAS & LDWS is automatically disabled. The LAS & LDWS becomes operational again when the direction indicator lever is returned and the system detects white (yellow) lane lines while the vehicle is being driven normally within its vehicle lane.
- If the steering wheel, accelerator pedal, or brake pedal is operated abruptly and the vehicle moves close to a white (yellow) line, the system determines that the driver is making a lane change and the LAS & LDWS operation is temporarily cancelled. The LAS & LDWS becomes operational again when the system detects white (yellow) lane lines while the vehicle is being driven normally within its vehicle lane.
- If the vehicle deviates from its lane repeatedly within a short period of time, the LAS & LDWS may not operate.
- When white (yellow) lane lines are not detected, the LAS & LDWS does not operate.
- Under the following conditions, the LAS & LDWS may not be able to detect white (yellow) lane lines correctly and it may not operate normally.
  - If an object placed on the instrument panel is reflected in the windscreen and picked up by the camera.
  - Heavy luggage is loaded in the luggage compartment or on the rear seat and the vehicle is tilted.

- *The tyre pressures are not adjusted to the specified pressure.*
- *Tyres other than conventional tyres are equipped.*
- *Vehicle is driven on an intersection or junction, or on a forked road.*
- *The white (yellow) lane lines are less visible because of dirt or fading/patchiness.*
- *A vehicle in front of your vehicle is running near a white (yellow) lane line making it less visible.*
- *A white (yellow) lane line is less visible because of bad weather (rain, fog, or snow).*
- *The vehicle is driven on a temporary lane or section with a closed lane resulting from construction where there may be multiple white (yellow) lane lines or they are interrupted.*
- *A misleading line is picked up on the road such as a temporary line for construction, or because of shade, lingering snow, or grooves filled with water.*
- *The surrounding brightness suddenly changes such as when entering or exiting a tunnel.*
- *The illumination of the headlights is weakened because of dirt or the optical axis is deviated.*
- *The windscreen is dirty or foggy.*
- *The windscreen, camera is fogged (water droplets).*
- *Back-light is reflected off the road surface.*
- *The road surface is wet and shiny after rain, or there are puddles on the road.*
- *The shade of a guardrail parallel to a white (yellow) lane line is cast on the road.*
- *The width of the driving lane is narrow or wide.*
- *Driving on roads with tight curves.*
- *The road is excessively uneven.*
- *The vehicle is shaken after hitting a road bump.*
- *There are 2 or more adjacent white (yellow) lane lines.*
- *There are various road markings or lane markings of various shapes near an intersection.*

## ▼ System Operation

### System operation

When the ignition is switched ON, the system goes on standby.


Drive the vehicle in the centre of the vehicle lane while the system is on standby. When all of the following conditions are met, and the system becomes operational.

- The engine is running.
- The vehicle speed is about 60 km/h (37 mph) or faster.
- The system detects white (yellow) lane lines on both the right and left sides.
- The driver is operating the steering wheel.
- The driving lane is neither narrow nor wide.
- The steering assist function of the Cruising & Traffic Support (CTS) is not operating.


When the system becomes operational, the LAS & LDWS indication (white) is displayed on the multi-information display and active driving display.

### Multi-information display (Basic display)


Instrument Cluster (Type A)



Instrument Cluster (Type B)



### Multi-information display (i-ACTIVSENSE display)



### Active driving display\*



The LAS & LDWS goes on stand-by status in the following cases:

- The system cannot detect white (yellow) lane lines.
- The vehicle speed is less than about 60 km/h (37 mph).
- The ABS/TCS is operating.
- The TCS is turned off.
- The Off-Road Traction Assist is turned on.

- When Off-road mode is selected using Mazda intelligent Drive Select (Mi-Drive).
- The vehicle is making a sharp curve.
- The brake pedal is depressed.
- The steering wheel is operated abruptly.
- The width of a lane is excessively narrow or wide.
- The steering assist function of the CTS operated.

## **NOTE**

- *The LAS & LDWS does not operate until the system detects white (yellow) lane lines on either the left or right.*
- *When the system detects a white (yellow) lane line on one side only, the system will not operate the steering wheel operation assist and the warning for the lane line on the side that is not being detected. The steering wheel operation assist and the warning is only for a lane deviation on the side that is being detected.*
- *When the system determines that the driver is driving the vehicle with his or her hands off the steering wheel while the steering wheel operation assist is operating, and if the condition continues several times within a certain period of time, the warning sound is activated. The higher the number of times the steering wheel operation assist operates, the longer the period of time the warning sound is activated.*
- *The timing at which the lane departure warning is activated and the steering wheel operation assist is performed varies.*
- *The following settings for the LAS & LDWS can be changed. Refer to the Settings section in the Mazda Connect Owner's Manual.*
  - *Steering operation assist operational/non-operational*
  - ***(Mazda Connect (Type A) only)***
    - *Cancel sensitivity (likelihood of steering assist)*


## **Vehicle lane line display**

When the LAS & LDWS goes on standby, the vehicle lane lines are indicated on the multi-information display and the active driving display. When white (yellow) lines on both the left and right sides are detected and the system becomes operational, the vehicle lane lines indicated on the multi-information display and the active driving display change to white.


(Stand-by status)

**Multi-information display (Basic display)**


Instrument Cluster (Type A)



Instrument Cluster (Type B)



**Multi-information display (i-ACTIVSENSE display)**



**Active driving display\***




# i-ACTIVSENSE

---


## (Operational status)

### Multi-information display (Basic display)


Instrument Cluster (Type A)



Instrument Cluster (Type B)



### Multi-information display (i-ACTIVSENSE display)



### Active driving display\*



### NOTE

When only one side of the white (yellow) lines is detected, only the detected vehicle lane line indicated on the multi-information display and the active driving display changes to white.

### Auto cancel

In the following cases, the LAS & LDWS is automatically cancelled, the LAS & LDWS warning indication (amber) turns on, and an alert is displayed. When the LAS & LDWS become operational, the system turns back on automatically.

- The temperature inside the camera is high or low.
- The windscreen around the camera is foggy.
- The windscreen around the camera is blocked by an obstruction, causing poor forward visibility.

### **Auto cancel of warning/steering assist**

When the following operations are performed, the LAS & LDWS operation is cancelled automatically. The LAS & LDWS resumes automatically after the operation.

- The steering wheel is operated abruptly.
- The brake pedal is operated.
- The accelerator pedal is operated.

#### **(Mazda Connect (Type A) only)**

(To cancel the automatic sensitivity cancel function, deselect “Cancel sensitivity” in the personalisation features setting.)

- The direction indicator lever is operated.
- The vehicle crosses a lane line.

### **NOTE**

- *After the operation, the LAS & LDWS operation may not operate for a period of 5 seconds at the most until the lane lines are detected.*
- *Under the following conditions, the LAS & LDWS cancels the warning/steering assist automatically.*
  - *The TCS OFF switch is pressed to cancel the TCS.*
  - *The Off-Road Traction Assist switch is pressed to turn on the Off-Road Traction Assist.*
  - *When Off-road mode is selected using Mazda intelligent Drive Select (Mi-Drive).*

### **Steering wheel operation assist OFF (non-operational)**

The steering wheel operation assist for the LAS & LDWS can be turned off. However, when driving the vehicle while the CTS function is in use, the steering wheel operation assist turns on automatically.

When the steering wheel operation assist has been turned off, only the lane departure warning is operational.

Refer to the Settings section in the Mazda Connect Owner's Manual.

### **System operation**

Drive the vehicle in the centre of the driving lane while the LAS & LDWS OFF indicator light in the instrument cluster is turned off.

The system becomes operational when all of the following conditions are met.

- The engine is running.

## i-ACTIVSENSE

---

- The vehicle speed is about 60 km/h (37 mph) or faster.
- The system detects white (yellow) lane lines on both the right and left sides or on either side.
- The vehicle is driven on a straight road or road with gentle curves.
- The steering assist function of the CTS is not operating.

The LAS & LDWS goes on stand-by status in the following cases:

- The vehicle speed is less than about 60 km/h (37 mph).
- The system cannot detect white (yellow) lane lines.
- The vehicle is making a sharp curve.
- The vehicle is making a curve at an inappropriate speed.
- The steering assist function of the CTS operated.


### NOTE

- *The LAS & LDWS remains on stand-by until it detects white (yellow) lines on both the left and right sides, or on either side.*
- *When the system detects a white (yellow) lane line on one side only, the system will not activate warnings for the lane line on the side that is not being detected.*
- **(Mazda Connect (Type A) only)**  
*The distance and warning sensitivity (likelihood of a warning) which the system uses to determine the possibility of a lane departure can be changed.*  
*Refer to the Settings section in the Mazda Connect Owner's Manual.*


### Vehicle lane line display

When the LAS & LDWS becomes operational while on standby, the vehicle lane lines are displayed in the multi-information display. The system changes to operational status display when the system detects a white (yellow) line on either the left or right.

**(Stand-by status)**



**(Operational status)**



**NOTE**

*When only one side of the white (yellow) lines is detected, only the detected vehicle lane line indicated on the multi-information display changes to white.*

**Auto cancel**

In the following cases, the LAS & LDWS is automatically cancelled, the LAS & LDWS warning indication (amber) turns on, and an alert is displayed. When the LAS & LDWS become operational, the system turns back on automatically.

- The temperature inside the camera is high or low.
- The windscreen around the camera is foggy.
- The windscreen around the camera is blocked by an obstruction, causing poor forward visibility.

**Auto cancel of warnings**

When the following operations are performed, the LAS & LDWS determines that the driver intends to make a lane change and the system operation is cancelled automatically. The LAS & LDWS resumes automatically after the operation.

- The steering wheel is operated abruptly.
- The brake pedal is depressed.
- The accelerator pedal is depressed.

**(Mazda Connect (Type A) only)**

(To cancel the automatic sensitivity cancel function, deselect “Warning sensitivity” in the personalisation features setting.)

- The direction indicator lever is operated.
- The vehicle crosses a lane line.

# i-ACTIVSENSE


## ▼ Steering Wheel Operation Assist

When the system determines that the vehicle might be deviating from its lane, the steering wheel operation assist operates.


The system notifies the driver that it provided steering wheel operation assistance on the multi-information display and the active driving display.

### Multi-information display (Basic display)


Instrument Cluster (Type A)




Instrument Cluster (Type B)



### Multi-information display (i-ACTIVSENSE display)



## Active driving display

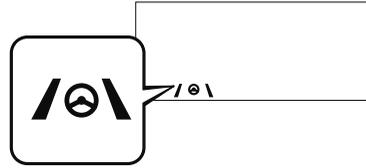

### NOTE

- When the driver operates the steering wheel while the steering wheel operation assist is operating, the steering wheel operation assistance is cancelled.


## ▼ Lane Departure Warning

If the system determines that the vehicle may deviate from its lane, the lane departure warning is activated and the direction in which the system determines that the vehicle may deviate is indicated in the multi-information display and the active driving display.


For vehicles equipped with the multi-information display, the direction which the system determined that the vehicle may be deviating from its lane is indicated in the multi-information display.

For vehicles equipped with the active driving display, the colour of the lane line in the direction which the system determined that the vehicle may be deviating from its lane changes from white to amber and the vehicle lane line flashes.

**Multi-information Display**



**Active Driving Display**

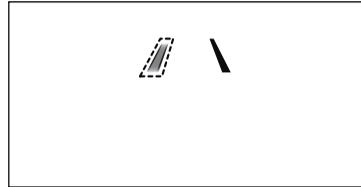


### NOTE

- If you have set the lane departure warning sound to the beep sound/rumble sound (Mazda Connect (Type A) only)\*1 setting, the warning sound may not be heard depending on the surrounding noise conditions.
- If you have set the lane departure warning system to the steering wheel vibrations setting, the vibration may not be felt depending on the road surface conditions.
- When the setting for the steering operation assist is changed to operational, the warnings can be set to activate/not activate. (If the setting for the steering operation assist is changed to non-operational, the warnings cannot be set to non-operational.) Refer to the Settings section in the Mazda Connect Owner's Manual.
- The LAS & LDWS can be changed to the following settings regardless of whether the steering operation assist has been set to operational/non-operational. Always check the setting status when driving the vehicle and make setting changes if necessary. Refer to the Settings section in the Mazda Connect Owner's Manual.
  - Steering wheel vibration: Strong/weak
  - Warning sound volume
  - Types of warnings (steering wheel vibration/beep sound/rumble sound (Mazda Connect (Type A) only)\*1)

# i-ACTIVSENSE


---

\*1 A rumble strip is a series of grooves in the road pavement surface positioned at specific intervals, and when the vehicle passes over it a vibration and rumble sound is produced which alerts the driver that the vehicle is departing from the lane. The rumble sound is a reproduction of the sound which occurs when a vehicle passes over a rumble strip.

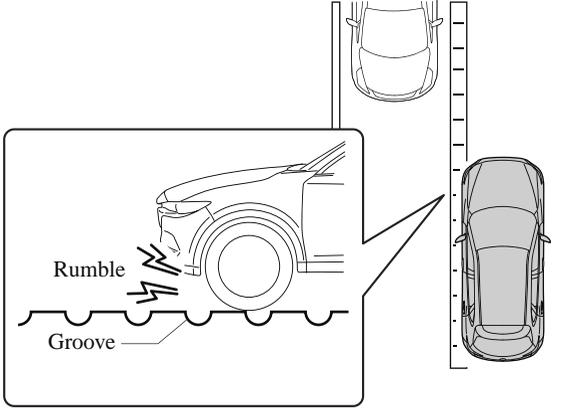

### ▼ System Cancellation

When the LAS & LDWS is turned off, press the LAS & LDWS OFF switch.

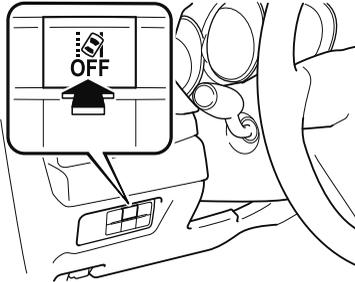

The LAS & LDWS OFF indicator light turns on.



### NOTE

- When driving the vehicle while the CTS function is in use, the LAS & LDWS turns on automatically.
- In the following cases, the LAS & LDWS is cancelled automatically and the LAS & LDWS OFF indicator light turns on. Have your vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).
  - There is a malfunction in the power steering.
  - There is a malfunction in the TCS.
  - There is a malfunction in the Forward Sensing Camera (FSC).

- When the ignition is switched OFF, the system status before it was turned off is maintained. For example, if the ignition is switched OFF with the lane-keep system operable, the system will be operable when the ignition is switched ON the next time.

When the LAS & LDWS is turned off, the vehicle lane line indication in the multi-information display and the active driving display turn off.

## **Adjustable Speed Limiter (ASL)\***

The ASL is a function to prevent the vehicle from being driven at a vehicle speed faster than a set speed. The vehicle speed is controlled to kept it below the set speed even if the accelerator pedal is depressed.


The ASL can be set between 30 km/h (20 mph) and 200 km/h (125 mph). The vehicle speed may exceed the set speed when the vehicle is driven on a down slope, however, the system notifies the driver by flashing the display and operating a warning sound.

### **WARNING**



***Always turn off the system when changing drivers:***

*If the driver is changed and the new driver is unaware of the ASL function, the vehicle may not accelerate when the driver depresses the accelerator pedal, leading to an accident.*

The system consists of the ASL display and the speed limiter switch on the steering wheel.

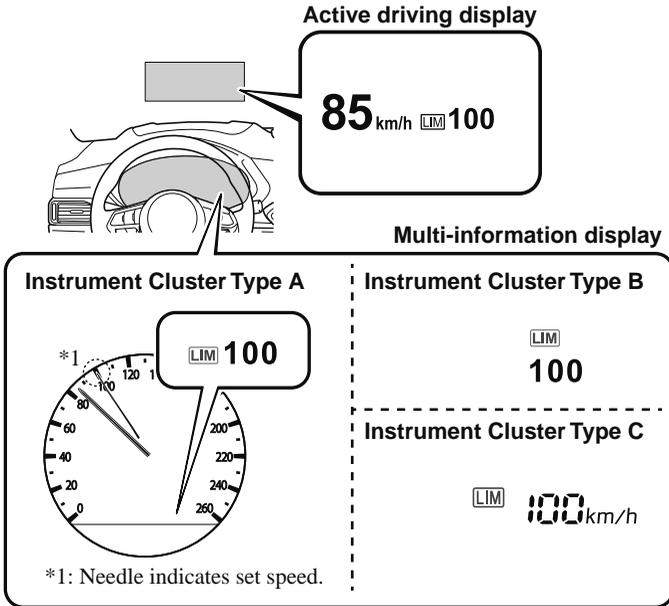

**Steering wheel**

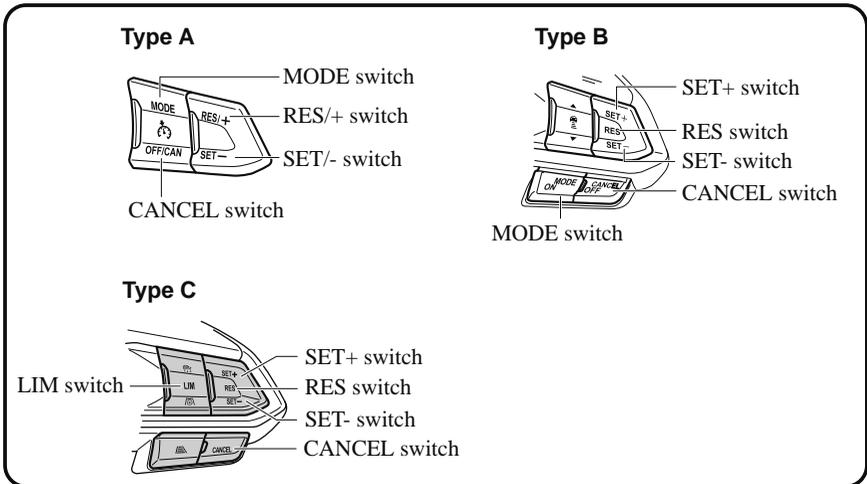

# i-ACTIVSENSE

---

## ▼ Adjustable Speed Limiter (ASL) Main Indication (White)/Adjustable Speed Limiter (ASL) Set Indication (Green)



The indication has 2 colours.

### ASL main indication (white)

#### **Steering wheel (Type A/Type B)**

The indication is display in white when the MODE switch is pressed and the ASL is activated.

#### **Steering wheel (Type C)**

The indication is display in white when the LIM switch is pressed and the ASL is activated.

### ASL set indication (green)

The indication is display in green when a speed has been set.

## ▼ Adjustable Speed Limiter (ASL) Display

The setting status of the ASL is displayed in the active driving display (vehicles with active driving display) or the display in the instrument cluster.

### Stand-by display

Displays when the speed limiter switch is operated and the system is turned on.  
Turns off when the system is turned off.

### Active Driving Display

85 km/h LIM ---

Instrument Cluster  
Type A

LIM ---

Instrument Cluster  
Type B

LIM

---

Instrument Cluster  
Type C

LIM --- km/h

**Setting display**

**Steering wheel (Type A)**

Displays when the SET/- switch is operated and the speed is set.


**Steering wheel (Type B/Type C)**

Displays when the SET- or SET+ switch is operated and the speed is set.

**Active Driving Display**

**85** km/h **LIM** **100**

**Instrument Cluster  
Type A**

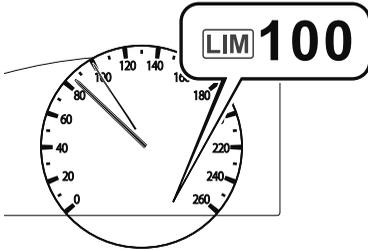

**Instrument Cluster  
Type B**

**LIM**  
**100**

**Instrument Cluster  
Type C**

**LIM** **100** km/h

# i-ACTIVSENSE

---

## Cancel display


Displays when any of the following operations is done and the system is temporarily cancelled.

- CANCEL switch is operated
- Accelerator pedal is strongly depressed

### Active Driving Display

**85** km/h **LIM** **100**

Instrument Cluster  
Type A



Instrument Cluster  
Type B



Instrument Cluster  
Type C



## ▼ Speed Limiter Warning Beep

### Indicated in instrument cluster

If the vehicle speed exceeds the set speed by about 5 km/h (3 mph) or more, a warning sound operates continuously and the ASL display flashes at the same time. The warning sound operates and the display flashes until the vehicle speed decreases to the set speed or less.

### Indicated in active driving display


If the vehicle speed exceeds the set speed by about 5 km/h (3 mph) or faster, the background of the ASL set speed indication turns amber and flashes 3 times. In addition, a warning sound is activated at the same time. The indication stops flashing and remains on if the vehicle speed continues to exceed the set speed by about 5 km/h (3 mph) or faster, and the indication and warning sound remain on until the vehicle is driven at the set speed or slower.

Verify the safety of the surrounding area and adjust the vehicle speed by applying the brakes. Additionally, keep a safer distance from the vehicles behind you.

### Active Driving Display

**85** km/h **LIM** **80**

Instrument Cluster  
Type A

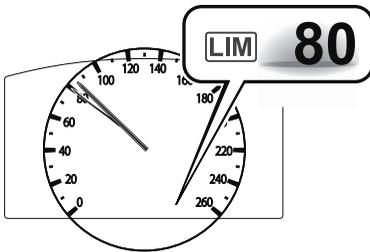

Instrument Cluster  
Type B



Instrument Cluster  
Type C



#### **Steering wheel (Type A)**

If the set speed is set lower than the current vehicle speed by pressing the SET/- or RES/+ switch, the warning beep is not activated for about 30 seconds even if the vehicle speed is faster than the newly set speed by 5 km/h (3 mph). Be careful not to drive over the set speed.

#### **Steering wheel (Type B/Type C)**

If the set speed is set lower than the current vehicle speed by pressing the SET- or RES switch, the warning beep is not activated for about 30 seconds even if the vehicle speed is faster than the newly set speed by 5 km/h (3 mph). Be careful not to drive over the set speed.

#### **NOTE**

When the system is temporarily cancelled by depressing the accelerator pedal fully, the ASL display shows the cancel display. Even if the vehicle speed exceeds the set speed by about 5 km/h (3 mph) or more while the cancel display is displayed, the warning sound is not operated.

**▼ Activation/Deactivation****NOTE**

When the ignition is switched off, the system status before it was turned off is maintained.

For example, if the ignition is switched off while the ASL is operating, the system will be operable when the ignition is switched ON the next time.

**Activation****Steering wheel (Type A/Type B)**

Press the MODE switch to operate the system. The ASL screen is displayed, and the ASL main indication displays in white.

**Steering wheel (Type C)**

Press the LIM switch to operate the system. The ASL screen is displayed, and the ASL main indication displays in white.

**NOTE****Steering wheel (Type A/Type B)**

When the cruise control, Mazda Radar Cruise Control (MRCC), or Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) system becomes operable after pressing the MODE switch, press the MODE switch again to switch to the ASL.

**Deactivation**

To deactivate the system, do the following operations:

**When a cruising speed has been set (ASL set indication displays in green)**

Long-press the CANCEL switch or press the CANCEL switch 2 times. The ASL screen is no longer displayed and the ASL set indication (green) does not display.

**When a cruising speed has not been set (ASL main indication displays in white)**

Press the CANCEL switch. The ASL screen is no longer displayed and the ASL main indication (white) does not display.

**NOTE****Steering wheel (Type A/Type B)**

When the MODE switch is pressed while the ASL is operating, the system switches to the cruise control, Mazda Radar Cruise Control (MRCC), or Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) system.

**▼ Setting the System****Always verify the safety of the surrounding area when setting the ASL:**

If the speed is set lower than the current vehicle speed, the vehicle speed is decreased to the set speed. Verify the safety of the surrounding area and keep a safer distance between vehicles ahead and behind you.

**1. (Steering wheel (Type A/Type B))**

Press the MODE switch to turn the system on.

**(Steering wheel (Type C))**

Press the LIM switch to turn the system on.

**2. (Steering wheel (Type A))**

Press the SET/- to set the speed. When the current vehicle speed is 30 km/h (20 mph) or more, the speed is set to the current vehicle speed. When the current vehicle speed is less than 30 km/h (20 mph), the speed is set to 30 km/h (20 mph).

**(Steering wheel (Type B/Type C))**

Press the SET+ or SET- to set the speed. When the current vehicle speed is 30 km/h (20 mph) or more, the speed is set to the current vehicle speed. When the current vehicle speed is less than 30 km/h (20 mph), the speed is set to 30 km/h (20 mph).

**3. (Steering wheel (Type A))**

To increase the set speed, press the RES/+ switch continuously. The set speed can be adjusted in 10 km/h (5 mph) increments. The set speed can also be adjusted in about 1 km/h (1 mph) increments by momentarily pressing the RES/+ switch. For example, the set speed increases about 4 km/h (4 mph) by pressing the RES/+ switch 4 times.

**(Steering wheel (Type B/Type C))**

To increase the set speed, press the SET+ switch continuously. The set speed can be adjusted in 10 km/h (5 mph) increments. The set speed can also be adjusted in about 1 km/h (1 mph) increments by momentarily pressing the SET+ switch. For example, the set speed increases about 4 km/h (4 mph) by pressing the SET+ switch 4 times.

**4. (Steering wheel (Type A))**

To decrease the set speed, press the SET/- switch continuously. The set speed can be adjusted in 10 km/h (5 mph) increments. The set speed can also be adjusted in about 1 km/h (1 mph) increments by momentarily pressing the SET/- switch. For example, the set speed decreases about 4 km/h (4 mph) by pressing the SET/- switch 4 times.

**(Steering wheel (Type B/Type C))**

To decrease the set speed, press the SET- switch continuously. The set speed can be adjusted in 10 km/h (5 mph) increments. The set speed can also be adjusted in about 1 km/h (1 mph) increments by momentarily pressing the SET- switch. For example, the set speed decreases about 4 km/h (4 mph) by pressing the SET- switch 4 times.

**NOTE****· (Steering wheel (Type A))**

*When the vehicle set speed is displayed in the instrument cluster, press the RES/+ switch to set the displayed vehicle speed.*

**(Steering wheel (Type B/Type C))**

*When the vehicle set speed is displayed in the instrument cluster, press the RES switch to set the displayed vehicle speed.*

- The system is temporarily cancelled when the vehicle is accelerated by depressing the accelerator pedal strongly, however, it resumes when the vehicle speed decreases to the set speed or less.*
- The vehicle speed may exceed the set speed on a down slope.*

## ▼ Temporarily Cancelling the System

The system is temporarily cancelled (stand-by status) when any of the following operations is done while the ASL is displayed.

- CANCEL switch is pressed
- Accelerator pedal is strongly depressed

### **Steering wheel (Type A)**

Press the RES/+ switch to resume the operation at the previous set speed. The ASL display remains displayed.

### **Steering wheel (Type B/Type C)**

Press the RES switch to resume the operation at the previous set speed. The ASL display remains displayed.

### **NOTE**

#### *· (Steering wheel (Type A))*

*The set speed can be set by pressing the SET/- switch while the system is in stand-by status.*


#### *(Steering wheel (Type B/Type C))*

*The set speed can be set by pressing the SET+ or SET- switch while the system is in stand-by status.*

- The ASL is not cancelled by depressing the brake pedal.*

## Advanced Smart City Brake Support (Advanced SCBS)\*

The Advanced SCBS alerts the driver of a possible collision using the display and a warning sound when the Forward Sensing Camera (FSC) detects a vehicle ahead or pedestrian and determines that a collision with the object is unavoidable while the vehicle is driven at a vehicle speed of about 4 to 80 km/h (2 to 50 mph) if the object is a vehicle ahead and about 10 to 80 km/h (6.2 to 50 mph) if the object is a pedestrian. In addition, the system reduces damage in the event of a collision by operating the brake control (Advanced SCBS brake) when the system determines that a collision is unavoidable. In addition, when the driver depresses the brake pedal, the brakes are applied firmly and quickly to assist. (Brake Assist (Advanced SCBS brake assist))

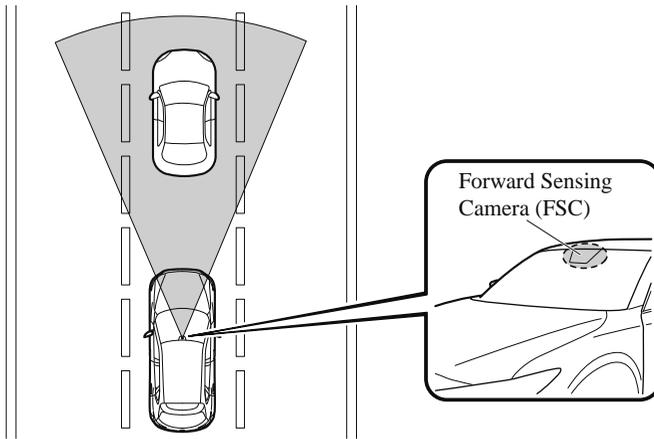

### **WARNING**

#### **Do not rely completely on the Advanced SCBS system:**

- *The Advanced SCBS system is only designed to reduce damage in the event of a collision. Over reliance on the system leading to the accelerator pedal or brake pedal being mistakenly operated could result in an accident.*
- *The Advanced SCBS system operates in response to a vehicle ahead or a pedestrian. The system does not operate in response to obstructions such as a wall, 2-wheeled vehicles, or animals.*



In the following cases, turn the system off to prevent a mis-operation:

- The vehicle is being towed or when towing another vehicle.
- The vehicle is on a chassis roller.
- When driving on rough roads such as in areas of dense grass or off-road.

Refer to Stopping the Advanced Smart City Brake Support (Advanced SCBS) System Operation on page 4-237 on how to turn off the Advanced SCBS system.

## NOTE


- The Advanced SCBS system will operate under the following conditions.
  - The engine is running.
  - The Smart City Brake Support (SCBS) warning light/warning indication (amber) does not illuminate.
  - **(Object is vehicle ahead)**  
The vehicle speed is between about 4 to 80 km/h (2 to 50 mph).
  - **(Object is a pedestrian)**  
The vehicle speed is between about 10 to 80 km/h (6.2 to 50 mph).
  - The Advanced SCBS system is not turned off.
- Under the following conditions, the Advanced SCBS system may not operate normally:
  - The Advanced SCBS system will not operate if the driver is deliberately performing driving operations (accelerator pedal and steering wheel).
  - If there is the possibility of partial contact with a vehicle ahead.
  - The vehicle is driven on a slippery road surface such as wet roads or icy or snow-bound roads.
  - The braking performance is adversely affected due to cold temperatures or wet brakes.
  - The vehicle is driven at the same speed as the vehicle ahead.
  - The accelerator pedal is depressed.
  - The brake pedal is depressed.
  - The steering wheel is being operated.
  - The selector lever is being operated.
- In the following cases, the Advanced SCBS may operate.
  - Objects on the road at the entrance to a curve.
  - Vehicles passing in the opposite lane while making a curve.
  - When passing through a toll gate.
  - When passing through low gates, narrow gates, car washing machines, or tunnels.
  - If you suddenly come close to a vehicle ahead.
  - 2-wheeled vehicles, animals, or standing trees.

· *(Manual transaxle)*

If the vehicle is stopped by the SCBS operation and the clutch pedal is not depressed, the engine stops.

▼ **Smart City Brake Support (SCBS)  
Indicator Light (Red)\***

If the Advanced SCBS is operating, the indicator light (red) flashes.



▼ **Collision Warning\***

If there is the possibility of a collision with a vehicle ahead, the beep sounds continuously and a warning is indicated in the multi-information display or the active driving display.

**BRAKE!**

**NOTE**

The operation distance and volume of the collision warning can be changed. Refer to the Settings section in the Mazda Connect Owner's Manual.

▼ **Automatic Brake Operation  
Display\***

The automatic brake operation display is indicated on the multi-information display after the Advanced SCBS is operated.



**SCBS  
Automatic Brake**

**NOTE**

- The collision warning beep sounds intermittently while the Advanced SCBS brake or brake assist (Advanced SCBS brake assist) is operating.
- If the vehicle is stopped by the Advanced SCBS operation and the brake pedal is not depressed, the warning beep sounds 1 time after about 2 seconds and the Advanced SCBS brake is automatically released.

▼ **Stopping the Advanced Smart City  
Brake Support (Advanced SCBS)  
System Operation**

The Advanced SCBS system can be temporarily deactivated. When the Advanced SCBS system is turned off, the Smart City Brake Support (SCBS) OFF indicator light turns on.



When the engine is restarted, the system becomes operational.

## **Without SCBS OFF switch**


Refer to the Settings section in the Mazda Connect Owner's Manual.

### **NOTE**

*When the Advanced SCBS system is set to inoperable, the Smart City Brake Support [Reverse] (SCBS R) system and the Smart Brake Support (SBS) are also set to inoperable.*

## **With SCBS OFF switch**


Press the SCBS OFF switch to turn off the system. The Smart City Brake Support (SCBS) OFF indicator light in the instrument cluster will illuminate.

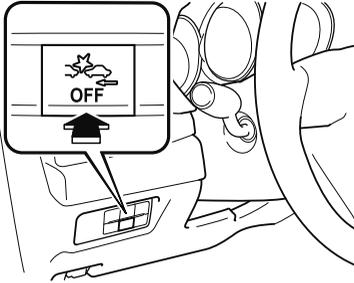

Press the switch again to turn the system back on. The Smart City Brake Support (SCBS) OFF indicator light will turn off.

## Smart City Brake Support [Forward] (SCBS F)\*

The SCBS F system alerts the driver of a possible collision using an indication in the display and a warning sound when the Forward Sensing Camera (FSC) detects a vehicle ahead and determines that a collision with a vehicle ahead is unavoidable while the vehicle is being driven at a vehicle speed of about 4 to 80 km/h (2 to 50 mph). In addition, the system reduces damage in the event of a collision by operating the brake control (Smart City Brake Support (SCBS) brake) when the system determines that a collision is unavoidable while the vehicle is being driven at a vehicle speed of about 4 to 30 km/h (2 to 18 mph). It may also be possible to avoid a collision if the relative speed between your vehicle and the vehicle in front of you is less than about 20 km/h (12 mph). In addition, when the driver depresses the brake pedal while the system is in the operation range at about 4 to 30 km/h (2 to 18 mph), the brakes are applied firmly and quickly to assist. (Brake Assist (Smart City Brake Support (SCBS) brake assist))

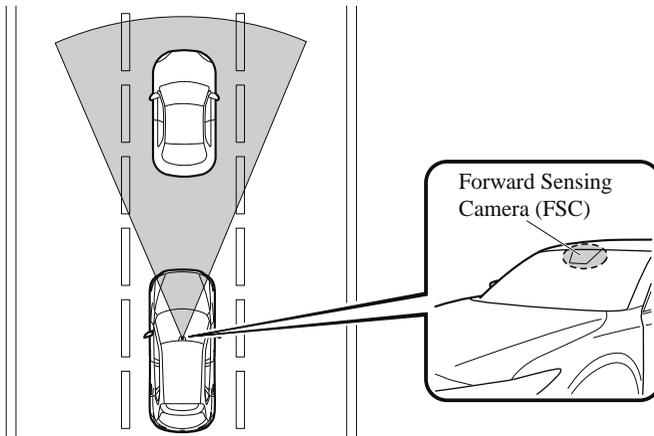

### **⚠ WARNING**

#### **Do not rely completely on the SCBS F system:**

- *The SCBS F system is only designed to reduce damage in the event of a collision. Over reliance on the system leading to the accelerator pedal or brake pedal being mistakenly operated could result in an accident.*
- *The SCBS F is a system which operates in response to a vehicle ahead. The system may not be able to detect or react to 2-wheeled vehicles or pedestrians.*



In the following cases, turn the system off to prevent a mis-operation:

- The vehicle is being towed or when towing another vehicle.
- The vehicle is on a chassis roller.
- When driving on rough roads such as in areas of dense grass or off-road.

Refer to Stopping the Smart City Brake Support [Forward] (SCBS F) system Operation on page 4-242 on how to turn off the SCBS F system.

### NOTE


- The SCBS F system will operate under the following conditions.
  - The engine is running.
  - The Smart Brake Support/Smart City Brake Support (SBS/SCBS) system warning indication/warning light (amber) does not illuminate.
  - **(Rear-end collision warning)**  
The vehicle speed is about 4 to 80 km/h (2 to 50 mph).
  - **(Brake control (Smart City Brake Support (SCBS) brake))**  
The vehicle speed is about 4 to 30 km/h (2 to 18 mph).
  - The SCBS F system is not turned off.
- Under the following conditions, the SCBS F system may not operate normally:
  - The SCBS F system will not operate if the driver is deliberately performing driving operations (accelerator pedal and steering wheel).
  - If there is the possibility of partial contact with a vehicle ahead.
  - The vehicle is driven on a slippery road surface such as wet roads or icy or snow-bound roads.
  - The braking performance is adversely affected due to cold temperatures or wet brakes.
  - The vehicle is driven at the same speed as the vehicle ahead.
  - The accelerator pedal is depressed.
  - The brake pedal is depressed.
  - The steering wheel is being operated.
  - The selector lever is being operated.
- In the following cases, the Forward Sensing Camera (FSC) determines that there is a vehicle ahead and the SCBS F may operate.
  - Objects on the road at the entrance to a curve.
  - Vehicles passing in the opposite lane while making a curve.
  - Metal objects, bumps, or protruding objects on the road.
  - When passing through a toll gate.
  - When passing through low gates, narrow gates, car washing machines, or tunnels.

- If you suddenly come close to a vehicle ahead.
- 2-wheeled vehicles, pedestrians, animals or standing trees.
- Vehicle is driven with some of the tyres having significant wear.
- **(Manual transaxle)**

If the vehicle is stopped by the Smart City Brake Support (SCBS) operation and the clutch pedal is not depressed, the engine stops.

### ▼ Smart City Brake Support (SCBS) Indicator Light (Red)\*

If the Smart City Brake Support (SCBS) is operating, the indicator light (red) flashes.



### ▼ Collision Warning\*

If there is the possibility of a collision with a vehicle ahead, the beep sounds continuously and a warning is indicated in the multi-information display or the active driving display.

**BRAKE!**

#### **NOTE**

The operation distance and volume of the collision warning can be changed. Refer to the Settings section in the Mazda Connect Owner's Manual.

### ▼ Automatic Brake Operation Display\*

The automatic brake operation display is indicated on the multi-information display after the SCBS F is operated.



### SCBS Automatic Brake

#### **NOTE**

- The collision warning beep sounds intermittently while the SCBS F brake or brake assist (SCBS F brake assist) is operating.
- If the vehicle is stopped by the SCBS F operation and the brake pedal is not depressed, the warning beep sounds 1 time after about 2 seconds and the SCBS F brake is automatically released.

## ▼ Stopping the Smart City Brake Support [Forward] (SCBS F) System Operation

The SCBS F system can be temporarily deactivated.

When the SCBS F system is turned off, the Smart City Brake Support (SCBS) OFF indicator light turns on.



When the engine is restarted, the system becomes operational.

### Without SCBS OFF switch


Refer to the Settings section in the Mazda Connect Owner's Manual.

#### **NOTE**

*When the SCBS F system is set to inoperable, the Smart City Brake Support [Reverse] (SCBS R) system and the Smart Brake Support (SBS) are also set to inoperable.*

### With SCBS OFF switch


Press the SCBS OFF switch to turn off the system. The Smart City Brake Support (SCBS) OFF indicator light in the instrument cluster will illuminate.

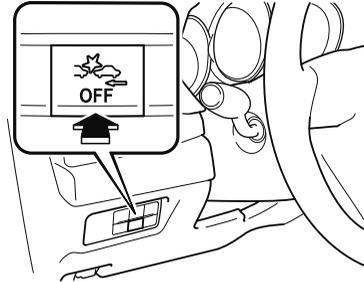

Press the switch again to turn the system back on. The Smart City Brake Support (SCBS) OFF indicator light will turn off.

## Smart City Brake Support [Reverse] (SCBS R)\*

The SCBS R is a system which is designed to reduce damage in the event of a collision by operating the brake control (SCBS brake) when the system's ultrasonic sensors detect an obstruction at the rear of the vehicle while driving at a speed of about 2 to 8 km/h (2 to 4 mph) and the system determines that a collision is unavoidable.

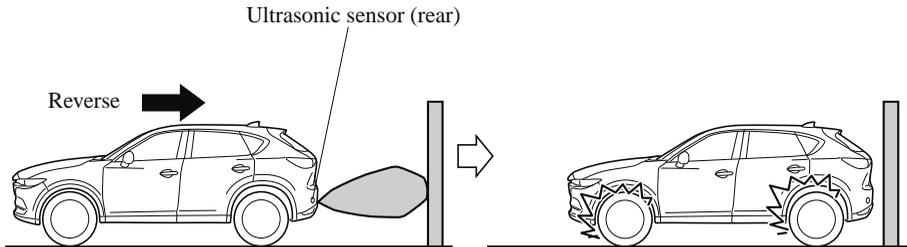

### **⚠ WARNING**

#### **Do not rely completely on the SCBS R system:**

- *The SCBS R system is only designed to reduce damage in the event of a collision. Over reliance on the system leading to the accelerator pedal or brake pedal being mistakenly operated could result in an accident.*
- *To assure the correct operation of the SCBS R, heed the following cautions.*
  - *Do not apply a sticker to an ultrasonic sensor (rear) (including transparent stickers). Otherwise, the ultrasonic sensor (rear) may not be able to detect vehicles or obstructions which could result in an accident.*
  - *Do not disassemble an ultrasonic sensor (rear).*
  - *If cracks or damage caused by flying gravel or debris is visible around an ultrasonic sensor (rear), stop using the SCBS R system immediately and have your vehicle inspected by an expert repairer (we recommend an Authorised Mazda Repairer). If the vehicle continues to be driven with cracks or scratch marks left around an ultrasonic sensor, the system may operate unnecessarily and cause an unexpected accident. Refer to Stopping the Smart City Brake Support [Reverse] (SCBS R) System Operation on page 4-246.*
  - *Consult an expert repairer (we recommend an Authorised Mazda Repairer) for rear bumper replacement.*

#### **Do not modify the suspension:**

*If the vehicle height or inclination is changed, the SCBS R system may not operate correctly because it cannot detect obstructions correctly.*

**Do not apply a strong force to an ultrasonic sensor (rear):**

When washing the vehicle, do not spray highly pressurised water against an ultrasonic sensor (rear), or rub it strongly. In addition, do not hit the rear bumper forcefully when loading and unloading cargo. Otherwise, the sensors may not detect obstructions correctly which could cause the SCBS R system to not operate normally, or it could operate unnecessarily.



- When driving off-road in areas where there is grass or foliage, it is recommended that the SCBS R system be turned off.
- Always use tyres of the specified size and the same manufacturer, brand, and tread pattern on all 4 wheels. In addition, do not use tyres with significantly different wear patterns on the same vehicle. Otherwise, the SCBS R system may not operate normally.
- If ice or snow is stuck on the ultrasonic sensors (rear) they may not be able to detect obstructions correctly depending on the conditions. In such cases, the system may not be able to perform controls correctly. Always drive carefully and pay attention to the rear of the vehicle.

**NOTE**

- The vehicle posture changes depending on the accelerator pedal, brake pedal and steering wheel operations, which could make it difficult for the system to recognise an obstruction, or it could facilitate unnecessary detection. In such cases, the SCBS R may or may not operate.
- The SCBS R system will operate under the following conditions.
  - The engine is running.
  - The change lever (manual transaxle vehicle) or the selector lever (automatic transaxle vehicle) is in the R (reverse) position.
  - “Reverse Smart City Brake Support Malfunction” is not displayed in the multi-information display.
  - The vehicle speed is between about 2 to 8 km/h (2 to 4 mph).
  - The SCBS R is not turned off.
  - The DSC is not malfunctioning.
- The SCBS R operates using ultrasonic sensors (rear) which detect obstructions at the rear by emitting ultrasonic waves and then receiving the returning waves reflected off the obstructions.
- In the following cases, the ultrasonic sensors (rear) cannot detect obstructions and the SCBS R may not operate.
  - The height of the obstruction is low such as low walls or trucks with low loading platforms.

- *The height of the obstruction is high such as trucks with high loading platforms.*
- *The obstruction is small.*
- *The obstruction is thin such as a signpost.*
- *The obstruction is positioned away from the centre of the vehicle.*
- *The surface of the obstruction is not pointed vertically relative to the vehicle.*
- *The obstruction is soft such as a hanging curtain or snow stuck to a vehicle.*
- *The obstruction is shaped irregularly.*
- *The obstruction is extremely close.*
- *In the following cases, the ultrasonic sensors (rear) cannot detect obstructions correctly and the SCBS R may not operate.*
  - *Something is stuck on the bumper near an ultrasonic sensor (rear).*
  - *The steering wheel is turned sharply, or the brake or accelerator pedal is operated.*
  - *There is another obstruction near one obstruction.*
  - *During inclement weather such as rain, fog and snow.*
  - *High or low humidity.*
  - *High or low temperatures*
  - *Strong winds.*
  - *The path of travel is not flat.*
  - *Heavy luggage is loaded in the luggage compartment or on the rear seat.*
  - *Objects such as a wireless aerial, fog light, or illuminated number plate is installed near an ultrasonic sensor (rear).*
  - *The orientation of an ultrasonic sensor (rear) has deviated for reasons such as a collision.*
  - *The vehicle is affected by other sound waves such as the horn, engine noise, ultrasonic sensor of another vehicle.*
- *In the following cases, an ultrasonic sensor (rear) may detect something as a target obstruction which could cause the SCBS R system to operate.*
  - *Driving on a steep slope.*
  - *Wheel blocks.*
  - *Hanging curtains, gate poles such as at toll gates and railroad crossing.*
  - *When travelling near objects such as foliage, barriers, vehicles, walls, and fences along a road.*
  - *When driving off-road in areas where there is grass and forage.*
  - *When passing through low gates, narrow gates, car washing machines, and tunnels.*
  - *A towing bar is installed or a trailer is connected.*
- **(Manual transaxle)**  
*If the vehicle is stopped by the Smart City Brake Support (SCBS) operation and the clutch pedal is not depressed, the engine stops.*
  - *When the system operates, the user is notified by the multi-information display.*

- The Smart City Brake Support (SCBS) warning indication (amber) turns on when the system has a malfunction.

Refer to Taking Action on page 7-55.

## ▼ Automatic Brake Operation Display

“SCBS Automatic Brake” is indicated in the multi-information display after the Smart City Brake Support (SCBS) brakes is operated.



### SCBS Automatic Brake

#### NOTE

- The collision warning beep sounds intermittently while the Smart City Brake Support (SCBS) brake is operating.
- If the vehicle is stopped by the Smart City Brake Support (SCBS) operation and the brake pedal is not depressed, the warning beep sounds one time after about 2 seconds and the Smart City Brake Support (SCBS) brake is automatically released.

## ▼ Stopping the Smart City Brake Support [Reverse] (SCBS R) System Operation

The SCBS R system can be temporarily deactivated.

Refer to the Settings section in the Mazda Connect Owner's Manual.

When the SCBS R system is turned off, the Smart City Brake Support (SCBS) OFF indicator light turns on.



When the engine is restarted, the system becomes operational.

#### NOTE

When the SCBS R system is set to inoperable, Advanced Smart City Brake Support (Advanced SCBS) and the Smart Brake Support (SBS) are also set to inoperable.

## Smart Brake Support (SBS)\*

The SBS system alerts the driver of a possible collision using a display and warning sound if the radar sensor (front) and the Forward Sensing Camera (FSC) determine that there is the possibility of a collision with a vehicle ahead while the vehicle is being driven at about 15 km/h or faster (10 mph or faster). Furthermore, if the radar sensor (front) and the Forward Sensing Camera (FSC) determines that a collision is unavoidable, the automatic brake control is performed to reduce damage in the event of a collision.

In addition, when the driver depresses the brake pedal, the brakes are applied firmly and quickly to assist. (Brake Assist (SBS brake assist))

### **WARNING**

#### **Do not rely completely on the SBS system and always drive carefully:**

*The SBS is designed to reduce damage in the event of a collision, not avoid an accident. The ability to detect an obstruction is limited depending on the obstruction, weather conditions, or traffic conditions. Therefore, if the accelerator pedal or brake pedal is mistakenly operated it could result in an accident. Always verify the safety of the surrounding area and depress the brake pedal or accelerator pedal while keeping a safer distance from vehicles ahead or on-coming vehicles.*

### **CAUTION**

*In the following cases, turn the system off to prevent a mis-operation:*

- *The vehicle is being towed or when towing another vehicle.*
- *The vehicle is on a chassis roller.*
- *When driving on rough roads such as in areas of dense grass or off-road.*

### **NOTE**

- *The SBS system operates when all of the following conditions are met:*
  - *The ignition is switched ON.*
  - *The SBS system is on.*
  - *The vehicle speed is about 15 km/h or faster (10 mph or faster).*
  - *The relative speed between your vehicle and the vehicle ahead is about 15 km/h or faster (10 mph or faster).*
  - *The Dynamic Stability Control (DSC) is not operating.*
- *The SBS system may not operate under the following conditions:*
  - *If the vehicle is accelerated rapidly and it comes close to a vehicle ahead.*
  - *The vehicle is driven at the same speed as the vehicle ahead.*
  - *The accelerator pedal is depressed.*
  - *The brake pedal is depressed.*
  - *The steering wheel is being operated.*
  - *The selector lever is being operated.*
  - *The direction indicator is being used.*
  - *When the vehicle ahead is not equipped with tail lights or the tail lights are turned off.*

## i-ACTIVSENSE

---

- When warnings and messages, such as a dirty windscreen, related to the Forward Sensing Camera (FSC) are being displayed in the multi-information display.
- Although the objects which activate the system are four-wheeled vehicles, the radar sensor (front) could detect the following objects, determine them to be an obstruction, and operate the SBS system.
  - Objects on the road at the entrance to a curve (including guardrails and snow banks).
  - A vehicle appears in the opposite lane while cornering or rounding a curve.
  - When crossing a narrow bridge.
  - When passing under a low gate or through a tunnel or narrow gate.
  - When entering an underground parking area.
  - Metal objects, bumps, or protruding objects on the road.
  - If you suddenly come close to a vehicle ahead.
  - When driving in areas where there is high grass or forage.
  - Two-wheeled vehicles such as motorbikes or bicycles.
  - Pedestrians or non-metallic objects such as standing trees.
- When the system operates, the user is notified by the multi-information display.
- The SBS warning indication (amber) turns on when the system has a malfunction.  
Refer to Taking Action on page 7-55.

### ▼ Collision Warning

If there is the possibility of a collision with a vehicle ahead, the beep sounds continuously and a warning is indicated in the display.

## **BRAKE!**

### ▼ Stopping The Smart Brake Support (SBS) System Operation

The SBS system can be temporarily deactivated.

Refer to the Settings section in the Mazda Connect Owner's Manual.

When the SBS system is turned off, the SBS OFF indicator light turns on.



When the engine is restarted, the system becomes operational.

### **NOTE**

If the SBS system operation is turned off, the Smart City Brake Support (SCBS) system operation is turned off simultaneously.

## **360° View Monitor (Mazda Connect (Type A))\***

The 360° View Monitor consists of the following functions which assist the driver in checking the area surrounding the vehicle using various indications in the centre display and a warning sound while the vehicle is being driven at low speeds or while parking.

- **Top view**

The top view displays an image of the vehicle from directly above on the centre display by combining the images taken from the 4 cameras set on all sides of the vehicle. The top view displays on the right side (left-hand drive)/left side (right-hand drive) of the screen when the front view or rear view screen is being displayed. The top view assists the driver in checking the area surrounding the vehicle when the vehicle is moving forward or in reverse.

- **Front view/front wide view**

The image from the front of the vehicle is displayed on the centre display.

The view from the front assists the driver in checking the front of the vehicle by displaying guide lines on the displayed image taken from the front of the vehicle.

- **Side view**

The images taken from the front left and right sides of the vehicle are displayed on the centre display.

The side view assists the driver in checking the front sides of the vehicle by displaying guide lines on the displayed image taken from the front left and right sides of the vehicle.

- **Rear view/rear wide view**

The image from the rear of the vehicle is displayed on the centre display.

The image from the rear assists the driver in checking the rear of the vehicle by displaying guide lines on the displayed image taken from the rear of the vehicle.

- **Parking sensor**

If there are any obstructions near the vehicle while the top view/side view is displayed, an obstruction detection indication on the centre display turns on.

The parking sensors use ultrasonic sensors to detect obstructions around the vehicle when the vehicle is driven at low speeds, such as during garage or parallel parking, and notifies the driver of the approximate distance from the vehicle to the surrounding obstruction using sound and an obstruction detection indication.

Refer to Parking Sensor System on page 4-352.


- **Rear Cross Traffic Alert (RCTA)**

If there is the possibility of a collision with an approaching vehicle while the rear view/rear wide view is displayed, a warning is displayed on the centre display.

The Rear Cross Traffic Alert (RCTA) uses radar sensors (rear) to detect vehicles approaching from the rear left and right sides of the vehicle, and it assists the driver in checking the rear of the vehicle while reversing by flashing the Blind Spot Monitoring (BSM) warning lights and activating the warning sound.

Refer to Rear Cross Traffic Alert (RCTA) on page 4-160.

## 360°View Monitor Range

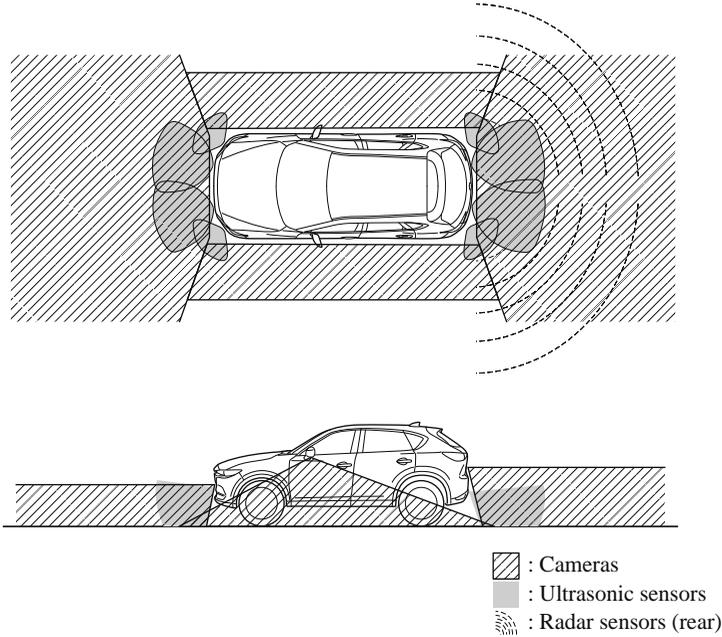

### **WARNING**

**Always confirm the safety of the area around the vehicle with the mirrors and directly with your eyes when driving.**

*The 360°View Monitor is an auxiliary device which assists the driver in checking the safety of the area around the vehicle.*

*The shooting range of the cameras and detection range of the sensors are limited. For example, the areas in black at the front and rear of the vehicle image and the seams where each of the camera images merge are blind spots where an obstruction may not be visible. In addition, the extended vehicle width lines and projected vehicle path lines are only to be used as references, and the images on the screen may differ from the actual conditions.*

**⚠ CAUTION**

- Do not use the 360°View Monitor under any of the following conditions.
  - Icy or snow-covered roads.
  - Tyre chains or a temporary spare tyre is installed.
  - The front doors or the liftgate is not fully closed.
  - The vehicle is on a road incline.
  - The door mirrors are retracted.
- Do not hit the front/rear camera, front bumper, and door mirrors forcefully. The camera position or installation angle may shift.
- The cameras are of a waterproof structure. Do not disassemble, modify, or remove a camera.
- The camera cover is made of hard plastic, therefore do not apply oil film remover, organic solvents, wax, or coating agents. If any such agent gets on the camera cover, wipe it off using a soft cloth immediately.
- Do not rub the camera lens forcefully, or clean it with an abrasive or hard brush. Otherwise, it could scratch the camera lens and negatively affect the images.
- Consult an expert repairer (we recommend an Authorised Mazda Repairer) for repair, painting, or replacement of the front/rear camera, front bumper and door mirrors.
- Heed the following cautions to assure that the 360°View Monitor operates normally.
  - Do not modify the vehicle suspensions or lower/raise the vehicle body, or both.
  - Always use wheels of the specified type and size for the front and rear wheels. Consult an expert repairer (we recommend an Authorised Mazda Repairer) for tyre replacement.
- When the display is cold, images may leave trails or the screen might be darker than usual, making it difficult to check the vehicle surroundings. Always confirm the safety at the front and around the vehicle visually when driving.
- The method for parking/stopping the vehicle using the 360°View Monitor differs depending on the road circumstances/conditions and the vehicle conditions. When and how much you turn the steering wheel will differ depending on the situation, therefore always check the vehicle surroundings directly with your eyes while using the system.  
Also, before using the system, always make sure that the vehicle can be parked/stopped in the parking/stopping space.


**NOTE**

- *If there are water droplets, snow, or mud on the camera lens, wipe it off using a soft cloth. If the camera lens is especially dirty, wash it off with mild detergent.*
- *If the area where the camera is installed, such as the liftgate or door mirrors, has been damaged in a vehicle accident, the camera (position, installation angle) may have shifted. Always consult an expert repairer (we recommend an Authorised Mazda Repairer) to have the vehicle inspected.*
- *If the camera is subjected to excessive changes in temperature such as by pouring hot water on the camera during cold weather, the 360°View Monitor may not operate normally.*
- *If the battery voltage is low, the screen might be temporarily difficult to view, however, this does not indicate a problem.*
- *The 360°View Monitor has limitations. Objects under the bumper or near both ends of the bumper cannot be displayed.*
- *Obstructions above the upper image range of the camera are not displayed.*
- *Under the following conditions, the screen might be difficult to view, however this does not indicate a problem.*
  - *The temperature near the lens is high/low.*
  - *Rainy conditions, water droplets on the camera, or high humidity.*
  - *Mud or foreign matter near the camera.*
  - *Extremely bright light such as sunlight or headlights hitting the camera lens directly.*
- *Because the 360°View Monitor camera uses a special lens, the distance displayed on the screen differs from the actual distance.*
- *Obstructions displayed on the screen may appear differently than in actuality. (Obstructions may appear fallen, larger, or longer than they actually are.)*
- *Do not apply stickers to a camera or the area around it. In addition, do not install accessories or an illuminated number/character number plate to the area around a camera. Otherwise, the camera may not correctly display the surrounding conditions.*

## ▼ Types of Images Displayed on the Screen


### Top view/Front view

Displays the image of the area around the vehicle and the vehicle front.

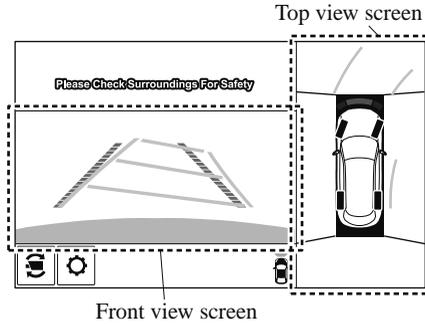


### Front wide view

Displays the image of the front of the vehicle (wide-area).

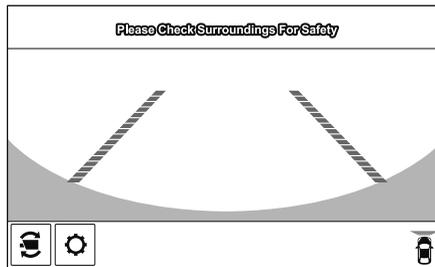


## Side view

Displays the image of the left and right sides of the vehicle.

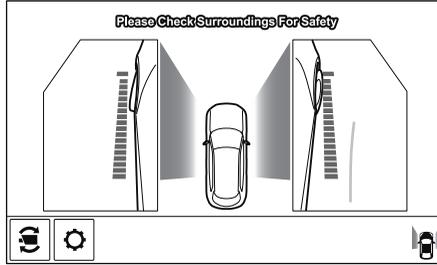


## Top view/Rear view

Displays the image of the area around the vehicle and the rear of the vehicle.

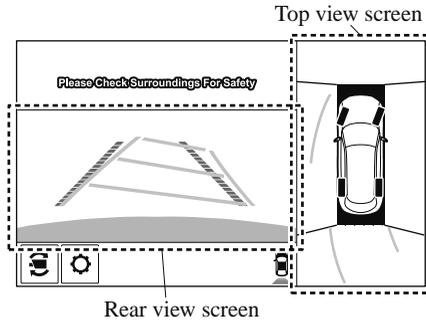

## Rear wide view

Displays the image of the rear of the vehicle (wide-area).

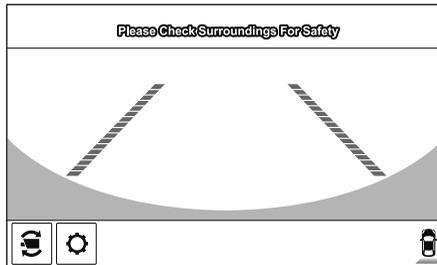


## ▼ How to Use the System

### Top view/Front view, Front wide view, Side view

#### **Indication**

Images are displayed on the screen when the 360°View Monitor switch is pressed with all of the following conditions met.



- The ignition is switched ON.
- The shift lever/selector lever is in a position other than R.

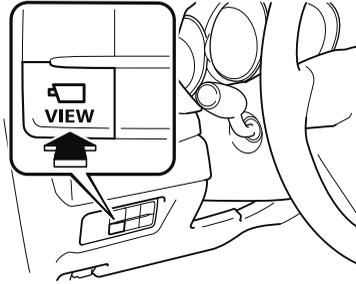

# i-ACTIVSENSE


## Display switching

You can change the displayed screen by pressing the commander knob or by touching the switch camera icon on the screen while the top view/front view, front wide view, or the side view is displayed.

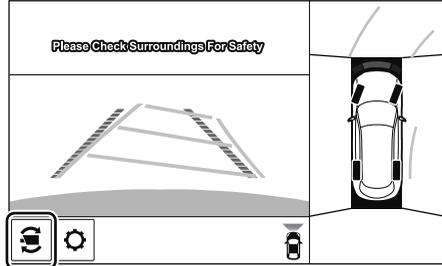



Switch camera icon


Top view/Front view



Front wide view

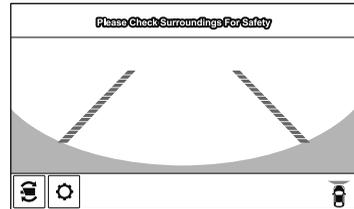

Side view



**NOTE**

- When the shift lever-selector lever is in R position, the displayed screen does not switch to the top view/front view, front wide view, or the side view.
- Display of the top view/front view, front wide view, or the side view stops even with the display conditions met if any of the following conditions occurs.
  - When a switch around the commander knob is pressed.
  - **(Manual transaxle)**  
The parking brake is applied.
  - **(Automatic transaxle)**  
The selector lever is shifted to P position (displayed when the selector lever is in a position other than P).
  - **(Displayed when vehicle speed is less than 15 km/h (9.3 mph))**
    - 4 minutes and 30 seconds have passed.
    - The vehicle speed is about 15 km/h (9.3 mph) or faster.
  - **(Displayed when the vehicle speed is about 15 km/h (9.3 mph) or faster)**
    - The vehicle speed is about 15 km/h (9.3 mph) or faster after 8 seconds have passed since pressing the 360°View Monitor switch.
    - 4 minutes and 22 seconds have passed from the point when the vehicle speed was less than 15 km/h (9.3 mph) after 8 seconds have passed since pressing the 360° View Monitor switch.
- The 360°View Monitor displays the previously displayed screen.
- The 360° View Monitor settings can be changed as follows.  
Refer to the Settings section in the Mazda Connect Owner's Manual.
- Automatic display of the 360°View Monitor when the ultrasonic sensor detects an obstruction.
- Automatic display of the 360°View Monitor when the ignition is switched ON.

# i-ACTIVSENSE



## Top view/Rear view, Rear wide view

The top view/rear view, rear wide view displays when all of the following conditions are met.

- The ignition is switched ON.
- Shift lever/selector lever is in R position.


### Display switching

The displayed screen can be switched by pressing the commander knob or by touching the switch camera icon on the screen while the top view/rear view, rear wide view is displayed.

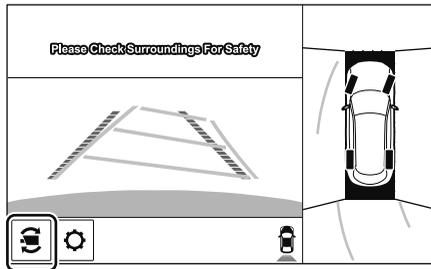



Switch camera icon

Top view/Rear view



Rear wide view

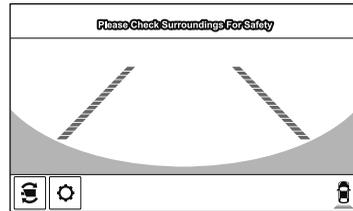

### NOTE

- The top view/rear view and rear wide view automatically display whether or not the 360° View Monitor switch is turned on or off when shifting the shift lever/selector lever to R position.
- The setting can be changed to display the top view/front view when shifting from reverse to a forward gear without operating the 360° View Monitor switch to check the front of the vehicle while parallel parking.  
Refer to the Settings section in the Mazda Connect Owner's Manual.


## Screen operation/icon



**Always stop the vehicle when adjusting the 360°View Monitor image quality.**

Do not adjust the 360°View Monitor image quality while driving. If you adjust the 360° View Monitor image quality (such as brightness, contrast, tone, and colour density) while driving, it could lead to an unexpected accident.

(Display example)

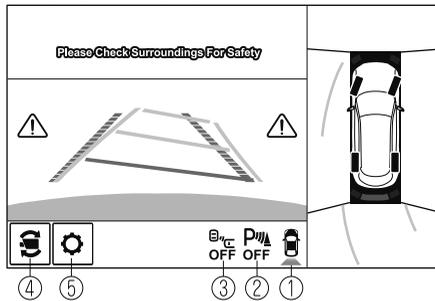


	Display/Icon	Content
①	View status icon	Indicates which image is displayed among the front view/front wide view/side view/rear view/rear wide view.
②	Parking sensor status icon	Indicates that the parking sensor has a problem or it is switched off.
③	Rear Cross Traffic Alert (RCTA) status icon	Indicates that the radar sensor (rear) has a problem or it is turned off.
④	Switch camera icon	Each time the screen is touched, the display screen switches.
⑤	Setting icon	The image quality for the 360°View Monitor can be adjusted.

**▼ Top View/Front View**


Use the top view/front view to assist in checking the safety of the surrounding area when accelerating from a stop, parking, or stopping the vehicle.

**Display range**

(Screen display)

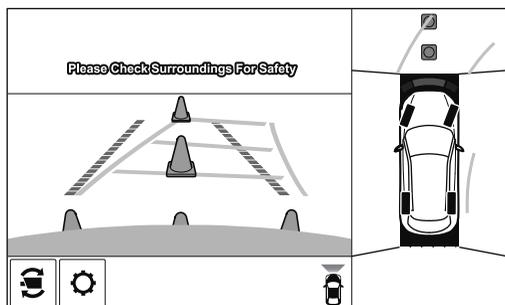


(Actual condition)

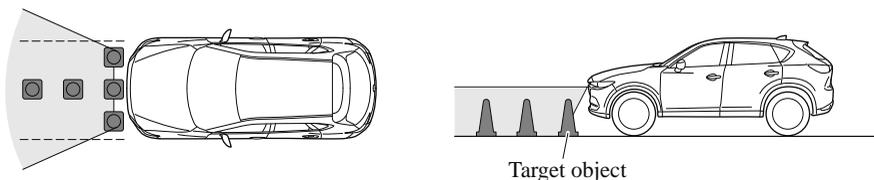**NOTE**


- In the top view screen, the areas in black at the front and rear of the vehicle image and the seams where each of the camera images merge are blind spots.
- Because images displayed in the top view screen are processed from each camera, the top view screen may display in the following ways.
  - If an image containing an object with a conspicuous colour is picked up by any of the cameras, the whole screen may be affected and it may display in that colour.
  - Obstructions displayed in the front view may not display on the top view screen.
  - If the position or angle of each camera changes due to tilting of the vehicle, the image may appear distorted.
  - Lines on the road may appear distorted at the seams where each of the camera images merge.
  - The entire screen may appear bright/dark depending on the illumination level around any of the cameras.

**Viewing the screen**

(When the projected vehicle path line display is on)

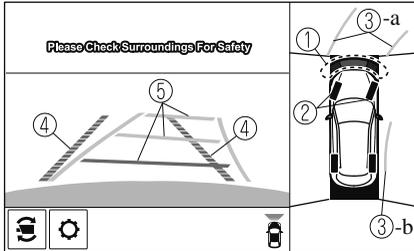

(When the projected vehicle path line display is off)

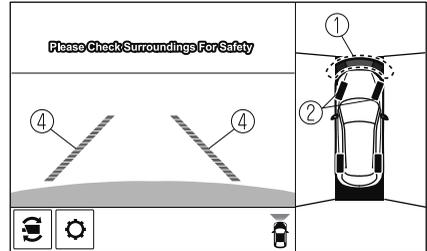

	Display/Icon	Content
①	Parking sensor view	Displays the parking sensor detection condition when the parking sensor is activated. For details, refer to the parking sensor obstruction detection indication and warning sound. Refer to Parking Sensor System on page 4-352.
②	Tyre icon	Indicates the tyre direction. Moves in conjunction with the steering wheel operation.
③	Projected vehicle path lines (amber)	Indicates the approximate projected path of the vehicle. Moves in conjunction with the steering wheel operation. a) Indicates the path where the edge of the front bumper is expected to travel. b) Indicates the path where the inner side of the vehicle is expected to travel.
④	Extended vehicle width lines and distance guide lines (red/blue)	Indicates the approximate width of the vehicle and the distance (from front end of bumper) in front of the vehicle. <ul style="list-style-type: none"> <li>• The red lines indicate the points up to about 0.5 m (19 in) from the front end of the bumper.</li> <li>• The blue lines indicate the points from about 0.5 m (19 in) and up to 2 m (78 in) from the front end of the bumper.</li> </ul>
⑤	Projected vehicle path distance guide lines (red/amber)	Indicates the distance (from front end of bumper) in front of the vehicle. <ul style="list-style-type: none"> <li>• The red line indicates the point about 0.5 m (19 in) from the front end of the bumper.</li> <li>• The amber lines indicate the points about 1 m (39 in) and 2 m (78 in) from the front end of the bumper.</li> </ul>

## CAUTION

The parking sensor detection range has limitations. For example, obstructions closing in from the side and objects short in height may not be detected. Always confirm the safety around the vehicle visually when driving.


For details, refer to the parking sensor obstruction detection indication and warning sound. Refer to Parking Sensor System on page 4-352.

### NOTE


The setting can be changed so that the projected vehicle path lines are not displayed. Refer to the Settings section in the Mazda Connect Owner's Manual.

### How to use the projected vehicle path line function

(Screen display)

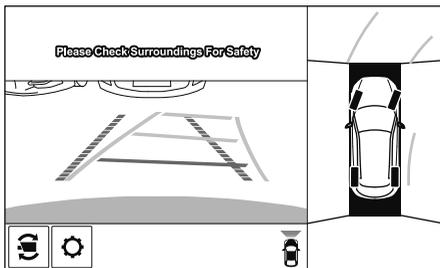

(Actual condition)

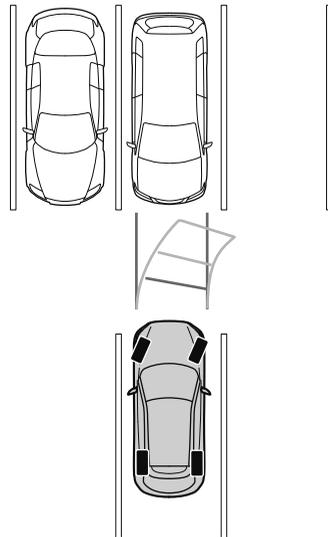


Make sure that there are no obstructions within the projected vehicle path lines. Drive the vehicle forward while turning the steering wheel so that no obstructions come within the projected vehicle path lines.

## ▼ Front Wide View


Use the front wide view to assist in checking the safety of the surrounding area when accelerating from a stop or entering a T-shaped intersection and intersection.


### Display range

(Screen display)

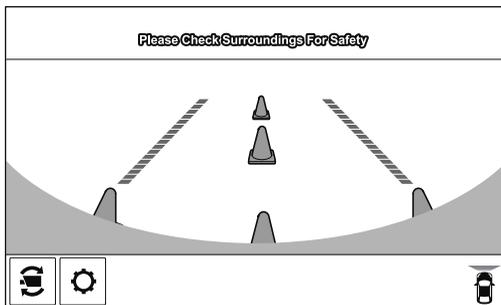

(Actual condition)

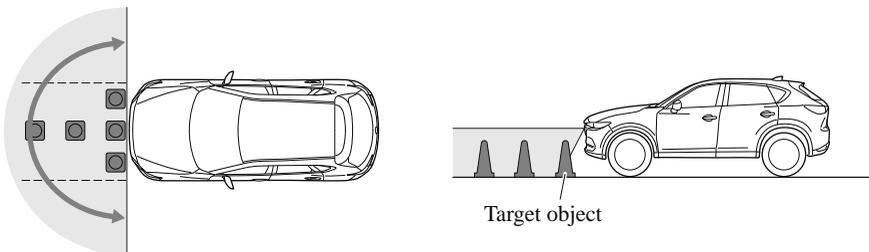

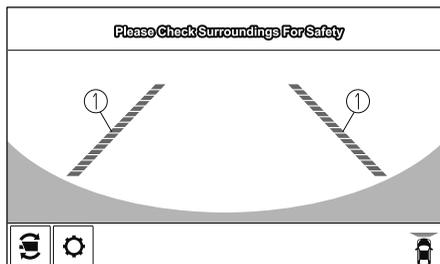**Viewing the screen**

	<b>Display/Icon</b>	<b>Content</b>
①	Extended vehicle width lines and distance guide lines (red/blue)	<p>Indicates the approximate width of the vehicle and the distance (from front end of bumper) in front of the vehicle.</p> <ul style="list-style-type: none"> <li>• The red lines indicate the points up to about 0.5 m (19 in) from the front end of the bumper.</li> <li>• The blue lines indicate the points from about 0.5 m (19 in) and up to 2 m (78 in) from the front end of the bumper.</li> </ul>



**NOTE**

- *The parking sensor obstruction detection indication does not display. Switch the screen display to the top view/front view or side view display if the parking sensor warning sound is activated.*
- *The front wide view screen displays the image in front of the vehicle at a wide angle and corrects the image to help detect approaching obstructions from the side. Therefore, it differs from the actual view.*

▼ Side View


Use the side view to assist in checking the safety of the surrounding area when accelerating from a stop, parking, or stopping the vehicle.

Display range

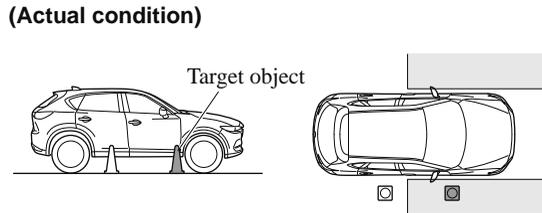


Viewing the screen

(When the projected vehicle path line display is on)

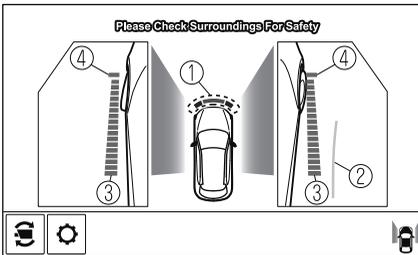



(When the projected vehicle path line display is off)

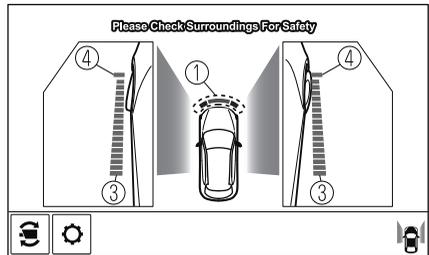

	Display/Icon	Content
①	Parking sensor view	Displays the parking sensor detection condition when the parking sensor is activated. For details, refer to the parking sensor obstruction detection indication and warning sound. Refer to Parking Sensor System on page 4-352.
②	Projected vehicle path lines (amber)	Indicates the approximate projected path of the vehicle. Moves in conjunction with the steering wheel operation. The projected vehicle path lines (amber) indicate the path the inner side of the vehicle is expected to travel.
③	Vehicle parallel guide lines (blue)	Indicates the approximate vehicle width including the door mirrors.
④	Vehicle front end guide lines (blue)	Indicates the point about 0.25 m (9.8 in) from the front edge of the vehicle (front edge of the bumper).

**NOTE**

The setting can be changed so that the projected vehicle path lines are not displayed. Refer to the Settings section in the Mazda Connect Owner's Manual.

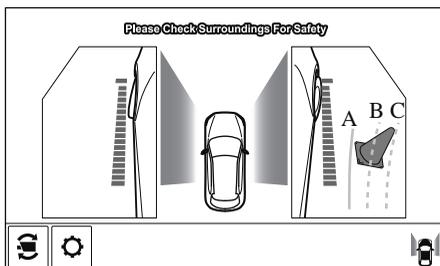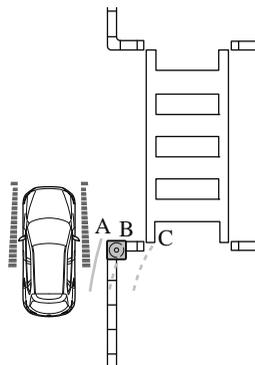**How to use the projected vehicle path line function****(Screen display)****(Actual condition)**

Make sure that there are no obstructions within the projected vehicle path lines. Turn the steering wheel so that the projected vehicle path lines travel inside of the obstruction (A), and drive the vehicle forward until it passes the obstruction. If the projected vehicle path lines are on an obstruction (B) or outside of the obstruction (C), the vehicle may contact the obstruction when turning the vehicle sharply.


**CAUTION**

- The parking sensor detection range has limitations. For example, obstructions closing in from the side and objects short in height may not be detected. Always confirm the safety around the vehicle visually when driving.  
For details, refer to the parking sensor obstruction detection indication and warning sound. Refer to Parking Sensor System on page 4-352.
- Do not turn the steering wheel any more until the vehicle has passed the obstruction, even if the obstruction is not visible on the side view image. If the steering wheel is turned even more, the vehicle may contact the obstruction if it is turned sharply.

**NOTE**

- Because there might be a difference between the image displayed on the screen and the actual conditions, always check the safety of the surrounding area using the mirrors and directly with your eyes when driving.


- Even though the object displayed on the screen, such as a road curb or a division line of a parking space, and the vehicle parallel guide lines appear parallel, they may not actually be parallel.

### ▼ Top View/Rear View


Use the top view/rear view to assist in checking the safety of the surrounding area when accelerating from a stop, parking, or stopping the vehicle.

#### Range of displayed screen image

(Screen display)

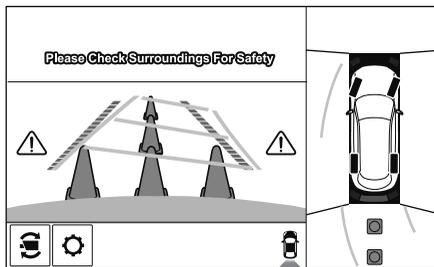

(Actual condition)

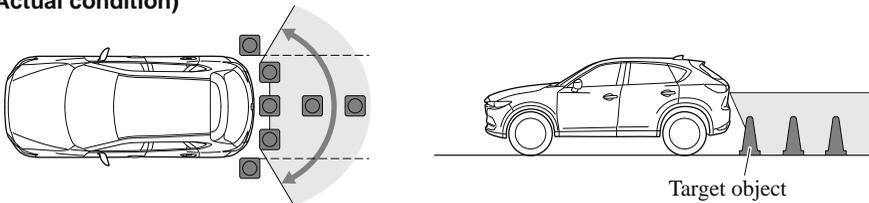


### NOTE


- In the top view screen, the areas in black at the front and rear of the vehicle image and the seams where each of the camera images merge are blind spots.
- Because images displayed in the top view screen are processed from each camera, the top view screen may display in the following ways.
  - If an image containing an object with a conspicuous colour is picked up by any of the cameras, the whole screen may be affected and it may display in that colour.
  - Obstructions displayed in the rear view may not display on the top view screen.
  - If the position or angle of each camera changes due to tilting of the vehicle, the image may appear distorted.
  - Lines on the road may appear distorted at the seams where each of the camera images merge.
  - The entire screen may appear bright/dark depending on the illumination level around any of the cameras.

**Viewing the screen**

**(When the projected vehicle path line display is on)**

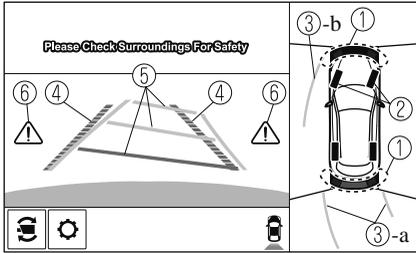

**(When the projected vehicle path line display is off)**

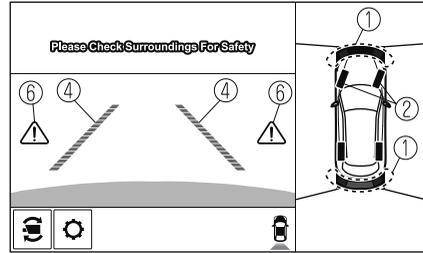

	Display/Icon	Content
①	Parking sensor view	Displays the parking sensor detection condition when the parking sensor is activated. For details, refer to the parking sensor obstruction detection indication and warning sound. Refer to Parking Sensor System on page 4-352.
②	Tyre icon	Indicates the tyre direction. Moves in conjunction with the steering wheel operation.
③	Projected vehicle path lines (amber)	Indicates the approximate projected path of the vehicle. Moves in conjunction with the steering wheel operation. a) Indicates the path where the rear wheels are expected to travel. b) Indicates the path where the outer side of the vehicle is expected to travel.
④	Extended vehicle width lines and distance guide lines (red/blue)	These guide lines indicate the approximate width of the vehicle and distance to a point measured from the rear of the vehicle (from the end of the bumper). <ul style="list-style-type: none"> <li>• The red lines indicate the points up to about 0.5 m (19 in) from the rear end of the bumper.</li> <li>• The blue lines indicate the points from about 0.5 m (19 in) and up to 2 m (78 in) from the rear end of the bumper.</li> </ul>
⑤	Projected vehicle path distance guide lines (red/amber)	These guide lines indicate the approximate distance to a point measured from the rear of the vehicle (from the end of the bumper). <ul style="list-style-type: none"> <li>• The red line indicates the point about 0.5 m (19 in) from the rear end of the bumper.</li> <li>• The amber lines indicate the points about 1 m (39 in) and 2 m (78 in) from the rear end of the bumper.</li> </ul>

	Display/Icon	Content
⑥	Blind Spot Monitoring (BSM) warning lights	Indicates when the Rear Cross Traffic Alert (RCTA) has operated. For details, refer to Rear Cross Traffic Alert (RCTA). Refer to Rear Cross Traffic Alert (RCTA) on page 4-160.

**NOTE**

*The setting can be changed so that the projected vehicle path lines are not displayed. Refer to the Settings section in the Mazda Connect Owner's Manual.*



**How to use the projected vehicle path line function**

- *The front of the vehicle swings out wide when turning the steering wheel while reversing. Maintain sufficient distance between the vehicle and an obstruction.*
- *The parking sensor detection range has limitations. For example, obstructions closing in from the side and objects short in height may not be detected. Always confirm the safety around the vehicle visually when driving.  
For details, refer to the parking sensor obstruction detection indication and warning sound. Refer to Parking Sensor System on page 4-352.*



**NOTE**

- *Because there might be a difference between the image displayed on the screen, such as indicated in the following, and the actual conditions when parking, always check the safety at the rear of the vehicle and the surrounding area directly with your eyes.*
  - *Even though the back end of the parking space (or garage) displayed on the screen and distance guide lines appear parallel, they may not actually be parallel.*
  - *When parking in a space with a division line on only one side of the parking space, even though the division line and the vehicle width guide line appear parallel, they may not actually be parallel.*
- *The following shows an example of vehicle parking with the steering wheel turned to the left while backing up the vehicle. When backing into a parking space from the opposite direction, the steering operation is reversed.*

1. Back the vehicle into the parking space by turning the steering wheel so that the vehicle enters the centre of the parking space.

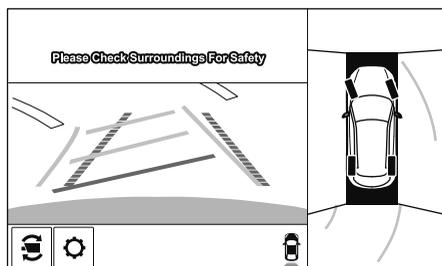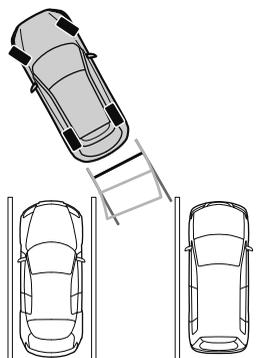**(Screen display)****(Actual condition)**

2. After the vehicle starts entering the parking space, stop and adjust the steering wheel so that the distance between the vehicle width lines and the sides of the parking space on the left and right are roughly equal, and then continue backing up slowly.
3. Once the vehicle width lines and the sides of the parking space on the left and right are parallel, straighten the wheels and back the vehicle slowly into the parking space. Continue checking the vehicle's surroundings and then stop the vehicle in the best possible position. (If the parking space has division lines, check whether the vehicle width guide lines are parallel to them.)

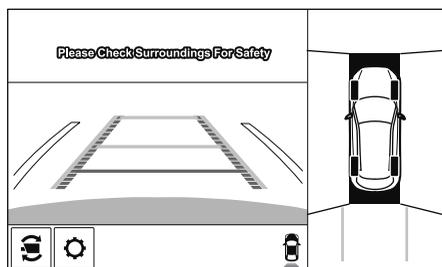
**(Screen display)****(Actual condition)**

### ▼ Rear Wide View


Use the rear wide view to assist in checking the safety of the surrounding area when accelerating from a stop, parking, or stopping the vehicle.

## Range of displayed screen image


(Screen display)

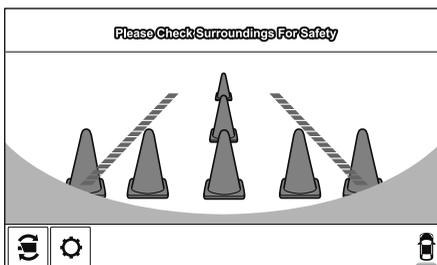

(Actual condition)

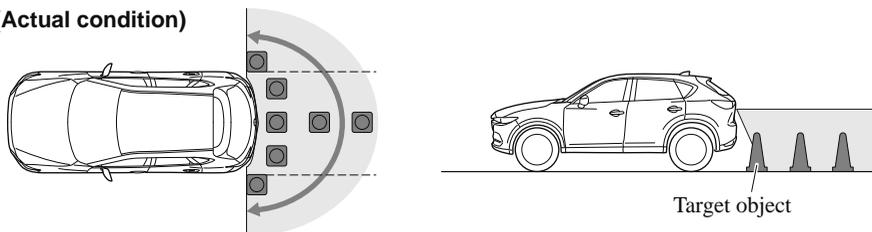

## Viewing the screen

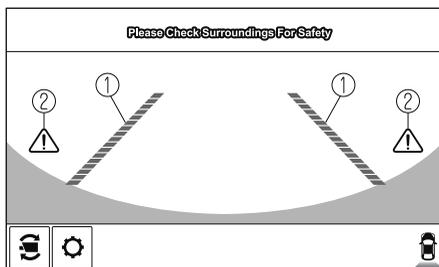

	Display/Icon	Content
①	Extended vehicle width lines and distance guide lines (red/blue)	<p>These guide lines indicate the approximate width of the vehicle and distance to a point measured from the rear of the vehicle (from the end of the bumper).</p> <ul style="list-style-type: none"> <li>• The red lines indicate the points up to about 0.5 m (19 in) from the rear end of the bumper.</li> <li>• The blue lines indicate the points from about 0.5 m (19 in) and up to 2 m (78 in) from the rear end of the bumper.</li> </ul>

	Display/Icon	Content
②	Blind Spot Monitoring (BSM) warning lights	Indicates when the Rear Cross Traffic Alert (RCTA) has operated. For details, refer to Rear Cross Traffic Alert (RCTA). Refer to Rear Cross Traffic Alert (RCTA) on page 4-160.

**NOTE**


- The parking sensor obstruction detection indication does not display. Switch the screen display to the top view/rear view display if the parking sensor warning sound is activated.
- The rear wide view screen displays the image at the rear of the vehicle at a wide angle and corrects the image to help detect approaching obstructions from the side. Therefore, it differs from the actual view.



**▼ Margin of Error Between Road Surface on Screen and Actual Road Surface**

There might be some margin of error between the road surface appearing on the screen and the actual road surface. A margin of error in the perceived distance could lead to an accident, therefore be aware of the following conditions which can more easily produce errors in the perceived distance.

**The vehicle tilts due to weight of passengers and cargo.**


If the vehicle is tilted, obstructions picked up by a camera can appear farther or closer than the actual distance from the vehicle.

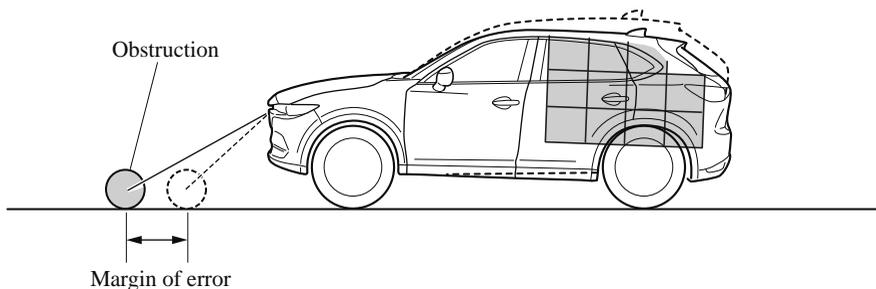**Front camera**

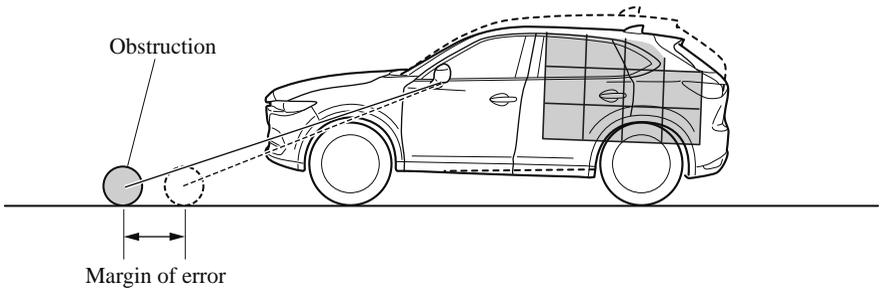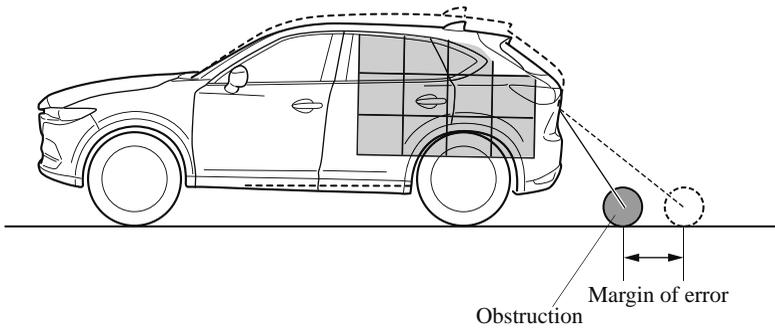**Side camera****Rear camera****There is a steep up or down grade in the road at the front or rear of the vehicle**


If there is a steep up or down grade in the road at the front or rear of the vehicle, obstructions picked up by the camera can appear farther or closer than the actual distance from the vehicle.

## Front camera

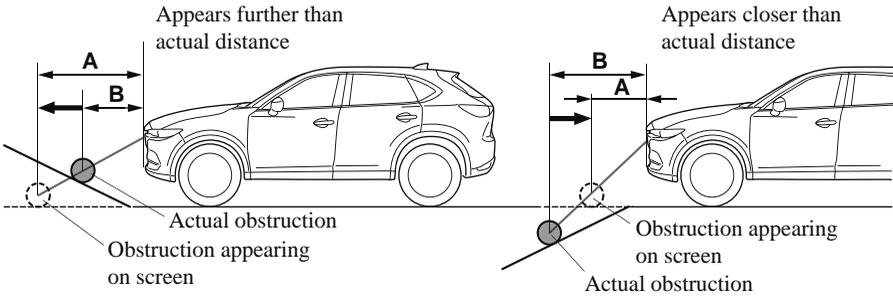


A: Distance of obstruction being viewed on screen  
B: Actual distance of obstruction from vehicle

## Side camera

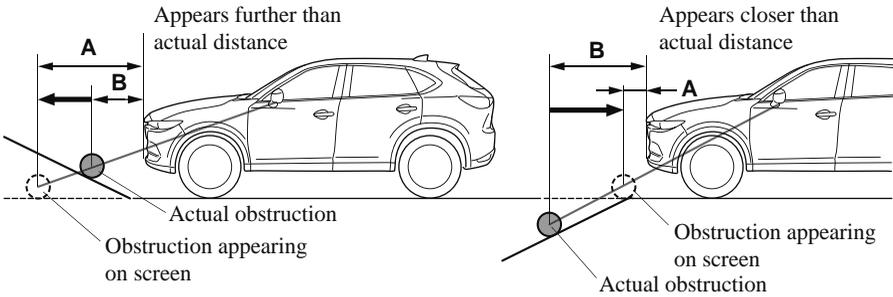

A: Distance of obstruction being viewed on screen  
B: Actual distance of obstruction from vehicle

## Rear camera

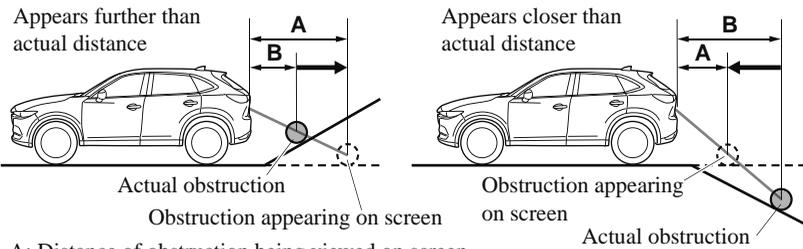




A: Distance of obstruction being viewed on screen  
B: Actual distance of obstruction from vehicle

**NOTE**

If the vehicle is on a slope, obstructions taken by the camera can appear farther or closer than the actual distance from the vehicle.

**Three-dimensional object at vehicle front or rear**

Because the vehicle front end guide lines (side camera) or the distance guide lines (rear camera) are displayed based on a flat surface, the distance to the three-dimensional object displayed on the screen is different from the actual distance.

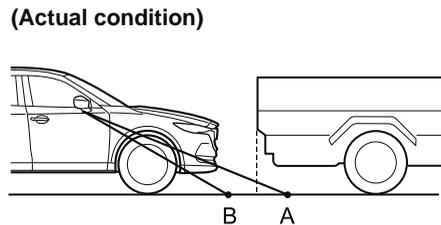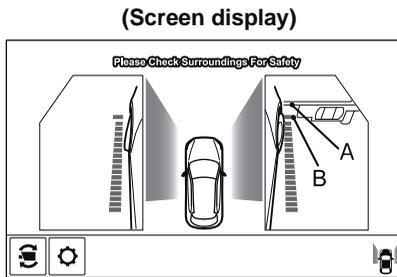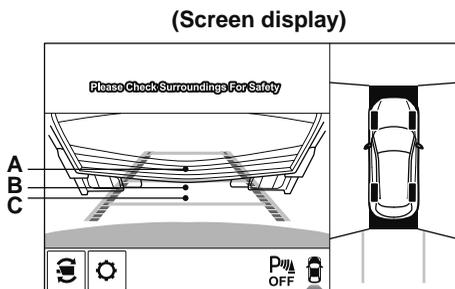**Side camera****Rear camera**

Sensed distance on screen  $A > B > C$

**(Actual condition)**

Actual distance  $B > C = A$

**▼ System Problem Indication**

Centre display indication	Cause	Action to be taken
“No image signal reception” is displayed	The control unit might be damaged.	Have your vehicle inspected by an expert repairer (we recommend an Authorised Mazda Repairer).
Screen is pitch-black and blank	The camera might be damaged.	

## 360° View Monitor (Mazda Connect (Type B))\*

### ▼ 360° View Monitor

The 360°View Monitor consists of the following functions which assist the driver in checking the area surrounding the vehicle using various indications in the centre display and a warning sound while the vehicle is being driven at low speeds or while parking.

- **Top view**

The top view displays an image of the vehicle from directly above on the centre display by combining the images taken from the 4 cameras set on all sides of the vehicle. The top view displays on the right side (left-hand drive)/left side (right-hand drive) of the screen when the front view or rear view screen is being displayed. The top view assists the driver in checking the area surrounding the vehicle when the vehicle is moving forward or in reverse.

- **Front view/front wide view**

The image from the front of the vehicle is displayed on the centre display.

The view from the front assists the driver in checking the front of the vehicle by displaying guide lines on the displayed image taken from the front of the vehicle.

- **Side view**

The images taken from the front left and right sides of the vehicle are displayed on the centre display.

The side view assists the driver in checking the front sides of the vehicle by displaying guide lines on the displayed image taken from the front left and right sides of the vehicle.

- **Rear view/rear wide view**

The image from the rear of the vehicle is displayed on the centre display.

The image from the rear assists the driver in checking the rear of the vehicle by displaying guide lines on the displayed image taken from the rear of the vehicle.

- **Parking sensor**

If there are any obstructions near the vehicle while the top view/side view is displayed, an obstruction detection indication turns on around the bumper in the centre display.

The parking sensors use ultrasonic sensors to detect obstructions around the vehicle when the vehicle is driven at low speeds, such as during garage or parallel parking, and notifies the driver of the approximate distance from the vehicle to the surrounding obstruction using sound and an obstruction detection indication.

Refer to Parking Sensor System on page 4-362.

- **Rear Cross Traffic Alert (RCTA)**


If there is the possibility of a collision with an approaching vehicle while the rear view/rear wide view is displayed, a warning is displayed on the centre display.

The Rear Cross Traffic Alert (RCTA) uses rear side radar sensor to detect vehicles approaching from the rear left and right sides of the vehicle, and it assists the driver in

checking the rear of the vehicle while reversing by flashing the Blind Spot Monitoring (BSM) warning lights and activating the warning sound.

Refer to Rear Cross Traffic Alert (RCTA) on page 4-160.

### **360°View Monitor Range**

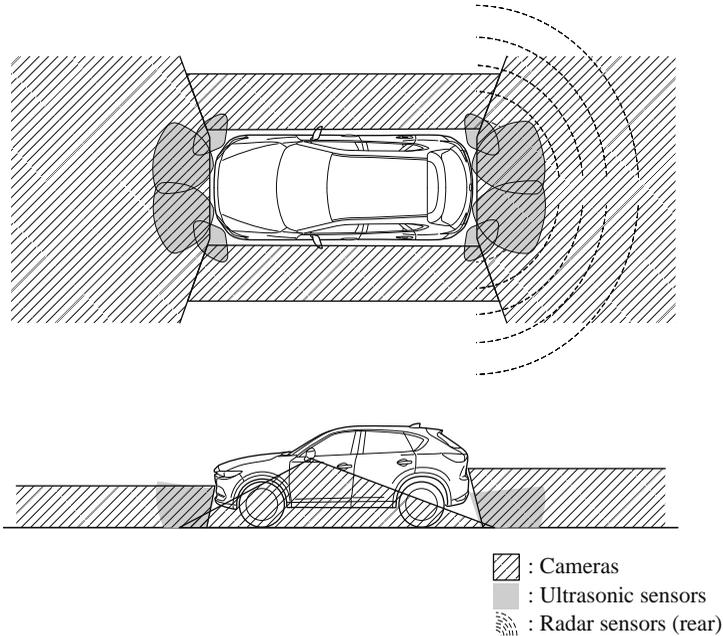

## **⚠ WARNING**

***Always confirm the safety of the area around the vehicle with the mirrors and directly with your eyes when driving:***

*The 360°View Monitor is an auxiliary device which assists the driver in checking the safety of the area around the vehicle.*

*The shooting range of the cameras and detection range of the sensors are limited. For example, the areas in black at the front and rear of the vehicle image and the seams where each of the camera images merge are blind spots where an obstruction may not be visible. In addition, the extended vehicle width lines and projected vehicle path lines are only to be used as references, and the images on the screen may differ from the actual conditions.*

**⚠ CAUTION**

- Do not use the 360°View Monitor under any of the following conditions.
  - Icy or snow-covered roads.
  - Tyre chains or a temporary spare tyre is installed.
  - The front or rear doors are not fully closed.
  - The vehicle is on a road incline.
  - The door mirrors are retracted.
- Do not hit the front/rear camera, front bumper, liftgate, and door mirrors forcefully. The camera position or installation angle may shift.
- The cameras are waterproof. Do not disassemble, modify, or remove a camera.
- The camera cover is made of hard plastic, therefore do not apply oil film remover, organic solvents, wax, or coating agents. If any such agent gets on the camera cover, wipe it off using a soft cloth immediately.
- Do not rub the camera lens forcefully, or clean it with an abrasive or hard brush. Otherwise, it could scratch the camera lens and negatively affect the images.
- Consult an expert repairer (we recommend an Authorised Mazda Repairer) for repair, painting, or replacement of the front/rear camera, front bumper, liftgate and door mirrors.
- Heed the following cautions to assure that the 360°View Monitor operates normally.
  - Do not modify the vehicle suspensions or lower/raise the vehicle body, or both.
  - Always use tyres of the specified type and size for the front and rear wheels. Consult an expert repairer (we recommend an Authorised Mazda Repairer) for tyre replacement.
- When the display is cold, images may leave trails or the screen might be darker than usual, making it difficult to check the vehicle surroundings. Always confirm the safety at the front and around the vehicle visually when driving.
- The method for parking/stopping the vehicle using the 360°View Monitor differs depending on the road circumstances/conditions and the vehicle conditions. When and how much you turn the steering wheel will differ depending on the situation, therefore always check the vehicle surroundings directly with your eyes while using the system.  
Also, before using the system, always make sure that the vehicle can be parked/stopped in the parking/stopping space.

**NOTE**

- If there are water droplets, snow, or mud on the camera lens, wipe it off using a soft cloth. If the camera lens is especially dirty, wash it off with mild detergent.
- If the camera lens is touched or there is any dirt on it, it could affect the screen image. Wipe the lens using a soft cloth.

- *If the area where the camera is installed, such as the front bumper, liftgate or door mirrors, has been damaged in a vehicle accident, the camera (position, installation angle) may have shifted. Always consult an expert repairer (we recommend an Authorised Mazda Repairer) to have the vehicle inspected.*
- *If the camera is subjected to excessive changes in temperature such as by pouring hot water on the camera during cold weather, the 360°View Monitor may not operate normally.*
- *If the battery voltage is low, the screen might be temporarily difficult to view, however, this does not indicate a problem.*
- *The 360°View Monitor has limitations. Objects under the bumper or near both ends of the bumper cannot be displayed.*
- *Obstructions above the upper image range of the camera are not displayed.*
- *Under the following conditions, the screen might be difficult to view, however this does not indicate a problem.*
  - *The temperature near the lens is high/low.*
  - *Rainy conditions, water droplets on the camera, or high humidity.*
  - *Mud or foreign matter near the camera.*
  - *Extremely bright light such as sunlight or headlights hitting the camera lens directly.*
  - *The surroundings are illuminated by vehicle lights, fluorescent lights, or LED lights (display may flicker).*
  - *Extremely small dark or white dots appear on the screen (dots may flicker).*
- *Because the 360°View Monitor camera uses a special lens, the distance displayed on the screen differs from the actual distance.*
- *Obstructions displayed on the screen may appear differently than in actuality. (Obstructions may appear fallen, larger, or longer than they actually are.)*
- *Do not apply stickers to a camera or the area around it. In addition, do not install accessories or an illuminated number/character number plate to the area around a camera. Otherwise, the camera may not correctly display the surrounding conditions.*
- *Only rear and rear wide images displayed on the monitor from the 360° view monitor camera are reversed images (mirror images).*
- **Free/open source software information**


*This product includes free/open sources. Information about the licensing and source code is available at the following URL.*

*<https://www.denso.com/global/en/opensource/svss/mazda/>*

## ▼ Types of Images Displayed on the Screen


### Top view/Front view

Displays the image of the area around the vehicle and the vehicle front.

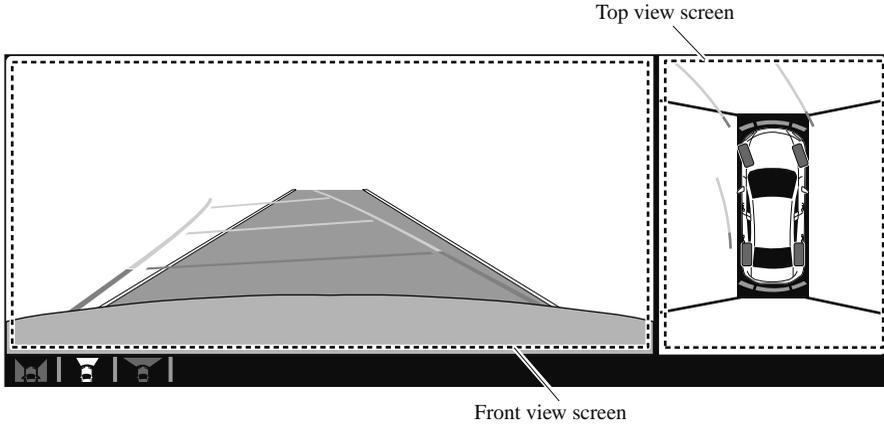


### Top view/Front wide view

Displays the image of the area around the vehicle and the front of the vehicle (wide-area).

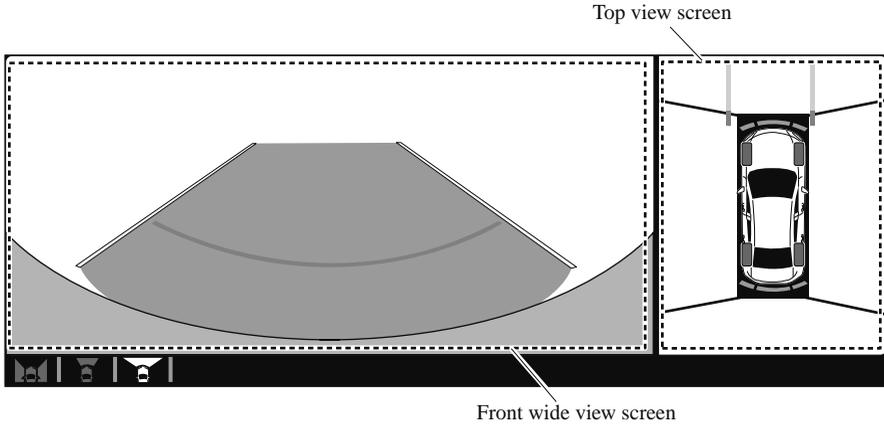


**Side view**

Displays the image of the left and right sides of the vehicle.

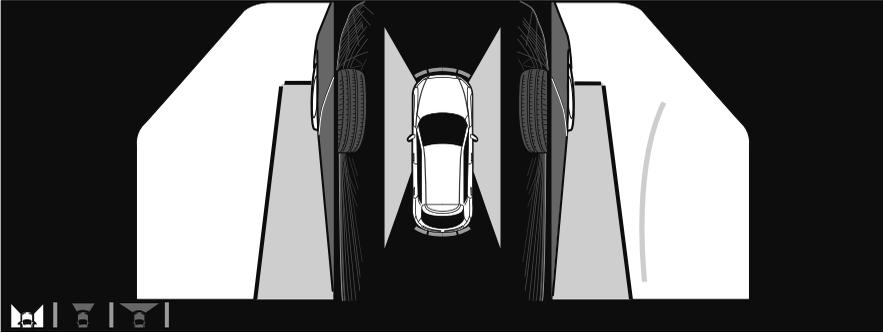

**Top view/Rear view**

Displays the image of the area around the vehicle and the rear of the vehicle.

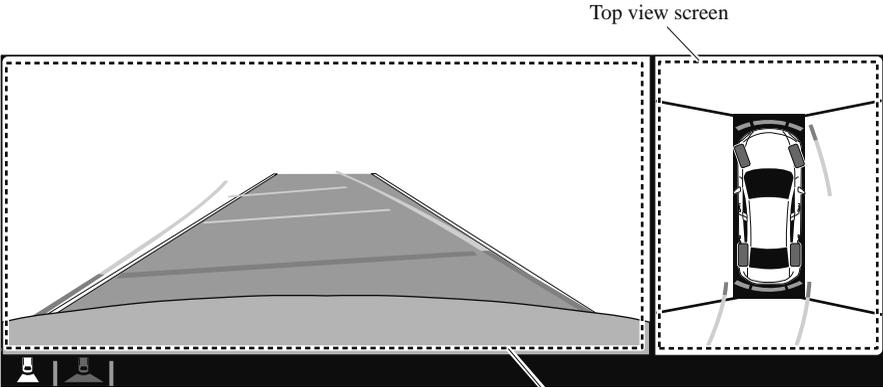


Top view screen

Rear view screen

## Top view/Rear wide view

Displays the image of the area around the vehicle and the rear of the vehicle (wide-area).

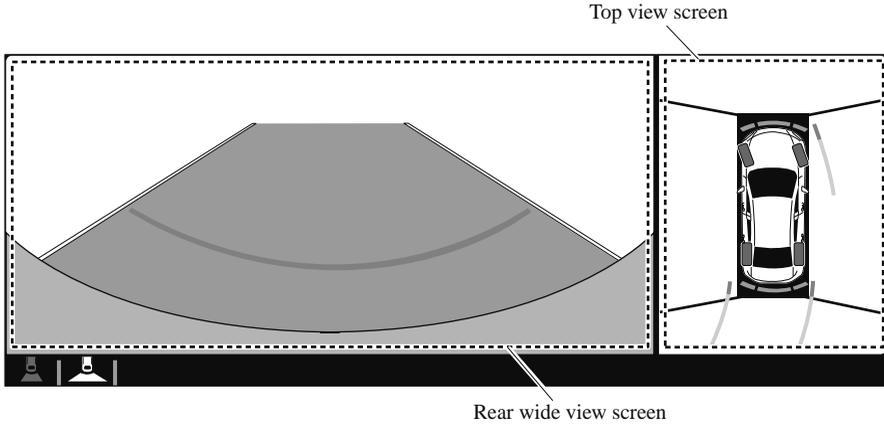


## ▼ How to Use the System

### Top view/Front view, Top view/Front wide view, Side view

#### Indication


Images are displayed on the screen when the 360°View Monitor switch is pressed with all of the following conditions met.

- The ignition is switched ON.
- The shift lever/selector lever is in a position other than R.

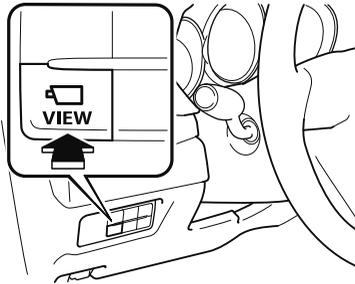

**Display switching**

The displayed screen can be changed each time the 360°view monitor switch is pressed.

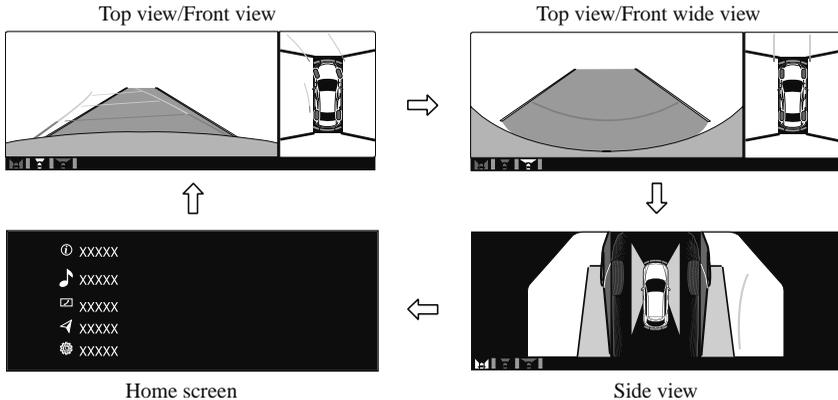**NOTE**

- When the shift lever/selecter lever is in R position, the displayed screen does not switch to the top view/front view, top view/front wide view, or the side view.
- Display of the top view/front view, top view/front wide view, or the side view stops even with the display conditions met if any of the following conditions occurs.
  - When a switch around the commander knob is pressed.
  - **(Manual transaxle)**  
The parking brake is applied.
  - **(Automatic transaxle)**  
The selector lever is shifted to P position (displayed when the selector lever is in a position other than P).
  - **(Displayed when vehicle speed is less than 15 km/h (9.3 mph))**
    - 4 minutes and 30 seconds have passed.
    - The vehicle speed is about 15 km/h (9.3 mph) or faster.
  - **(Displayed when the vehicle speed is about 15 km/h (9.3 mph) or faster)**
    - The vehicle speed is about 15 km/h (9.3 mph) or faster after 8 seconds have passed since pressing the 360°View Monitor switch.
    - 4 minutes and 22 seconds have passed from the point when the vehicle speed was less than 15 km/h (9.3 mph) after 8 seconds have passed since pressing the 360°View Monitor switch.
- The 360°View Monitor settings can be changed as follows.  
Refer to the Settings section in the Mazda Connect Owner's Manual.
  - Automatic display of the 360°View Monitor when the ultrasonic sensor detects an obstruction.

## i-ACTIVSENSE

---

- Automatic display of the 360°View Monitor when the ignition is switched ON.
- Screen priority level when the system launches.


### Top view/Rear view, Top view/Rear wide view

The top view/rear view, top view/rear wide view displays when all of the following conditions are met.

- The ignition is switched ON.
- Shift lever/selector lever is in R position.

### Display switching

The displayed screen can be changed each time the 360°view monitor switch is pressed.

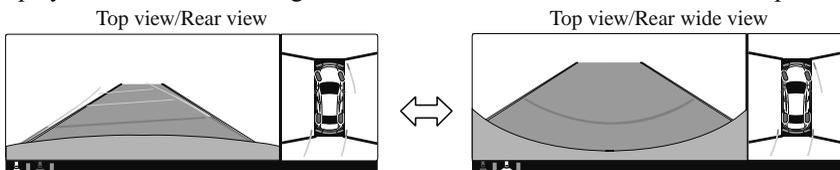


### NOTE

- The top view/rear view and top view/rear wide view automatically display whether or not the 360°View Monitor switch is turned on or off when shifting the shift lever/selector lever to R position.
- The top view/rear view and top view/rear wide view displays the previously displayed screen.
- The setting can be changed to display the top view/front view when shifting from reverse to a forward gear without operating the 360°View Monitor switch to check the front of the vehicle while parallel parking.  
Refer to the Settings section in the Mazda Connect Owner's Manual.

Screen operation/icon

**Always stop the vehicle when adjusting the 360°View Monitor image quality.**

Do not adjust the 360°View Monitor image quality while driving. If you adjust the 360°View Monitor image quality (such as brightness, contrast, tone, and colour density) while driving, it could lead to an unexpected accident.



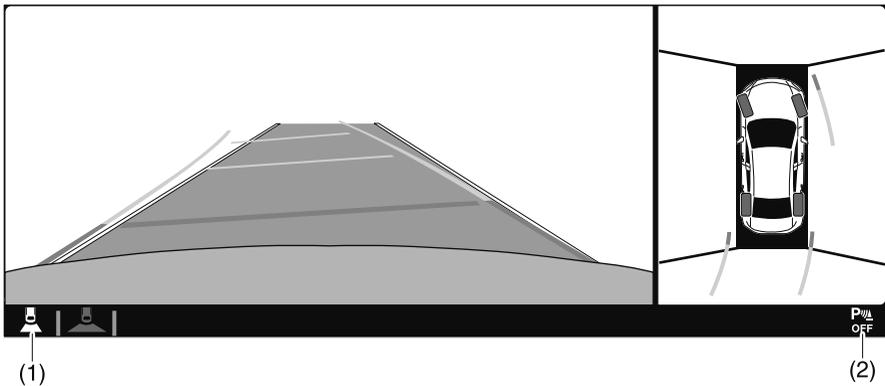


	Display/Icon	Content
(1)	View status icon	Indicates which image is displayed among the front view/front wide view/side view/rear view/rear wide view.
(2)	Parking sensor status icon	Indicates that the parking sensor has a problem or it is switched off.

## ▼ Top View/Front View

Use the top view/front view to assist in checking the safety of the surrounding area when accelerating from a stop, parking, or stopping the vehicle.


### Display range

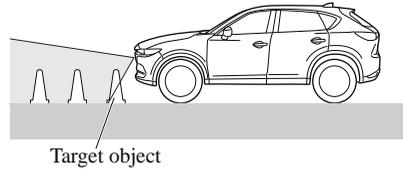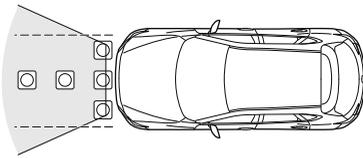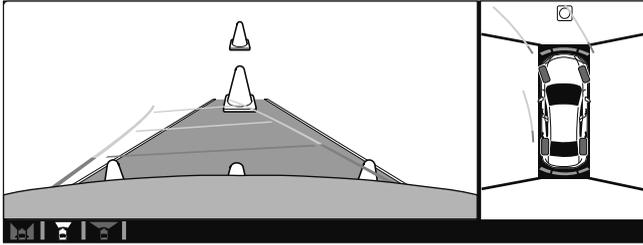

### **NOTE**

- In the top view screen, the areas in black at the front and rear of the vehicle image and the seams where each of the camera images merge are blind spots.
- Because images displayed in the top view screen are processed from each camera, the top view screen may display in the following ways.
  - If an image containing an object with a conspicuous colour is picked up by any of the cameras, the screen area for each camera may be affected and it may display in that colour.
  - Obstructions displayed in the front view may not display on the top view screen.
  - If the position or angle of each camera changes due to tilting of the vehicle, the image may appear distorted.
  - Lines on the road may appear distorted at the seams where each of the camera images merge.
  - The screen area for each camera may appear bright/dark depending on the illumination level around any of the cameras.

**Viewing the screen**

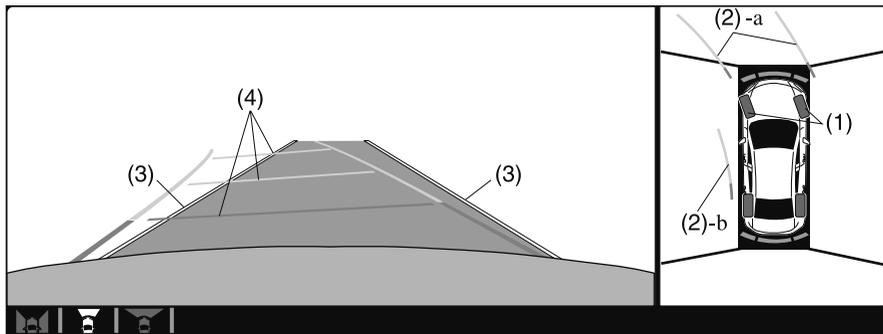

	Display/Icon	Content
(1)	Tyre icon	Indicates the tyre direction. Moves in conjunction with the steering wheel operation.
(2)	Projected vehicle path lines (yellow & red)	Indicates the approximate projected path of the vehicle. Moves in conjunction with the steering wheel operation. a) Indicates the path where the edge of the front bumper is expected to travel. b) Indicates the path where the inner side of the vehicle is expected to travel.
(3)	Extended vehicle width lines (blue)	Indicates the approximate width of the vehicle.
(4)	Projected vehicle path distance guide lines (yellow & red)	Indicates the distance (from front end of bumper) in front of the vehicle. <ul style="list-style-type: none"> <li>• The red line indicates the point about 0.5 m (19 in) from the front end of the bumper.</li> <li>• The yellow lines indicate the points about 1.0 m (39 in) and 2.0 m (78 in) from the front end of the bumper.</li> </ul>

**CAUTION**

*The parking sensor detection range has limitations. For example, obstructions closing in from the side and objects short in height may not be detected. Always confirm the safety around the vehicle visually when driving.*


*For details, refer to the parking sensor obstruction detection indication and warning sound. Refer to Parking Sensor System on page 4-362.*

**NOTE**


*The setting can be changed so that the projected vehicle path lines are not displayed. Refer to the Settings section in the Mazda Connect Owner's Manual.*

## How to use the projected vehicle path line function

(Screen display)

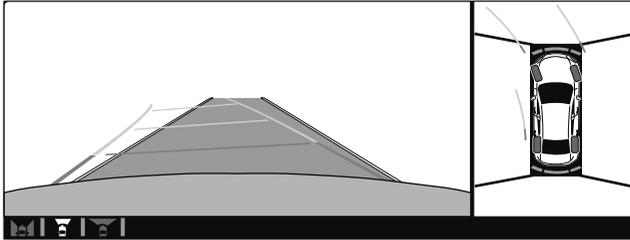

(Actual condition)






Make sure that there are no obstructions within the projected vehicle path lines.  
Drive the vehicle forward while turning the steering wheel so that no obstructions come within the projected vehicle path lines.

### ▼ Top View/Front Wide View

Use the top view/front wide view to assist in checking the safety of the surrounding area when accelerating from a stop or entering a T-shaped intersection and intersection.


#### Display range

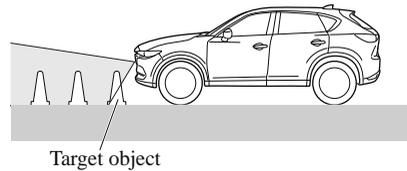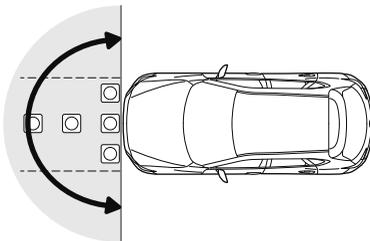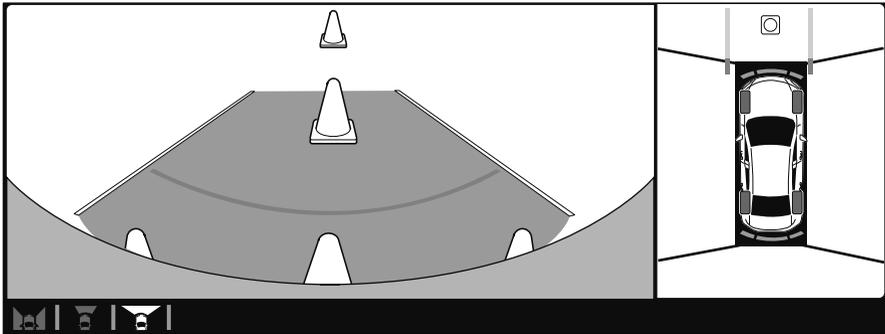

#### **NOTE**

- In the top view screen, the areas in black at the front and rear of the vehicle image and the seams where each of the camera images merge are blind spots.
- Because images displayed in the top view screen are processed from each camera, the top view screen may display in the following ways.
  - If an image containing an object with a conspicuous colour is picked up by any of the cameras, the screen area for each camera may be affected and it may display in that colour.
  - Obstructions displayed in the front view may not display on the top view screen.
  - If the position or angle of each camera changes due to tilting of the vehicle, the image may appear distorted.
  - Lines on the road may appear distorted at the seams where each of the camera images merge.
  - The screen area for each camera may appear bright/dark depending on the illumination level around any of the cameras.

**Viewing the screen**

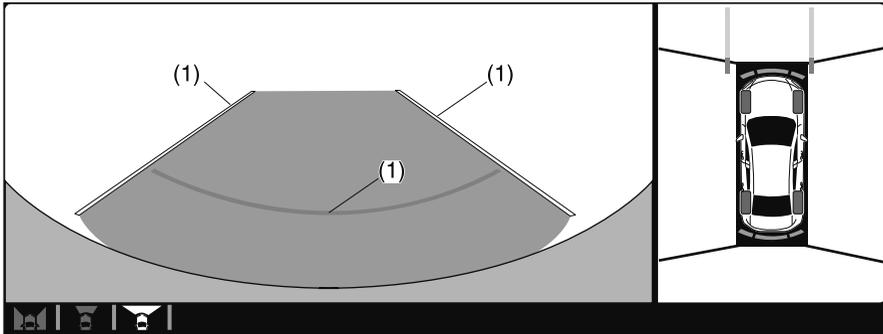

	Display/Icon	Content
(1)	Extended vehicle width lines and distance guide lines (blue & red)	<p>Indicates the approximate width of the vehicle and the distance (from front end of bumper) in front of the vehicle.</p> <ul style="list-style-type: none"> <li>• The red lines indicate the points up to about 0.5 m (19 in) from the front end of the bumper.</li> </ul>




**NOTE**


*The front wide view screen displays the image in front of the vehicle at a wide angle and corrects the image to help detect approaching obstructions from the side. Therefore, it differs from the actual view.*

▼ Side View

Use the side view to assist in checking the safety of the surrounding area when accelerating from a stop, parking, or stopping the vehicle.

Display range

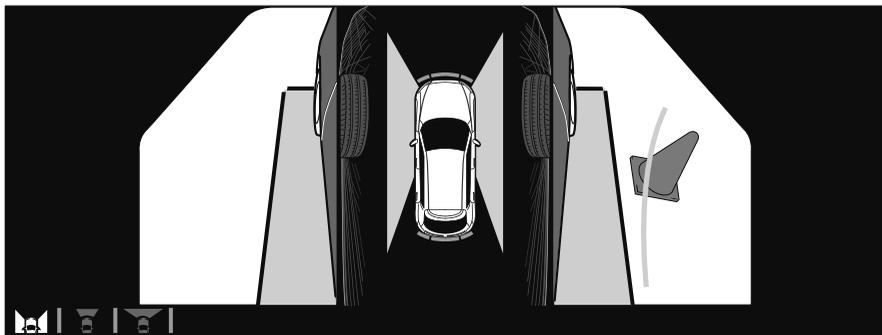

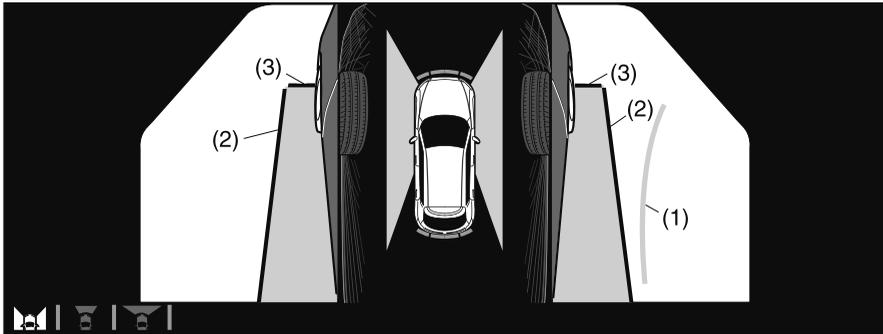**Viewing the screen**


	Display/Icon	Content
(1)	Projected vehicle path lines (yellow)	Indicates the approximate projected path of the vehicle. Moves in conjunction with the steering wheel operation. The projected vehicle path lines (yellow) indicate the path the inner side of the vehicle is expected to travel.
(2)	Vehicle parallel guide lines (blue)	Indicates the approximate vehicle width including the door mirrors.
(3)	Vehicle front end guide lines (blue)	Indicates the point about 0.25 m (9.8 in) from the front edge of the vehicle (front edge of the bumper).

**NOTE**


*The setting can be changed so that the projected vehicle path lines are not displayed. Refer to the Settings section in the Mazda Connect Owner's Manual.*

## How to use the projected vehicle path line function

(Screen display)

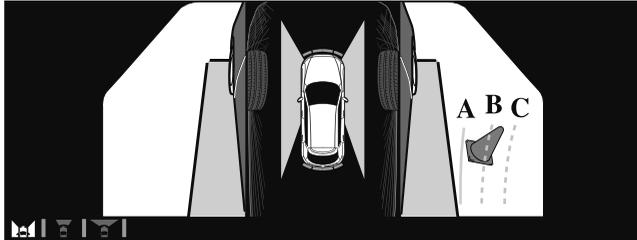

(Actual condition)



Make sure that there are no obstructions within the projected vehicle path lines. Turn the steering wheel so that the projected vehicle path lines travel inside of the obstruction (A), and drive the vehicle forward until it passes the obstruction. If the projected vehicle path lines are on an obstruction (B) or outside of the obstruction (C), the vehicle may contact the obstruction when turning the vehicle sharply.

### **CAUTION**




- *The parking sensor detection range has limitations. For example, obstructions closing in from the side and objects short in height may not be detected. Always confirm the safety around the vehicle visually when driving. For details, refer to the parking sensor obstruction detection indication and warning sound. Refer to Parking Sensor System on page 4-362.*
- *Do not turn the steering wheel any more until the vehicle has passed the obstruction, even if the obstruction is not visible on the side view image. If the steering wheel is turned even more, the vehicle may contact the obstruction if it is turned sharply.*

**NOTE**

- Because there might be a difference between the image displayed on the screen and the actual conditions, always check the safety of the surrounding area using the mirrors and directly with your eyes when driving.
- Even though the object displayed on the screen, such as a road curb or a division line of a parking space, and the vehicle parallel guide lines appear parallel, they may not actually be parallel.

**▼ Top View/Rear View**


Use the top view/rear view to assist in checking the safety of the surrounding area when accelerating from a stop, parking, or stopping the vehicle.

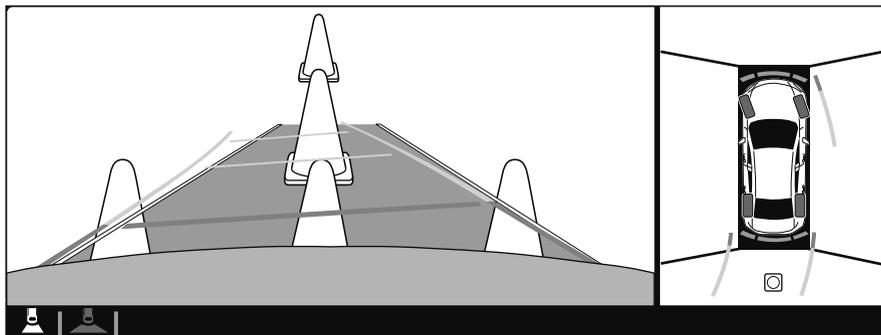**Range of displayed screen image****NOTE**

- In the top view screen, the areas in black at the front and rear of the vehicle image and the seams where each of the camera images merge are blind spots.
- Because images displayed in the top view screen are processed from each camera, the top view screen may display in the following ways.
  - If an image containing an object with a conspicuous colour is picked up by any of the cameras, the screen area for each camera may be affected and it may display in that colour.
  - Obstructions displayed in the rear view may not display on the top view screen.

- If the position or angle of each camera changes due to tilting of the vehicle, the image may appear distorted.
- Lines on the road may appear distorted at the seams where each of the camera images merge.
- The screen area for each camera may appear bright/dark depending on the illumination level around any of the cameras.

### Viewing the screen

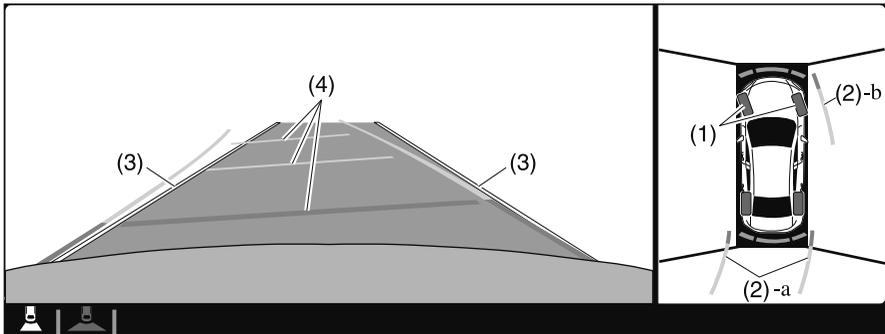

	Display/Icon	Content
(1)	Tyre icon	Indicates the tyre direction. Moves in conjunction with the steering wheel operation.
(2)	Projected vehicle path lines (yellow & red)	Indicates the approximate projected path of the vehicle. Moves in conjunction with the steering wheel operation. a) Indicates the path where the edge of the rear bumper is expected to travel. b) Indicates the path where the outer side of the vehicle is expected to travel.
(3)	Extended vehicle width lines (blue)	These guide lines indicate the approximate width of the vehicle.
(4)	Projected vehicle path distance guide lines (yellow & red)	These guide lines indicate the approximate distance to a point measured from the rear of the vehicle (from the end of the bumper). <ul style="list-style-type: none"> <li>· The red line indicates the point about 0.5 m (19 in) from the rear end of the bumper.</li> <li>· The yellow lines indicate the points about 1.0 m (39 in) and 2.0 m (78 in) from the rear end of the bumper.</li> </ul>

### **NOTE**

The setting can be changed so that the projected vehicle path lines are not displayed. Refer to the Settings section in the Mazda Connect Owner's Manual.

## How to use the projected vehicle path line function




- *The front of the vehicle swings out wide when turning the steering wheel while reversing. Maintain sufficient distance between the vehicle and an obstruction.*
- *The parking sensor detection range has limitations. For example, obstructions closing in from the side and objects short in height may not be detected. Always confirm the safety around the vehicle visually when driving. For details, refer to the parking sensor obstruction detection indication and warning sound. Refer to Parking Sensor System on page 4-362.*

### **NOTE**


- *Because there might be a difference between the image displayed on the screen, such as indicated in the following, and the actual conditions when parking, always check the safety at the rear of the vehicle and the surrounding area directly with your eyes.*
  - *Even though the back end of the parking space (or garage) displayed on the screen and distance guide lines appear parallel, they may not actually be parallel.*
  - *When parking in a space with a division line on only one side of the parking space, even though the division line and the vehicle width guide line appear parallel, they may not actually be parallel.*
- *The following shows an example of vehicle parking with the steering wheel turned to the left while backing up the vehicle. When backing into a parking space from the opposite direction, the steering operation is reversed.*

1. Back the vehicle into the parking space by turning the steering wheel so that the vehicle enters the centre of the parking space.

(Screen display)

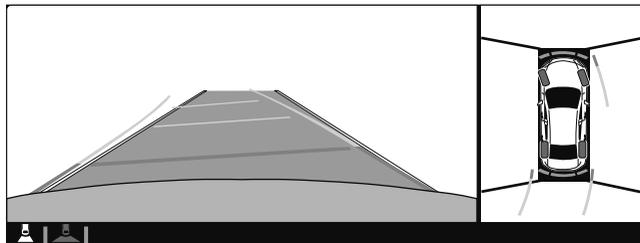


(Actual condition)




2. After the vehicle starts entering the parking space, stop and adjust the steering wheel so that the distance between the vehicle width lines and the sides of the parking space on the left and right are roughly equal, and then continue backing up slowly.
3. Once the vehicle width lines and the sides of the parking space on the left and right are parallel, straighten the wheels and back the vehicle slowly into the parking space. Continue checking the vehicle's surroundings and then stop the vehicle in the best

possible position. (If the parking space has division lines, check whether the vehicle width guide lines are parallel to them.)

(Screen display)



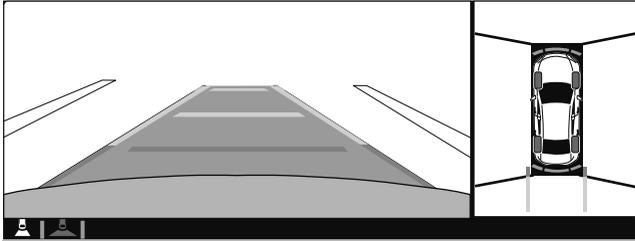


(Actual condition)




## ▼ Top View/Rear Wide View

Use the top view/rear wide view to assist in checking the safety of the surrounding area when accelerating from a stop, parking, or stopping the vehicle.

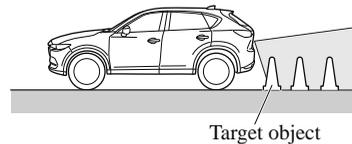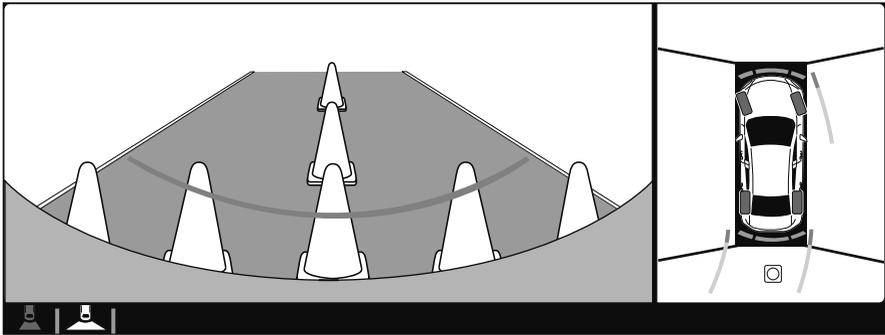**Range of displayed screen image****NOTE**

- In the top view screen, the areas in black at the front and rear of the vehicle image and the seams where each of the camera images merge are blind spots.
- Because images displayed in the top view screen are processed from each camera, the top view screen may display in the following ways.
  - If an image containing an object with a conspicuous colour is picked up by any of the cameras, the screen area for each camera may be affected and it may display in that colour.
  - Obstructions displayed in the front view may not display on the top view screen.
  - If the position or angle of each camera changes due to tilting of the vehicle, the image may appear distorted.
  - Lines on the road may appear distorted at the seams where each of the camera images merge.
  - The screen area for each camera may appear bright/dark depending on the illumination level around any of the cameras.

**Viewing the screen**

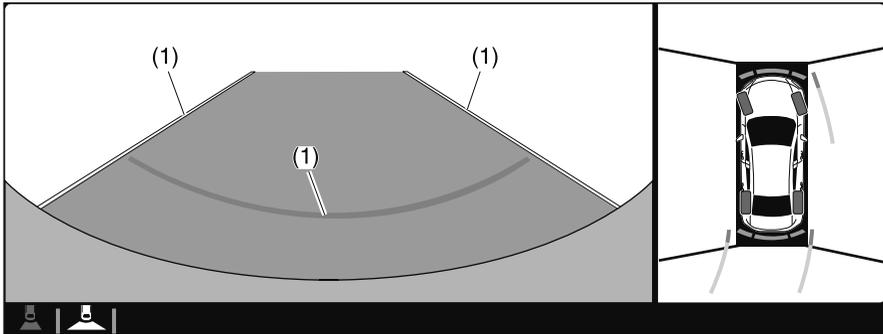

	Display/Icon	Content
(1)	Extended vehicle width lines and distance guide lines (blue & red)	<p>These guide lines indicate the approximate width of the vehicle and distance to a point measured from the rear of the vehicle (from the end of the bumper).</p> <ul style="list-style-type: none"> <li>• The red lines indicate the points up to about 0.5 m (19 in) from the rear end of the bumper.</li> </ul>

**NOTE**




*The top view/rear wide view screen displays the image at the rear of the vehicle at a wide angle and corrects the image to help detect approaching obstructions from the side. Therefore, it differs from the actual view.*

**▼ Margin of Error Between Road Surface on Screen and Actual Road Surface**

There might be some margin of error between the road surface appearing on the screen and the actual road surface. A margin of error in the perceived distance could lead to an accident, therefore be aware of the following conditions which can more easily produce errors in the perceived distance.


**The vehicle tilts due to weight of passengers and cargo.**

If the vehicle is tilted, obstructions picked up by a camera can appear farther or closer than the actual distance from the vehicle.

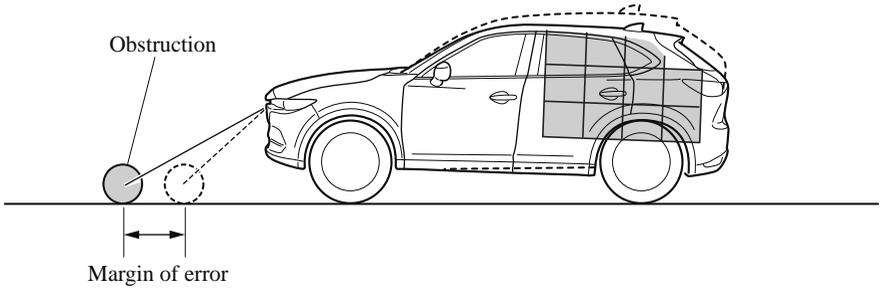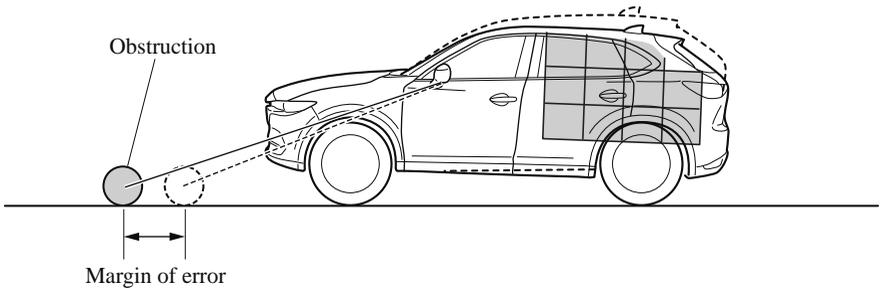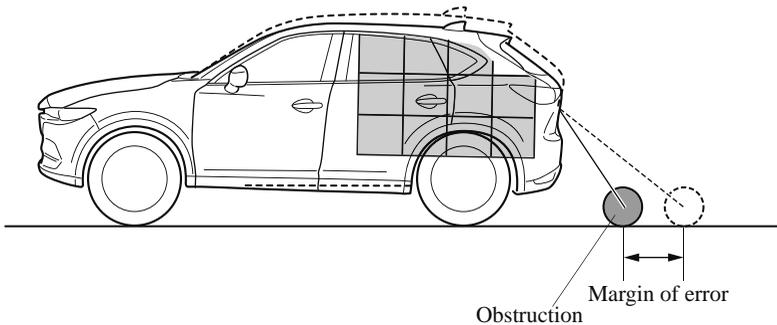**Front camera****Side camera****Rear camera****There is a steep up or down grade in the road at the front or rear of the vehicle**


If there is a steep up or down grade in the road at the front or rear of the vehicle, obstructions picked up by the camera can appear farther or closer than the actual distance from the vehicle.

## Front camera

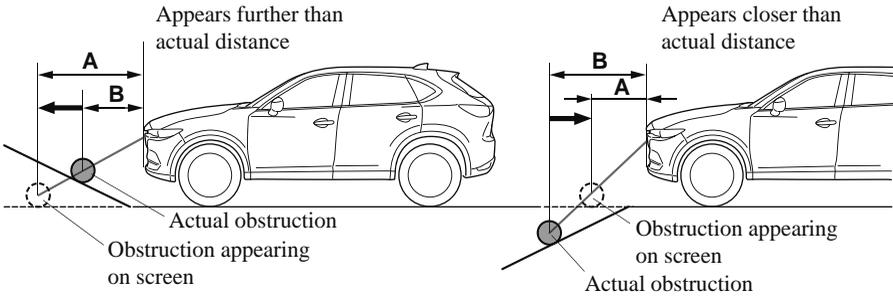


A: Distance of obstruction being viewed on screen  
B: Actual distance of obstruction from vehicle

## Side camera

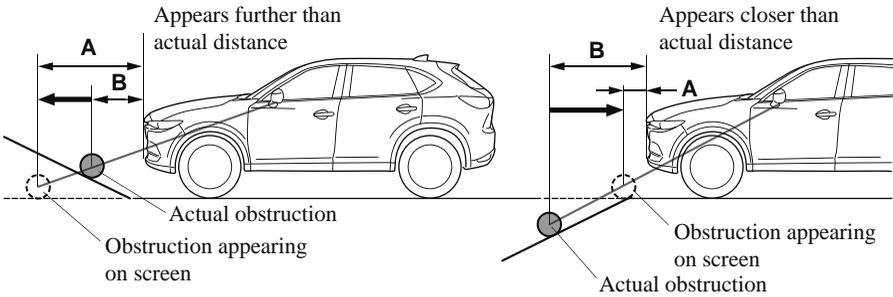

A: Distance of obstruction being viewed on screen  
B: Actual distance of obstruction from vehicle

## Rear camera

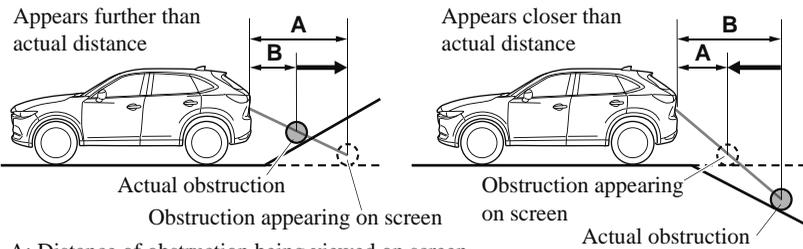

A: Distance of obstruction being viewed on screen  
B: Actual distance of obstruction from vehicle

**NOTE**


*If the vehicle is on a slope, obstructions taken by the camera can appear farther or closer than the actual distance from the vehicle.*

**Three-dimensional object at vehicle front or rear**


Because the vehicle front end guide lines (side camera) or the distance guide lines (rear camera) are displayed based on a flat surface, the distance to the three-dimensional object displayed on the screen is different from the actual distance.

**Side camera**


(Screen display)

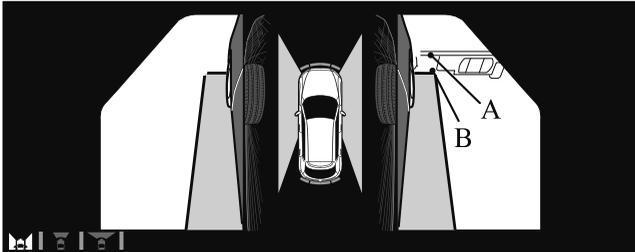

(Actual condition)

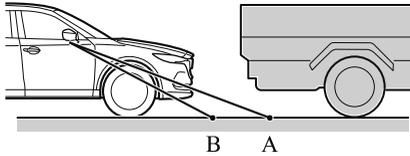

## Rear camera

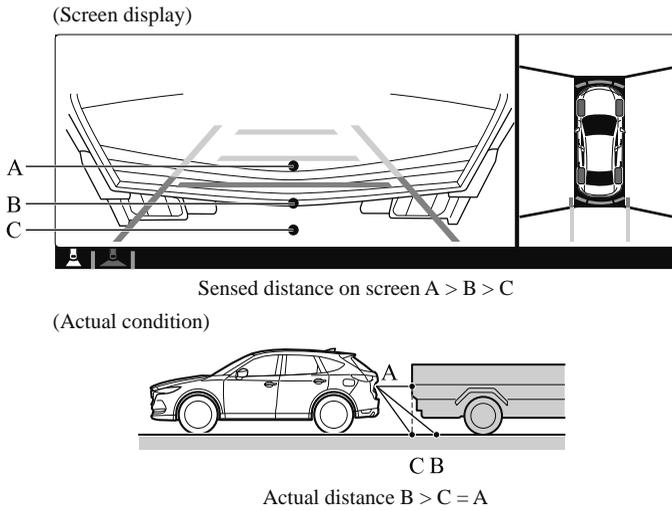


### ▼ System Problem Indication

Centre display indication	Cause	Action to be taken
"No camera signal." is displayed	The control unit might be damaged.	Have your vehicle inspected by an expert repairer (we recommend an Authorised Mazda Repairer).
Screen is pitch-black and blank	The camera might be damaged.	

## Forward Sensing Camera (FSC)\*

Your vehicle is equipped with a Forward Sensing Camera (FSC). The Forward Sensing Camera (FSC) is positioned near the rearview mirror and used by the following systems.

- High Beam Control System (HBC)
- Adaptive LED Headlights (ALH)
- Driver Attention Alert (DAA)
- Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS)
- Traffic Sign Recognition System (TSR)
- Advanced Smart City Brake Support (Advanced SCBS)
- Smart City Brake Support [Forward] (SCBS F)
- Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function)
- Cruising & Traffic Support (CTS)
- Smart Brake Support (SBS)

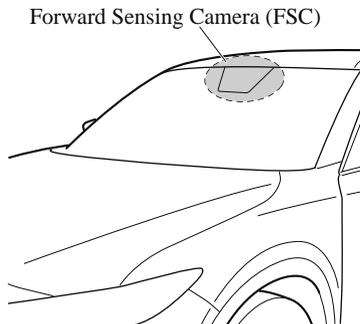

The Forward Sensing Camera (FSC) determines the conditions ahead of the vehicle while travelling at night and detects traffic lanes. The distance in which the Forward Sensing Camera (FSC) can detect objects varies depending on the surrounding conditions.

### **WARNING**

***Do not modify the suspension:***

*If the vehicle height or inclination is changed, the system will not be able to correctly detect vehicles ahead. This will result in the system not operating normally or mistakenly operating, which could cause a serious accident.*

**⚠ CAUTION**

- Do not apply accessories, stickers or film to the windscreen near the Forward Sensing Camera (FSC).  
If the area in front of the Forward Sensing Camera (FSC) lens is obstructed, it will cause the system to not operate correctly. Consequently, each system may not operate normally which could lead to an unexpected accident.
- Do not disassemble or modify the Forward Sensing Camera (FSC).  
Disassembly or modification of the Forward Sensing Camera (FSC) will cause a malfunction or mistaken operation. Consequently, each system may not operate normally which could lead to an unexpected accident.
- Heed the following cautions to assure the correct operation of the Forward Sensing Camera (FSC).
  - Be careful not to scratch the Forward Sensing Camera (FSC) lens or allow it to get dirty.
  - Do not remove the Forward Sensing Camera (FSC) cover.
  - Do not place objects on the instrument panel which reflect light.
  - Always keep the windscreen glass around the camera clean by removing dirt or fogging. Use the windscreen defroster to remove fogging on the windscreen.
  - Consult an expert repairer (we recommend an Authorised Mazda Repairer) regarding cleaning the interior side of the windscreen around the Forward Sensing Camera (FSC).
  - Consult an expert repairer (we recommend an Authorised Mazda Repairer) before performing repairs around the Forward Sensing Camera (FSC).
  - The Forward Sensing Camera (FSC) is installed to the windscreen. Consult an expert repairer (we recommend an Authorised Mazda Repairer) for windscreen repair and replacement.
  - When cleaning the windscreen, do not allow glass cleaners or similar cleaning fluids to get on the Forward Sensing Camera (FSC) lens. In addition, do not touch the Forward Sensing Camera (FSC) lens.
  - When performing repairs around the rearview mirror, consult an expert repairer (we recommend an Authorised Mazda Repairer).
  - Consult an expert repairer (we recommend an Authorised Mazda Repairer) regarding cleaning of the camera lens.
  - Do not hit or apply strong force to the Forward Sensing Camera (FSC) or the area around it. If the Forward Sensing Camera (FSC) is severely hit or if there are cracks or damage caused by flying gravel or debris in the area around it, stop using the following systems and consult an expert repairer (we recommend an Authorised Mazda Repairer).
    - High Beam Control System (HBC)
    - Adaptive LED Headlights (ALH)
    - Driver Attention Alert (DAA)
    - Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS)

- *Traffic Sign Recognition System (TSR)*
- *Advanced Smart City Brake Support (Advanced SCBS)*
- *Smart City Brake Support [Forward] (SCBS F)*
- *Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function)*
- *Cruising & Traffic Support (CTS)*
- *Smart Brake Support (SBS)*
- *The direction in which the Forward Sensing Camera (FSC) is pointed has been finely adjusted. Do not change the installation position of the Forward Sensing Camera (FSC) or remove it. Otherwise, it could result in damage or malfunction.*
- *Always use tyres for all wheels that are of the specified size, and the same manufacturer, brand, and tread pattern. In addition, do not use tyres with significantly different wear patterns on the same vehicle as the system may not operate normally.*
- *The Forward Sensing Camera (FSC) includes a function for detecting a soiled windscreen and informing the driver, however, depending on the conditions, it may not detect plastic shopping bags, ice or snow on the windscreen. In such cases, the system cannot accurately determine a vehicle ahead and may not be able to operate normally. Always drive carefully and pay attention to the road ahead.*

**NOTE**

- *In the following cases, the Forward Sensing Camera (FSC) cannot detect target objects correctly, and each system may be unable to operate normally.*
  - *The height of the vehicle ahead is low.*
  - *You drive your vehicle at the same speed as the vehicle ahead.*
  - *Headlights are not turned on during the night or when going through a tunnel.*
- *In the following cases, the Forward Sensing Camera (FSC) may not be able to detect target objects correctly.*
  - *Under bad weather condition, such as rain, fog and snow.*
  - *The window washer is being used or the windscreen wipers are not used when it's raining.*
  - *Ice, fog, snow, frost, rainfall, dirt, or foreign matter such as a plastic bag is stuck on the windscreen.*
  - *Trucks with low loading platforms and vehicles with an extremely low or high profile.*
  - *When driving next to walls with no patterning (including fences and longitudinally striped walls).*
  - *The tail lights of the vehicle ahead are turned off.*
  - *A vehicle is outside the illumination range of the headlights.*
  - *The vehicle is making a sharp turn, or ascending or descending a steep slope.*
  - *Entering or exiting a tunnel.*
  - *Heavy luggage is loaded causing the vehicle to tilt.*

- *Strong light is shone at the front of the vehicle (back light or high-beam light from on-coming vehicles).*
- *There are many light emitters on the vehicle ahead.*
- *When the vehicle ahead is not equipped with tail lights or the tail lights are turned off at nighttime.*
- *Elongated luggage or cargo is loaded onto installed roof rails and covers the Forward Sensing Camera (FSC).*
- *Exhaust gas from the vehicle in front, sand, snow, and water vapour rising from manholes and grating, and water splashed into the air.*
- *When towing a malfunctioning vehicle.*
- *The vehicle is driven with tyres having significantly different wear.*
- *The vehicle is driven on down slopes or bumpy roads.*
- *There are water puddles on the road.*
- *The surroundings are dark such as during the night, early evening, or early morning, or in a tunnel or indoor parking lot.*
- *The illumination brightness of the headlights is reduced or the headlight illumination is weakened due to dirt or a deviated optical axis.*
- *The target object enters the blind spot of the Forward Sensing Camera (FSC).*
- *A person or object bursts onto the road from the shoulder or cuts right in front of you.*
- *You change lanes and approach a vehicle ahead.*
- *When driving extremely close to the target object.*
- *Tyre chains or a temporary spare tyre is installed.*
- *The vehicle ahead has a special shape. For example, a vehicle towing a trailer house or a boat, or a vehicle carrier carrying a vehicle with its front pointed rearward.*
- *If the Forward Sensing Camera (FSC) cannot operate normally due to backlight or fog, the system functions related to the Forward Sensing Camera (FSC) are temporarily stopped and the following warning lights turn on. However, this does not indicate a malfunction.*
  - *High Beam Control System (HBC) warning light (amber)*
  - *Adaptive LED Headlights (ALH) warning light (amber)*
  - *Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS) warning indication*
  - *Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) warning indication*
  - *Cruising & Traffic Support (CTS) warning indication*
  - *Smart Brake Support/Smart City Brake Support (SBS/SCBS) warning indication/warning light (amber)*

- *If the Forward Sensing Camera (FSC) cannot operate normally due to high temperatures, the system functions related to the Forward Sensing Camera (FSC) are temporarily stopped and the following warning lights turn on. However, this does not indicate a malfunction. Cool down the area around the Forward Sensing Camera (FSC) such as by turning on the air conditioner.*
  - *High Beam Control System (HBC) warning light (amber)*
  - *Adaptive LED Headlights (ALH) warning light (amber)*
  - *Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS) warning indication*
  - *Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) warning indication*
  - *Cruising & Traffic Support (CTS) warning indication*
  - *Smart Brake Support/Smart City Brake Support (SBS/SCBS) warning indication/warning light (amber)*
- *If the Forward Sensing Camera (FSC) detects that the windscreen is dirty or foggy, the system functions related to the Forward Sensing Camera (FSC) are temporarily stopped and the following warning lights turn on. However, this does not indicate a problem. Remove the dirt from the windscreen or press the defroster switch and defog the windscreen.*
  - *High Beam Control System (HBC) warning light (amber)*
  - *Adaptive LED Headlights (ALH) warning light (amber)*
  - *Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS) warning indication*
  - *Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) warning indication*
  - *Cruising & Traffic Support (CTS) warning indication*
  - *Smart Brake Support/Smart City Brake Support (SBS/SCBS) warning indication/warning light (amber)*
- *If there are recognizable cracks or damage caused by flying gravel or debris on the windscreen, always have the windscreen replaced. Consult an expert repairer (we recommend an Authorised Mazda Repairer) for replacement.*
- ***(With Advanced Smart City Brake Support (Advanced SCBS))***
  - *The Forward Sensing Camera (FSC) recognises pedestrians when all of the following conditions are met:*
    - *The height of a pedestrian is about 1 to 2 meters.*
    - *An outline such as the head, both shoulders, or the legs can be determined.*

- *In the following cases, the Forward Sensing Camera (FSC) may not be able to detect target objects correctly:*
  - *Multiple pedestrians are walking, or there are groups of people.*
  - *A pedestrian is close to a separate object.*
  - *A pedestrian is crouching, lying, or slouching.*
  - *A pedestrian suddenly jumps into the road right in front of the vehicle.*
  - *A pedestrian opens an umbrella, or is carrying large baggage or articles.*
  - *A pedestrian is in a dark location such as during the night, or blends into the background by wearing clothes matching the background colour.*

## Radar Sensor (Front)\*


Your vehicle is equipped with a radar sensor (front).

The following systems also use the radar sensor (front).

- Mazda Radar Cruise Control (MRCC)
- Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function)
- Distance Recognition Support System (DRSS)
- Smart Brake Support (SBS)
- Cruising & Traffic Support (CTS)

The radar sensor (front) functions by detecting the radio waves reflected off a vehicle ahead or an obstruction sent from the radar sensor.

The radar sensor (front) is mounted behind the front emblem.

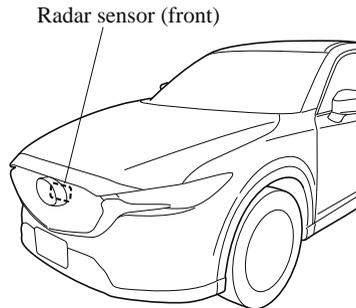

If “Front radar blocked” is displayed in the multi-information display of the instrument cluster, clean the area around the radar sensor (front).

### **CAUTION**

Heed the following precautions to assure correct operation of each system.

- Do not adhere stickers (including transparent stickers) to the surface of the radiator grille and front emblem in and around the radar sensor (front), and do not replace the radiator grille and front emblem with any product that is not a genuine product designed for use with the radar sensor (front).
- The radar sensor (front) includes a function for detecting soiling of the radar sensor's front surface and informing the driver, however, depending on the conditions, it may require time to detect or it may not detect plastic shopping bags, ice or snow. If this occurs, the system may not operate correctly, therefore always keep the radar sensor (front) clean.
- Do not install a grille guard.
- If the front part of the vehicle has been damaged in a vehicle accident, the position of the radar sensor (front) may have moved. Stop the system immediately and always have the vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).

- Do not use the front bumper to push other vehicles or obstructions such as when pulling out of a parking space. Otherwise, the radar sensor (front) could be hit and its position deviated.
- Do not remove, disassemble, or modify the radar sensor (front).
- For repairs, replacement or paint work around the radar sensor (front), consult an expert repairer (we recommend an Authorised Mazda Repairer).
- Do not modify the suspension. If the suspension are modified, the vehicle's posture could change and the radar sensor (front) may not be able to correctly detect a vehicle ahead or an obstruction.

**NOTE**

- Under the following conditions, the radar sensor (front) may not be able to detect vehicles ahead or obstructions correctly and each system may not operate normally.
  - The rear surface of a vehicle ahead does not reflect radio waves effectively, such as an unloaded trailer or an automobile with a loading platform covered by a soft top, vehicles with a hard plastic tailgate, and round-shaped vehicles.
  - Vehicles ahead with low vehicle height and thus less area for reflecting radio waves.
  - Visibility is reduced due to a vehicle ahead casting off water, snow, or sand from its tyres and onto your windscreen.
  - The luggage compartment is loaded with heavy objects or the rear passenger seats are occupied.
  - Ice, snow, or soiling is on the front surface of the front emblem.
  - During inclement weather such as rain, snow, or sand storms.
  - When driving near facilities or objects emitting strong radio waves.
- Under the following conditions, the radar sensor (front) may not be able to detect vehicles ahead or obstructions.
  - The beginning and end of a curve.
  - Roads with continuous curves.
  - Narrow lane roads due to road construction or lane closures.
  - The vehicle ahead enters the radar sensor's blind spot.
  - The vehicle ahead is running abnormally due to accident or vehicle damage.
  - Roads with repeated up and down slopes
  - Driving on poor roads or unpaved roads.
  - The distance between your vehicle and the vehicle ahead is extremely short.
  - A vehicle suddenly comes close such as by cutting into the lane.
- To prevent incorrect operation of the system, use tyres of the same specified size, manufacturer, brand, and tread pattern on all 4 wheels. In addition, do not use tyres with significantly different wear patterns or tyre pressures on the same vehicle (Including the temporary spare tyre).
- If the battery power is weak, the system may not operate correctly.


- *When driving on roads with little traffic and few vehicles ahead or obstructions for the radar sensor (front) to detect, “Front radar blocked” may be temporarily displayed, however, this does not indicate a problem.*
- *The radar sensors are regulated by the relevant radio wave laws of the country in which the vehicle is driven. If the vehicle is driven abroad, authorization from the country in which the vehicle is driven may be required.*

## Radar Sensors (Rear)\*

Your vehicle is equipped with radar sensors (rear). The following systems also use the radar sensors (rear).

- Blind Spot Monitoring (BSM)
- Rear Cross Traffic Alert (RCTA)

The radar sensors (rear) function by detecting the radio waves reflected off a vehicle approaching from the rear or an obstruction sent from the radar sensor.



The radar sensors (rear) are installed inside the rear bumper, one each on the left and right sides.

Always keep the surface of the rear bumper near the radar sensors (rear) clean so that the radar sensors (rear) operate normally. Also, do not apply items such as stickers.

Refer to Exterior Care on page 6-64.



*If the rear bumper receives a severe impact, the system may no longer operate normally. Stop the system immediately and have the vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).*

### NOTE


- *The detection ability of the radar sensors (rear) has limitations. In the following cases, the detection ability may lower and the system may not operate normally.*
  - *The rear bumper near the radar sensors (rear) has become deformed.*
  - *Snow, ice or mud adheres to the radar sensors (rear) on the rear bumper.*
  - *Under bad weather conditions such as rain, snow and fog.*
- *Under the following conditions, the radar sensors (rear) cannot detect target objects or it may be difficult to detect them.*
  - *Stationary objects on a road or a road side such as small, two-wheeled vehicles, bicycles, pedestrians, animals, and shopping carts.*

- *Vehicle shapes which do not reflect radar waves well such as empty trailers with a low vehicle height and sports cars.*
- *Vehicles are shipped with the direction of the radar sensors (rear) adjusted for each vehicle to a loaded vehicle condition so that the radar sensors (rear) detect approaching vehicles correctly. If the direction of the radar sensors (rear) has deviated for some reason, have the vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).*
- *For repairs or replacement of the radar sensors (rear), or bumper repairs, paintwork, and replacement near the radar sensors, consult an expert repairer (we recommend an Authorised Mazda Repairer).*
- *Turn off the system while pulling a trailer or while an accessory such as a bicycle carrier is installed to the rear of the vehicle. Otherwise, the radio waves emitted by the radar will be blocked causing the system to not operate normally.*
- *The radar sensors are regulated by the relevant radio wave laws of the country in which the vehicle is driven. If the vehicle is driven abroad, authorization from the country in which the vehicle is driven may be required.*

## Ultrasonic Sensor (Rear)\*

The ultrasonic sensors (rear) function by emitting ultrasonic waves which are reflected off obstructions at the rear and the returning ultrasonic waves are picked up by the ultrasonic sensors (rear).

Ultrasonic sensor (rear)




The ultrasonic sensors (rear) are mounted in the rear bumper.

## Front Camera/Side Cameras/Rear Camera\*

Your vehicle is equipped with a front camera, side cameras, and a rear camera. The 360° View Monitor uses each camera.

The front camera, side cameras, and rear camera shoot images of the area surrounding the vehicle.

Each camera is installed to the following positions.

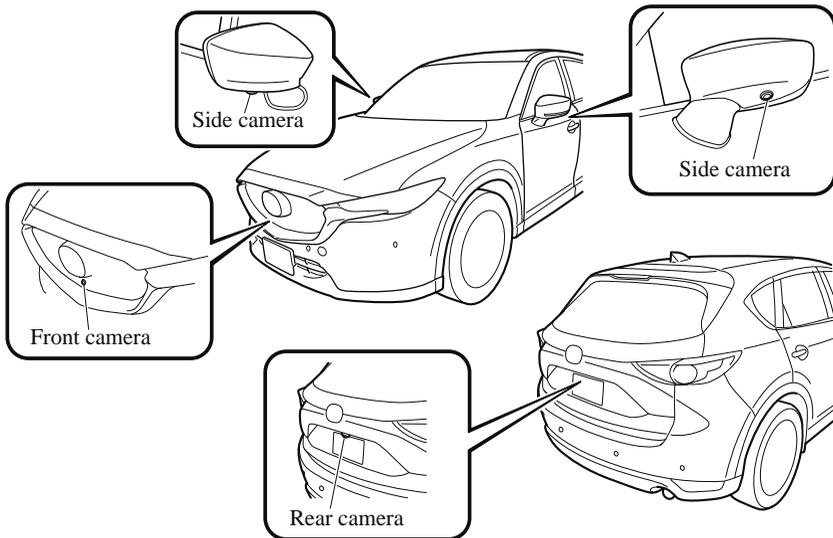

# Cruise Control

## Cruise Control\*

With cruise control, you can set and automatically maintain any speed of more than about 25 km/h (16 mph).



### WARNING

**Do not use the cruise control under the following conditions:**

Using the cruise control under the following conditions is dangerous and could result in loss of vehicle control.

- Hilly terrain
- Steep inclines
- Heavy or unsteady traffic
- Slippery or winding roads
- Similar restrictions that require inconsistent speed

### ▼ Cruise Control Switch

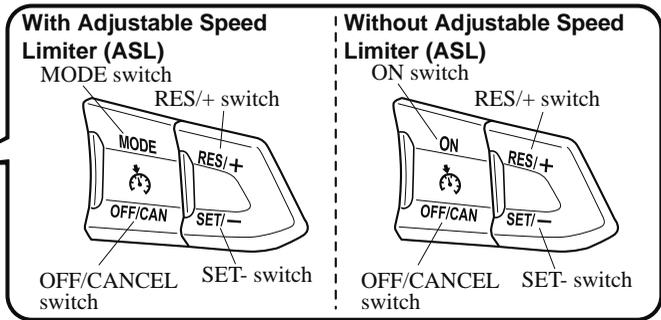


### NOTE

If your Mazda has the following steering switch, your Mazda is equipped the Mazda Radar Cruise Control (MRCC) system or the Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) system.

Refer to Mazda Radar Cruise Control (MRCC) on page 4-164.

Refer to Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) on page 4-177.

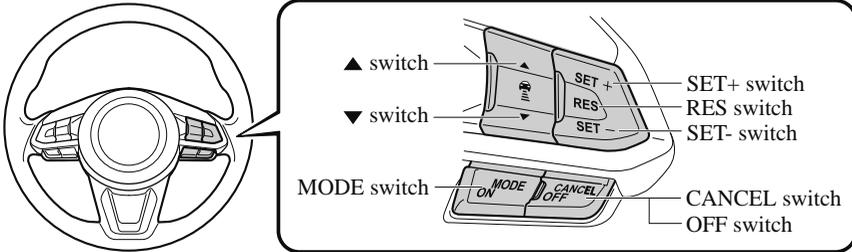

### ▼ Cruise Main Indication (White)/ Cruise Set Indication (Green)



The indication has 2 colours.

#### Cruise Main Indication (White)

The indication turns on (white) when the cruise control system is activated.

#### Cruise Set Indication (Green)

The indication turns on (green) when a cruising speed has been set.

### ▼ Activation/Deactivation

#### With Adjustable Speed Limiter (ASL)

To activate the system, press the MODE switch. The cruise main indication (white) is displayed.

To deactivate the system, press the OFF/CANCEL switch.

The cruise main indication (white) turns off.

### **NOTE**

When the MODE switch is pressed while the cruise control system is operating, the cruise control system switches to the Adjustable Speed Limiter (ASL).

#### Without Adjustable Speed Limiter (ASL)

To activate the system, press the ON switch. The cruise main indication (white) is displayed.

To deactivate the system, press the OFF/CANCEL switch.

The cruise main indication (white) turns off.



### **Always turn off the cruise control system when it is not in use:**

Leaving the cruise control system in an activation-ready state while the cruise control is not in use is dangerous as the cruise control could unexpectedly activate if the activation button is accidentally pressed, and result in loss of vehicle control and an accident.

## Cruise Control

---

### **NOTE**

When the ignition is switched OFF, the system status before it was turned off is maintained. For example, if the ignition is switched OFF with the cruise control system operable, the system will be operable when the ignition is switched ON the next time.

### ▼ To Set Speed

#### 1. (With Adjustable Speed Limiter (ASL))

Activate the cruise control system by pressing the MODE switch. The cruise main indication (white) is displayed.

#### (Without Adjustable Speed Limiter (ASL))

Activate the cruise control system by pressing the ON switch. The cruise main indication (white) is displayed.

2. Accelerate to the desired speed, which must be more than 25 km/h (16 mph).
3. Set the cruise control by pressing the SET/− switch at the desired speed. The cruise control is set at the moment the SET/− switch is pressed. Release the accelerator pedal simultaneously. The cruise set indication (green) is displayed.

### **NOTE**

· The cruise control speed setting cannot be performed under the following conditions:

· **(Automatic transaxle)**

The selector lever is in the P or N position.

· **(Manual transaxle)**

The shift lever is in the neutral position.

· The parking brake is applied.

· **(Vehicles with Adjustable Speed Limiter (ASL))**

The MODE switch for the Adjustable Speed Limiter (ASL) is pressed.

- Release the SET/− or RES/+ switch at the desired speed, otherwise the speed will continue increasing while the RES/+ switch is pressed and held, and continue decreasing while the SET/− switch is pressed and held (except when the accelerator pedal is depressed).
- On a steep grade, the vehicle may momentarily slow down while ascending, or speed up while descending.
- The cruise control will cancel if the vehicle speed decreases below 21 km/h (13 mph) when climbing a steep grade.
- The cruise control may cancel at about 15 km/h (9 mph) below the preset speed such as when climbing a long, steep grade.

The vehicle speed preset using the cruise control is displayed in the instrument cluster.

**Instrument Cluster****Type A****Type B**

\*1: Needle indicates set speed.

**Type C****European model****Except European model****Active Driving Display****▼ To Increase Cruising Speed**

Follow either of these procedures.

**To increase speed using cruise control switch**

Press the RES/+ switch and hold it. Your vehicle will accelerate. Release the switch at the desired speed.

Press the RES/+ switch and release it immediately to adjust the preset speed. Multiple operations will increase the preset speed according to the number of times it is operated.

**Increasing speed with a single RES/+ switch operation**

Instrument cluster display for vehicle speed indicated in km/h: 1 km/h (0.6 mph)  
Instrument cluster display for vehicle speed indicated in mph: 1 mph (1.6 km/h)

**To increase speed using accelerator pedal**

Depress the accelerator pedal to accelerate to the desired speed. Press the SET/- switch and release it immediately.

**NOTE**

*Accelerate if you want to speed up temporarily when the cruise control is on. Greater speed will not interfere with or change the set speed. Take your foot off the accelerator to return to the set speed.*

**▼ To Decrease Cruising Speed**

Press the SET/- switch and hold it. The vehicle will gradually slow. Release the switch at the desired speed.

Press the SET/- switch and release it immediately to adjust the preset speed. Multiple operations will decrease the preset speed according to the number of times it is operated.

**Decreasing speed with a single SET/- switch operation**

Instrument cluster display for vehicle speed indicated in km/h: 1 km/h (0.6 mph)  
Instrument cluster display for vehicle speed indicated in mph: 1 mph (1.6 km/h)

## Cruise Control

---

### ▼ To Resume Cruising Speed at More Than 25 km/h (16 mph)

If the cruise control system temporarily cancelled (such as applying the brake pedal) and the system is still activated, the most recent set speed will automatically resume when the RES/+ switch is pressed. If vehicle speed is below 25 km/h (16 mph), increase the vehicle speed up to 25 km/h (16 mph) or more and press the RES/+ switch.

### ▼ To Temporarily Cancel

To temporarily cancel the system, use one of these methods:

- Slightly depress the brake pedal.
- **(Manual transaxle)**  
Depress the clutch pedal.
- Press the OFF/CANCEL switch.

If the RES/+ switch is pressed when the vehicle speed is 25 km/h (16 mph) or higher, the system reverts to the previously set speed.

### NOTE

- *If any of the following conditions occur, the cruise control system is temporarily cancelled.*
  - *The parking brake is applied.*
  - **(Vehicles with Adjustable Speed Limiter (ASL))**  
*The MODE switch for the Adjustable Speed Limiter (ASL) is pressed.*
  - **(Automatic transaxle)**  
*The selector lever is in the P or N position.*
  - **(Manual transaxle)**  
*The shift lever is in the neutral position.*

· *When the cruise control system is temporarily cancelled by even one of the applicable cancel conditions, the speed cannot be re-set.*

#### · **(Automatic transaxle)**

*The cruise control cannot be cancelled while driving in manual mode (selector lever shifted from D to M position). Therefore, engine braking will not be applied even if the transaxle is shifted down to a lower gear. If deceleration is required, lower the set speed or depress the brake pedal.*

### ▼ To Deactivate

#### **When a cruising speed has been set (cruise set indication (green) turns on)**

Long-press the OFF/CANCEL switch or press the OFF/CANCEL switch 2 times.

#### **When a cruising speed has not been set (cruise main indication (white) turns on)**

Press the OFF/CANCEL switch.

# Tyre Pressure Monitoring System

## Tyre Pressure Monitoring System\*

The Tyre Pressure Monitoring System (TPMS) monitors the pressure for each tyre.


If tyre pressure is too low in one or more tyres, the system will inform the driver via the warning light in the instrument cluster and by the warning beep sound.

Refer to Contact expert repairer (we recommend an Authorised Mazda Repairer) and Have Vehicle Inspected on page 7-46.

Refer to Taking Action on page 7-55.

Refer to Tyre Inflation Pressure Warning Beep on page 7-68.

The tyre pressure sensors installed on each wheel send tyre pressure data by radio signal to the receiver unit in the vehicle.



Tyre pressure sensors

### **NOTE**

*When the ambient temperature is low due to seasonal changes, tyre temperatures are also lower. When the tyre temperature decreases, the air pressure decreases as well. The TPMS warning light may illuminate more frequently. Visually inspect the tyres daily before driving, and check tyre pressures monthly with a tyre pressure gauge. When checking tyre pressures, use of a digital tyre pressure gauge is recommended.*

TPMS does not alleviate your need to check the pressure and condition of all four tyres regularly.

# Tyre Pressure Monitoring System

---

## CAUTION

- Each tyre, including the spare (if provided), should be checked monthly when cold and inflated to the inflation pressure recommended by the vehicle manufacturer on the vehicle placard or tyre inflation pressure label. (If your vehicle has tyres of a different size than the size indicated on the vehicle placard or tyre inflation pressure label, you should determine the proper tyre inflation pressure for those tyres.)

As an added safety feature, your vehicle has been equipped with a tyre pressure monitoring system (TPMS) that illuminates a low tyre pressure telltale when one or more of your tyres is significantly under-inflated. Accordingly, when the low tyre pressure telltale illuminates, you should stop and check your tyres as soon as possible, and inflate them to the proper pressure. Driving on a significantly under-inflated tyre causes the tyre to overheat and can lead to tyre failure. Under-inflation also reduces fuel efficiency and tyre tread life, and may affect the vehicle's handling and stopping ability.

Please note that the TPMS is not a substitute for proper tyre maintenance, and it is the driver's responsibility to maintain correct tyre pressure, even if under-inflation has not reached the level to trigger illumination of the TPMS low tyre pressure telltale.

Your vehicle has also been equipped with a TPMS malfunction indicator to indicate when the system is not operating properly.

The TPMS malfunction indicator is combined with the low tyre pressure telltale. When the system detects a malfunction, the telltale will flash for approximately one minute and then remain continuously illuminated. This sequence will continue upon subsequent vehicle start-ups as long as the malfunction exists. When the malfunction indicator is illuminated, the system may not be able to detect or signal low tyre pressure as intended. TPMS malfunctions may occur for a variety of reasons, including the installation of replacement or alternate tyres or wheels on the vehicle that prevent the TPMS from functioning properly. Always check the TPMS malfunction telltale after replacing one or more tyres or wheels on your vehicle to ensure that the replacement or alternate tyres and wheels allow the TPMS to continue to function properly.

- To avoid false readings, the system samples for a little while before indicating a problem. As a result it will not instantaneously register a rapid tyre deflation or blow out.

# Tyre Pressure Monitoring System

## ▼ System Error Activation

When the warning light flashes, there may be a system malfunction. Consult an expert repairer (we recommend an Authorised Mazda Repairer).

A system error activation may occur in the following cases:

- When there is equipment or a device near the vehicle using the same radio frequency as that of the tyre pressure sensors.
- When a metallic device such as a non-genuine navigation system is equipped near the centre of the instrument panel, which may block radio signals from the tyre pressure sensor to the receiver unit.
- When using the following devices in the vehicle that may cause radio interference with the receiver unit.
  - A digital device such as a personal computer.
  - A current converter device such as a DC-AC converter.
- When excess snow or ice adheres to the vehicle, especially around the wheels.
- When the tyre pressure sensor batteries are exhausted.
- When using a wheel with no tyre pressure sensor installed.
- When using tyres with steel wire reinforcement in the sidewalls.
- When using tyre chains.

## ▼ Tyres and Wheels



*When inspecting or adjusting the tyre air pressures, do not apply excessive force to the stem part of the wheel unit. The stem part could be damaged.*

### Changing tyres and wheels

The following procedure allows the TPMS to recognise a tyre pressure sensor's unique ID signal code whenever tyres or wheels are changed, such as changing to and from winter tyres.

#### **NOTE**

*Each tyre pressure sensor has a unique ID signal code. The signal code must be registered with the TPMS before it can work. The easiest way to do it is to have an expert repairer (we recommend an Authorised Mazda Repairer), change your tyre and complete ID signal code registration.*

### **When having tyres changed at an expert repairer (we recommend an Authorised Mazda Repairer)**

When an expert repairer (we recommend an Authorised Mazda Repairer), changes your vehicle's tyres, they will complete the tyre pressure sensor ID signal code registration.

### **When changing tyres yourself**

If you or someone else changes tyres, you or someone else can also undertake the steps for the TPMS to complete the ID signal code registration.

## Tyre Pressure Monitoring System

---

1. After tyres have been changed, switch the ignition ON, then back to ACC or OFF.
2. Wait for about 15 minutes.
3. After about 15 minutes, drive the vehicle at a speed of at least 25 km/h (16 mph) for 10 minutes and the tyre pressure sensor ID signal code will be registered automatically.

### **NOTE**

*If the vehicle is driven within about 15 minutes of changing tyres, the tyre pressure monitoring system warning light will flash because the sensor ID signal code would not have been registered. If this happens, park the vehicle for about 15 minutes, after which the sensor ID signal code will register upon driving the vehicle for 10 minutes.*

### **Replacing tyres and wheels**



- *When replacing/repairing the tyres or wheels or both, have the work done by an expert repairer (we recommend an Authorised Mazda Repairer), or the tyre pressure sensors may be damaged.*
- *The wheels equipped on your Mazda are specially designed for installation of the tyre pressure sensors. Do not use non-genuine wheels, otherwise it may not be possible to install the tyre pressure sensors.*

Be sure to have the tyre pressure sensors installed whenever tyres or wheels are replaced.

When having a tyre or wheel or both replaced, the following types of tyre pressure sensor installations are possible.

- The tyre pressure sensor is removed from the old wheel and installed to the new one.
- The same tyre pressure sensor is used with the same wheel. Only the tyre is replaced.
- A new tyre pressure sensor is installed to a new wheel.

### **NOTE**

- *The tyre pressure sensor ID signal code must be registered when a new tyre pressure sensor is purchased. For purchase of a tyre pressure sensor and registration of the tyre pressure sensor ID signal code, consult an expert repairer (we recommend an Authorised Mazda Repairer).*
- *When reinstalling a previously removed tyre pressure sensor to a wheel, replace the grommet (seal between valve body/sensor and wheel) for the tyre pressure sensor.*

## **Diesel Particulate Filter (SKYACTIV-D 2.2)**

The diesel particulate filter collects and removes most of the particulate matter (PM) in the exhaust gas of a diesel engine. PM collected by the diesel particulate filter is cleared during normal driving, however, PM may not be removed and the diesel particulate filter indicator light may illuminate under the following conditions:

- If the vehicle is driven at 15 km/h (9 mph) or less continuously.
- If the vehicle is repeatedly driven for a short period of time (10 minute or less) or driven while the engine is cold.
- If the vehicle is idled for a long time.

### **With Instrument cluster (Type A/B)**

#### **When “Soot Accumulation in DPF too high” is indicated**

The particulate matter (PM) cannot be removed automatically and the amount of collected PM reaches a specified amount. After the engine has sufficiently warmed up (engine coolant temperature of 80 °C (176 °F) or more), depress the accelerator pedal and drive the vehicle at a speed of 20 km/h (12 mph) or more for about 15 to 20 minutes to eliminate the PM.

#### **When “DPF malfunction” is indicated**

Contact an expert repairer (we recommend an Authorised Mazda Repairer).

### **⚠ CAUTION**

*If the vehicle continues to be driven with “Soot Accumulation in DPF too high” indicated in the display, the particulate matter (PM) increases and the indication may change to “DPF malfunction”. If the indication changes to “DPF malfunction”, have the vehicle inspected immediately at an expert repairer (we recommend an Authorised Mazda Repairer). If the vehicle is not inspected and continues to be driven, the engine may malfunction.*

### **NOTE**

- *When “DPF malfunction” is indicated in the display, the engine output is restricted to protect the diesel particulate filter.*
- *The engine sound and exhaust gas smell may change when PM is being removed while driving.*

### **With Instrument cluster (Type C)**

## **DPF**

#### **When illuminated**

The particulate matter (PM) cannot be removed automatically and the amount of collected PM reaches a specified amount. After the engine has sufficiently warmed up (engine coolant temperature of 80 °C (176 °F) or more), depress the accelerator pedal and drive the vehicle at a speed of 20 km/h (12 mph) or more for about 15 to 20 minutes to eliminate the PM.

## Diesel Particulate Filter

---

### When flashing

Contact an expert repairer (we recommend an Authorised Mazda Repairer).

Refer to Indication/Indicator Lights on page 4-71.



*If the vehicle is continually driven as usual with the diesel particulate filter indicator light illuminated, PM increases and the indicator light may start flashing. If the diesel particulate filter indicator light starts flashing, have the vehicle inspected immediately at an expert repairer (we recommend an Authorised Mazda Repairer). If the vehicle is not inspected and continues to be driven, the engine may malfunction.*

### NOTE

- When the diesel particulate filter indicator light flashes, the engine output is restricted to protect the diesel particulate filter.*
- The engine sound and exhaust gas smell may change when PM is being removed while driving.*

# Selective Catalytic Reduction (SCR) System

## Selective Catalytic Reduction (SCR) System\*

The SCR system is designed to reduce nitrogen oxide (NOx) in the exhaust gas and purify the exhaust gas by injecting it with AdBlue®.

### WARNING

**Be careful not to allow the AdBlue® fluid to run out. If the AdBlue® fluid completely runs out, the SCR system will not operate normally.**

When the remaining AdBlue® is low, a message is displayed on the multi-information display, and the SCR warning light turns on/flashes.

Refer to Selective Catalytic Reduction (SCR) System Indications on page 4-329.

In this case, consult an expert repairer (we recommend an Authorised Mazda Repairer). If AdBlue® needs to be replenished, add AdBlue® following the specified procedure.

Refer to AdBlue® Replenishment on page 6-35.

### NOTE

- AdBlue® needs to be replenished periodically according to the scheduled maintenance information.
- Normally, the vehicle can be driven about 12,000 km (7,500 miles) before AdBlue® needs to be replenished. However, it may need to be replenished earlier depending on the driving and environmental conditions (such as putting a high load on the engine while driving or driving the vehicle at high altitudes).
- The sound of the SCR system operating may be heard from the area under the vehicle, however, this does not indicate a problem.

### ▼ Selective Catalytic Reduction (SCR) System Indications

As the remaining amount of AdBlue® lowers, the SCR system notifies the driver using the following indications.

The vehicle speed may be restricted for a while even if the warning light turns off after replenishing the AdBlue®. To cancel the vehicle speed restriction immediately, switch the ignition OFF after the warning light turns off and then switch the ignition ON again.

Status	Warning sound	SCR warning light	Multi-information display indication	Driving restriction
Remaining AdBlue® has decreased (Maximum driving distance : 2400 km (1491 miles) or less)	Sound is activated when ignition is switched ON	Turns off	 <p><b>Low AdBlue® level No start in 2400 km</b></p>	None

## Selective Catalytic Reduction (SCR) System

Status	Warning sound	SCR warning light	Multi-information display indication	Driving restriction
Remaining AdBlue® is low (Maximum driving distance : 1400 km (869.9 miles) or less)	Sound is activated when ignition is switched ON	Turns on	 <b>Refill AdBlue®</b> <b>Speed will be limited in 700km .</b> <b>No start in 1400 km</b>	None
Remaining AdBlue® is extremely low (Maximum driving distance : 700 km (435 miles) or less)	Sound is activated when ignition is switched ON	Flashes	 <b>Vehicle speed Restricted</b> <b>Refill AdBlue®</b> <b>No start in 700km</b>	Vehicle speed lowers gradually to 50 km/h (31 mph)
No remaining AdBlue® (Maximum driving distance : 0 km (0 miles))	Sound is activated when remaining-distance-to-empty indication is 0 km (0 miles)	Flashes	 <b>Engine start disabled</b> <b>AdBlue® empty</b> <b>Refill now</b>	Engine restarting not possible

The following indications are displayed when there is a problem with the SCR system/ AdBlue®. If there is a problem with the SCR system/AdBlue®, consult your expert repairer (we recommend an Authorised Mazda Repairer).

The vehicle speed may be restricted for a while even if the warning light turned off after having the vehicle repaired. To cancel the vehicle speed restriction immediately, switch the ignition OFF after the warning light turns off, and then switch the ignition ON again.

Status	Warning sound	SCR warning light	Multi-information display indication	Driving restriction
Vehicle is driven with AdBlue® in diluted form (Maximum driving distance : 700 km (435 miles) or less)	<ul style="list-style-type: none"> <li>• Sound is activated when there is a problem</li> <li>• Sound is activated when ignition is switched ON</li> </ul>	Flashes	  <b>Improper AdBlue®</b> ↔ <b>Excessive emissions</b> <b>Speed will be limited in 700km.</b> <b>Use proper AdBlue®</b> <b>No start in 700km</b>	None
Vehicle continues to be driven with AdBlue® in diluted form (Maximum driving distance : 650 km (404 miles) or less)	Sound is activated when ignition is switched ON	Flashes	  <b>Vehicle speed restricted</b> ↔ <b>Excessive emissions</b> <b>Improper AdBlue®</b> <b>Use proper AdBlue®</b> <b>No start in 650 km</b>	Vehicle speed lowers gradually to 50 km/h (31 mph)

# Selective Catalytic Reduction (SCR) System

Status	Warning sound	SCR warning light	Multi-information display indication	Driving restriction
Vehicle continues to be driven with AdBlue® in diluted form (Maximum driving distance : 0 km (0 miles))	Sound is activated when remaining-distance-to-empty indication is 0 km (0 miles)	Flashes	 Engine start disabled Improper AdBlue®   Excessive emissions Use proper AdBlue®	Engine restarting not possible
Problem with AdBlue® (Maximum driving distance : 700 km (435 miles) or less)	<ul style="list-style-type: none"> <li>Sound is activated when there is a problem</li> <li>Sound is activated when ignition is switched ON</li> </ul>	Flashes	 Dosing malfunction Speed will be limited in 50 km. No start in 700 km   Excessive emissions Contact your dealer	None
Problem with AdBlue® continues (Maximum driving distance : 650 km (404 miles) or less)	Sound is activated when ignition is switched ON	Flashes	 Vehicle speed restricted Dosing malfunction No start in 650 km   Excessive emissions Contact your dealer	Vehicle speed lowers gradually to 50 km/h (31 mph)
Problem with AdBlue® continues (Maximum driving distance : 0 km (0 miles))	Sound is activated when remaining-distance-to-empty indication is 0 km (0 miles)	Flashes	 Engine start disabled Dosing malfunction   Excessive emissions Contact your dealer	Engine restarting not possible
Problem with SCR system (Maximum driving distance : 700 km (435 miles) or less)	<ul style="list-style-type: none"> <li>Sound is activated when there is a problem</li> <li>Sound is activated when ignition is switched ON</li> </ul>	Flashes	 SCR malfunction Speed will be limited in 50 km. No start in 700 km   Excessive emissions Contact your dealer	None
Problem with SCR system continues (Maximum driving distance : 650 km (404 miles) or less)	Sound is activated when ignition is switched ON	Flashes	 Vehicle speed restricted SCR malfunction No start in 650 km   Excessive emissions Contact your dealer	Vehicle speed lowers gradually to 50 km/h (31 mph)
Problem with SCR system continues (Maximum driving distance : 0 km (0 miles))	Sound is activated when remaining-distance-to-empty indication is 0 km (0 miles)	Flashes	 Engine start disabled SCR malfunction   Excessive emissions Contact your dealer	Engine restarting not possible
AdBlue® has been replenished over the specified amount	—	Turns on	 <p><b>Overfilled AdBlue® Drain excess AdBlue® as soon as possible</b></p>	None

## Rear View Monitor (Mazda Connect (Type A))

---

### Rear View Monitor (Mazda Connect (Type A))\*

The rear view monitor provides visual images of the rear of the vehicle when reversing.

#### **WARNING**

**Always drive carefully confirming the safety of the rear and the surrounding conditions by looking directly with your eyes:**

*Reversing the vehicle by only looking at the screen is dangerous as it may cause an accident or a collision with an object. The rear view monitor is only a visual assist device when reversing the vehicle. The images on the screen may be different from the actual conditions.*

#### **CAUTION**

- Do not use the rear view monitor under the following conditions: Using the rear view monitor under the following conditions is dangerous and could result in injury or vehicle damage or both.
  - Icy or snow-covered roads.
  - Tyre chains or a temporary spare tyre is installed.
  - The liftgate is not fully closed.
  - The vehicle is on a road incline.
- When the display is cold, images may course across the monitor or the screen and may be dimmer than usual, which could cause difficulty in confirming the surrounding conditions of the vehicle. Always drive carefully confirming the safety of the rear and the surrounding conditions by looking directly with your eyes.
- Do not apply excessive force to the camera. The camera position and angle may deviate.
- Do not disassemble, modify, or remove it as it may no longer be waterproof.
- The camera cover is made of plastic. Do not apply degreasing agents, organic solvents, wax, or glass coating agents to the camera cover. If any are spilled on the cover, wipe off with a soft cloth immediately.
- Do not rub the camera cover forcefully with an abrasive or hard brush. The camera cover or lens may be scratched which might affect the images.


#### **NOTE**

- If water, snow, or mud is stuck on the camera lens, wipe it off using a soft cloth. If it cannot be wiped off, use a mild detergent.
- If the camera temperature changes rapidly (Hot to cold, cold to hot), the rear view monitor may not operate correctly.

## Rear View Monitor (Mazda Connect (Type A))

- When replacing the tyres, consult an expert repairer (we recommend an Authorised Mazda Repairer). Replacing the tyres could result in deviation of the guide lines which appear on the display.
- If the vehicle's front, side, or rear has been involved in a collision, the alignment of the rear view parking camera (location, installation angle) may have deviated. Always consult an expert repairer (we recommend an Authorised Mazda Repairer) to have the vehicle inspected.
- If “No Video Signal Available” is indicated in the display, there could be a problem with the camera. Have your vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).
- **(Predicted vehicle path assist lines display type)**  
If force is applied to the steering wheel, the guide lines may not display. Loosen your grip on the steering wheel to allow the guide lines to display.

### ▼ Rear View Parking Camera Location

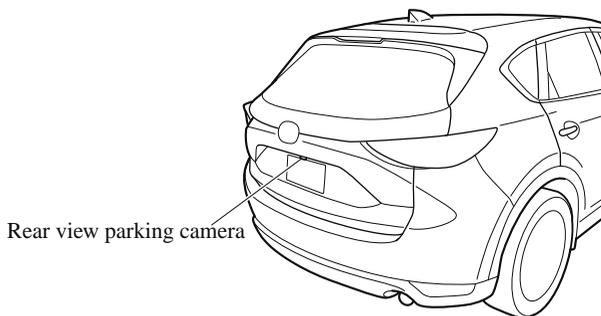

### ▼ Switching to the Rear View Monitor Display

Shift the shift lever (manual transaxle) or the selector lever (automatic transaxle) to reverse (R) position with the ignition switched ON to switch the display to the rear view monitor display.

#### **NOTE**

When the shift lever (manual transaxle) or the selector lever (automatic transaxle) is shifted from reverse (R) position to another shift lever (manual transaxle) or the selector lever (automatic transaxle) position, the screen returns to the previous display.


# Rear View Monitor (Mazda Connect (Type A))

---


## ▼ Displayable Range on the Screen

The images on the screen may be different from the actual conditions.

(Screen display)

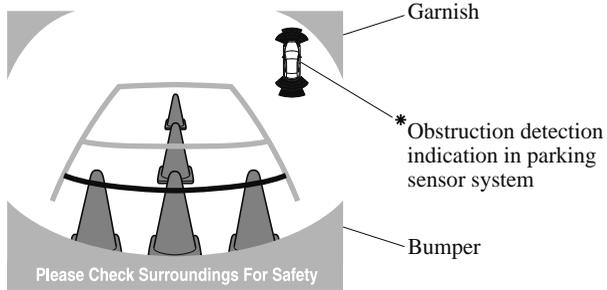

(Actual view)

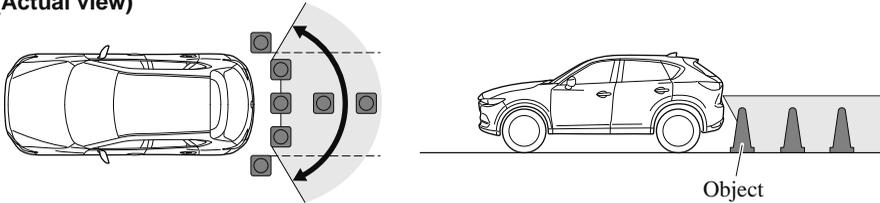

## NOTE

- The displayable range varies depending on the vehicle and road conditions.
- The displayable range is limited. Objects under the bumper or around the bumper ends cannot be displayed.
- The distance appearing in the displayed image is different from the actual distance because the rear view parking camera is equipped with a specific lens.
- Images displayed on the monitor from the rear view parking camera are reversed images (mirror images).
- Some optionally installed vehicle accessories may be picked up by the camera. Do not install any optional parts that can interfere with the camera view, such as illuminating parts or parts made of reflective material.
- It may be difficult to see the display under the following conditions, however, it does not indicate a malfunction.
  - In darkened areas.
  - When the temperature around the lens is high/low.
  - When the camera is wet such as on a rainy day or during periods of high humidity.
  - When foreign material such as mud is stuck around the camera.
  - When the camera lens reflects sunlight or headlight beams.
- Image display may be delayed if the temperature around the camera is low.


## Rear View Monitor (Mazda Connect (Type A))

### ▼ Viewing the Display

#### Predicted vehicle path assist lines display type

The projected path guidance mode displays the predicted path of the vehicle after you turn the steering wheel.

Use this mode for parking your vehicle in a parking space or garage.

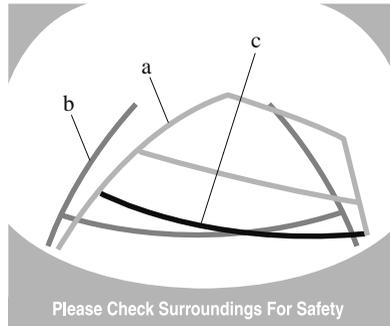

#### a) Projected vehicle path (yellow)

These lines are displayed as a reference for the projected path of the vehicle.

The lines displaying the projected vehicle path change after you turn the steering wheel.

#### b) Extended vehicle width lines (blue)

These lines indicate the vehicle's extended width.

These lines are not displayed when the vehicle's wheels are in the straight-ahead position.

#### c) Distance guide lines

These lines indicate the approximate distance to a point measured from the vehicle's rear (from the end of the bumper).

The blue line indicates the point about 0.5 m (19 in) from the rear bumper.

The red and yellow lines, which change position after you turn the steering wheel, indicate the points about 0.5 m (19 in) for the red line and 1.0 m (39 in) for the yellow lines from the rear bumper (at the centre point of each of the lines).

A degree of error occurs when the wheels are not in the straight-ahead position.

In the above illustration, the right side of the vehicle is in a position closer to the actual distance displayed by the distance guide lines (red: about 0.5 m (19 in) point, yellow: about 1.0 m (39 in) point behind the rear bumper), whereas the left side is in a position farther away.

## Rear View Monitor (Mazda Connect (Type A))

---

### CAUTION


*The indicated position of the guide lines on the display changes depending on the vehicle conditions (such as the number of occupants/cargo load) and the road conditions (such as a steep gradient to the rear of the vehicle).*

*Always check the area to the vehicle's rear and the surrounding area directly with your eyes while backing up.*

### **Fixed assist lines display type**

Guide lines which indicate the width of the vehicle (yellow) are displayed on the screen as a reference to the approximate width of the vehicle in comparison to the width of the parking space you are about to back into.

Use this display view for parking your vehicle in a parking space or garage.

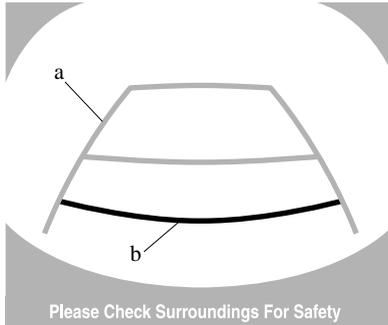

a) Vehicle width guide lines (yellow)

Guide lines serve as a reference to the approximate width of the vehicle.

b) Distance guide lines

These guide lines indicate the approximate distance to a point measured from the vehicle's rear (from the end of the bumper).

The red and yellow lines indicate the points about 0.5 m (19 in) for the red line and 1.0 m (39 in) for the yellow lines from the rear bumper (at the centre point of each of the lines).

### CAUTION

*The guide lines on the screen are fixed lines. They are not synced to the driver's turning of the steering wheel. Always be careful and check the area to the vehicle's rear and the surrounding area directly with your eyes while backing up.*

## Rear View Monitor (Mazda Connect (Type A))

### ▼ Rear View Monitor Operation

The operation of the rear view monitor when reversing the vehicle varies depending on the traffic, road, and vehicle conditions. The amount of steering and the timing also varies depending on conditions, so confirm the surrounding conditions directly with your eyes and steer the vehicle in accordance with the conditions.

Be well aware of the above cautions prior to using the rear view monitor.

### Predicted vehicle path assist lines display type

#### **NOTE**


*The following shows an example of vehicle parking in which the steering wheel is turned to the right when backing up the vehicle. The operation is reversed when backing up the vehicle from the opposite direction.*

1. Shift the shift lever (manual transaxle) or the selector lever (automatic transaxle) to reverse (R) position to switch the display to the rear view monitor display.
2. Before backing the vehicle into the parking space, turn the steering wheel while referring to the projected vehicle path display so that the vehicle enters the centre of the parking space.

**(Display condition)**



**(Vehicle condition)**

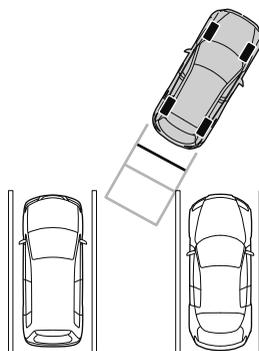


## Rear View Monitor (Mazda Connect (Type A))


---

3. After your vehicle begins entering the parking space, continue backing up slowly so that the distance between the vehicle width lines and the sides of the parking space on the left and right are roughly equal.

(Display condition)

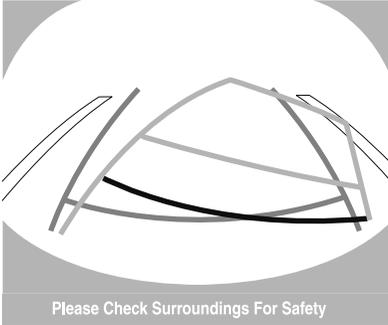


(Vehicle condition)




4. Continue to adjust the steering wheel until the vehicle width guide lines are parallel to the left and right sides of the parking space.
5. Once they are parallel, straighten the wheels and back your vehicle slowly into the parking space. Continue checking the vehicle's surroundings and then stop the vehicle in the best possible position. (If the parking space has division lines, check whether the vehicle width guide lines are parallel to them.)

(Display condition)

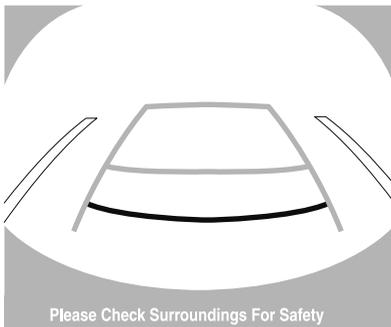

(Vehicle condition)



6. When the shift lever (manual transaxle) or the selector lever (automatic transaxle) is shifted from reverse (R) position to another shift lever (manual transaxle) or the selector lever (automatic transaxle) position, the screen returns to the previous display.


## Rear View Monitor (Mazda Connect (Type A))

---

### **NOTE**

*Because there may be a difference between the displayed image, such as indicated below, and the actual conditions when parking, always verify the safety at the rear of the vehicle and the surrounding area directly with your eyes.*

- *In the image of the parking space (or garage) displayed on the screen, the back end and distance guide lines may appear aligned in the monitor, but they may not actually be aligned on the ground.*
- *When parking in a space with a division line on only one side of the parking space, the division line and the vehicle width guide line appear aligned in the monitor, but they may not actually be aligned on the ground.*

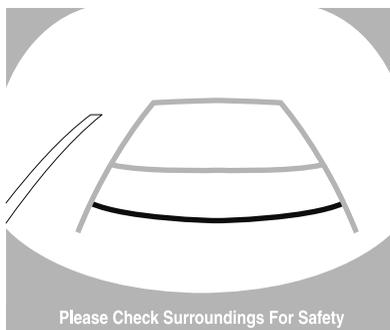

### **Fixed assist lines display type**

### **NOTE**

*Images displayed on the monitor from the rear view parking camera are reversed images (mirror images).*

1. Shift the shift lever (manual transaxle) or the selector lever (automatic transaxle) to reverse (R) position to switch the display to the rear view monitor display.
2. Confirming the surrounding conditions, reverse the vehicle.

## Rear View Monitor (Mazda Connect (Type A))


---

3. After your vehicle begins entering the parking space, continue backing up slowly so that the distance between the vehicle width lines and the sides of the parking space on the left and right are roughly equal.

(Display condition)




(Vehicle condition)

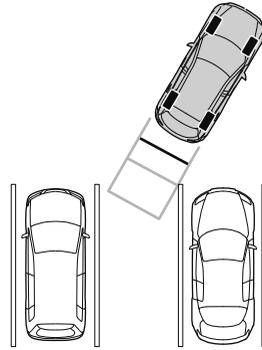


4. Continue to adjust the steering wheel until the vehicle width guide lines are parallel to the left and right sides of the parking space.
5. Once they are parallel, straighten the wheels and back your vehicle slowly into the parking space. Continue checking the vehicle's surroundings and then stop the vehicle in the best possible position. (If the parking space has division lines, check whether the vehicle width guide lines are parallel to them.)

(Display condition)

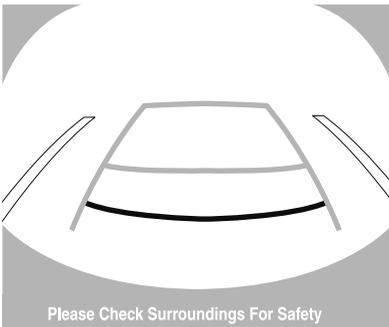

(Vehicle condition)




6. When the shift lever (manual transaxle) or the selector lever (automatic transaxle) is shifted from reverse (R) position to another shift lever (manual transaxle) or the selector lever (automatic transaxle) position, the screen returns to the previous display.

## Rear View Monitor (Mazda Connect (Type A))

### NOTE

Because there may be a difference between the displayed image, such as indicated below, and the actual conditions when parking, always verify the safety at the rear of the vehicle and the surrounding area directly with your eyes.

- In the image of the parking space (or garage) displayed on the screen, the back end and distance guide lines may appear aligned in the monitor, but they may not actually be aligned on the ground.
- When parking in a space with a division line on only one side of the parking space, the division line and the vehicle width guide line appear aligned in the monitor, but they may not actually be aligned on the ground.

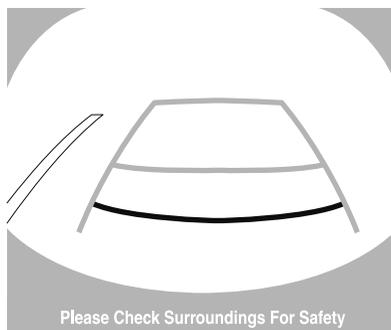


### ▼ Variance Between Actual Road Conditions and Displayed Image

Some variance occurs between the actual road and the displayed road. Such variance in distance perspective could lead to an accident. Note the following conditions that may cause a variance in distance perspective.

#### When the vehicle is tilted due to the weight of passengers and load


When the vehicle rear is lowered, the object displayed on the screen appears farther than the actual distance.

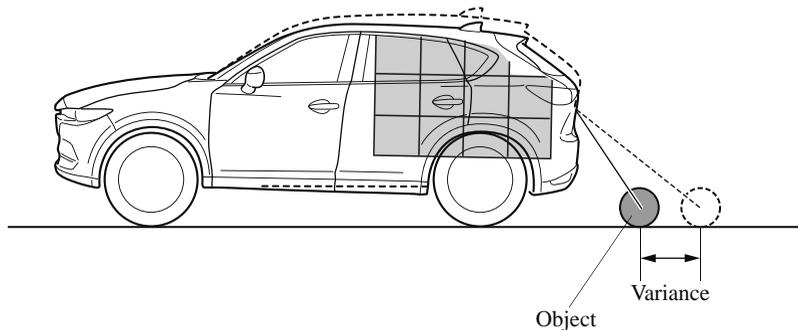

# Rear View Monitor (Mazda Connect (Type A))

## When there is a steep grade behind the vehicle


When there is a steep upgrade (downgrade) behind the vehicle, the object displayed on the screen appears farther (downgrade: closer) than the actual distance.

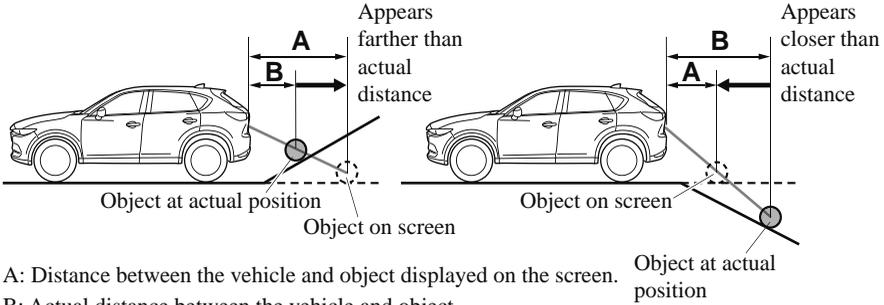

## Three-dimensional object on vehicle rear


Because the distance guide lines are displayed based on a flat surface, the distance to the three-dimensional object displayed on the screen is different from the actual distance.

(Screen display)

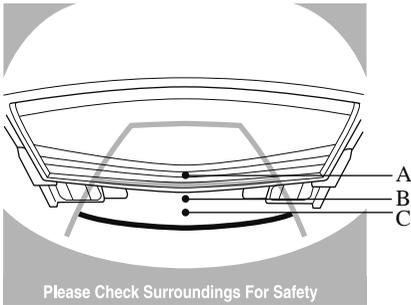

Sensed distance on screen  $A > B > C$

(Actual condition)

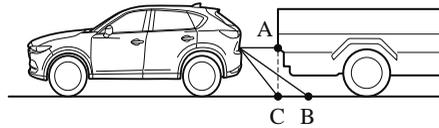

(Actual distance)  $B > C = A$


## Rear View Monitor (Mazda Connect (Type A))

### (Predicted vehicle path assist lines display type)

#### When reversing near a three-dimensional object

When reversing near an overhanging object, the vehicle may hit the object even if the anticipated course line does not contact the object on the screen. The position of the object displayed on the screen is different from the actual position because the anticipated course lines on the screen are displayed based on a horizontal road surface. When backing up near an overhanging object, confirm the rear and surrounding conditions directly with your eyes.

(Screen display)

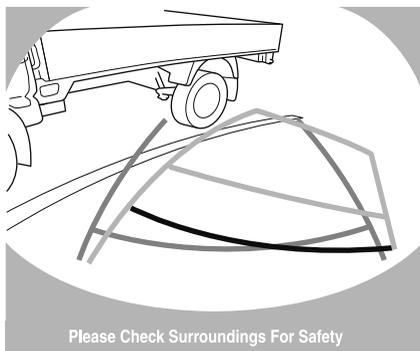

(Actual view)



### ▼ Picture Quality Adjustment



#### **Always adjust the picture quality of the rear view monitor while the vehicle is stopped:**

*Do not adjust the picture quality of the rear view monitor while driving the vehicle. Adjusting the picture quality of the rear view monitor such as brightness, contrast, colour, and tint while driving the vehicle is dangerous as it could distract your attention from the vehicle operation which could lead to an accident.*

Picture quality adjustment must be done while the shift lever (manual transaxle) or the selector lever (automatic transaxle) is in reverse (R) position.

There are 4 settings which can be adjusted including, brightness, contrast, tint, and colour. When adjusting, pay sufficient attention to the vehicle surroundings.

1. Select the  icon on the screen to display the tabs.
2. Select the desired tab item.
3. Adjust the brightness, contrast, tint, and colour using the slider.  
If you need to reset, press the reset button.
4. Select the  icon on the screen to close the tab.

## Rear View Monitor (Mazda Connect (Type B))

---

### Rear View Monitor (Mazda Connect (Type B))\*

The rear view monitor provides visual images of the rear of the vehicle when reversing.

#### **WARNING**

**Always drive carefully confirming the safety of the rear and the surrounding conditions by looking directly with your eyes:**

*Reversing the vehicle by only looking at the screen is dangerous as it may cause an accident or a collision with an object. The rear view monitor is only a visual assist device when reversing the vehicle. The images on the screen may be different from the actual conditions.*

#### **CAUTION**

- Do not use the rear view monitor under the following conditions: Using the rear view monitor under the following conditions is dangerous and could result in injury or vehicle damage or both.
  - Icy or snow-covered roads.
  - Tyre chains or a temporary spare tyre is installed.
  - The liftgate is not fully closed.
  - The vehicle is on a road incline.
- When the display is cold, images may course across the monitor or the screen and may be dimmer than usual, which could cause difficulty in confirming the surrounding conditions of the vehicle. Always drive carefully confirming the safety of the rear and the surrounding conditions by looking directly with your eyes.
- Do not apply excessive force to the camera. The camera position and angle may deviate.
- Do not disassemble, modify, or remove it as it may no longer be waterproof.
- The camera cover is made of plastic. Do not apply degreasing agents, organic solvents, wax, or glass coating agents to the camera cover. If any are spilled on the cover, wipe off with a soft cloth immediately.
- Do not rub the camera cover forcefully with an abrasive or hard brush. The camera cover or lens may be scratched which might affect the images.

#### **NOTE**


- If water, snow, or mud is stuck on the camera lens, wipe it off using a soft cloth. If it cannot be wiped off, use a mild detergent.
- If the camera temperature changes rapidly (Hot to cold, cold to hot), the rear view monitor may not operate correctly.

## Rear View Monitor (Mazda Connect (Type B))

---

- *When replacing the tyres, consult an expert repairer (we recommend an Authorised Mazda Repairer). Replacing the tyres could result in deviation of the guide lines which appear on the display.*
- *If the vehicle's front, side, or rear has been involved in a collision, the alignment of the rear view parking camera (location, installation angle) may have deviated. Always consult an expert repairer (we recommend an Authorised Mazda Repairer) to have the vehicle inspected.*
- *If “No camera signal.” is indicated in the display, there could be a problem with the camera. Have your vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).*

### ▼ Rear View Parking Camera Location

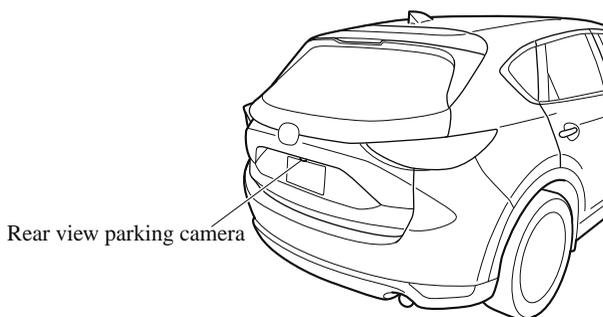

### ▼ Switching to the Rear View Monitor Display

Shift the shift lever/selector lever to R with the ignition switched ON to switch the display to the rear view monitor display.

#### **NOTE**


*When the shift lever/selector lever is shifted from R to another shift lever/selector lever position, the screen returns to the previous display.*

## Rear View Monitor (Mazda Connect (Type B))


### ▼ Displayable Range on the Screen

The images on the screen may be different from the actual conditions.

(Screen display)

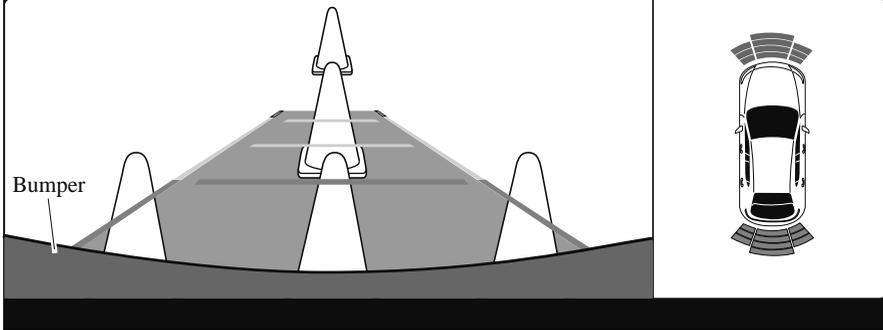

(Actual view)

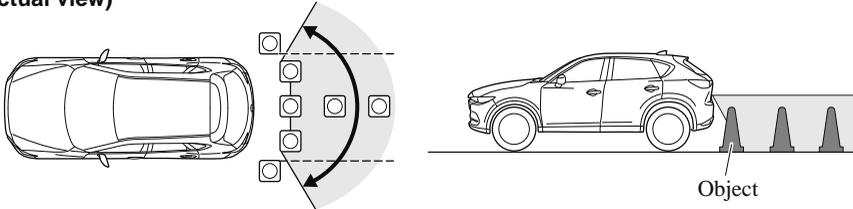

### NOTE

- The displayable range varies depending on the vehicle and road conditions.
- If the camera lens is touched or there is any dirt on it, it could affect the screen image.  
Wipe the lens using a soft cloth.
- The displayable range is limited. Objects under the bumper or around the bumper ends cannot be displayed.
- The distance appearing in the displayed image is different from the actual distance because the rear view parking camera is equipped with a specific lens.
- Images displayed on the monitor from the rear view parking camera are reversed images (mirror images).
- Some optionally installed vehicle accessories may be picked up by the camera. Do not install any optional parts that can interfere with the camera view, such as illuminating parts or parts made of reflective material.
- It may be difficult to see the display under the following conditions, however, it does not indicate a malfunction.
  - In darkened areas.
  - When the temperature around the lens is high/low.


## Rear View Monitor (Mazda Connect (Type B))

- When the camera is wet such as on a rainy day or during periods of high humidity.
- When foreign material such as mud is stuck around the camera.
- When the camera lens reflects sunlight or headlight beams.
- The surroundings are illuminated by vehicle lights, fluorescent lights, or LED lights (display may flicker).
- Extremely small dark or white dots appear on the screen (dots may flicker).
- Image display may be delayed if the temperature around the camera is low.

### ▼ Viewing the Display

Guide lines which indicate the width of the vehicle are displayed on the screen as a reference to the approximate width of the vehicle in comparison to the width of the parking space you are about to back into.

Use this display view for parking your vehicle in a parking space or garage.

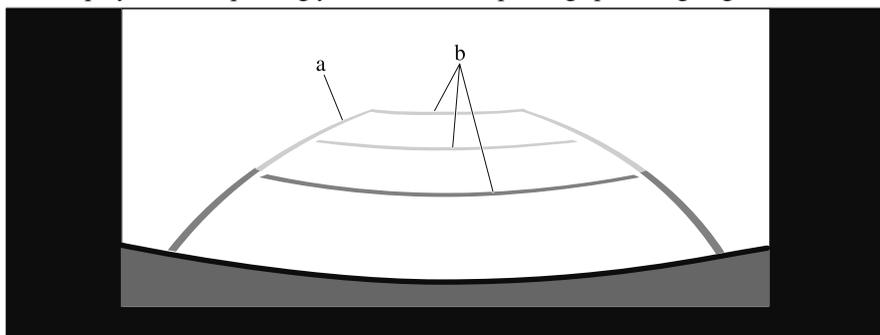

#### a) Vehicle width guide lines

Guide lines serve as a reference to the approximate width of the vehicle.

#### b) Distance guide lines

These guide lines indicate the approximate distance to a point measured from the vehicle's rear (from the end of the bumper).

The red line indicates the point about 0.5 m (19 in) from the rear bumper.

The yellow lines indicate the points about 1.0 m (39 in) and 2.0 m (78 in) from the rear bumper.

### ▼ Rear View Monitor Operation

The operation of the rear view monitor when reversing the vehicle varies depending on the traffic, road, and vehicle conditions. The amount of steering and the timing also varies depending on conditions, so confirm the surrounding conditions directly with your eyes and steer the vehicle in accordance with the conditions.

Be well aware of the above cautions prior to using the rear view monitor.

## Rear View Monitor (Mazda Connect (Type B))


---

### NOTE


Images displayed on the monitor from the rear view parking camera are reversed images (mirror images).

1. Shift the shift lever/selector lever to R to switch the display to the rear view monitor display.
2. Confirming the surrounding conditions, reverse the vehicle.

### (Display condition)

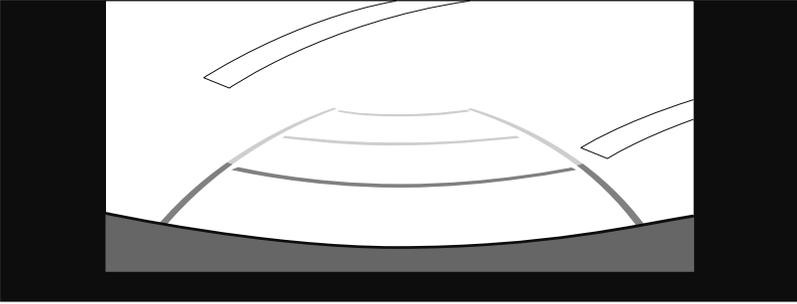

### (Vehicle condition)

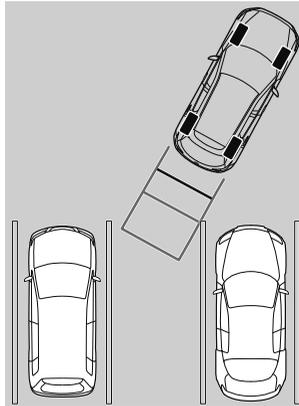


3. After your vehicle begins entering the parking space, continue backing up slowly so that the distance between the vehicle width lines and the sides of the parking space on the left and right are roughly equal.
4. Continue to adjust the steering wheel until the vehicle width guide lines are parallel to the left and right sides of the parking space.


## Rear View Monitor (Mazda Connect (Type B))

- Once they are parallel, straighten the wheels and back your vehicle slowly into the parking space. Continue checking the vehicle's surroundings and then stop the vehicle in the best possible position.

### (Display condition)

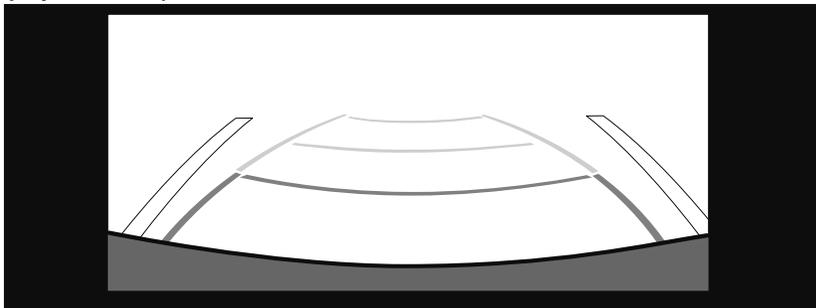

### (Vehicle condition)

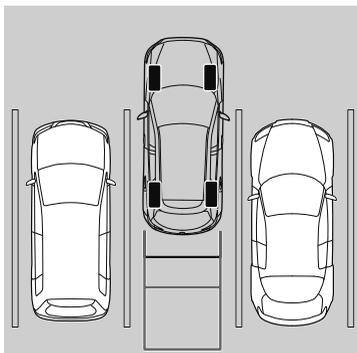

- When the shift lever/selector lever is shifted from R to another shift lever/selector lever position, the screen returns to the previous display.


### NOTE

- If the parking space has division lines, straighten the wheels when the vehicle width guide lines are parallel to them.
- Because there may be a difference between the displayed image, such as indicated below, and the actual conditions when parking, always verify the safety at the rear of the vehicle and the surrounding area directly with your eyes.
- In the image of the parking space (or garage) displayed on the screen, the back end and distance guide lines may appear aligned in the monitor, but they may not actually be aligned on the ground.

## Rear View Monitor (Mazda Connect (Type B))

---

- When parking in a space with a division line on only one side of the parking space, the division line and the vehicle width guide line appear aligned in the monitor, but they may not actually be aligned on the ground.

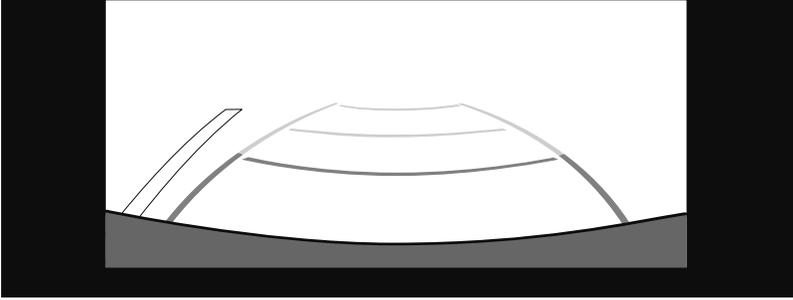


### ▼ Variance Between Actual Road Conditions and Displayed Image

Some variance occurs between the actual road and the displayed road. Such variance in distance perspective could lead to an accident. Note the following conditions that may cause a variance in distance perspective.

#### When the vehicle is tilted due to the weight of passengers and load


When the vehicle rear is lowered, the object displayed on the screen appears farther than the actual distance.

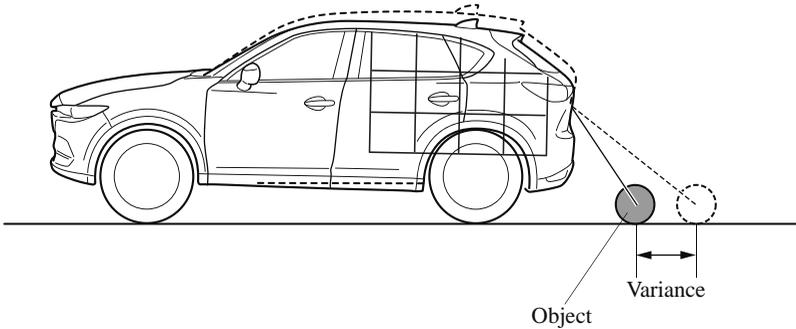

# Rear View Monitor (Mazda Connect (Type B))

## When there is a steep grade behind the vehicle


When there is a steep upgrade (downgrade) behind the vehicle, the object displayed on the screen appears farther (downgrade: closer) than the actual distance.

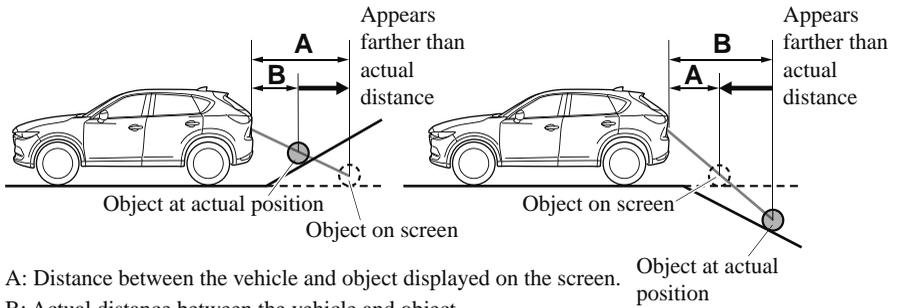

## Three-dimensional object on vehicle rear

Because the distance guide lines are displayed based on a flat surface, the distance to the three-dimensional object displayed on the screen is different from the actual distance.

### (Screen display)

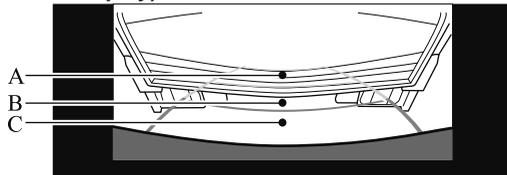

Sensed distance on screen  $A > B > C$

### (Actual view)





(Actual distance)  $B > C = A$

## Parking Sensor System (Mazda Connect (Type A))

### Parking Sensor System (Mazda Connect (Type A))\*

The parking sensors use ultrasonic sensors which detect obstructions around the vehicle when the vehicle is driven at low speeds, such as during garage or parallel parking, and a buzzer sound and detection indicator notify the driver of the approximate distance from the vehicle to the surrounding obstruction.

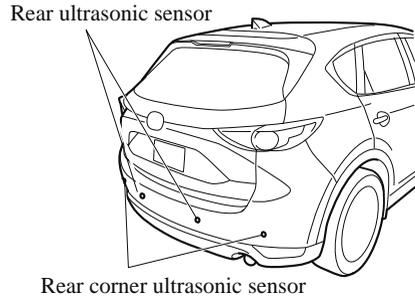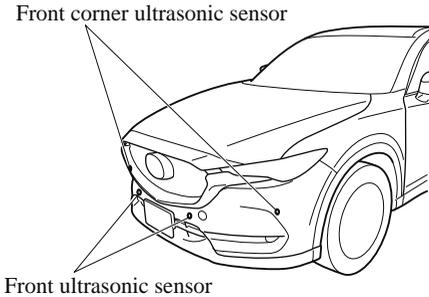

### WARNING

**Do not rely completely on the parking sensor system and be sure to confirm the safety around your vehicle visually when driving:**

*This system can assist the driver in operating the vehicle in the forward and backward directions while parking. The detection ranges of the sensors are limited, therefore, driving the vehicle while relying only on the system may cause an accident. Always confirm the safety around your vehicle visually when driving.*

### NOTE

- Do not install any accessories within the detection ranges of the sensors. It may affect the system operation.
- Depending on the type of obstruction and the surrounding conditions, the detection range of a sensor may narrow, or the sensors may not be able to detect obstructions.
- The system may not operate normally under the following conditions:
  - Mud, ice, or snow is adhering to the sensor area (Returns to normal operation when removed).
  - The sensor area is frozen (Returns to normal operation when the ice is thawed).
  - The sensor is covered by a hand.
  - The sensor is excessively shocked.
  - The vehicle is excessively tilted.
  - Under extremely hot or cold weather conditions.
  - The vehicle is driven on bumps, inclines, gravel, or grass covered roads.

## Parking Sensor System (Mazda Connect (Type A))


---

- Anything which generates ultrasound is near the vehicle, such as another vehicle's horn, the engine sound of a motorcycle, the air brake sound of a large-sized vehicle, or another vehicle's sensors.
- The vehicle is driven in heavy rain or in road conditions causing water-splash.
- A commercially-available wing pole or an aerial for a radio transmitter is installed to the vehicle.
- The vehicle is moving towards a tall or square curbstone.
- An obstruction is too close to the sensor.
- Obstructions under the bumper may not be detected. Obstructions that are lower than the bumper or thin which may have been initially detected may no longer be detected as the vehicle approaches more closely to the obstruction.
- The following types of obstructions may not be detected:
  - Thin objects such as wire or rope
  - Things which absorb sonic waves easily such as cotton or snow
  - Angular shaped objects
  - Very tall objects, and those which are wide at the top
  - Small, short objects
- Always have the system inspected at an expert repairer (we recommend an Authorised Mazda Repairer) if any shock is applied to the bumpers, even in a minor accident. If the sensors are deviated, they cannot detect obstructions.
- **(With front ultrasonic sensor and front ultrasonic corner sensor)**  
*The system may have a malfunction if the beep does not operate or the indicator light does not illuminate when the parking sensor switch is turned on. Consult an expert repairer (we recommend an Authorised Mazda Repairer).*
- **(Without front ultrasonic sensor and front ultrasonic corner sensor)**  
*The system may have a malfunction if the beep does not operate. Consult an expert repairer (we recommend an Authorised Mazda Repairer).*
- **(With front ultrasonic sensor and front ultrasonic corner sensor)**  
*The system may have a malfunction if the beep sound which indicates a system malfunction is heard and the indicator light flashes. Consult an expert repairer (we recommend an Authorised Mazda Repairer).*
- The beeper which indicates a system malfunction may not be heard if the ambient temperature is extremely cold, or mud, ice, or snow adheres to the sensor area. Remove any foreign material from the sensor area.
- When installing a trailer hitch, consult an expert repairer (we recommend an Authorised Mazda Repairer).

# Parking Sensor System (Mazda Connect (Type A))

## ▼ Sensor Detection Range










The sensors detect obstructions within the following range.

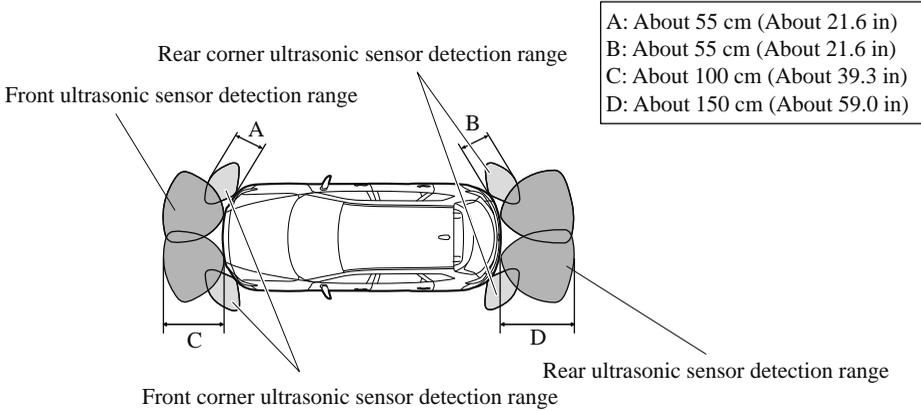

## Viewing distance display

Display		Distance between vehicle and obstruction		
Without 360° view monitor		With 360° view monitor	Front ultrasonic sensor*/Front corner ultrasonic sensor*	Rear ultrasonic sensor/Rear Corner ultrasonic sensor
Without front ultrasonic sensor and front corner ultrasonic sensor	With front ultrasonic sensor and front corner ultrasonic sensor			
		Green 	Front ultrasonic sensor: Approx. 100—60 cm (39.4—23.6 in)	Rear ultrasonic sensor: Approx. 150—60 cm (59.1—23.6 in)

# Parking Sensor System (Mazda Connect (Type A))

Display		Distance between vehicle and obstruction		
Without 360° view monitor		With 360° view monitor	Front ultrasonic sensor <sup>2</sup> /Front corner ultrasonic sensor*	Rear ultrasonic sensor/Rear Corner ultrasonic sensor
Without front ultrasonic sensor and front corner ultrasonic sensor	With front ultrasonic sensor and front corner ultrasonic sensor			
		Yellow 	Front ultrasonic sensor: Approx. 60—45 cm (23.6—17.7 in) Front corner ultrasonic sensor: Approx. 55—38 cm (21.7—14.9 in)	Rear ultrasonic sensor: Approx. 60—45 cm (23.6—17.7 in) Rear corner ultrasonic sensor: Approx. 55—38 cm (21.7—14.9 in)
		Amber 	Front ultrasonic sensor: Approx. 45—35 cm (17.7—13.8 in) Front corner ultrasonic sensor: Approx. 38—25 cm (15—9.8 in)	Rear ultrasonic sensor: Approx. 45—35 cm (17.7—13.8 in) Rear corner ultrasonic sensor: Approx. 38—25 cm (15—9.8 in)
		Red 	Front ultrasonic sensor: Within approx. 35 cm (13.8 in) Front corner ultrasonic sensor: Within approx. 25 cm (9.8 in)	Rear ultrasonic sensor: Within approx. 35 cm (13.8 in) Rear corner ultrasonic sensor: Within approx. 25 cm (9.8 in)

## Parking Sensor System (Mazda Connect (Type A))

---

### ▼ Parking Sensor System Operation

#### Vehicles without front ultrasonic sensor/front corner ultrasonic sensor


The parking sensors can be used when the shift lever/selector lever is shifted to the R position with the ignition switched ON.

#### Vehicles with front ultrasonic sensor/front corner ultrasonic sensor

When the parking sensor switch is pressed with the ignition switched ON, the buzzer sounds and the indicator light turns on.

When the ignition is switched ON with the parking sensor activated, the indicator light turns on.

Press the switch again to stop the operation.

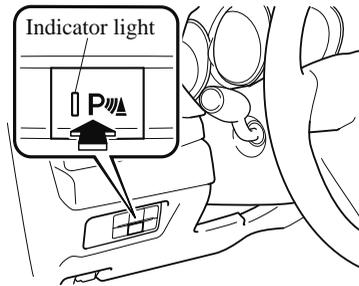

#### **NOTE**

*When the ignition is switched OFF, the system status before it was turned off is maintained. For example, if the ignition is switched OFF while the parking sensor is activated, the system will be activated when the ignition is switched ON the next time.*

#### **Operation conditions**

The parking sensor system can be used when all of the following conditions are met:

- The ignition is switched ON.
- The parking sensor switch is turned on.

#### **NOTE**

- **(Automatic transaxle vehicle)**

*The detection indicator and buzzer of the front ultrasonic sensors/front corner ultrasonic sensors do not operate when the selector lever is in the P position.*

- *The detection indicator and buzzer sound do not activate when the parking brake is applied.*


# Parking Sensor System (Mazda Connect (Type A))

## ▼ Obstruction Detection Indication


The position of a sensor which has detected an obstruction is indicated. The gauge illuminates in different areas depending on the distance to an obstruction detected by the sensor.

As the vehicle approaches closer to an obstruction, the zone in the gauge closer to the vehicle illuminates.

### Without 360° view monitor

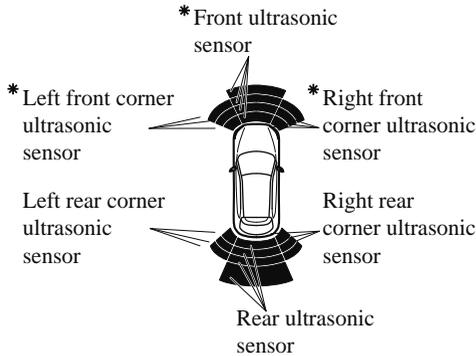

### With 360° view monitor

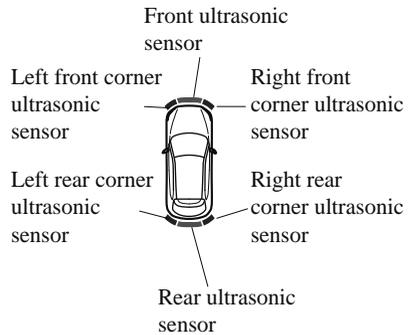

\* Some models

## NOTE

The detection indicator can switch between display and non-display. Refer to the Settings section in the Mazda Connect Owner's Manual.








### (Vehicles with 360° View Monitor)

When the detection indicator is set to "Display", even with the 360° view monitor not displayed, if a front ultrasonic sensor or a front corner ultrasonic sensor detects an obstruction, the 360° view monitor switches automatically to display. When an obstruction is no longer detected, the display switches to the display before the obstruction was detected. However, while the 360° view monitor is displayed, it continues to display no matter if an obstruction is detected or not.

# Parking Sensor System (Mazda Connect (Type A))

## System problem notification

If a problem occurs, the driver is notified of the problem by the following indications.









	Detection Indicator			Solution
	Without 360° view monitor		With 360° view monitor	
	Without front ultrasonic sensor and front corner ultrasonic sensor	With front ultrasonic sensor and front corner ultrasonic sensor		
Disconnection				The system may have a malfunction. Have the vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer) as soon as possible.
System malfunction				The system may have a malfunction. Have the vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer) as soon as possible.
Frost/soiling				Foreign matter may be on the sensor area corresponding to the obstruction detection indication shown. If the system does not recover, have the vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).

# Parking Sensor System (Mazda Connect (Type A))

## ▼ Parking Sensor Warning Beep

The beeper sounds as follows while the system is operating.




### Front Ultrasonic Sensor\*, Rear Ultrasonic Sensor

Distance detection area	Distance between vehicle and obstruction		Beeper sound* <sup>1</sup>
	Front ultrasonic sensor*	Rear ultrasonic sensor	
Farthest distance	Approx. 100—60 cm (39.3—23.6 in) 	Approx. 150—60 cm (59.0—23.6 in) 	Slow intermittent sound
Far distance	Approx. 60—45 cm (23.6—17.7 in) 	Approx. 60—45 cm (23.6—17.7 in) 	Medium intermittent sound
Middle distance	Approx. 45—35 cm (17.7—13.7 in) 	Approx. 45—35 cm (17.7—13.7 in) 	Fast intermittent sound
Close distance	Within approx. 35 cm (13.7 in) 	Within approx. 35 cm (13.7 in) 	Continuous sound

\*1 The rate at which the intermittent sound beeps increases as the vehicle approaches the obstruction.

# Parking Sensor System (Mazda Connect (Type A))

## Front Corner Ultrasonic Sensor\*, Rear Corner Ultrasonic Sensor

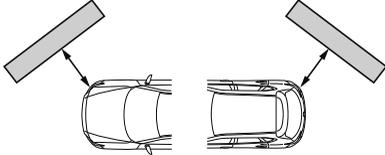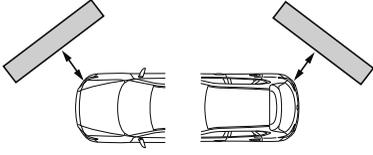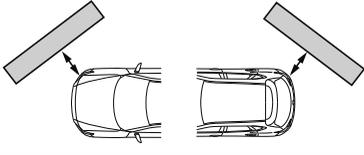Distance detection area	Distance between vehicle and obstruction	Beeper sound*1
	Front corner ultrasonic*/Rear corner ultrasonic sensor	
Far distance	Approx. 55—38 cm (21.6—14.9 in) 	Medium intermittent sound
Middle distance	Approx. 38—25 cm (14.9—9.8 in) 	Fast intermittent sound
Close distance	Within approx. 25 cm (9.8 in) 	Continuous sound

\*1 The rate at which the intermittent sound beeps increases as the vehicle approaches the obstruction.

### NOTE

*If an obstruction is detected in a zone for 6 seconds or more, the beep sound is stopped (except for the close-distance zone). If the same obstruction is detected in another zone, the corresponding beep sound is heard.*

## Parking Sensor System (Mazda Connect (Type A))

### ▼ When Warning Indicator/Beep is Activated



The system notifies the driver of an abnormality by activating the beep sound and the indicator light.

Indicator/Beep	How to check
The indicator light flashes when the parking sensor switch is pressed at a vehicle speed of 10 km/h (6 mph) or less.	The system may have a malfunction. Have the vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer) as soon as possible.
The beep sound is not heard.	The system may have a malfunction. Have the vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer) as soon as possible.
The intermittent sound of the buzzer is heard 5 times.	Remove any foreign material from the sensor area. If the system does not recover, have the vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).
A certain obstruction detection indicator is continuously displayed.	Refer to Obstruction Detection Indication on page 4-357.

## Parking Sensor System (Mazda Connect (Type B))

### Parking Sensor System (Mazda Connect (Type B))\*

The parking sensors use ultrasonic sensors which detect obstructions around the vehicle when the vehicle is driven at low speeds, such as during garage or parallel parking, and a buzzer sound and detection indicator notify the driver of the approximate distance from the vehicle to the surrounding obstruction.

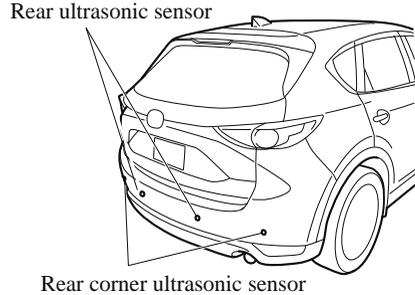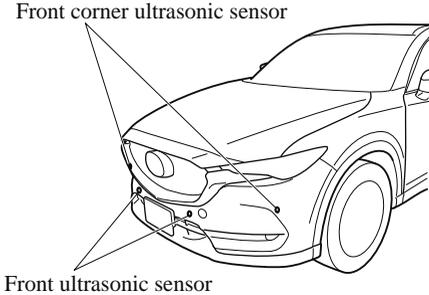

### WARNING

**Do not rely completely on the parking sensor system and be sure to confirm the safety around your vehicle visually when driving:**

*This system can assist the driver in operating the vehicle in the forward and backward directions while parking. The detection ranges of the sensors are limited, therefore, driving the vehicle while relying only on the system may cause an accident. Always confirm the safety around your vehicle visually when driving.*

### NOTE

- Do not install any accessories within the detection ranges of the sensors. It may affect the system operation.
- Depending on the type of obstruction and the surrounding conditions, the detection range of a sensor may narrow, or the sensors may not be able to detect obstructions.
- The system may not operate normally under the following conditions:
  - Mud, ice, or snow is adhering to the sensor area (Returns to normal operation when removed).
  - The sensor area is frozen (Returns to normal operation when the ice is thawed).
  - The sensor is covered by a hand.
  - The sensor is excessively shocked.
  - The vehicle is excessively tilted.
  - Under extremely hot or cold weather conditions.
  - The vehicle is driven on bumps, inclines, gravel, or grass covered roads.

## Parking Sensor System (Mazda Connect (Type B))


---

- Anything which generates ultrasound is near the vehicle, such as another vehicle's horn, the engine sound of a motorcycle, the air brake sound of a large-sized vehicle, or another vehicle's sensors.
- The vehicle is driven in heavy rain or in road conditions causing water-splash.
- A commercially-available wing pole or an aerial for a radio transmitter is installed to the vehicle.
- The vehicle is moving towards a tall or square curbstone.
- An obstruction is too close to the sensor.
- Obstructions under the bumper may not be detected. Obstructions that are lower than the bumper or thin which may have been initially detected may no longer be detected as the vehicle approaches more closely to the obstruction.
- The following types of obstructions may not be detected:
  - Thin objects such as wire or rope
  - Things which absorb sonic waves easily such as cotton or snow
  - Angular shaped objects
  - Very tall objects, and those which are wide at the top
  - Small, short objects
- Always have the system inspected at an expert repairer (we recommend an Authorised Mazda Repairer) if any shock is applied to the bumpers, even in a minor accident. If the sensors are deviated, they cannot detect obstructions.
- The system may have a malfunction if the beep does not operate or the indicator light does not illuminate when the parking sensor switch is turned on. Consult an expert repairer (we recommend an Authorised Mazda Repairer).
- The system may have a malfunction if the beep sound which indicates a system malfunction is heard and the indicator light flashes. Consult an expert repairer (we recommend an Authorised Mazda Repairer).
- The beeper which indicates a system malfunction may not be heard if the ambient temperature is extremely cold, or mud, ice, or snow adheres to the sensor area. Remove any foreign material from the sensor area.
- When installing a trailer hitch, consult an expert repairer (we recommend an Authorised Mazda Repairer).



# Parking Sensor System (Mazda Connect (Type B))

## ▼ Sensor Detection Range







The sensors detect obstructions within the following range.

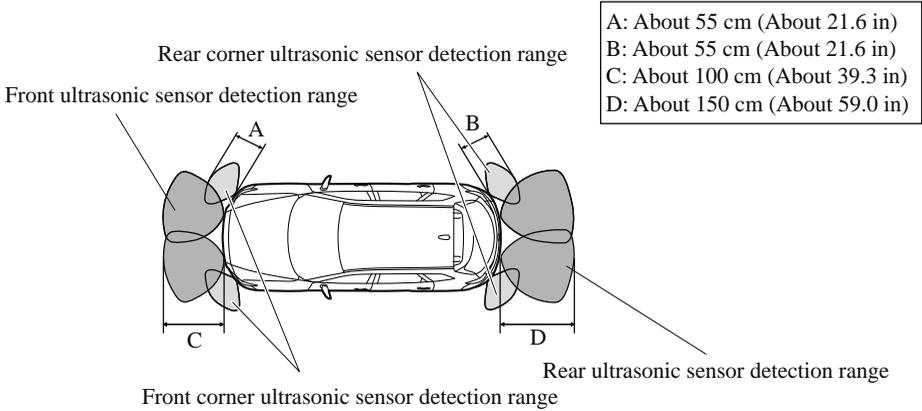

## Viewing distance display

Display		Distance between vehicle and obstruction	
Without 360° view monitor	With 360° view monitor	Front ultrasonic sensor/ Front corner ultrasonic sensor	Rear ultrasonic sensor/ Rear corner ultrasonic sensor
	Green 	Front ultrasonic sensor: Approx. 100—60 cm (39.3—23.6 in)	Rear ultrasonic sensor: Approx. 150—60 cm (59.0—23.6 in)

# Parking Sensor System (Mazda Connect (Type B))

Display		Distance between vehicle and obstruction	
Without 360° view monitor	With 360° view monitor	Front ultrasonic sensor/ Front corner ultrasonic sensor	Rear ultrasonic sensor/ Rear corner ultrasonic sensor
	Yellow 	Front ultrasonic sensor: Approx. 60—45 cm (23.6—17.7 in) Front corner ultrasonic sensor: Approx. 55—38 cm (21.6—14.9 in)	Rear ultrasonic sensor: Approx. 60—45 cm (23.6—17.7 in) Rear corner ultrasonic sensor: Approx. 55—38 cm (21.6—14.9 in)
	Amber 	Front ultrasonic sensor: Approx. 45—35 cm (17.7—13.7 in) Front corner ultrasonic sensor: Approx. 38—25 cm (14.9—9.8 in)	Rear ultrasonic sensor: Approx. 45—35 cm (17.7—13.7 in) Rear corner ultrasonic sensor: Approx. 38—25 cm (14.9—9.8 in)
	Red 	Front ultrasonic sensor: Within approx. 35 cm (13.7 in) Front corner ultrasonic sensor: Within approx. 25 cm (9.8 in)	Rear ultrasonic sensor: Within approx. 35 cm (13.7 in) Rear corner ultrasonic sensor: Within approx. 25 cm (9.8 in)

## Parking Sensor System (Mazda Connect (Type B))


---

### ▼ Parking Sensor System Operation

When the parking sensor switch is pressed with the ignition switched ON, the buzzer sounds and the indicator light turns on.

When the ignition is switched ON with the parking sensor activated, the indicator light turns on.

Press the switch again to stop the operation.

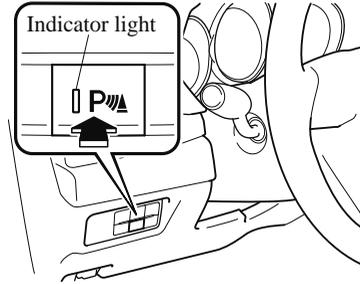

### NOTE

*When the ignition is switched OFF, the system status before it was turned off is maintained. For example, if the ignition is switched OFF while the parking sensor is activated, the system will be activated when the ignition is switched ON the next time.*

### Operation conditions

The parking sensor system can be used when all of the following conditions are met:

- The ignition is switched ON.
- The parking sensor switch is turned on.

### NOTE

- *(Automatic transaxle vehicle)*

*The detection indicator and buzzer of the front sensors/front corner sensors do not operate when the selector lever is in the P position.*

- *The detection indicator and buzzer sound do not activate when the parking brake is applied.*


### ▼ Obstruction Detection Indication

The position of a sensor which has detected an obstruction is indicated. The gauge illuminates in different areas depending on the distance to an obstruction detected by the sensor.


As the vehicle approaches closer to an obstruction, the zone in the gauge closer to the vehicle illuminates.

# Parking Sensor System (Mazda Connect (Type B))

## Without 360°view monitor

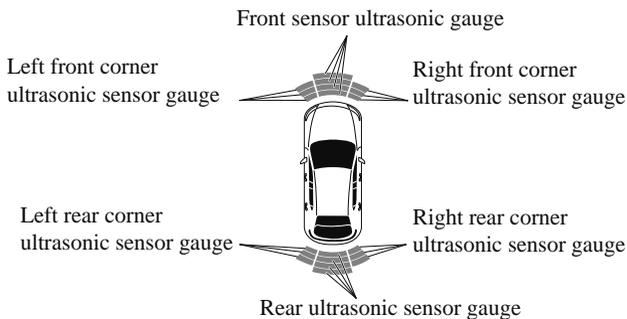

## With 360°view monitor

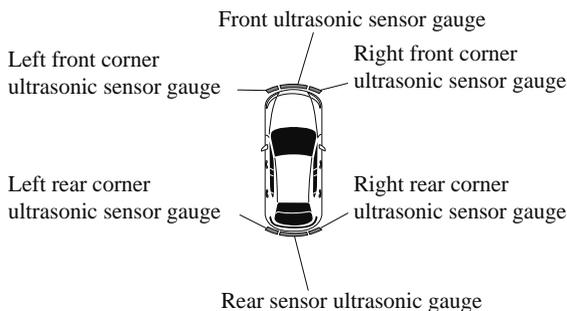

### NOTE

The detection indicator can be switched between display and non-display and the buzzer volume can be changed.

Refer to the Settings section in the Mazda Connect Owner's Manual.

### (Vehicles with 360° View Monitor)

When the detection indicator is set to "Display", even with the 360° view monitor not displayed, if a front ultrasonic sensor or a front corner ultrasonic sensor detects an obstruction, the 360° view monitor switches automatically to display. When an obstruction is no longer detected, the display switches to the display before the obstruction was detected. However, while the 360° view monitor is displayed, it continues to display no matter if an obstruction is detected or not.


# Parking Sensor System (Mazda Connect (Type B))

---


## System problem notification

The indication displays if the system has a malfunction.

**Without 360°view monitor**



**With 360°view monitor**



Check the reason for the indication displaying on the centre display or multi-information display.









Refer to If a Warning Light Turns On or Flashes on page 7-42.

# Parking Sensor System (Mazda Connect (Type B))

## ▼ Parking Sensor Warning Beep

The beeper sounds as follows while the system is operating.




### Front ultrasonic sensor, Rear ultrasonic sensor

Distance Detection area	Distance between vehicle and obstruction		Beeper sound*1
	Front ultrasonic sensor	Rear ultrasonic sensor	
Farthest distance	Approx. 100—60 cm (39.3—23.6 in) 	Approx. 150—60 cm (59.0—23.6 in) 	Slow intermittent sound
Far distance	Approx. 60—45 cm (23.6—17.7 in) 	Approx. 60—45 cm (23.6—17.7 in) 	Medium intermittent sound
Middle distance	Approx. 45—35 cm (17.7—13.7 in) 	Approx. 45—35 cm (17.7—13.7 in) 	Fast intermittent sound
Close distance	Within approx. 35 cm (13.7 in) 	Within approx. 35 cm (13.7 in) 	Continuous sound

\*1 The rate at which the intermittent sound beeps increases as the vehicle approaches the obstruction.

# Parking Sensor System (Mazda Connect (Type B))

## Front corner ultrasonic sensor, Rear corner ultrasonic sensor

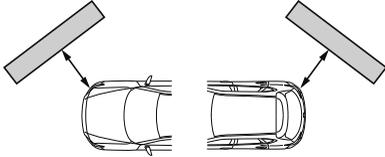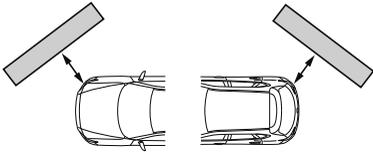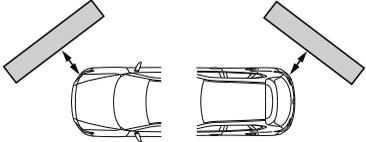Distance Detection area	Distance between vehicle and obstruction	Beeper sound*1
	Front corner ultrasonic sensor/Rear corner ultrasonic sensor	
Far distance	Approx. 55—38 cm (21.6—14.9 in) 	Medium intermittent sound
Middle distance	Approx. 38—25 cm (14.9—9.8 in) 	Fast intermittent sound
Close distance	Within approx. 25 cm (9.8 in) 	Continuous sound

\*1 The rate at which the intermittent sound beeps increases as the vehicle approaches the obstruction.

### NOTE

- If an obstruction is detected in a zone for 6 seconds or more, the beep sound is stopped (except for the close-distance zone). If the same obstruction is detected in another zone, the corresponding beep sound is heard.

## Parking Sensor System (Mazda Connect (Type B))

### ▼ When Warning Indicator/Beep is Activated

The system notifies the driver of an abnormality by activating the beep sound and the indicator light.

Indicator/Beep	How to check
The indicator light flashes when the parking sensor switch is pressed at a vehicle speed of 10 km/h (6 mph) or less.	The system may have a malfunction. Have the vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer) as soon as possible.
The beep sound is not heard.	The system may have a malfunction. Have the vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer) as soon as possible.
The intermittent sound of the buzzer is heard 5 times.	Remove any foreign material from the sensor area. If the system does not recover, have the vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).
A certain obstruction detection indicator is continuously displayed.	Refer to Obstruction Detection Indication on page 4-357.

# MEMO

# 5

## Interior Features

Use of various features for ride comfort, including air-conditioning and audio system.

<b>Air-Conditioning System</b> .....	5-2
Operating Tips.....	5-2
Vent Operation.....	5-3
Manual Type.....	5-5
Fully Automatic Type.....	5-9
<b>Before Using the Audio System</b> .....	5-14
Audio Control Switch.....	5-14
AUX/USB mode.....	5-16
Aerial.....	5-18
<b>Audio Set</b> .....	5-19
Power/Volume/Sound	
Controls.....	5-19
Clock.....	5-21
Operating the Radio.....	5-22
How to use AUX mode.....	5-25
How to use USB mode.....	5-26
How to use iPod mode.....	5-29
Error Indications.....	5-31
Bluetooth®*.....	5-32
Bluetooth® Preparation*.....	5-35
Available Language*.....	5-45
Security Setting*.....	5-46
Bluetooth® Audio*.....	5-47
Bluetooth® Hands-Free*.....	5-50
Voice Recognition*.....	5-57
Voice Recognition Learning	
Function (Speaker Enrolment)*.....	
.....	5-58
Troubleshooting*.....	5-61
Appendix.....	5-65
<b>Mazda Connect [Mazda Connect Type A]</b> .....	5-70
What is Mazda Connect ?.....	5-70
Mazda Connect Basic	
Operations.....	5-73
<b>Mazda Connect [Mazda Connect Type B]</b> .....	5-87
What is Mazda Connect ?.....	5-87
Mazda Connect Basic	
Operations.....	5-91
<b>Interior Equipment</b> .....	5-105
Sunvisors.....	5-105
Interior Lights.....	5-105
Accessory Sockets.....	5-109
USB Power Outlet*.....	5-111
Wireless Charger (Qi)*.....	5-112
Cup Holder.....	5-115
Bottle Holder.....	5-116
Storage Compartments.....	5-117
Removable Ashtray*.....	5-124


## Air-Conditioning System

### Operating Tips

- Operate the air-conditioning system with the engine running.
- To prevent the battery from being discharged, do not leave the fan control dial/switch on for a long period of time with the ignition switched ON when the engine is not running.
- **(With i-stop)**  
The airflow amount may decrease slightly while the i-stop function is operating.
- Clear all obstructions such as leaves, snow and ice from the bonnet and the air inlet in the cowl grille to improve the system efficiency.
- Use the air-conditioning system to defog the windows and dehumidify the air.
- The recirculate mode should be used when driving through tunnels or while in a traffic jam, or when you would like to shut off outside air for quick cooling of the interior.
- Use the outside air position for ventilation or windscreen defrosting.
- If the vehicle has been parked in direct sunlight during hot weather, open the windows to let warm air escape, then run the air-conditioning system.
- Run the air conditioner about 10 minutes at least once a month to keep internal parts lubricated.

- Have the air conditioner checked before the weather gets hot. Lack of refrigerant may make the air conditioner less efficient.

The refrigerant specifications are indicated on a label attached to the inside of the engine compartment. If the wrong type of refrigerant is used, it could result in a serious malfunction of the air conditioner. Consult a professional, government certified repairer for the inspection or repair because a special device is required for the air conditioner maintenance. For details, consult an expert repairer (we recommend an Authorised Mazda Repairer).

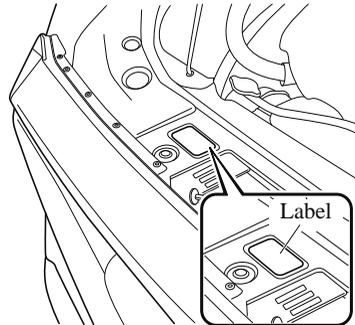

# Air-Conditioning System

## Vent Operation

### ▼ Adjusting the Vents


#### Directing airflow

To adjust the direction of airflow, move the adjustment knob.


#### **NOTE**

- When using the air conditioner under humid ambient temperature conditions, the system may blow fog from the vents. This is not a sign of trouble but a result of humid air being suddenly cooled.
- The air vents can be fully opened and closed by operating the dial.


#### Side Vents



#### Centre Vents

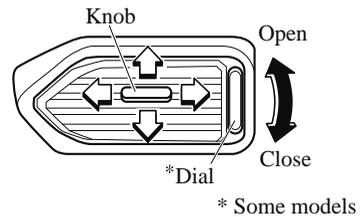


#### Rear Vents\*




# Air-Conditioning System

## ▼ Selecting the Airflow Mode


### Instrument panel Vents

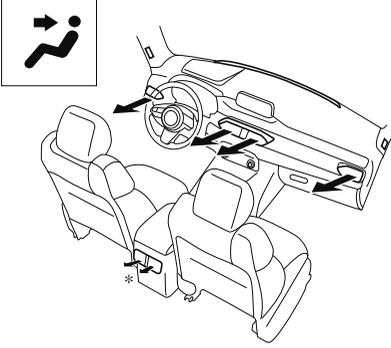


### Defroster and Floor Vents

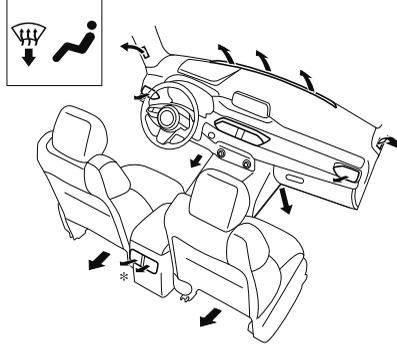


### Instrument panel and Floor Vents

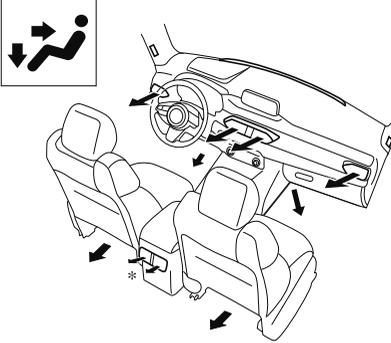

### Defroster Vents

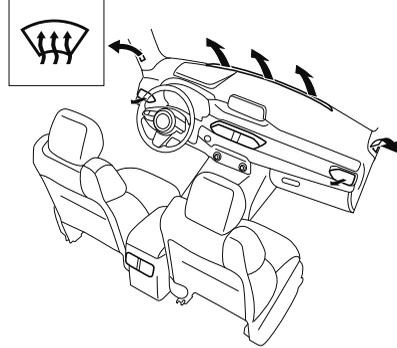

### Floor Vents

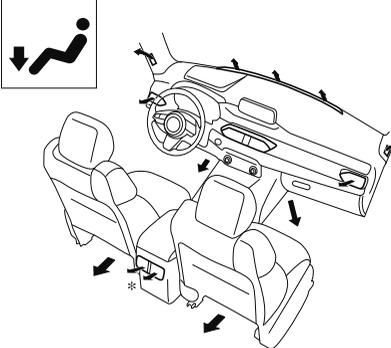


\* With rear vents

### NOTE

The location airflow exits the air vents and the airflow amount may change depending on the open or close status of the air vents.

# Air-Conditioning System

## Manual Type

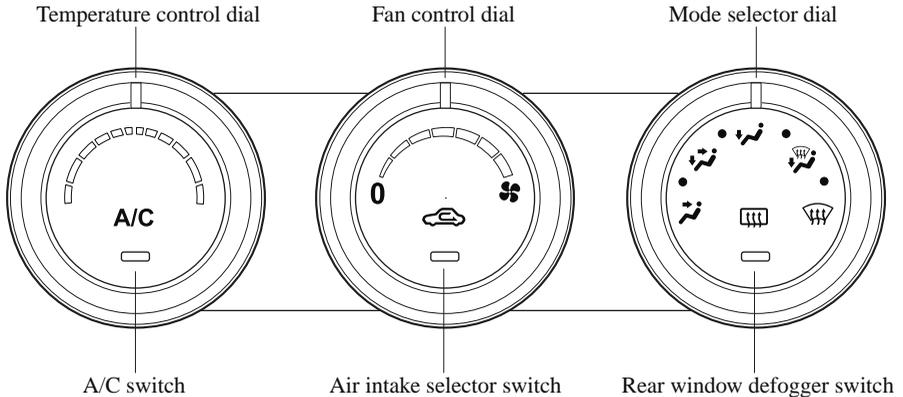

### ▼ Control Switches

#### Temperature control dial

This dial controls temperature. Turn it clockwise for hot and anticlockwise for cold.

#### Fan control dial

This dial allows variable fan speeds. The fan has seven speeds.

#### Mode selector dial

Turn the mode selector dial to select airflow mode (page 5-4).

#### **NOTE**

- The mode selector dial can be set at the intermediate positions (●) between each mode. Set the dial to an intermediate position if you want to split the airflow between the two modes.
- For example, when the mode selector dial is at the ● position between the  and  positions, airflow from the floor vent is less than that of the  position.

#### A/C switch

Press the A/C switch to turn the air conditioner on. The indicator light on the switch will illuminate when the fan control dial is in any position except OFF.

Press the switch once again to turn the air conditioner off.

#### **NOTE**

The air conditioner may not function when the outside temperature approaches 0 °C (32 °F).

#### Air intake selector

This switch controls the source of air entering the vehicle.

Outside or recirculated air positions can be selected. Press the switch to select outside/recirculated air positions.

# Air-Conditioning System

---

## Recirculated air position (indicator light illuminated)

Outside air is shut off. Use this position when going through tunnels, driving in congested traffic (high engine exhaust areas) or when quick cooling is desired.

## Outside air position (indicator light turned off)

Outside air is allowed to enter the cabin. Use this mode for ventilation or windscreen defrosting.



**Do not use the  position in cold or rainy weather:**

Using the  position in cold or rainy weather is dangerous as it will cause the windows to fog up. Your vision will be hampered, which could lead to a serious accident.

## Rear window defogger switch

Press the rear window defogger switch to defrost the rear window.

Refer to Rear Window Defogger on page 4-104.

## ▼ Heating

1. Set the mode selector dial to the  position.
2. Set the air intake selector to the outside air position (indicator light turns off).
3. Set the temperature control dial to the hot position.
4. Set the fan control dial to the desired speed.
5. If dehumidified heating is desired, turn on the air conditioner.

## NOTE

- If the windscreen fogs up easily, set the mode selector dial to the  position.
- If cooler air is desired at face level, set the mode selector dial at the  position and adjust the temperature control dial to maintain maximum comfort.
- The air to the floor is warmer than air to the face (except when the temperature control dial is set at the extreme hot or cold position).

## ▼ Cooling

1. Set the mode selector dial to the  position.
2. Set the temperature control dial to the cold position.
3. Set the fan control dial to the desired speed.
4. Turn on the air conditioner by pressing the A/C switch.
5. After cooling begins, adjust the fan control dial and temperature control dial as needed to maintain maximum comfort.



*If the air conditioner is used while driving up long hills or in heavy traffic, monitor the high engine coolant temperature warning indication/warning light to see if it is illuminated or flashing (page 7-42). The air conditioner may cause engine overheating. If the warning light is illuminated or flashing, turn the air conditioner off (page 7-36).*

# Air-Conditioning System

## NOTE

- When maximum cooling is desired, set the temperature control dial to the extreme cold position and set the air intake selector to the recirculated air position, then turn the fan control dial fully clockwise.
- If warmer air is desired at floor level, set the mode selector dial to the  position and adjust the temperature control dial to maintain maximum comfort.
- The air to the floor is warmer than air to the face (except when the temperature control dial is set at the extreme hot or cold position).

## ▼ Ventilation

1. Set the mode selector dial to the  position.
2. Set the air intake selector to the outside air position (indicator light turns off).
3. Set the temperature control dial to the desired position.
4. Set the fan control dial to the desired speed.

## ▼ Windscreen Defrosting and Defogging

1. Set the mode selector dial to the  position.
2. Set the temperature control dial to the desired position.
3. Set the fan control dial to the desired speed.
4. If dehumidified heating is desired, turn on the air conditioner.

## WARNING

**Do not defog the windscreen using the  position with the temperature control set to the cold position:**

Using the  position with the temperature control set to the cold position is dangerous as it will cause the outside of the windscreen to fog up. Your vision will be hampered, which could lead to a serious accident. Set the temperature control to the hot or warm position when using the  position.

## NOTE

- For maximum defrosting, turn on the air conditioner, set the temperature control dial to the extreme hot position, and turn the fan control dial fully clockwise.
- If warm air is desired at the floor, set the mode selector dial to the  position.
- In the  position, the outside air position is automatically selected. The air intake selector cannot be changed to the recirculated air position.

## ▼ Dehumidifying

Operate the air conditioner in cool or cold weather to help defog the windscreen and side windows.

1. Set the mode selector dial to the desired position.
2. Set the air intake selector to the outside air position (indicator light turns off).
3. Set the temperature control dial to the desired position.
4. Set the fan control dial to the desired speed.
5. Turn on the air conditioner by pressing the A/C switch.

## Air-Conditioning System

---


**NOTE**

*One of the functions of the air conditioner is dehumidifying the air and, to use this function, the temperature does not have to be set to cold. Therefore, set the temperature control dial to the desired position (hot or cold) and turn on the air conditioner when you want to dehumidify the cabin air.*

# Air-Conditioning System

## Fully Automatic Type

Air-conditioning system information is displayed on the display.

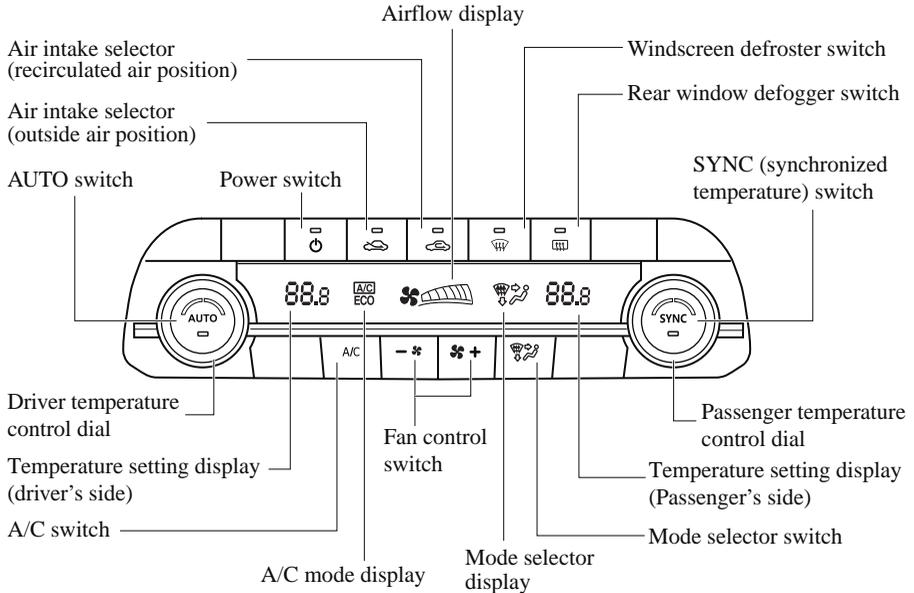

### ▼ Control Switches

#### AUTO switch

By pressing the AUTO switch the following functions will be automatically controlled in accordance with the selected set temperature:

- Airflow temperature
- Amount of airflow
- Selection of airflow mode
- Outside/Recirculated air selection
- Air conditioner operation
- A/C or A/C ECO selection

#### **NOTE**

*AUTO switch indicator light*

• When on, it indicates auto operation, and the system will function automatically.

• If any of the following switches are operated while in auto control, the AUTO switch indicator turns off.

- Mode selector switch
- Fan control switch
- Windscreen defroster switch

*The functions for switches other than those operated continue to operate in auto control.*

#### Power switch (Fan On/Off)

The air-conditioning system turns on or off by pressing the power switch.

# Air-Conditioning System

---

## Temperature control dial

This dial controls temperature. Turn it clockwise for hot and anticlockwise for cold.

### **(European models)**

Turn the temperature control dial to adjust the temperature between 15 °C (60 °F) and 29 °C (84 °F).

### **(Except European models)**

Turn the temperature control dial to adjust the temperature between 18 °C (64 °F) and 32 °C (90 °F).

- When the SYNC switch is on:  
Turn the driver temperature control dial to control the temperature throughout the entire cabin.
- When the SYNC switch is off:  
Turn the driver or front passenger temperature control dial to independently control the temperature on each side of the cabin.

## **NOTE**

- *The air-conditioning system changes to the individual operation mode (SYNC switch indicator light turns off) by turning the front passenger temperature control dial even when the SYNC switch is on, which allows individual control of the set temperature for the driver and front passenger.*
- *When you set the temperature to the lower or upper limit, “Lo” or “Hi” is displayed.*

- *The temperature units for the temperature setting display can be changed in conjunction with the temperature units for the outside temperature display.  
(Instrument cluster Type A)  
Refer to Outside Temperature Display on page 4-28.  
(Instrument cluster Type B)  
Refer to Outside Temperature Display on page 4-48.  
(Instrument cluster Type C)  
Refer to Outside Temperature Display on page 4-66.*

## Fan control switch

The fan has 7 speeds. The selected speed will be displayed.

## Mode selector switch

The desired airflow mode can be selected (page 5-4).

## **NOTE**

- *With the airflow mode set to the  position and the temperature control dial set at a medium temperature, heated air is directed to the feet and air at a comparably lower temperature will flow through the central, left and right vents.*
- *To set the air vent to , press the windscreen defroster switch.*
- *In the  position, the air conditioner is automatically turned on and the outside air position is automatically selected to defrost the windscreen.*

# Air-Conditioning System

## A/C switch

Pressing the A/C switch while the AUTO switch is turned on will turn off the air conditioner (cooling/dehumidifying functions).

The on/off of the air conditioner switches each time the A/C switch is pressed. Changes as follows each time the A/C switch is pressed.

A/C → A/C ECO → Stop

### **NOTE**

- *The air conditioner operates when the A/C switch is pressed while the air conditioner is turned off.*
- *The A/C ECO function is designed to economize use of the air-conditioning system. "A/C ECO" is displayed to indicate that the air-conditioning system is operating at optimum control.*
- *The air conditioner may not function when the outside temperature approaches 0 °C (32 °F).*

## Air intake selector

Outside or recirculated air positions can be selected. Press the switch to select outside/recirculated air positions.

### **Recirculated air position** (↻)

Outside air is shut off. Air within the vehicle is recirculated. Use this position when going through tunnels, driving in congested traffic (high engine exhaust areas), or when quick cooling is desired.

### **Outside air position** (↻)

Outside air is allowed to enter the cabin. Use this position for ventilation or windscreen defrosting.

## **WARNING**

**Do not use the  position in cold or rainy weather:**

Using the  position in cold or rainy weather is dangerous as it will cause the windows to fog up. Your vision will be hampered, which could lead to a serious accident.

## SYNC (Synchronized Temperature) switch

Use the SYNC switch to change the mode between the individual operation (driver and passenger) and interconnection (simultaneous) modes.

### **Interconnection mode (indicator light turns on)**

The set temperature for the driver and front passenger is controlled simultaneously.

### **Individual operation mode (indicator light turns off)**

The set temperature can be controlled individually for the driver and front passenger.

## Windscreen defroster switch

Press the switch to defrost the windscreen and front door windows.

Refer to Windscreen Defrosting and Defogging on page 5-12.

## Rear window defogger switch

Press the rear window defogger switch to defrost the rear window.

Refer to Rear Window Defogger on page 4-104.

# Air-Conditioning System

---

## ▼ Operation of Automatic Air Conditioner

1. Press the AUTO switch. Selection of the airflow mode, air intake selector and amount of airflow will be automatically controlled.
2. Use the temperature control dial to select a desired temperature.  
If you want to set the temperature on the front passenger's side separately from the driver's side, turn the front passenger temperature control dial to switch the mode automatically to the individual operation mode and set the temperature for the front passenger's side.

To turn off the system, press the power switch.

### NOTE

#### · (European models)

Set the control dial to the recommended temperature of 22 °C (72 °F), and then adjust it as desired.

#### · (Except European models)

Set the control dial to the recommended temperature of 25 °C (77 °F), and then adjust it as desired.

- Setting the temperature to maximum hot or cold will not provide the desired temperature at a faster rate.
- When selecting heat, the system will restrict airflow until the engine has warmed to prevent cold air from blowing out of the vents.

## ▼ Windscreen Defrosting and Defogging

Press the windscreen defroster switch. In this position, the outside air position is automatically selected, and the air conditioner automatically turns on. The air conditioner will directly dehumidify the air to the front windscreen and side windows on page 5-4.  
Airflow amount will be increased.



**Set the temperature control to the hot or warm position when defogging (☼ position):**


Using the ☼ position with the temperature control set to the cold position is dangerous as it will cause the outside of the windscreen to fog up. Your vision will be hampered, which could lead to a serious accident.

### NOTE


Use the temperature control dial to increase the air flow temperature and defog the windscreen more quickly.

**▼ Sunlight/Interior temperature sensor****Sunlight sensor**

Do not place objects on the sunlight sensor. Otherwise, the interior temperature may not adjust correctly.

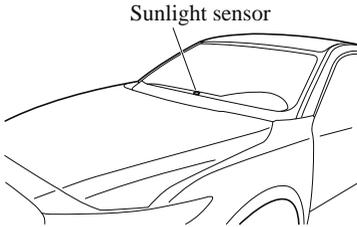**Interior temperature sensor**

Do not cover the interior temperature sensor. Otherwise, the interior temperature may not adjust correctly.

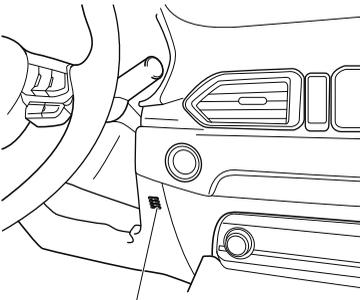


Interior temperature sensor


# Before Using the Audio System

## Audio Control Switch

### Without Bluetooth® Hands-Free

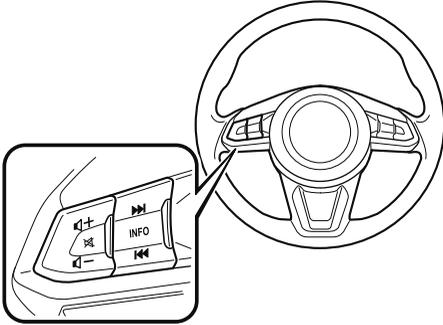

### With Bluetooth® Hands-Free

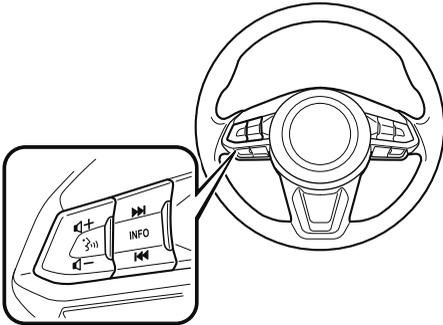

### ▼ Adjusting the Volume

To increase the volume, press up the volume switch (+).

To decrease the volume, press down the volume switch (-).




### ▼ Mute Switch\*

Press the mute switch (⊘) once to mute audio, press it again to resume audio output.

#### **NOTE**

*If the ignition is switched off with the audio muted, the mute will be cancelled. Therefore, when the engine is restarted, the audio is not muted. To mute the audio again, press the mute switch (⊘).*



# Before Using the Audio System

## ▼ Seek Switch

### AM/MW\*/LW\*/FM radio

Press the seek switch (◀◀, ▶▶). The radio switches to the next/previous stored station in the order that it was stored. Press and hold the seek switch (◀◀, ▶▶) to seek all usable stations at a higher or lower frequency whether programmed or not.

Radio stations which have been previously stored in the auto memory tuning (Type A)/favourite radio (Type B) can be called up by pressing the seek switch (◀◀, ▶▶) while any radio station stored in the auto memory tuning (Type A)/favourite radio (Type B) is being received. Radio stations can be called up in the order they were stored with each press of the switch (◀◀, ▶▶).



### DAB radio (Type B)\*

Press the Seek switch (◀◀, ▶▶) while listening to DAB radio to call up a station previously stored to the favourites list. With each operation of the switch, radio stations can be called up in the order they were stored. Press and hold the seek switch (▶▶) to go to the next station, (◀◀) to return to the previous station.

### USB Audio/Bluetooth® Audio\*/CD\*

Press the seek switch (▶▶) to skip forward to the beginning of the next track.

Press the seek switch (◀◀) within a few seconds after playback begins to track down to the beginning of the previous track.

Press the seek switch (◀◀) after a few seconds have elapsed to start playback from the beginning of the current track.

Press and hold the seek switch (◀◀, ▶▶) to continuously switch the tracks up or down.

### DVD (Type B)\*

Press the seek switch (▶▶) to skip forward to the beginning of the next chapter.

Press the seek switch (◀◀) to return to the beginning of the previous chapter.

### Aha™\*/Stitcher™ Radio (Type B)

Press the seek switch (▶▶) to skip forward to the beginning of the next track.

Press and hold the seek switch (▶▶) to evaluate the playback of the current song as “Like”.

Press and hold the seek switch (◀◀) to evaluate the playback of the current song as “Dislike”.

# Before Using the Audio System

## AUX/USB mode

Audio can be heard from the vehicle's speakers by connecting a commercially-available portable audio unit to the auxiliary jack.


A commercially-available, non-impedance (3.5 $\phi$ ) stereo mini plug lead is required. Contact an expert repairer (we recommend an Authorised Mazda Repairer) for details. In addition, audio can be played from the vehicle audio device by connecting a USB device to the USB port.

### NOTE

#### (Type B)


The SD card slot is for the navigation system. For vehicles with the navigation system, the SD card (Mazda genuine) with stored map data is inserted into the SD card slot and used.

#### Type A

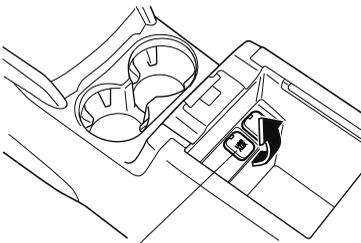

Auxiliary jack/USB port

#### Type B

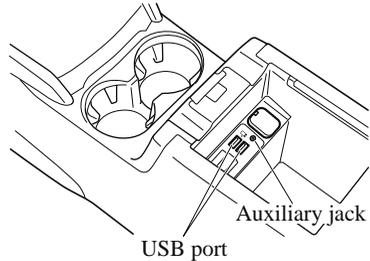

- ① How to use AUX mode.....page 5-25
- ② How to use USB mode..... page 5-26
- ③ How to use iPod mode..... page 5-29

### WARNING

**Do not adjust the portable audio unit or a similar product while driving the vehicle:** Adjusting the portable audio unit or a similar product while driving the vehicle is dangerous as it could distract your attention from the vehicle operation which could lead to a serious accident. Always adjust the portable audio unit or a similar product while the vehicle is stopped.

### CAUTION

Depending on the portable audio device, noise may occur when the device is connected to the vehicle accessory socket. (If noise occurs, do not use the accessory socket.)

### NOTE


- This mode may not be usable depending on the portable audio device to be connected.

# Before Using the Audio System


- Before using the auxiliary jack/USB port, refer to the instruction manual for the portable audio device.
- Use a commercially-available, non-impedance (3.5Φ) stereo mini plug for connecting the portable audio unit to the auxiliary jack. Before using the auxiliary jack, read the manufacturer's instructions for connecting a portable audio unit to the auxiliary jack.
- To prevent discharging of the battery, do not use the auxiliary input for long periods with the engine off or idling.
- When connecting a device to the auxiliary jack or USB port, noise may occur depending on the connected device. If the device is connected to the vehicle's accessory socket, the noise can be reduced by unplugging it from the accessory socket.

## ▼ How to connect USB port/Auxiliary jack

### Type A

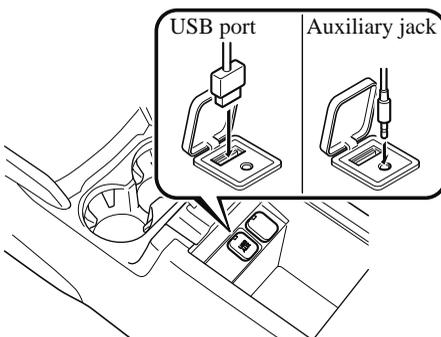

### Type B

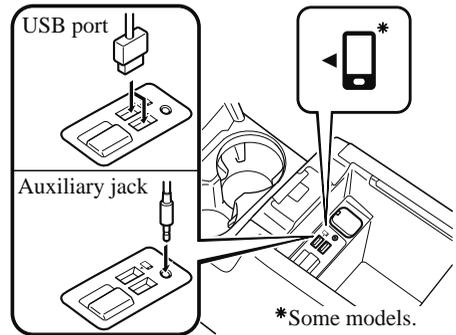

### Connecting a device

1. Open the console lid.
2. If there is a cover on the auxiliary jack or USB port, remove the cover. (Type A)
3. Connect the connector on the device to the USB port.

### Connecting with a connector lead

1. Open the console lid.
2. If there is a cover on the auxiliary jack or USB port, remove the cover. (Type A)
3. Connect the device plug/connector lead to the auxiliary jack/USB port. Pass the device plug/connector lead through the notch in the console and connect.

## Before Using the Audio System

### **WARNING**

**Do not allow the connection plug cord to get tangled with the shift lever (manual transaxle)/selector lever (automatic transaxle):**

Allowing the plug cord to become tangled with the shift lever (manual transaxle)/selector lever (automatic transaxle) is dangerous as it could interfere with driving, resulting in an accident.

### **CAUTION**

Do not place objects or apply force to the auxiliary jack/USB port with the plug connected.

### **NOTE**

- Insert the plug into the auxiliary jack/USB port securely.
- Insert or pull out the plug with the plug perpendicular to the auxiliary jack/USB port hole.
- Insert or remove the plug by holding its base.
- **(Vehicles with USB port indicated with )**

Use the USB terminal indicated by the  mark when using Apple CarPlay and Android Auto™.

## Aerial


### ▼ Type A\*

The aerial is embedded into the rear window glass.


### **CAUTION**

When washing the inside of the window which has an aerial, use a soft cloth dampened in lukewarm water, gently wiping the aerial lines. Use of glass cleaning products could damage the aerial.

### ▼ Type B

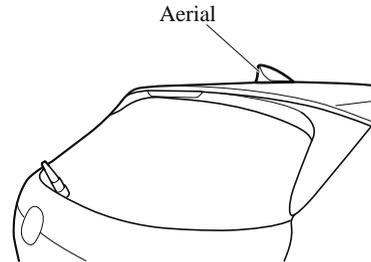

## Power/Volume/Sound Controls

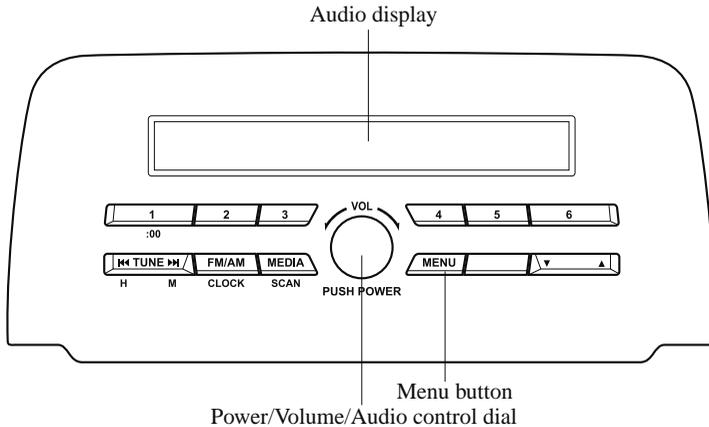

### ▼ Power ON/OFF

Switch the ignition to ACC or ON. Press the power/volume dial to turn the audio system on. Press the power/volume dial again to turn the audio system off.

### ▼ Volume adjustment

To adjust the volume, turn the power/volume dial. Turn the power/volume dial clockwise to increase volume, anticlockwise to decrease it.

### ▼ Audio sound adjustment

1. Press the menu button (**MENU**) to select the function. The selected function will be indicated.
2. Turn the audio control dial to adjust the selected functions as follows:

Indication	Setting value	
	Turn Anti-clockwise	Turn Clockwise
AF*1 (Setting Alternative Frequency (AF))	Off	On

Indication	Setting value	
	Turn Anti-clockwise	Turn Clockwise
REG*1 (Setting Regional Programme (REG))	Off	On
ALC (Automatic volume adjustment)	Level decrease	Level increase
BASS (Low pitch sound)	Decrease bass	Increase bass
TREB (Treble sound)	Decrease treble	Increase treble
FADE (Front/back volume balance)	Shift the sound to the front	Shift the sound to the rear
BAL (Left/right volume balance)	Shift the sound to the left	Shift the sound to the right
BEEP (Audio operation sound)	Off	On
BT SETUP*2	Select mode	
12Hr < > 24Hr (12 Hr/24 Hr time adjustment)	12Hr (Flashing)	24Hr (Flashing)

\*1 With Radio Data System (RDS)

## Audio Set

---

\*2 Depending on the model, this function may not be available.

### **NOTE**

*If not operated for several seconds, the display returns to the previous display. To reset bass, treble, fade, and balance, press the menu button (MENU) for 2 seconds. The unit will beep and "CLEAR" will be displayed.*

### **AF (Setting Alternative Frequency (AF))\***

The AF function of the Radio Data System (RDS) can be set on or off.

Refer to Radio Data System (RDS) on page 5-24.

### **REG (Setting Regional Programme (REG))\***

The REG function of the Radio Data System (RDS) can be set on or off.

Refer to Radio Data System (RDS) on page 5-24.

### **ALC (Automatic volume adjustment)**

The automatic level control (ALC) changes the audio volume automatically according to the vehicle speed. The faster the vehicle speed, the higher the volume increases. ALC has ALC OFF and ALC LEVEL 1 to 7 modes. At ALC LEVEL 7, the amount that the volume can increase is at the maximum. Select the mode according to the driving conditions.

### **BEEP (Audio operation sound)**

The setting for the operation sound when pressing and holding a button can be changed. The initial setting is ON. Set to OFF to mute the operation sound.


### **BT SETUP mode\***

Music and other audio such as voice data recorded on portable audio devices and mobile phones available on the market which are equipped with the Bluetooth® transmission function can be listened to via wireless transmission over the vehicle's speakers. Using the BT SETUP mode, these devices can be programmed to the Bluetooth® unit or changed (page 5-35).

### **12Hr < > 24Hr (12 Hr/24 Hr time adjustment)**

Rotating the audio control dial switches the display between 12 and 24-hour clock time (page 5-21).

## Clock

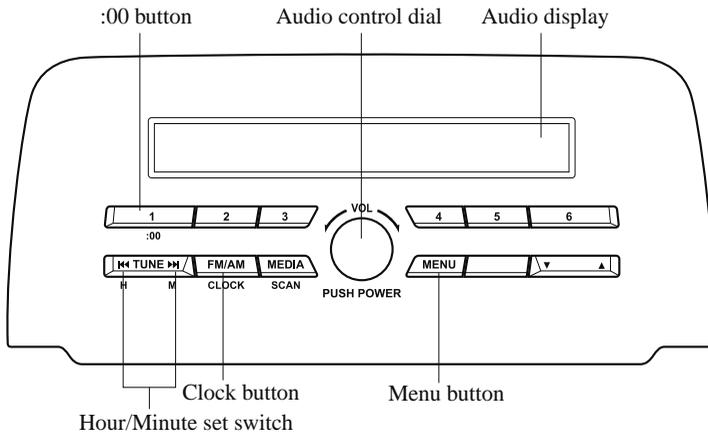

### ▼ Setting the time

The clock can be set at any time when the ignition is switched to ACC or ON.

1. To adjust the time, press the clock button (FM/AM) for about 2 seconds until a beep is heard.
2. The clock's current time will flash.

#### Time adjustment

- To adjust the time, press the hour/minute set button (◀, ▶) while the clock's current time is flashing.
  - The hours advance while the hour set button (◀) is pressed. The minutes advance while the minute set button (▶) is pressed.
3. Press the clock button (FM/AM) again to start the clock.

### ▼ Time resetting

1. Press the clock button (FM/AM) for about 2 seconds until a beep is heard.
2. Press the :00 button (1).
3. When the button is pressed, the time will be reset as follows:  
(Example)  
12:01—12:29→12:00  
12:30—12:59→1:00


#### NOTE

- When the :00 button (1) is pressed, the seconds will start at "00".
- Switching between 12 and 24-hour clock time:  
Press the menu button (MENU) several times until 12 and 24-hour clock time are displayed. Turn the audio control dial in either direction, select the desired clock setting while the preferred clock time is flashing.


# Audio Set

## Operating the Radio

### Without Radio Data System (RDS)

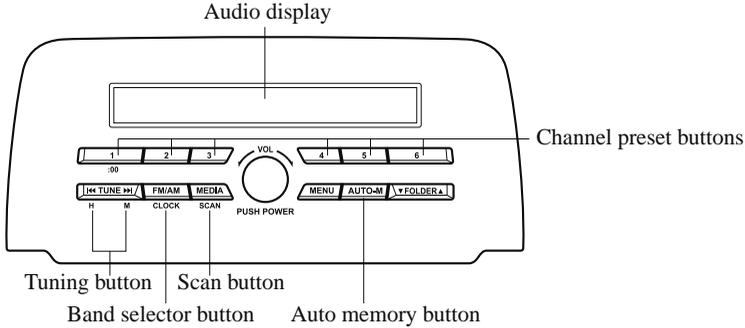

### With Radio Data System (RDS)

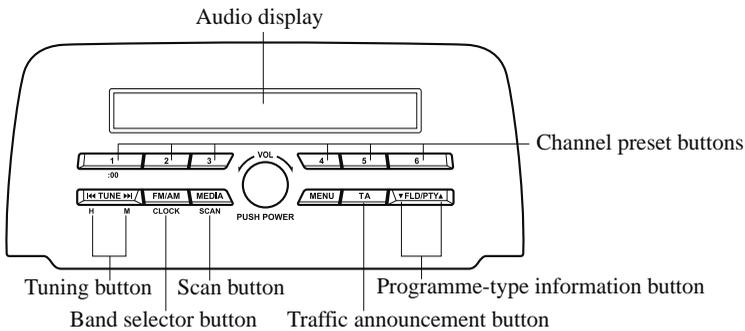

#### ▼ Radio ON

Press a band selector button (**FM/AM**) to turn the radio on.

#### ▼ Band selection

Successively pressing the band selector button (**FM/AM**) switches the bands as follows: FM1→FM2→AM (Without Radio Data System (RDS)), MW/LW (With Radio Data System (RDS)).

The selected mode will be indicated.

#### **NOTE**

*If the FM broadcast signal becomes weak, reception automatically changes from STEREO to MONO for reduced noise.*

#### ▼ Tuning

The radio has the following tuning methods: Manual, Seek, Scan, Preset channel, and Auto memory tuning. The easiest way to tune stations is to set them on preset channels.

#### **Manual tuning**

Select the station by pressing the tuning button (◀▶) lightly.

### Seek tuning

Automatic search for radio stations starts when the tuning button (◀▶) is pressed until a beep sound is heard. The search stops when a station is found.

#### **NOTE**

*If you continue to press and hold the button, the frequency will continue changing without stopping.*

### Scan tuning

Press and hold the scan button (**MEDIA**) to automatically sample strong stations. Scanning stops at each station for about 5 seconds. To hold a station, press and hold the scan button (**MEDIA**) again during this interval.

### Preset channel tuning

The 6 preset channels can be used to store 6 AM (Without Radio Data System (RDS)), MW/LW (With Radio Data System (RDS)) and 12 FM stations.

1. To set a channel first select AM (Without Radio Data System (RDS)), MW/LW (With Radio Data System (RDS)), FM1, or FM2. Tune to the desired station.
2. Press a channel preset button for about 2 seconds until a beep is heard. The preset channel number or station frequency will be displayed. The station is now held in the memory.

3. Repeat this operation for the other stations and bands you want to store. To tune one in the memory, select AM (Without Radio Data System (RDS)), MW/LW (With Radio Data System (RDS)), FM1, or FM2 and then press its channel preset button. The station frequency or the channel number will be displayed.

### Auto memory tuning (Without Radio Data System (RDS))

This is especially useful when driving in an area where the local stations are not known.

Press and hold the auto memory button (**AUTO-M**) for about 2 seconds until a beep is heard; the system will automatically scan and temporarily store up to 6 stations with the strongest frequencies in each selected band in that area.

After scanning is completed, the station with the strongest frequency will be tuned and its frequency displayed. Press and release the auto memory button (**AUTO-M**) to recall stations from the auto-stored stations. One stored station will be selected each time and its frequency and channel number will be displayed.

#### **NOTE**

*If no stations can be tuned after scanning operations, "A" will be displayed.*

## Audio Set

---

### ▼ Radio Data System (RDS)\*

#### NOTE

*The radio data system (RDS) does not function if it is out of the system's service coverage area.*

### Alternative frequency (AF)

AF functions on FM stations. Press the menu button (**MENU**) and select the AF mode to turn it on and “AF” will be displayed. If the radio reception of the current station weakens, the system switches to an alternative station automatically.

If you wish to continue a regional programme, press the menu button (**MENU**) and select the REG mode to turn it on. “REG ON” is displayed. To cancel it, press the audio control dial and select the REG mode to turn it off. “REG OFF” is displayed.

### Traffic announcement (TA)

If the traffic announcement button (**TA**) is pressed, the unit switches to TA mode and “TA” is displayed.

If a TA broadcast is received while in the TA mode, the TA broadcast intercedes even while using other functions (FM, USB device, AUX, or BT audio), and “Traffic Info” is displayed.

During a TA broadcast, press the traffic announcement button (**TA**) to end the broadcast and return to the previous mode.

### Programme-type information (PTY)

Some FM stations transmit programme-type codes. This code enables alternative stations transmitting the same programme-type code to be found quickly.

Press the programme-type information button (▼,▲) while in FM mode. The programme-type code and “PTY” will be displayed during reception. If there is no programme-type code, “None” will be displayed.

#### (To choose a programme-type:)

1. Press the Programme-type information button (▼,▲) when the programme-type code is displayed.
2. Operate any one of the following:
  - Press the pre-programmed channel preset button (1 to 6).
  - Press the Programme-type information button (▼,▲).

#### (To scan for programme-type information:)

1. Press the Programme-type information button (▼,▲) when the programme-type code is displayed.
2. Press the Programme-type information button (▼,▲) until the beep sounds. The unit will scan for broadcasts, if none are found, “Nothing” will be displayed and the unit will return to the previously tuned band.

**(To store programme types in the channel preset buttons:)**

1. Press the Programme-type information button (▼,▲) when the programme-type code is displayed.
2. Press the Programme-type information button (▼,▲) and select the programme type.
3. While the programme type is displayed, press a channel preset button for about 2 seconds.

**Emergency broadcast**

If an emergency broadcast is received, the emergency broadcast intercedes even while using other functions (FM, USB device, AUX, or BT audio), and “Alarm!” is displayed.

When the emergency broadcast ends, the system will return to the previous mode.

**How to use AUX mode**


1. Switch the ignition to ACC or ON.
2. Press the power/volume dial to turn the audio system on.
3. Press the media button (**MEDIA**) of the audio unit to change to the AUX mode.



**NOTE**

- When the device is not connected to the auxiliary jack, the mode does not switch to the AUX mode.
- Adjust the audio volume using the portable audio device or audio unit.
- Audio adjustments other than audio volume can only be done using the portable audio device.
- If the connection plug is pulled out from the auxiliary jack while in AUX mode, noise may occur.

## How to use USB mode

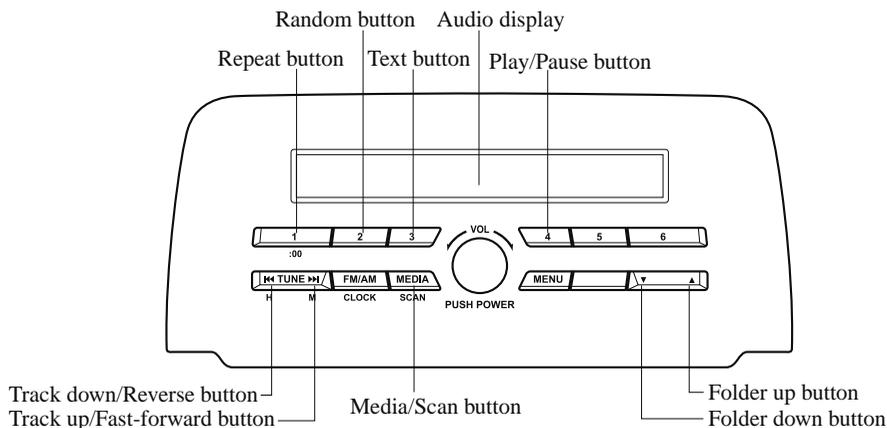

Type	Playable data
USB mode	MP3/WMA/AAC file

This unit does not support a USB 3.0 device. In addition, other devices may not be supported depending on the model or OS version.

### ▼ Playback

1. Switch the ignition to ACC or ON.
2. Press the power/volume dial to turn the audio system on.
3. Press the media button (**MEDIA**) to switch to the USB mode and start playback.

### NOTE

- Some devices such as smart phones may require a setting change to allow operation using a USB connection.
- When the USB device is not connected, the mode does not switch to USB mode.
- When there is no playable data in the USB device, "NO CONTENTS" is flashed.

- Playback of the USB device is in the order of the folder numbers. Folders which have no MP3/WMA/AAC files are skipped.
- Do not remove the USB device while in the USB mode. The data may be damaged.

### Pause

To stop playback, press the play/pause button (4).

Press the button again to resume playback.

### Fast-forward/Reverse

Press and hold the fast-forward button (▶▶) to advance through a track at high speed.

Press and hold the reverse button (◀◀) to reverse through a track at high speed.

### Track search

Press the track up button (▶▶) once to skip forward to the beginning of the next track. Press the track down button (◀◀) within a few seconds after playback begins to track down to the beginning of the previous track.

Press the track down button (◀◀) after a few seconds have elapsed to start playback from the beginning of the current track.

### Folder search

To change to the previous folder, press the folder down button (▼), or press the folder up button (▲) to advance to the next folder.

### Music scan

This function scans the titles in a folder currently being played and plays 10 seconds of each song to aid you in finding a song you want to listen to.

Press and hold the scan button (**MEDIA**) during playback to start the scan play operation (the track number will flash). Press and hold the scan button (**MEDIA**) again to cancel scan playback.

#### **NOTE**

*If the unit is left in scan, normal playback will resume where scan was selected.*

### Repeat playback

#### **Track repeat**

1. Press the repeat button (1) during playback to play the current track repeatedly. “TRACK RPT” is displayed (♫ is displayed next to RPT at the bottom of the display area).
2. To cancel the repeat playback, press the button again after 3 seconds.

#### **Folder repeat**

1. Press the repeat button (1) during playback, and then press the button again within 3 seconds to play the tracks in the current folder repeatedly. “FOLDER RPT” is displayed (📁 is displayed next to RPT at the bottom of the display area).
2. Press the button again to cancel the repeat playback.

### Random playback

Tracks are randomly selected and played.

#### **Folder random**

1. Press the random button (2) during playback to play the tracks in the folder randomly. “FOLDER RDM” is displayed (📁 is displayed next to RDM at the bottom of the display area).
2. To cancel the random playback, press the button again after 3 seconds.

#### **All random**

1. Press the random button (2) during playback, and then press the button again within 3 seconds to play the tracks in the USB device randomly. “ALL RDM” is displayed (🎵 is displayed next to RDM at the bottom of the display area).
2. Press the button again to cancel the random playback.

# Audio Set

---

## ▼ Switching the display

The information displayed on the audio display changes as follows each time the text button (3) is pressed during playback.

Button	Information displayed on audio display
	File number/Elapsed time
	Folder number/File number
	File name
	Folder name
	Album name
	Song name
	Artist name

### NOTE

- The information (artist name, music name) is displayed only when the USB device information in the USB device has information which can be displayed on the screen.
- This unit cannot display some characters. Characters which cannot be displayed are indicated by an asterisk (\*).


### Display scroll

Only 13 characters can be displayed at one time. To display the rest of the characters of a long title, press and hold the text button (3). The display scrolls the next 13 characters. Press and hold the text button (3) again after the last 13 characters have been displayed to return to the beginning of the title.

### NOTE

The number of characters which can be displayed is restricted.

## How to use iPod mode

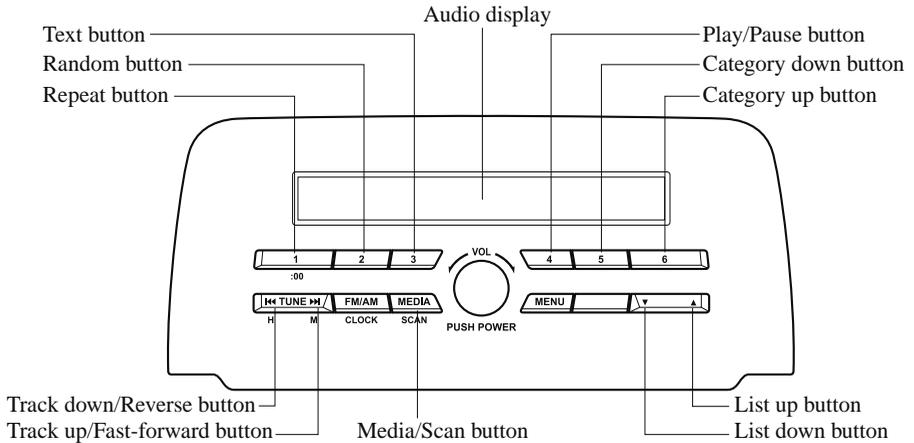

An iPod may not be compatible depending on the model or OS version. In this case, an error message is displayed.

### **NOTE**

*The iPod functions on the iPod cannot be operated while it is connected to the unit because the unit controls the iPod functions.*

### **▼ Playback**

1. Switch the ignition to ACC or ON.
2. Press the power/volume dial to turn the audio system on.
3. Press the media button (**MEDIA**) to switch to the iPod mode and start playback.

### **NOTE**

- When an iPod is not connected, the mode does not switch to the iPod mode.
- When there is no playable data in the iPod, "NO CONTENTS" is flashed.

- Do not remove the iPod while in the iPod mode. Otherwise, the data could be damaged.

### **Pause**

To stop playback, press the play/pause button (4). Press the button again to resume playback.

### **Fast-forward/Reverse**

Press and hold the fast-forward button (▶▶) to advance through a track at high speed. Press and hold the reverse button (◀◀) to reverse through a track at high speed.

### **Track search**

Press the track up button (▶▶) once to skip forward to the beginning of the next track. Press the track down button (◀◀) within a few seconds (depends on iPod software version) after playback begins to track down to the beginning of the previous track.

## Audio Set

---

Press the track down button (**⏮**) after a few seconds (depends on iPod software version) have elapsed to start playback from the beginning of the current track.

### Category search

Press the category down button (5) to select the previous category and press the category up button (6) to select the next category.

#### **NOTE**

*The types of categories include Playlist, Artist, Album, Song, Podcast, Genre, Composer, and Audio book.*

### List search

Press the list down button (**▼**) to select the previous list and press the list up button (**▲**) to select the next list.

#### **NOTE**

*When the selected category is Song or Audio book, there is no list.*

### Music scan

This function scans the titles in a list currently being played and plays 10 seconds of each song to aid you in finding a song you want to listen to.

Press and hold the scan button (**MEDIA**) during playback to start the scan play operation (the track number will flash). Press and hold the scan button (**MEDIA**) again to cancel scan playback.

#### **NOTE**

*If the unit is left in scan, normal playback will resume where scan was selected.*

### Repeat playback

1. Press the repeat button (1) during playback to play the current track repeatedly. “TRACK RPT” is displayed (**⏮** is displayed next to RPT at the bottom of the display area).
2. Press the button again to cancel the repeat playback.

### Random playback

Tracks are randomly selected and played.

#### **Song random**

1. Press the random button (2) during playback to play the tracks in the list randomly. “SONG RDM” is displayed (**⏮** is displayed next to RDM at the bottom of the display area).
2. To cancel the random playback, press the button again after 3 seconds.

#### **Album random**

1. Press the random button (2) during playback, and then press the button again within 3 seconds to play the tracks in the iPod randomly. “ALBUM RDM” is displayed (**⏮** is displayed next to RDM at the bottom of the display area).
2. Press the button again to cancel the random playback.

#### **NOTE**

*The track number being played randomly is in the order of the iPod shuffle table.*

▼ **Switching the display**

The information displayed on the audio display changes as follows each time the text button (3) is pressed during playback.

Button	Information displayed on audio display
	File number/Elapsed time
	File number
	Category name
	Artist name
	Album name
	Song name

**NOTE**

- The information (artist name, music name) is displayed only when the iPod has information which can be displayed.
- This unit cannot display some characters. Characters which cannot be displayed are indicated by an asterisk (\*).

**Display scroll**

13 characters can be displayed at one time. To display the rest of the characters of a long title, press and hold the text button (3). The display scrolls the next 13 characters. Press and hold the text button (3) again after the last 13 characters have been displayed to return to the beginning of the title.

**NOTE**

The number of characters which can be displayed is restricted.

**Error Indications**

If you see an error indication on the display, take appropriate action according to the following methods. If you cannot clear the error indication, take the vehicle to an expert repairer (we recommend an Authorised Mazda Repairer).

**CHECK USB**

When the message “CHECK USB” is displayed, it indicates that there is some error in the USB device. Verify that the content recorded in the USB device has MP3/WMA/AAC files and re-connect correctly.

**CHECK iPod**

If the message “CHECK iPod” is displayed, it indicates that there is a malfunction in the iPod. Verify that the content recorded in the iPod has playable files and connect correctly.

**Bluetooth®\*****▼ Introduction****Bluetooth® Hands-Free outline**

When a Bluetooth® device (mobile phone) is connected to the vehicle's Bluetooth® unit, a call can be made or received by pressing the talk button, pick-up button, or hang-up button on the audio remote control switch. For example, even if a device (mobile phone) is in your coat pocket, a call can be made without taking the device (mobile phone) out and operating it directly.

**Bluetooth® audio outline**

When a portable audio unit equipped with the Bluetooth® communication function is paired to the vehicle, you can listen to music stored on the paired portable audio device from the vehicle's speakers. It is not necessary to connect the portable audio device to the vehicle's external input terminal. After programming, operate the vehicle audio control panel to play/stop the audio.

**NOTE**

- *For your safety, a device can be paired only when the vehicle is parked. If the vehicle starts to move, the pairing procedure will end. Park the vehicle in a safe place before pairing.*
- *The communication range of a Bluetooth® equipped device is about 10 meters (32 ft) or less.*
- *Basic audio operation is available using voice commands even if Bluetooth® is not connected.*



*Some Bluetooth® mobile devices are not compatible with the vehicle. Consult an expert repairer (we recommend an Authorised Mazda Repairer), Mazda's call centre or Web support centre for information regarding Bluetooth® mobile device compatibility:*

Phone:

(Germany)

0800 4263 738 (8:00—18:00 Central European Time)

(Except Germany)

00800 4263 7383 (8:00—18:00 Central European Time)

(Worldwide)

+ 49 721 5099 8198 (8:00—18:00 Central European Time)


Web:

<http://www.mazdahandsfree.com>

**Applicable Bluetooth® specification (Recommended)**

Ver. 2.0

## ▼ Component Parts

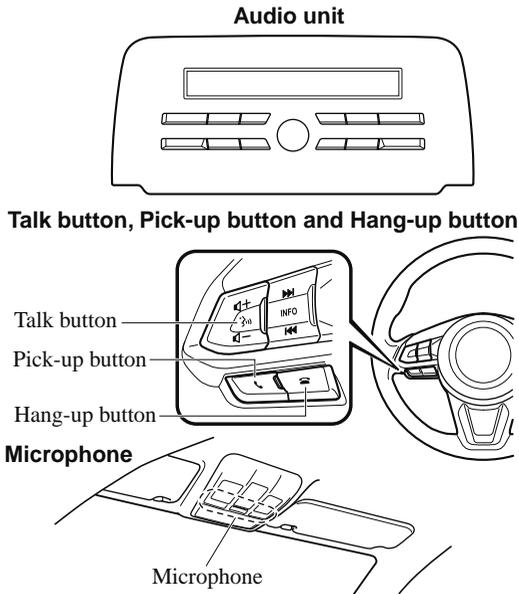

### Microphone (hands-free)

The microphone is used for speaking voice commands or when making a Hands-free call.

### Talk button

Activates the voice recognition. In addition, it skips the voice guidance.

### Pick-up button

Responds to incoming calls. In addition, after selecting a contact or dialing a number, it places the call when the button is pressed.

### Hang-up button

Ends the call or refuses an incoming call. In addition, it ends the voice recognition operation.

## Audio Set

---

### Volume adjustment

The power/volume dial of the audio unit is used to adjust the volume. Turn the dial to the right to increase volume, to the left to decrease it.

The volume can also be adjusted using the volume button on the steering wheel.

### **NOTE**

*If the volume is lower compared to other audio modes, increase the volume from the device side.*

## Bluetooth® Preparation\*

### ▼ Bluetooth® Hands-Free Preparation

#### Pairing code setting

The 4-digit pairing code setting for registration of your cell phone (pairing) can be set beforehand.

#### **NOTE**

*The initial setting value is "0000".*

1. Press the pick-up button or talk button with a short press.
2. **Say:** [Beep] "Setup"
3. **Prompt:** "Select one of the following: Pairing options, confirmation prompts, language, password, select phone or select music player."
4. **Say:** [Beep] "Pairing options"
5. **Prompt:** "Select one of the following: Pair, Edit, Delete, List, or Set pin Code."
6. **Say:** [Beep] "Set pin code"
7. **Prompt:** "Your current pin code is XXXX. Do you want to change it to a different pairing pin code?"
8. **Say:** [Beep] "Yes"
9. **Prompt:** "Please say a 4-digit pairing code."
10. **Say:** [Beep] "YYYY"
11. **Prompt:** "YYYY is this correct?"
12. **Say:** [Beep] "Yes" or "No"
13. If "Yes", go to Step 14. If "No", the procedure returns to Step 9.
14. **Prompt:** "Your new pairing pin code is YYYY. Use this pin code when pairing devices to the Hands free system. Do you want to pair a device now?"
15. **Say:** [Beep] "Yes" or "No"

16. If "Yes", the system switches to the device registration mode. If "No", the system returns to standby status.

### ▼ Device pairing (Bluetooth® Hands-Free)

To use Bluetooth® Hands-Free, the device equipped with Bluetooth® has to be paired to the Bluetooth® unit using the following procedure.

A maximum of seven devices including hands-free mobile phones and Bluetooth® audio devices can be paired to one vehicle.

#### **NOTE**

- *A device can be paired only when the vehicle is parked. If the vehicle starts to move, the pairing procedure will end. Pairing is dangerous while driving - pair up your device before you start driving. Park the car in a safe place before paired.*
  - *If a Bluetooth® device has already been paired to the vehicle as a Bluetooth® audio device, it does not need to be paired again when using the device as a hands-free mobile phone. Conversely, it does not need to be paired again as a Bluetooth® audio device if it has already been paired as a hands-free mobile phone.*
  - *Since the communication range of a Bluetooth® equipped device is about 10 m (32 ft), if a device is placed within a 10 m (32 ft) radius of the vehicle, it may be detected/paired unintentionally while another device is being paired.*
1. Activate the Bluetooth® application of the device.

## Audio Set

---

### NOTE

For the operation of the device, refer to its instruction manual.

2. Press the pick-up button or talk button with a short press.
3. **Say:** [Beep] “Setup”
4. **Prompt:** “Select one of the following: Pairing options, confirmation prompts, language, password, select phone or select music player.”
5. **Say:** [Beep] “Pairing options”
6. **Prompt:** “Select one of the following: Pair, edit, delete, list, or set pin code.”
7. **Say:** [Beep] “Pair”
8. **Prompt:** “Start the pairing process on your Bluetooth® device. Your pin code is 0000 (XXXX). Input this on your Bluetooth® device. See device manual for instructions.”
9. Using the device, perform a search for the Bluetooth® device (Peripheral device).

### NOTE

For the operation of the device, refer to its instruction manual.

10. Select “Mazda” from the device list searched by the device.
11. Input the 4-digit pairing code to the device.
12. **Prompt:** “Please say the name of the device after the beep.”
13. **Say:** [Beep] “XXXX - - -” (Speak a “device tag”, an arbitrary name for the device.)  
Example: “Stan's device.”

### NOTE

Say a paired “device tag” within 10 seconds.

If more than 2 devices are to be paired, they cannot be paired with the same or similar “device tag”.

14. **Prompt:** “Adding XXXXXX - - - (Ex. “Stan's device”) (Device tag). Is this correct?”
15. **Say:** [Beep] “Yes”
16. **Prompt:** “Pairing complete”

After a device is registered, the system automatically identifies the device. By activating Bluetooth® Hands-Free again, or by activating Bluetooth® Hands-Free first after switching the ignition from OFF to ACC, the system reads out a voice guidance, “XXXXXX - - - (Ex. “Stan's device”) (Device tag) is connected”.

### NOTE

- When the pairing is completed, the  symbol is displayed.
- Some Bluetooth® audio devices need a certain amount of time before the  symbol is displayed.
- Device registration can also be done by operating the audio unit.
- Depending on the device, the registration status may be lost after a certain period of time. If this occurs, repeat the entire process from Step 1.

### Registered device read-out

Bluetooth® Hands-Free can read-out the devices registered to its system.

### NOTE

Do this function only when parked. It is too distracting to attempt while driving and you may make too many errors to be effective.

1. Press the pick-up button or talk button with a short press.
2. **Say:** [Beep] “Setup”
3. **Prompt:** “Select one of the following: Pairing options, confirmation prompts, language, password, select phone or select music player.”
4. **Say:** [Beep] “Pairing options”
5. **Prompt:** “Select one of the following: Pair, edit, delete, list, or set pin code.”
6. **Say:** [Beep] “List”
7. **Prompt:** “XXXXXX..., XXXXX..., XXXXX... (Ex. Device A, device B, device C)” (The voice guidance reads out the device tags registered to the hands-free system.)

Press the talk button with a short press during the read-out at the desired device, and then say one of the following voice commands to execute it.

- “Select phone”: Selects device (Mobile phone) when the talk button is short-pressed.
  - “Select music player”: Selects device (Music player) when the talk button is short-pressed.
  - “Edit”: Edits device when the talk button is short-pressed.
  - “Continue”: Continues the list read-out.
  - “Delete”: Deletes the registered device when the talk button is short-pressed.
  - “Previous”: Returns to the previous device in read-out when the talk button is short-pressed.
8. **Prompt:** “End of list, would you like to start from the beginning?”
  9. **Say:** [Beep] “No”

10. **Prompt:** “Returning to main menu.”

### ▼ **Device selection (Bluetooth® Hands-Free)**

If several devices have been paired, the Bluetooth® unit links the device last paired. If you would like to link a different paired device, it is necessary to change the link. The order of device priority after the link has been changed is maintained even when the ignition is switched off.

### **(Hands-free phone)**

1. Press the pick-up button or talk button with a short press.
2. **Say:** [Beep] “Setup”
3. **Prompt:** “Select one of the following: Pairing options, confirmation prompts, language, password, select phone or select music player.”
4. **Say:** [Beep] “Select phone”
5. **Prompt:** “Please say the name of the device you would like to select. Available devices are XXXXX... (Ex. device A), XXXXX... (Ex. device B), XXXXX... (Ex. device C). Which device please?”
6. **Say:** [Beep] “X” (Say the number for the mobile phone to be connected.)
7. **Prompt:** “XXXXXX... (Ex. device B...) (Registered device tag) is this correct?”
8. **Say:** [Beep] “Yes”
9. **Prompt:** “XXXXXX... (Ex. device B...) (Device tag) selected.”

### **(Music player)**

1. Press the pick-up button or talk button with a short press.
2. **Say:** [Beep] “Setup”

## Audio Set

---

3. **Prompt:** “Select one of the following: Pairing options, confirmation prompts, language, password, select phone or select music player.”
4. **Say:** [Beep] “Select music player”
5. **Prompt:** “Please say the name of the device you would like to select. Available devices are XXXXX... (Ex. device A), XXXXX... (Ex. device B), XXXXX... (Ex. device C). Which device please?”
6. **Say:** [Beep] “X” (Say the number for the music player to be connected.)
7. **Prompt:** “XXXXX... (Ex. device B...) (Registered device tag) is this correct?”
8. **Say:** [Beep] “Yes”
9. **Prompt:** “XXXXX... (Ex. device B...) (Device tag) selected.”

### NOTE

- When the selected device connection is completed, the  or  symbol is displayed.
- Some Bluetooth® audio devices need a certain amount of time before the  or  symbol is displayed.
- Device (Music player) selection can also be done by operating the panel button.

### ▼ Deleting a device (Bluetooth® Hands-Free)

Registered devices (Mobile phone) can be deleted individually or collectively.

### NOTE

Do this function only when parked. It is too distracting to attempt while driving and you may make too many errors to be effective.

1. Press the pick-up button or talk button with a short press.
2. **Say:** [Beep] “Setup”
3. **Prompt:** “Select one of the following: Pairing options, confirmation prompts, language, password, select phone or select music player.”
4. **Say:** [Beep] “Pairing options”
5. **Prompt:** “Select one of the following: Pair, edit, delete, list, or set pin code.”

### NOTE

A registered device (Mobile phone) can be deleted using the registration list.

6. **Say:** [Beep] “Delete”
7. **Prompt:** “Please say the name of the device you would like to delete. Available devices are XXXXX... (Ex. device A), XXXXX... (Ex. device B), XXXXX... (Ex. device C), or all. Which device please?”
8. **Say:** [Beep] “X” (Say the number of the device to be deleted.)

### NOTE

Say “All” to delete all devices (Mobile phone).

9. **Prompt:** “Deleting XXXXX... (Ex. device B...) (Registered device tag). Is this correct?”
10. **Say:** [Beep] “Yes”
11. **Prompt:** “Deleted”

### ▼ Registered device editing (Bluetooth® Hands-Free)

1. Press the pick-up button or talk button with a short press.
2. **Say:** [Beep] “Setup”
3. **Prompt:** “Select one of the following: Pairing options, confirmation prompts, language, password, select phone or select music player.”

4. **Say:** [Beep] “Pairing options”
5. **Prompt:** “Select one of the following: Pair, edit, delete, list, or set pin code.”
6. **Say:** [Beep] “Edit”
7. **Prompt:** “Please say the name of the device you would like to edit.  
Available devices are XXXXX... (Ex. device A), XXXXX... (Ex. device B), XXXXX... (Ex. device C). Which device please?”
8. **Say:** [Beep] “X” (Say the number of the device to be edited.)
9. **Prompt:** “New name please?”
10. **Say:** [Beep] “XXXXX... (Ex. device C)” (Speak a “device tag”, an arbitrary name for the device.)
11. **Prompt:** “XXXXX... (Ex. device C) (Device tag), is this correct?”
12. **Say:** [Beep] “Yes”
13. **Prompt:** “New name saved.”


### ▼ Bluetooth® Audio Preparation

#### Bluetooth® audio device set-up


Bluetooth® audio pairing, changes, deletions, and display of paired device information can be performed.

1. The mode changes as follows each time the menu button (**MENU**) is pressed. Select “BT SETUP”.

#### Without Radio Data System (RDS)

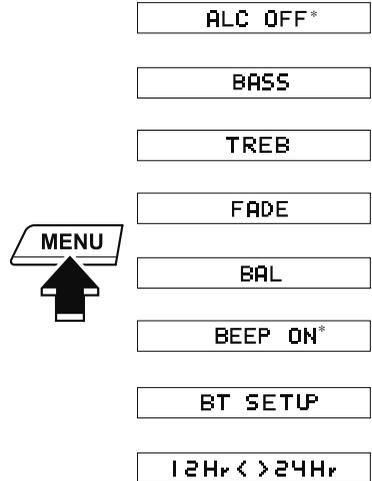


#### With Radio Data System (RDS)

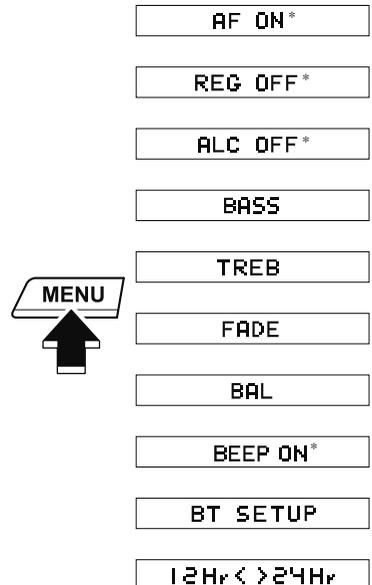

# Audio Set

- \* Depending on the mode selected, the indication changes.
- Turn the audio control dial and select a desired mode.

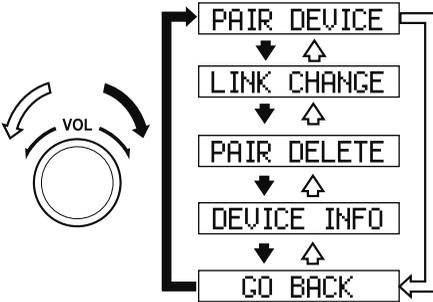

Display	Mode	Function
PAIR DE- VICE	Pairing mode	Bluetooth® audio de- vice pairing
LINK CHANGE	Link change mode	Changing link to Blue- tooth® audio device
PAIR DE- LETE	Pairing dele- tion mode	Deleting link to Blue- tooth® audio device
DEVICE INFO	Device infor- mation dis- play mode	Displaying vehicle's Bluetooth® unit infor- mation

- Press the audio control dial to determine the mode.

## ▼ Bluetooth® audio device pairing (Bluetooth® Audio)

Any Bluetooth® audio device must be paired to the vehicle's Bluetooth® unit before it can be listened to over the vehicle's speakers.

A maximum of seven devices including Bluetooth® audio devices and hands-free mobile phones can be paired to one vehicle.

## NOTE

- If a Bluetooth® device has already been paired to the vehicle as a hands-free mobile phone, it does not need to be paired again when using the device as a Bluetooth® audio device. Conversely, it does not need to be paired again as a hands-free mobile phone if it has already been paired as a Bluetooth® audio device.
- Device registration can also be done using voice recognition.

Concerning the operation of a Bluetooth® audio device itself, refer to its instruction manual.

Some Bluetooth® audio devices have PIN codes (four digits). Refer to the audio device's instruction manual because the pairing procedure differs depending on whether it has a PIN code or not.

## Pairing a Bluetooth® audio device which has a four-digit PIN code

- Using the audio control dial, select the pairing mode "PAIR DEVICE" in the "BT SETUP" mode. (Refer to "Bluetooth® audio device set-up" for details.)
- Press the audio control dial to determine the mode.  
After "ENTER PIN" is displayed on the audio display for 3 seconds, "PIN 0000" is displayed and the PIN code can be input.

3. Input the PIN code of your Bluetooth® audio device by pressing channel preset buttons 1 to 4 while “PIN 0000” is displayed.  
Press channel preset button 1 to input the first digit, 2 for the second, 3 for the third, and 4 for the fourth. For example, if the PIN code were “4213”, press channel preset button 1 four times (1, 2, 3, 4), button 2 twice (1, 2), button 3 once (1), and button 4 three times (1, 2, 3). If the “PIN 0000” display disappears before finishing the PIN code input, repeat the procedure from Step 1.

**NOTE**

*Some devices accept only a particular pairing code (Usually, “0000” or “1234”).*

*If pairing cannot be completed, refer to the owner's manual of your mobile device, and try those numbers if necessary.*

4. Press the audio control dial while the input PIN code is displayed.  
“PAIRING” flashes on the display.
5. Operate the Bluetooth® audio device and set it to the pairing mode while “PAIRING” is flashing.
6. When the pairing is completed, “♪” and “PAIR SUCCESS” are displayed after about 10 — 30 seconds, after which “PAIR SUCCESS” continues to be displayed for 3 seconds, and then the unit returns to the normal display.

**NOTE**

*Some Bluetooth® audio devices need a certain amount of time before the “♪” symbol is displayed.*

- *If the pairing failed, “Err” flashes for 3 seconds.*
- *Pairing cannot be performed while the vehicle is moving. If you attempt to perform pairing while the vehicle is moving, “PAIR DISABLE” is displayed.*
- *If seven Bluetooth® audio devices have already been paired to the vehicle, pairing cannot be performed and “MEMORY FULL” is displayed. Delete one paired device to pair another one.*

**Pairing a Bluetooth® audio device which does not have a four-digit PIN code**

1. Using the audio control dial, select the pairing mode “PAIR DEVICE” in the “BT SETUP” mode. (Refer to “Bluetooth® audio set up” for details.)
2. Press the audio control dial to determine the mode. After “ENTER PIN” is displayed on the audio display for 3 seconds, “PIN 0000” is displayed and the PIN code can be input.
3. Press the audio control dial while “PIN 0000” is displayed.  
“PAIRING” flashes on the audio display.
4. Operate the Bluetooth® audio device and set it to the pairing mode while “PAIRING” is flashing.
5. As the Bluetooth® audio device requires a PIN code, input “0000”.
6. When the pairing is completed, “♪” and “PAIR SUCCESS” are displayed after about 10 — 30 seconds, after which “PAIR SUCCESS” continues to be displayed for 3 seconds, and then the unit returns to the normal display.

# Audio Set

## NOTE


- If pairing cannot be completed, try “1234” instead. Refer to the owner's manual of your mobile device for the right PIN code.
- Some Bluetooth® audio devices need a certain amount of time before the “♪” symbol is displayed.
- If the pairing failed, “Err” flashes for 3 seconds.
- Pairing cannot be performed while the vehicle is moving. If you attempt to perform pairing while the vehicle is moving, “PAIR DISABLE” is displayed.
- If seven Bluetooth® audio devices have already been paired to the vehicle, pairing cannot be performed and “MEMORY FULL” is displayed. Delete one paired device to pair another one.

## ▼ Device selection (Bluetooth® Audio)

If several devices have been paired, the Bluetooth® unit links the device last paired. If you would like to link a different paired device, it is necessary to change the link. The order of device priority after the link has been changed is maintained even when the ignition is switched off.

1. Using the audio control dial, select the link change mode “LINK CHANGE” in the “BT SETUP” mode. (Refer to “Bluetooth® audio device set-up” for details.)
2. Press the audio control dial to determine the mode.

3. The name of the currently linked Bluetooth® audio device is displayed. If no Bluetooth® audio device is currently linked, the name of the first device among the paired devices is displayed.
4. Turn the audio control dial to select the name of the device you would like to link.

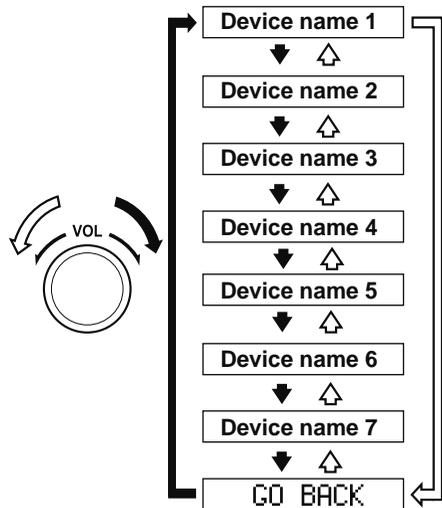

5. Press the audio control dial to select the device you would like to link. The “♪” symbol disappears, and “PAIRING” flashes in the audio display.

## NOTE

When “GO BACK” is selected and the audio control dial is pressed, the display returns to “LINK CHANGE”.

- If the link to the desired device is successful, the “♪” symbol is displayed again, together with “LINK CHANGED”. “LINK CHANGED” is displayed for 3 seconds, then it returns to the normal display.

**NOTE**

- Some Bluetooth® audio devices need a certain amount of time before the “♪” symbol is displayed.
- If a hands-free type mobile phone has been the most recently paired device, the Bluetooth® unit links this device. If you would like to use a Bluetooth® audio type device which has been previously paired to the Bluetooth® unit, the link must be changed to this device.
- If an error occurs while trying to link a device, “Err” flashes in the display for 3 seconds, and the display returns to “LINK CHANGE”. If this occurs, check the pairing status of the Bluetooth® audio device and the location of the device in the vehicle (not in the luggage compartment or a metal-type box), and then try the link operation again.
- Device selection can also be done using voice recognition.


**How to confirm the device currently linked**

Switch to the link-change mode. (Refer to “Changing the link to a Bluetooth® audio device”)

The device name displayed first is the device which is currently linked.

**▼ Deleting a device (Bluetooth® Audio)**

- Using the audio control dial, select the pairing delete mode “PAIR DELETE” in the “BT SETUP” mode. (Refer to “Bluetooth® audio device set-up” for details.)
- Press the audio control dial to determine the mode.
- The name of the first device among the paired devices is displayed.
- Rotate the audio control dial and select the name of the paired device you would like to delete.

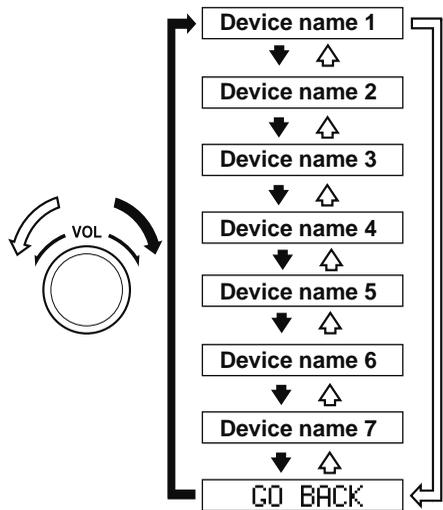

**NOTE**

Only the names of paired devices can be displayed. If only one device is paired, only the name for this device is displayed.

- If a selection other than “GO BACK” is made and the audio control dial is pressed, “SURE ? NO” is displayed.

# Audio Set

6. Rotate the audio control dial clockwise and switch the display to “SURE ? YES”.

**NOTE**

The display changes as follows depending on whether the audio control dial is rotated clockwise or anticlockwise.

- Clockwise: “SURE ? YES” displayed
- Anticlockwise: “SURE ? NO” displayed

7. Press the audio control dial to delete the selected device.

**NOTE**

Select “GO BACK” and press the audio control dial to return to the “PAIR DELETE” display.

8. “PAIR DELETED” is displayed for 3 seconds after the deletion is completed, and then it returns to the normal display.


**NOTE**

If an error occurs while trying to delete the paired device, “Err” flashes in the display for 3 seconds and the display returns to “LINK DELETE”.

## ▼ Bluetooth® audio device information display

1. Using the audio control dial, select the pair device information display mode “DEVICE INFO” in the “BT SETUP” mode. (Refer to “Bluetooth® audio device set-up” for details.)
2. Press the audio control dial to determine the mode.
3. The name of the Bluetooth® unit device is displayed.

4. Rotate the audio control dial to select the information for the Bluetooth® unit which you would like to view.



Device name

BT address

GO BACK

**NOTE**

When “GO BACK” is selected and the audio control dial is pressed, the display returns to “DEVICE INFO”.

## Available Language\*

The available languages are English, French, Spanish, Italian, German, Dutch, and Portuguese. If the language setting is changed, all of the voice guidance and voice input commands are done in the selected language.

### NOTE

- If the language setting is changed, device registration is maintained.
- Phonebook records are not cleared, but each language has a separate phonebook. Therefore, entries created in one language will need to be re-entered in the phonebook of the new language.
- Do these steps before you start driving. These less used functions are too distracting to undertake while driving until you are fully familiar with the system.

### (Method 1)

1. Press the pick-up button or talk button with a short press.
2. **Say:** [Beep] "Setup"
3. **Prompt:** "Select one of the following: Pairing options, confirmation prompts, language, password, select phone or select music player."
4. **Say:** [Beep] "Language"
5. **Prompt:** "Select a language: English, French, Spanish, Italian, German, Dutch, or Portuguese."
6. **Say:** [Beep] "French" (Speak the desired language: "English", "French", "Spanish", "Italian", "German", "Dutch", or "Portuguese")

### NOTE

*Other language settings can also be made while in the current setting by saying the name of the language in the native pronunciation.*

7. **Prompt:** "French (Desired language) selected. Is this correct?"
8. **Say:** [Beep] "Yes"
9. **Prompt:** "Please wait. Switching to French phonebook. French selected." (Spoken in the newly selected language).

### (Method 2)

1. Press the pick-up button or talk button with a short press.
2. **Say:** [Beep] "French" (Say the desired language: "English", "French", "Spanish", "Italian", "German", "Dutch", or "Portuguese"). (Change the desired language by saying the language name.)

### NOTE

*Other language settings can also be made while in the current setting by saying the name of the language in the native pronunciation.*

3. **Prompt:** "Would you like to change the language to French (Desired language)?"
4. **Say:** [Beep] "Yes"
5. **Prompt:** "Please wait. Switching to French phonebook. French selected." (Spoken in the newly selected language).

## Audio Set

### Security Setting\*

If a password is set, the system cannot be activated unless the password is input.

#### NOTE

*Do this function only when parked. It is too distracting to attempt while driving and you may make too many errors to be effective.*

#### Password setting

1. Press the pick-up button or talk button with a short press.
2. **Say:** [Beep] "Setup"
3. **Prompt:** "Select one of the following: Pairing options, confirmation prompts, language, password, select phone or select music player."
4. **Say:** [Beep] "Password"
5. **Prompt:** "Password is disabled. Would you like to enable it?"
6. **Say:** [Beep] "Yes"
7. **Prompt:** "Please say a 4-digit password. Remember this password. It will be required to use this system."
8. **Say:** [Beep] "XXXX" (Say a desired 4-digit password, "PCode".)
9. **Prompt:** "Password XXXX (Password, PCode). Is this correct?"
10. **Say:** [Beep] "Yes"
11. **Prompt:** "Password is enabled."

#### Using Bluetooth® Hands-Free with a password

1. Press the pick-up button or talk button with a short press.
2. **Prompt:** "Hands-Free system is locked. State the password to continue."
3. **Say:** [Beep] "XXXX" (Say the set password "PCode".)
4. If the correct password is input, voice guidance "XXXXXX... (Ex. "Mary's device") (Device tag) is connected" is announced.  
If the password is incorrect, voice guidance "XXXX (4-digit password, Pcode) incorrect password, please try again" is announced.

#### Cancelling the password

#### NOTE

*Do this function only when parked. It is too distracting to attempt while driving and you may make too many errors to be effective.*

1. Press the pick-up button or talk button with a short press.
2. **Say:** [Beep] "Setup"
3. **Prompt:** "Select one of the following: Pairing options, confirmation prompts, language, password, select phone or select music player."
4. **Say:** [Beep] "Password"
5. **Prompt:** "Password is enabled. Would you like to disable it?"
6. **Say:** [Beep] "Yes"
7. **Prompt:** "Password is disabled."

## Confirmation Prompts

The confirmation prompt confirms the command content to the user before advancing to the operation requested by the user. When this function is turned on, the system reads out the voice input command previously received and confirms whether the command is correct before advancing to the command execution.

When the confirmation prompt function is turned on:

(Ex. “Calling John's device. Is this correct?”)

When the confirmation prompt function is turned off:

(Ex. “Calling John's device.”)

### **NOTE**

*If the confirmation prompt function is turned off when making an emergency call, the system reads out and confirms the command before executing it.*

1. Press the pick-up button or talk button with a short press.
2. **Say:** [Beep] “Setup”
3. **Prompt:** “Select one of the following: Pairing options, confirmation prompts, language, password, select phone or select music player.”
4. **Say:** [Beep] “Confirmation prompts”
5. **Prompt:** “Confirmation prompts are on/off. Would you like to turn confirmation prompts off/on?”
6. **Say:** [Beep] “Yes”
7. **Prompt:** “Confirmation prompts are off/on.”

## **Bluetooth® Audio\***

### **Applicable Bluetooth® specification (Recommended)**

Ver. 2.0

### **Response profile**

- A2DP (Advanced Audio Distribution Profile) Ver. 1.0
- AVRCP (Audio/Video Remote Control Profile) Ver. 1.0/1.3

A2DP is a profile which transmits only audio to the Bluetooth® unit. If your Bluetooth® audio device corresponds only to A2DP, but not AVRCP, you cannot operate it using the control panel of the vehicle's audio system. In this case, only the operations on the mobile device are available the same as when a portable audio device for a non-compliant Bluetooth® device is connected to the AUX terminal.

Function	A2DP	AVRCP	
		Ver. 1.0	Ver. 1.3
Playback	—	X	X
Pause	—	X	X
File (Track) up/down	—	X	X
Reverse	—	—	X
Fast-forward	—	—	X
Text display	—	—	X

X: Available

—: Not available

### **NOTE**

- *The battery consumption of Bluetooth® audio devices increases while Bluetooth® is connected.*

## Audio Set

- If a general mobile phone device is USB connected during music playback over the Bluetooth® connection, the Bluetooth® connection is disconnected. For this reason, you cannot have music playback over a Bluetooth® connection and music playback using a USB connection at the same time.
- The system may not operate normally depending on the Bluetooth® audio device.

### ▼ Switching to Bluetooth® audio mode

To listen to music or voice audio recorded to a Bluetooth® audio device, switch to the Bluetooth® audio mode to operate the audio device using the audio system control panel. Any Bluetooth® audio device must be paired to the vehicle's Bluetooth® unit before it can be used. Refer to Bluetooth® Preparation on page 5-35.

1. Turn on the Bluetooth® audio device's power.
2. Switch the ignition to ACC or ON. Make sure that the “♪” symbol is displayed in the audio display. The symbol is not displayed if an un-paired Bluetooth® audio device is being used or the vehicle's Bluetooth® unit has a malfunction.

#### NOTE

*Some Bluetooth® audio devices need a certain amount of time before the “♪” symbol is displayed.*

3. Press the media button (MEDIA) to switch to the Bluetooth® audio mode and start playback.

**If the current device version is lower than AVRCP Ver. 1.3:** “BT Audio” is displayed.

**If the current device is AVRCP Ver. 1.3:** The playback time is displayed.

#### NOTE

- If the Bluetooth® audio device does not begin playback, press the Play/Pause button (4).
- If a call is received on a hands-free mobile phone during playback from the Bluetooth® audio device, the playback is stopped. Playback from the Bluetooth® audio device resumes after the call ends.

### ▼ Playback

1. To listen to a Bluetooth® audio device over the vehicle's speaker system, switch the mode to Bluetooth® audio mode. (Refer to “Switching to Bluetooth® audio mode”)
2. To stop playback, press the Play/Pause button (4).
3. Press the button again to resume playback.

### Selecting a file (track)

#### Selects the next file (track)

Short-press the track up button (▶▶).

#### Selects the beginning of the current file (track)

Short-press the track down button (◀◀).

### Fast-forward/Reverse (AVRCP Ver. 1.3)

#### Fast-forward

Press and hold the fast-forward button (▶▶▶).

## Reverse

Press and hold the reverse down button (⏮).

## ▼ Switching the display (only AVRCP Ver. 1.3)

The information displayed on the audio display changes as follows each time the text button (3) is pressed during playback.

Button	Information displayed on audio display
	Elapsed time
	Album name
	Song name
	Artist name

### NOTE

- If title information is not available, “NO TITLE” is displayed.
- This unit cannot display some characters. Characters which cannot be displayed are indicated by an asterisk (\*).

### Display scroll

Only 13 characters can be displayed at one time. To display the rest of the characters of a long title, press and hold the text button (3). The display scrolls the next 13 characters. Press and hold the text button (3) again after the last 13 characters have been displayed to return to the beginning of the title.

## ▼ Bluetooth® audio device information display

If a Bluetooth® audio device is connected, the following information is displayed in the audio display.

Category	AVRCP Ver. lower than 1.3	AVRCP Ver. 1.3
Device name	X	X
Title	—	X
Artist name	—	X
Album name	—	X
File number	—	X
Playback time	—	X
Folder number	—	—

X: Available  
 —: Not available

### NOTE

Some information may not display depending on the device, and if the information cannot be displayed, “NO TITLE” is indicated.

# Audio Set

## Bluetooth® Hands-Free\*

### ▼ Making a Call

#### Phonebook Usage

Telephone calls can be made by saying the name of a person (voice tag) whose phone number has been registered in Bluetooth® Hands-Free in advance. Refer to Phonebook registration.

1. Press the pick-up button or talk button with a short press.
2. **Say:** [Beep] “Call”
3. **Prompt:** “Name please.”
4. **Say:** [Beep] “XXXXX... (Ex. “John's phone”)” (Say a voice tag registered in the phonebook.)
5. **Prompt:** “Calling XXXXX... (Ex. “John's phone”) XXXX (Ex. “at home”). Is this correct?” (Voice tag and phone number location registered in phonebook).
6. **Say:** [Beep] “Yes”
7. **Prompt:** “Dialing”

#### NOTE

The “Call” command and the voice tag can be combined.

Ex. In Step 2, say, “Call John's phone”, then, Steps 3 and 4 can be skipped.

#### Phonebook registration

Phone numbers can be registered to the Bluetooth® Hands-Free phonebook.

#### NOTE

Do this function only when parked. It is too distracting to attempt while driving and you may make too many errors to be effective.

1. Press the pick-up button or talk button with a short press.

2. **Say:** [Beep] “Phonebook”
3. **Prompt:** “Select one of the following: New entry, edit, list names, delete, erase all or import contact.”
4. **Say:** [Beep] “New entry”
5. **Prompt:** “Name please.”
6. **Say:** [Beep] “XXXXX... (Ex. “Mary's phone”)” (Say a voice tag for the name registered.)
7. **Prompt:** “Adding XXXXX... (Ex. “Mary's phone”) (Registered voice tag). Is this correct?”
8. **Say:** [Beep] “Yes”
9. **Prompt:** “Home, Work, Mobile, or Other?”
10. **Say:** [Beep] “Mobile” (Say “Home”, “Work”, “Mobile”, or “Other”, for the desired location to be registered.)
11. **Prompt:** “Mobile (Location to be registered). Is this correct?”
12. **Say:** [Beep] “Yes”
13. **Prompt:** “Number, please.”
14. **Say:** [Beep] “XXXXXXXXXXXX” (Say the phone number to be registered.)
15. **Prompt:** “XXXXXXXXXXXX (Phone number registration). After the beep, continue to add numbers, or say Go-Back to re-enter the last entered numbers, or press the Pick-Up button to save the number.”
16. **(Registration)**  
Press the pick-up button or say “Enter”, then go to Step 17.  
**(Adding/inputting telephone number)**  
Say, “XXXX” (desired telephone number), then go to Step 15.  
**(Telephone number correction)**  
Say, “Go Back”. The prompt replies, “Go Back. The last entered numbers

have been removed.”. Then go back to Step 13.

17. **Prompt:** “Number saved. Would you like to add another number for this entry?”

18. **Say:** [Beep] “Yes” or “No”.

19. If “Yes”, an additional phone number registration can be made for the same entry.

If “No”, the system returns to standby status.

### **(Import contact)**

Phonebook data from your device (Mobile phone) can be sent and registered to your Bluetooth® Hands-Free phonebook using Bluetooth®.

1. Press the pick-up button or talk button with a short press.

2. **Say:** [Beep] “Phonebook”

3. **Prompt:** “Select one of the following: New entry, edit, list names, delete, erase all or import contact.”

4. **Say:** [Beep] “Import contact”

5. **Prompt:** “The hands free system is ready to receive a contact from the phone; only a home, work, mobile number can be imported into the hands free system. The import contact process requires the user to operate the phone. Refer to the phone's manual for information on how to operate the phone to perform the import operation.”

6. **Prompt:** “X (Number of locations which include data) numbers have been imported. What name would you like to use for these numbers?”

7. **Say:** [Beep] “XXXXX... (Ex. “Mary's phone”)” (Say a voice tag for the name registered.)

8. **Prompt:** “Adding XXXXX... (Ex. “Mary's phone”) (Voice tag). Is this correct?”

9. **Say:** [Beep] “Yes”

10. **Prompt:** “Number saved. Would you like to import another contact?”

11. **Say:** [Beep] “Yes” or “No”

12. If “Yes”, the procedure proceeds to Step 5.  
 If “No”, the system returns to standby status.

### **Editing phonebook**

The data registered to the Bluetooth® Hands-Free phonebook can be edited.

#### **NOTE**

*Do this function only when parked. It is too distracting to attempt while driving and you may make too many errors to be effective.*

1. Press the pick-up button or talk button with a short press.

2. **Say:** [Beep] “Phonebook”

3. **Prompt:** “Select one of the following: New entry, edit, list names, delete, erase all or import contact.”

4. **Say:** [Beep] “Edit”

5. **Prompt:** “Please say the name of the entry you would like to edit or say, “List names”.”

6. **Say:** [Beep] “XXXXX... (Ex. “Mary's phone”)” (Say the voice tag for the registered name to be edited in the phonebook.)

7. **Prompt:** “Home, Work, Mobile, or Other?”

8. **Say:** [Beep] “Home” (Say the registered location to be edited: “Home”, “Work”, “Mobile”, or “Other”.)

## Audio Set

---

9. **Prompt:** “XXXXX... (Ex. “Mary’s phone”) (Registered voice tag) XXXX (Ex. “Home”) (Registered location). Is this correct?”
10. **Say:** [Beep] “Yes”
11. **Prompt:** “The current number is XXXXXXXXXXXX (Ex. “555-1234”) (Currently registered number). New number, please.”

### **NOTE**

*If there was no previous phone number registered to a location (Ex. “Work”), the prompt will only read out “Number, please”*

12. **Say:** [Beep] “XXXXXXXXXXXX (Ex. “555-5678”)” (Say the new phone number to be registered.)
13. **Prompt:** “XXXXXXXX (Telephone number) After the beep, continue to add numbers, or say Go-Back to re-enter the last entered numbers, or press the Pick-Up button to save the number.”
14. **(Number Change)**  
Press the pick-up button, then go to Step 15.  
**(Adding/inputting telephone number)**  
Say, “XXXX” (desired telephone number), then go to Step 13.  
**(Telephone number correction)**  
Say, “Go Back”. The prompt replies, “Go Back. The last entered numbers have been removed. Number, please.”. Then go back to Step 12.
15. **Prompt:** “Number changed.”

### **Phonebook data deletion**

#### **(Erasing individual phonebook data)**

Individual data registered to the Bluetooth® Hands-Free phonebook can be cleared.

### **NOTE**

*Do this function only when parked. It is too distracting to attempt while driving and you may make too many errors to be effective.*

1. Press the pick-up button or talk button with a short press.
2. **Say:** [Beep] “Phonebook”
3. **Prompt:** “Select one of the following: New entry, edit, list names, delete, erase all or import contact.”
4. **Say:** [Beep] “Delete”
5. **Prompt:** “Please say the name of the entry you would like to delete or say, “List names”. ”
6. **Say:** [Beep] “XXXXX... (Ex. “John’s phone”)” (Say the registered voice tag to be deleted from the phonebook.)
7. **Prompt:** “Deleting XXXXX... (Ex. “John’s phone”) (Registered voice tag) Home (Registered location). Is this correct?”
8. **Say:** [Beep] “Yes”
9. **Prompt:** “XXXXX... (Ex. “John’s phone”) (Registered voice tag) Home (Registered location) deleted.”

#### **(Complete deletion of the phonebook data)**

All data registered to the Bluetooth® Hands-Free phonebook can be erased.

**NOTE**

*Do this function only when parked. It is too distracting to attempt while driving and you may make too many errors to be effective.*

1. Press the pick-up button or talk button with a short press.
2. **Say:** [Beep] “Phonebook”
3. **Prompt:** “Select one of the following: New entry, edit, list names, delete, erase all or import contact.”
4. **Say:** [Beep] “Erase all”
5. **Prompt:** “Are you sure you want to delete everything from your Hands Free system phonebook?”
6. **Say:** [Beep] “Yes”
7. **Prompt:** “You are about to delete everything from your Hands Free system phonebook. Do you want to continue?”
8. **Say:** [Beep] “Yes”
9. **Prompt:** “Please wait, deleting the Hands Free system phonebook.”
10. **Prompt:** “Hands-Free system phonebook deleted.”

**Read-out of names registered to the Bluetooth® Hands-Free phonebook**

Bluetooth® Hands-Free can read out the list of names registered to its phonebook.

1. Press the pick-up button or talk button with a short press.
2. **Say:** [Beep] “Phonebook”
3. **Prompt:** “Select one of the following: New entry, edit, list names, delete, erase all or import contact.”
4. **Say:** [Beep] “List names”

5. **Prompt:** “XXXXXX..., XXXXX..., XXXXX... (Ex. “John's phone”, Mary's phone, Bill's phone)” (Voice guidance reads out the voice tags registered to the phonebook.)

Press the talk button with a short press during the read-out at the desired name, and then say one of the following voice commands to execute it.

- “Continue”: Continues the list readout.
  - “Call”: Calls the registered phonebook data when the talk button is short-pressed.
  - “Edit”: Edits the registered phonebook data when the talk button is short-pressed.
  - “Delete”: Deletes the registered phonebook data when the talk button is short-pressed.
  - “Previous”: Returns to the previous phonebook data in read-out when the talk button is short-pressed.
6. **Prompt:** “End of list, would you like to start from the beginning?”
  7. **Say:** [Beep] “No”

**Redial Function**

Redialing the number of the person previously dialed using the phone is possible.

1. Press the pick-up button or talk button with a short press.
2. **Say:** [Beep] “Redial”
3. **Prompt:** “Dialing”

## Audio Set

---

### Telephone Number Input

#### **NOTE**

*Practice this while parked until you are confident you can do it while driving in a non-taxing road situation. If you are not completely comfortable, make all calls from a safe parking position, and only start driving when you can devote your full attention to driving.*

1. Press the pick-up button or talk button with a short press.
2. **Say:** [Beep] “Dial”
3. **Prompt:** “Number, please”
4. **Say:** [Beep] “XXXXXXXXXXXX (Telephone number)”
5. **Prompt:** “XXXXXXXXXXXX. (Telephone number) After the beep, continue to add numbers, or say Go-Back to re-enter the last entered numbers, or press the Pick-Up button to execute dialing.”
6. **(Dialing)**  
Press the pick-up button or say “Dial”, then go to Step 7.  
**(Adding/inputting telephone number)**  
Say, “XXXX” (desired telephone number), then go to Step 5.  
**(Telephone number correction)**  
Say, “Go Back”. The prompt replies, “Go Back. The last entered numbers have been removed.”. Then go back to Step 3.
7. **Prompt:** “Dialing”

#### **NOTE**

*The “Dial” command and a telephone number can be combined.*

*Ex. In Step 2, say, “Dial 123-4567” then, Steps 3 and 4 can be skipped.*

### Emergency calls

A call can be made to the emergency phone number (112) using the voice input command.

1. Press the pick-up button or talk button with a short press.
2. **Say:** [Beep] “Emergency”
3. **Prompt:** “Dialing “112”, is this correct?”
4. **Say:** [Beep] “Yes”
5. **Prompt:** “Dialing”

#### ▼ **Receiving an Incoming Call**

1. **Prompt:** “Incoming call, press the pick-up button to answer”
2. To accept the call, press the pick-up button.  
To reject the call, press the hang-up button.

#### ▼ **Hanging Up a Call**

Press the hang-up button during the call. A beep sound will confirm that call is ended.

#### ▼ **Mute**

The microphone can be muted during a call.

1. Press the talk button with a short press.
2. **Say:** [Beep] “Mute”
3. **Prompt:** “Microphone muted”

### Canceling mute

1. Press the talk button with a short press.
2. **Say:** [Beep] “Mute off”
3. **Prompt:** “Microphone unmuted”

### ▼ Transferring a Call from Hands-Free to a Device (Mobile Phone)

Communication between the hands-free unit and a device (Mobile phone) is cancelled, and the line can be switched to a standard call using a device (Mobile phone).

1. Press the talk button with a short press.
2. **Say:** [Beep] “Transfer call”
3. **Prompt:** “Transferred call to phone”

### ▼ Transferring a Call from a Device (Mobile Phone) to Hands-Free

Communication between devices (Mobile phone) can be switched to Bluetooth® Hands-Free.

1. Press the talk button with a short press.
2. **Say:** [Beep] “Transfer call”
3. **Prompt:** “Transferred call to Hands Free system”

### ▼ Call interrupt

A call can be interrupted to receive an incoming call from a third party. Switch to a new incoming call using the following methods.

#### (Method 1)

1. Press the pick-up button.
2. **Prompt:** “Swapping calls.”

#### (Method 2)

1. Press the talk button with a short press.
2. **Say:** [Beep] “Swap calls”
3. **Prompt:** “Swapping calls.”

#### NOTE

· To refuse an incoming call, press the hang-up button.

· After receiving a new incoming call, the previous call is placed on hold.

### Switching calls

Switching back to the previous call can also be done.

#### Method 1

1. Press the pick-up button.
2. **Prompt:** “Swapping calls.”

#### Method 2

1. Press the talk button with a short press.
2. **Say:** [Beep] “Swap calls”
3. **Prompt:** “Swapping calls.”

### Three-way call function

1. Press the talk button with a short press.
2. **Say:** [Beep] “Join calls”
3. **Prompt:** “Joining calls”

### Making a call using a telephone number

1. Press the talk button with a short press.
2. **Say:** [Beep] “Dial”
3. **Prompt:** “Number, please”
4. **Say:** [Beep] “XXXXXXXXXXXX (Telephone number)”
5. **Prompt:** “XXXXXXXXXXXX (Telephone number) After the beep, continue to add numbers, or say Go-Back to re-enter the last entered numbers, or press the Pick-Up button to execute dialing.”

## Audio Set

---

### 6. (Dialing)

Press the pick-up button or say “Dial”, then go to Step 7.

#### (Adding/inputting telephone number)

Say, “XXXX” (desired telephone number), then go to Step 5.

#### (Telephone number correction)

Say, “Go Back”. The prompt replies, “Go Back. The last entered numbers have been removed.”. Then go back to Step 3.

### 7. Prompt: “Dialing”

#### Making calls using the phonebook

1. Press the talk button with a short press.
2. **Say:** [Beep] “Call”
3. **Prompt:** “Name please.”
4. **Say:** [Beep] “XXXXX... (Ex. “John's phone”)” (Say a voice tag registered in the phonebook.)
5. **Prompt:** “Calling XXXXX... (Ex. “John's phone”) XXXX (Ex. “at home”). Is this correct?” (Voice tag and phone number location registered in phonebook).
6. **Say:** [Beep] “Yes”
7. **Prompt:** “Dialing”

#### Redialing function

1. Press the talk button with a short press.
2. **Say:** [Beep] “Redial”
3. **Prompt:** “Dialing”

#### Ending the current call

Press the hang-up button during the call.

### ▼ DTMF (Dual Tone Multi-Frequency Signal) Transmission

This function is used when transmitting DTMF via the user's voice. The receiver of a DTMF transmission is generally a home telephone answering machine or a company's automated guidance call centre (When you send tone signals back according to the voice guidance recording).

1. Press the talk button with a short press.
2. **Say:** [Beep] “XXXX... send” (Say DTMF code)
3. **Prompt:** “Sending XXXX... (DTMF code)”

## Voice Recognition\*

In this section, the basic operation of the voice recognition is explained.

### Activating Voice Recognition

To Activate the Main Menu: Press the pick-up button or talk button with a short press.

### Ending Voice Recognition

Use one of the following methods:

- Press and hold the talk-button.
- Press the hang-up button.

### Skipping Voice Guidance (for faster operation)

Press and release the talk-button.

#### **NOTE**

- *The Bluetooth® Hands-Free system is operable several seconds after the ignition is switched to ACC or ON (requires less than 15 seconds).*
- *When operating the audio unit or the A/C while using Bluetooth® Hands-Free, the beep sounds or voice guidance (audio unit)/cannot be heard.*

### Tutorial

The tutorial explains how to use Bluetooth® Hands-Free.

To activate the tutorial, do the following:

1. Press the pick-up button or talk button with a short press.
2. **Say:** [Beep] “Tutorial”
3. Follow the prompts to receive the appropriate voice guidance instructions.

### Commands useable anytime during voice recognition

“Help” or “Go Back” are commands which can be used at anytime during voice recognition.

### **Help function use**

The help function informs the user of all the available voice commands under the current conditions.

1. **Say:** [Beep] “Help”
2. Follow the prompts to receive the appropriate voice guidance instructions.

### **Returning to previous operation**

This command is for returning to the previous operation while in the voice recognition mode.

**Say:** [Beep] “Go Back”

### To prevent a deterioration in the voice recognition rate and voice quality, the following points should be observed:

- **The voice recognition cannot be performed while voice guidance or the beep sound is operating. Wait until the voice guidance or the beep sound is finished before saying your commands.**
- Dialects or different wording other than hands-free prompts cannot be recognised by voice recognition. Speak in the wording specified by the voice commands.
- It is not necessary to face the microphone or approach it. Speak the voice commands while maintaining a safe driving position.
- Do not speak too slow or too loud.

## Audio Set

---

- Speak clearly, without pausing between words or numbers.
- Close the windows to reduce loud noises from outside the vehicle, or turn down the airflow of the air-conditioning system while Bluetooth® Hands-Free is being used.
- Make sure the vents are not directing air up towards the microphone.

### **NOTE**

*If the voice recognition performance is not satisfactory.*

*Refer to Voice Recognition Learning Function (Speaker Enrolment) on page 5-58.*

*Refer to Troubleshooting on page 5-61.*

## Voice Recognition Learning Function (Speaker Enrolment)\*

The voice recognition learning function enables voice recognition appropriate to the characteristics of the user's voice. If the recognition of the voice input commands to the system is not adequate, this function can largely improve the system's voice recognition of the user. If your voice can be recognised sufficiently without using this function, you may not realize the added benefit of the function. To register your voice, the voice input command list must be read out. Read out the list when the vehicle is parked. Perform the registration in as quiet a place as possible (page 5-57). The registration must be performed completely. The required time is a few minutes. The user needs to be seated in the driver's seat with the voice input command list for voice recognition learning visible.

### ▼ When voice recognition learning is done for the first time

1. Press the pick-up button or talk button with a short press.
2. **Say:** [Beep] "Voice training"
3. **Prompt:** "This operation must be performed in a quiet environment while the vehicle is stopped. See the owner's manual for the list of required training phrases. Press and release the talk button when you are ready to begin. Press the hang-up button to cancel at any time."
4. Press the talk button with a short press.

5. The voice guidance reads out the voice input command number (refer to the voice input command list for voice recognition learning). (Ex. “Please read phrase 1”)
6. **Say:** [Beep] “0123456789” (Say the voice input command for voice recognition learning (1 to 8) according to the voice guidance.)
7. **Prompt:** “Speaker enrolment is complete.”

**NOTE**

*If an error occurred in the voice recognition learning, re-learning can be done by pressing the talk button with a short press.*

▼ **Voice recognition re-learning**

If voice recognition learning has already been done.

1. Press the pick-up button or talk button with a short press.
2. **Say:** [Beep] “Voice training”
3. **Prompt:** “Enrolment is enabled/disabled. Would you like to disable/enable or retrain?”
4. **Say:** [Beep] “Retrain”
5. **Prompt:** “This operation must be performed in a quiet environment while the vehicle is stopped. See the owner's manual for the list of required training phrases. Press and release the talk button when you are ready to begin. Press the hang-up button to cancel at any time.”
6. Press the talk button with a short press.
7. The voice guidance reads out the voice input command number (refer to the voice input command list for voice recognition learning). (Ex. “Please read phrase 1”)

8. **Say:** [Beep] “0123456789” (Say the voice input command for voice recognition learning (1 to 8) according to the voice guidance.)
9. **Prompt:** “Speaker enrolment is complete.”

**NOTE**

*If an error occurred in the voice recognition learning, re-learning can be done by pressing the talk button with a short press.*

**Voice input command list for voice recognition learning**

When reading out, the following points must be observed:

- Read out the numbers one at a time correctly and naturally. (For example, “1234” must be read out “one, two, three, four” not “twelve, thirty four”.)
- Do not read out parentheses. “(” and hyphens “-” are used for separating numbers in a phone number.

Ex.

“(888) 555-1212” must be spoken “Eight, eight, eight, five, five, five, one, two, one, two.”

Phrase	Command
1	0123456789
2	(888) 555-1212
3	Call
4	Dial
5	Setup
6	Cancel
7	Continue
8	Help

## Audio Set

---

### *NOTE*

- *The applicable phrase appears in the audio display.*
- *After user voice registration is completed, voice guidance “Speaker enrolment is complete” is announced.*

### **Voice recognition learning on/off**

1. Press the pick-up button or talk button with a short press.
2. **Say:** [Beep] “Voice training”
3. **Prompt:** “Enrolment is enabled/disabled. Would you like to disable/enable or retrain?”
4. **Say:** [Beep] “Disable” or “Enable”
5. When “Disable” is spoken, the voice recognition learning is turned off. When “Enable” is spoken, the voice recognition learning is turned on.
6. **Prompt:** “Speaker Enrolment is disabled/enabled.”

## Troubleshooting\*

### Mazda Bluetooth® Hands-Free Customer Service

If you have any problems with Bluetooth®, contact our toll-free customer service centre.

Phone:

(Germany)

0800 4263 738 (8:00—18:00 Central European Time)

(Except Germany)

00800 4263 7383 (8:00—18:00 Central European Time)

(Worldwide)

+ 49 721 5099 8198 (8:00—18:00 Central European Time)

Web:

<http://www.mazdahandsfree.com>

### Bluetooth® Device pairing, connection problems

Symptom	Cause	Solution method
Unable to perform pairing	—	First make sure the device is compatible with the Bluetooth® unit, and then check whether the Bluetooth® function and the Find Mode/Visible setting*1 on the device are turned on. If pairing is still not possible after this, contact an expert repairer (we recommend an Authorised Mazda Repairer) or Mazda Bluetooth® Hands-Free Customer Service.
Pairing cannot be performed again	The pairing information paired to the Bluetooth® unit or device is not recognised correctly.	Perform pairing using the following procedure. <ul style="list-style-type: none"> <li>• Clear “Mazda” stored in the device.</li> <li>• Perform pairing again.</li> </ul>
Unable to perform pairing	The Bluetooth® function and the Find Mode/Visible setting*1 on the device may turn off automatically after a period of time has elapsed depending on the device.	Check whether the Bluetooth® function and the Find Mode/Visible setting*1 on the device are turned on and pairing or reconnect.
Does not connect automatically when starting the engine		
Automatically connects, but then disconnects suddenly		
Disconnects intermittently	The device is in a location in which radio wave interference can occur easily, such as inside a bag in a rear seat, in a rear pocket of a pair of pants.	Move the device to a location in which radio wave interference is less likely to occur.

## Audio Set

---

Symptom	Cause	Solution method
Does not connect automatically when starting the engine	The pairing information is updated when the device OS is updated.	Perform pairing again.

\*1 Setting which detects the existence of a device external to the Bluetooth® unit.

### NOTE

- *When the OS of the device is updated, the pairing information may be deleted. If this happens, reprogramme the pairing information to the Bluetooth® unit.*
- *If you pair your phone which has already been paired to your vehicle more than once in the past, you need to delete “Mazda” on your mobile device. Then, execute the Bluetooth® search on your mobile device once again, and pair to a newly detected “Mazda”.*
- *Before you pair your device, make sure that Bluetooth® is “ON”, both on your phone and on the vehicle.*
- *If Bluetooth®-enabled devices are used in the following locations or conditions, connection via Bluetooth® may not be possible.*
  - *The device is in a location hidden from the unit such as behind or under a seat, or inside the glove compartment.*
  - *The device contacts or is covered by a metal object or body.*
  - *The device is set to power-saving mode.*
- *Different Bluetooth®-enabled devices can be used for Bluetooth® Hands-Free and Bluetooth® audio. For example, device A can be connected as a Bluetooth® Hands-Free device and device B can be connected as a Bluetooth® audio device. However, the following may occur when they are used at the same time.*
  - *The Bluetooth® connection of the device is disconnected.*
  - *Noise occurs in the Hands-Free audio.*
  - *Hands-Free operates slowly.*

**Voice recognition related problems**

Symptom	Cause	Solution method
Poor voice recognition	<ul style="list-style-type: none"> <li>• Excessive, slow speech.</li> <li>• Excessive, forceful speech (shouting).</li> <li>• Speaking before the beep sound has ended.</li> <li>• Loud noise (speaking or noise from outside/inside vehicle).</li> <li>• Airflow from A/C is blowing against the microphone.</li> <li>• Speaking in off-standard expressions (dialect).</li> </ul>	<p>Regarding the causes indicated on the left, be careful with how you speak. In addition, when numbers are spoken in a sequence, recognition ability will improve if no stop is placed between the numbers.</p>
False recognition of numbers		
Poor voice recognition	There is a malfunction in the microphone.	A poor connection or malfunction with the microphone may have occurred. Consult an expert repairer (we recommend an Authorised Mazda Repairer).
Phone-related voice recognition is disabled	There is a problem with the connection between the Bluetooth® unit and the device.	If there is any malfunction after checking the pairing situation, check for device pairing or connection problems.
Names in the phonebook are not easily recognised	The Bluetooth® system is under a condition in which recognition is difficult.	<p>By carrying out the following measures, the rate of recognition will improve.</p> <ul style="list-style-type: none"> <li>• Clear memory from the phonebook which is not used very often.</li> <li>• Avoid shortened names, use full names. (Recognition improves the longer the name is. By not using names such as “Mum”, “Dad”, recognition will improve.)</li> </ul>
When operating the audio, a song name is not recognised	Song names cannot be recognised by voice.	—
You want to skip guidance	—	Guidance can be skipped by quickly pressing and releasing the Talk button.

## Audio Set

---

### Regarding problems with calls

Symptom	Cause	Solution method
When starting a call, vehicle noise from the other party can be heard	For about 3 seconds after starting a call, the Bluetooth® unit's Noise Suppression function requires time to adapt to the call environment.	This does not indicate a problem with the device.
The other party cannot be heard or the speaker's voice is quiet	The volume is set at zero or low.	Increase the volume.

### Other problems

Symptom	Cause	Solution method
The indication for the remaining battery is different between the vehicle and the device	The indication method is different between the vehicle and the device.	—
When a call is made from the vehicle, the telephone number is updated in the incoming/outgoing call record but the name does not appear	The number has not been registered into the phonebook.	If the number has been registered into the phonebook, the incoming/outgoing call record is updated by the name in the phonebook when the engine is restarted.
The cell phone does not synchronize with the vehicle regarding the incoming/outgoing call record	Some types of cell phones do not synchronize automatically.	Operate the cell phone for synchronization.
It takes a long time to complete the function for changing the language	A maximum of 60 seconds is required.	—

## Appendix

### ▼ Things You Need to Know

#### **WARNING**

#### **Always adjust the audio while the vehicle is stopped:**

Do not adjust the audio control switches while driving the vehicle. Adjusting the audio while driving the vehicle is dangerous as it could distract your attention from the vehicle operation which could lead to a serious accident. Even if the audio control switches are equipped on the steering wheel, learn to use the switches without looking down at them so that you can keep your maximum attention on the road while driving the vehicle.


#### **CAUTION**

For the purposes of safe driving, adjust the audio volume to a level that allows you to hear sounds outside of the vehicle including car horns and particularly emergency vehicle sirens.

#### **NOTE**

- To prevent the battery from being discharged, do not leave the audio system on for a long period of time when the engine is not running.
- If a cellular phone or CB radio is used in or near the vehicle, it could cause noise to occur from the audio system, however, this does not indicate that the system has been damaged.

Do not spill any liquid on the audio system.




### ▼ Radio Reception

#### AM characteristics

AM signals bend around such things as buildings or mountains and bounce off the ionosphere.

Therefore, they can reach longer distances than FM signals.

Because of this, 2 stations may sometimes be picked up on the same frequency at the same time.

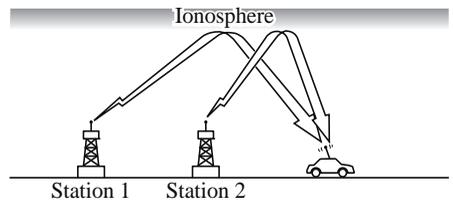


#### FM characteristics


An FM broadcast range is usually about 40—50 km (25—30 miles) from the source. Because of extra coding needed to break the sound into 2 channels, stereo FM

# Audio Set

has even less range than monaural (non-stereo) FM.

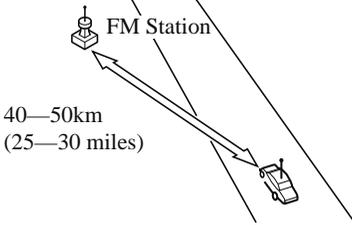

Signals from an FM transmitter are similar to beams of light because they do not bend around corners, but they do reflect. Unlike AM signals, FM signals cannot travel beyond the horizon. Therefore, FM stations cannot be received at the great distances possible with AM reception.

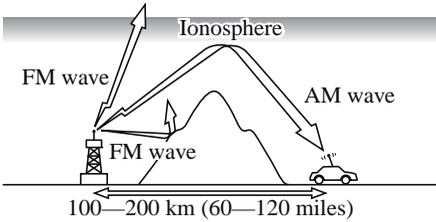


Atmospheric conditions can also affect FM reception. High humidity will cause poor reception. However, cloudy days may provide better reception than clear days.

## Multipath noise


Since FM signals can be reflected by obstructions, it is possible to receive both the direct signal and the reflected signal at the same time. This causes a slight delay in reception and may be heard as a broken sound or a distortion. This problem may

also be encountered when in close proximity to the transmitter.

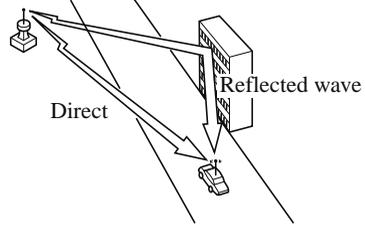


## Flutter/Skip noise

Signals from an FM transmitter move in straight lines and become weak in valleys between tall buildings, mountains, and other obstacles. When a vehicle passes through such an area, the reception conditions may change suddenly, resulting in annoying noise.




## Weak signal noise

In suburban areas, broadcast signals become weak because of distance from the transmitter. Reception in such fringe areas is characterised by sound breakup.

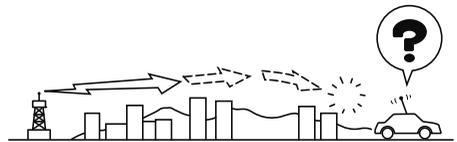


### Strong signal noise

This occurs very close to a transmitter tower. The broadcast signals are extremely strong, so the result is noise and sound breakup at the radio receiver.



### Station drift noise

When a vehicle reaches the area of 2 strong stations broadcasting at similar frequencies, the original station may be temporarily lost and the second station picked up. At this time there will be some noise from this disturbance.

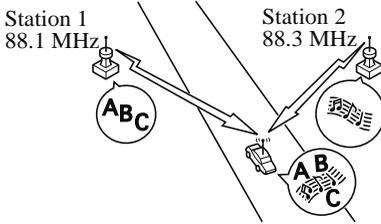

### ▼ Operating Tips for MP3

MP3 stands for MPEG Audio Layer 3, which is standardised voice compression established by the ISO\*1 working group (MPEG).

Use of MP3 allows for audio data to be compressed to approximately a tenth of the source data size.

This unit plays files with the extension (.mp3) as MP3 files.

\*1 International Organisation for Standardisation

### **⚠ CAUTION**

*Do not use an audio file extension on files other than audio files. In addition, do not change the audio file extension. Otherwise, the unit will not recognise the file correctly resulting in noise or a malfunction.*

### **NOTE**

*Supply of this product only conveys a license for private, non-commercial use and does not convey a license nor imply any right to use this product in any commercial (i.e. revenue-generating) real time broadcasting (terrestrial, satellite, lead and/or any other media), broadcasting/streaming via the Internet, intranets and/or other networks or in other electronic content distribution systems, such as pay-audio or audio-on-demand applications. An independent license for such use is required. For details, please visit <http://www.mp3licensing.com>.*

- When naming an MP3 file, be sure to add an MP3 file extension (.mp3) after the file name.
- The number of characters which can be displayed is restricted.

### ▼ Operating Tips for WMA

WMA is short for Windows Media\*1 Audio and is the audio compression format used by Microsoft\*1.

Audio data can be created and stored at a higher compression ratio than MP3. This unit plays files with the extension (.wma) as WMA files.

\*1 Windows Media and Microsoft are registered trademarks of Microsoft

## Audio Set

---

Corporation U.S. in the United States and other countries.

### CAUTION

*Do not use an audio file extension on files other than audio files. In addition, do not change the audio file extension. Otherwise, the unit will not recognise the file correctly resulting in noise or a malfunction.*

- WMA files written under specifications other than the indicated specification may not play normally or files or folder names may not display correctly.
- The file extension may not be provided depending on the computer operating system, version, software, or settings. In this case, add the file extension “.wma” to the end of the file name, and then write it to the memory.

### ▼ Operating Tips for AAC

AAC stands for Advanced Audio Coding, which is standardised voice compression established by the ISO\*1 working group (MPEG). Audio data can be created and stored at a higher compression ratio than MP3.

This unit plays files with the extensions (.m4a) as the AAC files.

### CAUTION

*Do not use an audio file extension on files other than audio files. In addition, do not change the audio file extension. Otherwise, the unit will not recognise the file correctly resulting in noise or a malfunction.*

- AAC files written under specifications other than the indicated specification

may not play normally or files or folder names may not display correctly.

- The file extension may not be provided depending on the computer operating system, version, software, or settings. In this case, add the file extension “.m4a” to the end of the file name, and then write it to the disc/memory.

\*1 International Organisation for Standardisation

### ▼ Operating Tips for OGG

OGG is the audio compression format for Xiph. Org Foundation.

Audio data can be created and stored at a higher compression ratio than MP3.

This unit plays files with the extension (.ogg) as OGG files.

### CAUTION

*Do not use an audio file extension on files other than audio files. In addition, do not change the audio file extension. Otherwise, the unit will not recognise the file correctly resulting in noise or a malfunction.*

- OGG files written under specifications other than the indicated specification may not play normally or files or folder names may not display correctly.
- The file extension may not be provided depending on the computer operating system, version, software, or settings. In this case, add the file extension “.ogg” to the end of the file name, and then write it to the memory.

### ▼ Operating Tips for USB device

This unit plays audio files as follows:

Extension	Playback with this unit
.mp3	MP3
.wma	WMA
.m4a	AAC

 **CAUTION**

*Do not use an audio file extension on files other than audio files. In addition, do not change the audio file extension. Otherwise, the unit will not recognise the file correctly resulting in noise or a malfunction.*

**NOTE**

- Playback may not be possible depending on the type and condition of the USB flash memory even if the audio file complies with the standard.
- A copyright protected WMA/AAC file cannot be played in this unit.
- The order of the music data stored in the device may differ from the playback order.
- To prevent loss or damage of stored data, we recommend that you always back up your data.
- If a device exceeds the maximum electric current value of 1,000 mA, it may not operate or recharge when connected.
- Do not pull out the USB device while in the USB mode (only pull it out while in FM/AM radio mode).
- The device will not operate if the data is password protected.

MP3/WMA/AAC files written under specifications other than the indicated specification may not play normally or files/folder names may not display correctly.

▼ **Operating Tips for iPod**

This unit supports playback of music files recorded to an iPod.

\* iPod is a trademark of Apple Inc., registered in the U.S. and other countries.

The iPod may not be compatible depending on the model or OS version. In this case, an error message is displayed.

 **CAUTION**

- Remove the iPod when it is not in use. Because the iPod is not designed to withstand excessive changes in temperature inside the cabin, it could be damaged or the battery may deteriorate due to the excessive temperature or humidity inside the cabin if it is left in the vehicle.
- If data in the iPod is lost while it is connected to the unit, Mazda cannot guarantee recovery of any lost data.
- If the iPod battery is deteriorated, the iPod may not recharge and playback may not be possible when it is connected to the unit.
- Be careful not to pinch the iPod connecting lead when opening/closing the centre console.
- For details on using the iPod, refer to the iPod instruction manual.
- When connecting the iPod to a USB port, all commands are made from the audio unit. iPod control is not possible.

**NOTE**

The audio unit cannot display images or videos stored in an iPod.


# Mazda Connect [Mazda Connect Type A]

## What is Mazda Connect ?


### ▼ What is Mazda Connect ?

For vehicles with the following display type, refer to the following page because your vehicle is equipped with Mazda Connect (Type B).

Refer to What is Mazda Connect ? 5-87.

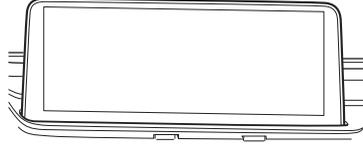

This manual only indicates a part of the information for Mazda Connect. For details, check the Web owner's manual at the Mazda site for each country.

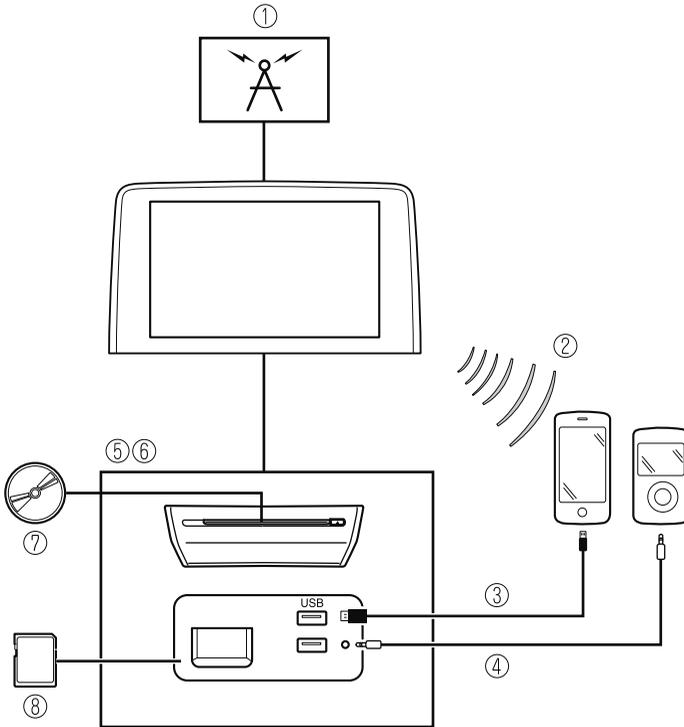


# Mazda Connect [Mazda Connect Type A]

1. Radio
2. Bluetooth® Audio/Hands-Free Call/SMS (Short Message Service)/E-mail
3. USB Audio
4. AUX
5. USB port\*1/Auxiliary jack\*1/SD card slot\*2
6. CD/DVD player\*
7. CD/DVD\*
8. SD card (Navigation system)\*

\*1 The location of the USB slot/auxiliary jack differs depending on the specifications.

\*2 The SD card slot is for the navigation system only. For vehicles with the navigation system, the SD card (Mazda genuine) with stored map data is inserted into the SD card slot and used.

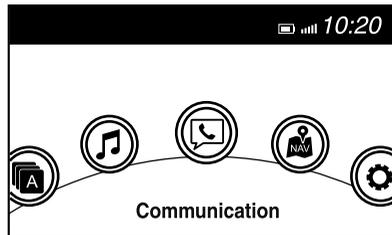

Icon	Function
	<p><b>Applications</b> Information such as average fuel economy, maintenance, and warnings can be verified. In addition, Apple CarPlay*, and Android™* can be selected. Depending on the grade and specification, the screen display may differ.</p>
	<p><b>Entertainment</b> Operates audio such as the radio and CD/DVD*. The audio source most recently used is displayed. An audio source which cannot be used at that time is skipped and the previous audio source is displayed. To change the audio source, select the  icon displayed at the bottom of the screen.</p>
	<p><b>Communication</b> Bluetooth® related functions are available.</p>
	<p><b>Navigation</b> Navigation screen is displayed (vehicles with navigation system). If the SD card for the navigation system is not inserted, the compass indicating the direction in which the vehicle is moving is displayed. The compass may not indicate the correct bearing when the vehicle is stopped or traveling at a slow speed.</p>
	<p><b>Settings</b> Overall setting menu (Such as display, sound, Bluetooth® and Language). Depending on the grade and specification, the screen display may differ.</p>

## Mazda Connect [Mazda Connect Type A]

---



**Always adjust Mazda Connect while the vehicle is stopped:**

*Do not adjust Mazda Connect with the Commander switch while driving the vehicle.*

*Adjusting Mazda Connect with the Commander switch while driving the vehicle is dangerous as it could distract your attention from the vehicle operation which could lead to a serious accident.*

*Even if the audio remote control switches are equipped on the steering wheel, learn to use the switches without looking down at them so that you can keep your maximum attention on the road while driving the vehicle.*

**Do not allow the connection plug cord to get tangled with the shift lever (manual transmission)/selector lever (automatic transmission):**

*Allowing the plug cord to become tangled with the shift lever (manual transmission)/selector lever (automatic transmission) is dangerous as it could interfere with driving, resulting in an accident.*

**Do not adjust a mobile device or a similar product while driving the vehicle:**

*Adjusting a mobile device or a similar product while driving the vehicle is dangerous as it could distract your attention from the vehicle operation which could lead to a serious accident. Always adjust a mobile device or a similar product while the vehicle is stopped.*



*For the purposes of safe driving, adjust the audio volume to a level that allows you to hear sounds outside of the vehicle including car horns and particularly emergency vehicle sirens.*

**NOTE**

- Do not use Mazda Connect for a long time with the engine stopped. Otherwise, the battery power could be depleted.*
- If a mobile phone or CB radio is used in or near the vehicle, it could cause noise to occur from the audio system. However, this does not indicate a problem.*

## Mazda Connect Basic Operations

### ▼ Mazda Connect Basic Operations

#### **NOTE**

*The explanation of functions described in this manual may differ from the actual operation, and the shapes of screens and buttons and the letters and characters displayed may also differ from the actual appearance.*

*Additionally, depending on future software updates, the content may successively change without notice.*


### ▼ Touch Panel Operation



*Do not press the screen strongly or press it with a sharp-pointed object. Otherwise, the screen could be damaged.*

#### **NOTE**

*For safety reasons, operation of the centre display is disabled while the vehicle is being driven. However, items not displayed in grey can be operated using the commander switch while the vehicle is being driven.*




### **Touch & Tap**

1. Touch or tap on the item indicated on the screen.


# Mazda Connect [Mazda Connect Type A]

2. The operation is launched and the next item is displayed.

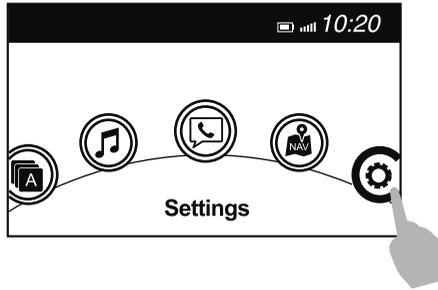

## Slide

1. Touch the setting item displaying a slider bar.
2. Touch the slider with your finger and move to the desired level.

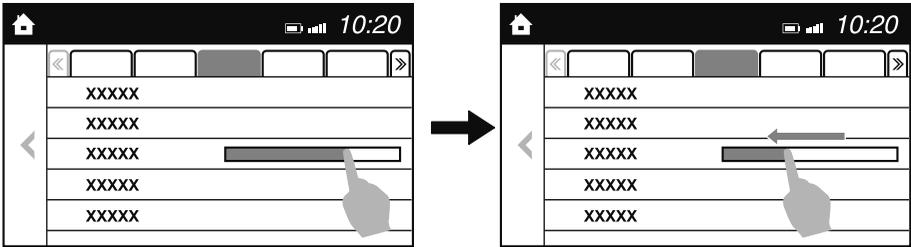

## Swipe

1. Touch the screen with your finger and move up or down.
2. Items which were not displayed can be displayed.



## Return to previous screen

1. Touch the .

# Mazda Connect [Mazda Connect Type A]

## Displaying the home screen


1. Touch the .

## ▼ Commander Switch Operation

### NOTE

For safety reasons, some operations are disabled while the vehicle is being driven.


## Volume dial operation

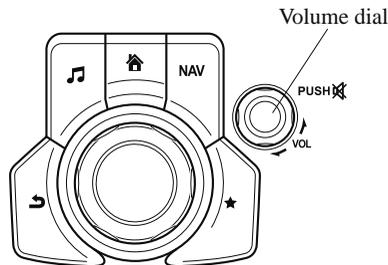

Press the volume dial to mute and pause. However, while an audio source which cannot be paused such as FM radio is playing, only mute is available. Press the volume dial again to resume the audio.

Turn the volume dial to adjust the volume. The volume increases by turning the dial clockwise, and decreases by turning it anticlockwise.

## Switches around commander knob

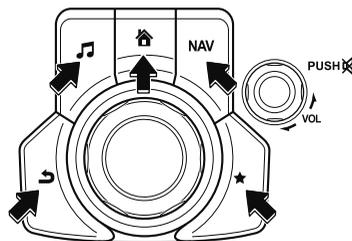

The following operations can be done by pressing the switches around the commander knob.

 : Displays the home screen.

 : Displays the Entertainment screen.

**NAV** : Displays the Navigation screen (Only navigation-equipped vehicles). For operation of the Navigation screen, refer to the navigation system manual. If the SD card for the navigation system is not inserted, the compass indicating the direction in which the vehicle is moving is displayed.


# Mazda Connect [Mazda Connect Type A]

---

★ : Displays the Favourites screen. Long-press to store particular items in Favourites. (Radio, phonebook and destination of the navigation system can be programmed.)

↶ : Returns to previous screen.

## Commander knob operation




### (Selection of icons on screen)

1. Tilt or turn the commander knob and move the cursor to the desired icon.
2. Press the commander knob and select the icon.

### NOTE

Long-press operation of the commander knob is also possible for some functions.

## ▼ Audio Remote Control Switch Operation

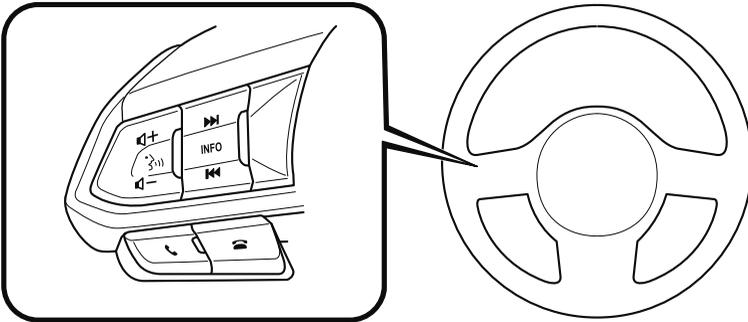

## Adjusting the Volume

To increase the volume, press up the volume switch (+).

# Mazda Connect [Mazda Connect Type A]

To decrease the volume, press down the volume switch (—).



## Seek Switch

### AM/FM radio

Press the seek switch (◀◀, ▶▶). The radio switches to the next/previous stored station in the order that it was stored.

Press and hold the seek switch (◀◀, ▶▶) to seek all usable stations at a higher or lower frequency whether programmed or not.

Radio stations which have been previously stored in favourites can be called up by pressing the seek switch (◀◀, ▶▶) while any radio station stored in the favourite radio is being received. Radio stations can be called up in the order they were stored with each press of the switch (◀◀, ▶▶).



### DAB radio\*

Press the Seek switch (◀◀, ▶▶) while listening to DAB radio to call up a station previously stored to the favourites list. With each operation of the switch, radio stations can be called up in the order they were stored.

Press and hold the seek switch (▶▶) to go to the next station, (◀◀) to return to the previous station.

### USB Audio/Bluetooth® Audio /CD\*

Press the seek switch (▶▶) to skip forward to the beginning of the next track.

Press the seek switch (◀◀) within a few seconds after playback begins to track down to the beginning of the previous track.

Press the seek switch (◀◀) after a few seconds have elapsed to start playback from the beginning of the current track.

Press and hold the seek switch (◀◀, ▶▶) to continuously switch the tracks up or down.

# Mazda Connect [Mazda Connect Type A]

---

## DVD\*

Press the seek switch (▶▶) to skip forward to the beginning of the next chapter.

Press the seek switch (◀◀) to return to the beginning of the previous chapter.

## Aha™/Stitcher™ Radio

Press the seek switch (▶▶) to skip forward to the beginning of the next track.

Press and hold the seek switch (▶▶) to evaluate the playback of the current song as “Like”.

Press and hold the seek switch (◀◀) to evaluate the playback of the current song as “Dislike”.

## Pick up/hang up the Phone, or Activate Voice Control Using the Switch

### Talk button

Activates the voice recognition. In addition, it skips the voice guidance.


### Pick-up button

Answers incoming calls. In addition, after selecting a contact or dialing a number, it places the call when the button is pressed.

### Hang-up button

Ends the call or refuses an incoming call. In addition, it ends the voice recognition operation.

## ▼ Operation Using Voice Recognition Function

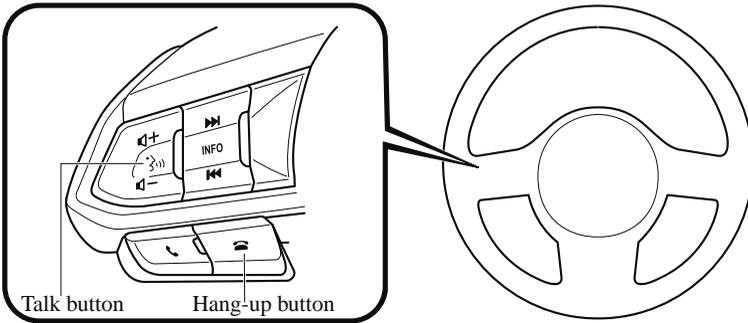

### Talk button

Activates the voice recognition. In addition, it skips the voice guidance.

# Mazda Connect [Mazda Connect Type A]

---

## Hang-up button

Ends the voice recognition operation.

## Basic Operation Method

### Activating Voice Recognition

Press the talk button.

### Ending Voice Recognition

Use one of the following methods:

- Press the hang-up button.
- Say, “Cancel”.
- Operate the commander switch or the centre display (only when vehicle is stopped).

### Skipping Voice Guidance (for faster operation)

Press and release the talk button.

### Troubleshooting for Voice Recognition

If you do not understand an operation method while in the voice recognition mode, say “Tutorial” or “Help”.

### Commands useable anytime during voice recognition

“Go Back” and “Cancel” are commands which can be used at anytime during voice recognition.

### Returning to previous operation

To return to the previous operation, say, “Go Back” while in voice recognition mode.

### Cancel

To put the Bluetooth® Hands-Free system in standby mode, say, “Cancel” while in voice recognition mode.

### To prevent a deterioration in the voice recognition rate and voice quality, the following points should be observed:

- **The voice recognition cannot be performed while voice guidance or the beep sound is operating. Wait until the voice guidance or the beep sound is finished before saying a command.**
- Phone related commands are available only when a phone is connected via Bluetooth®. Make sure a phone is connected via Bluetooth® before you operate phone related voice commands.
- Music play commands, such as Play Artist and Play Album can be used only in USB audio mode.

## Mazda Connect [Mazda Connect Type A]

---

- Do not speak too slowly or loudly (no loud voice).
- Speak clearly, without pausing between words or numbers.
- Dialects or different wording other than hands-free prompts cannot be recognised by voice recognition. Speak in the wording specified by the voice commands.
- It is not necessary to face the microphone or be close to it. Speak the voice commands while maintaining a safe driving position.
- Close the windows and/or the sunroof to reduce loud noises from outside the vehicle, or turn down the airflow of the air-conditioning system while Bluetooth® Hands-Free is being used.
- Make sure the vents are not directing air up towards the microphone.

### Voice Command List

#### Voice command

When the talk button is pressed and the following command is spoken, the audio or navigation can be operated. The commands in the () can be omitted. The specified name and number are put into the {}.

#### Standard command

Voice command	Function
Help	Usable commands can be verified.
Tutorial	Basic voice commands and methods of use can be verified.
(Navigate/Take me/Drive) Home	Set the destination to Home.

#### Communication (phone) related command

Voice command	Function
Call {name in phonebook} (mobile/home/work/other) Example: "Call John Mobile"	Calls to the contact in the downloaded phonebook.
Redial	Calls to the last contact you called.
Callback	Calls to the last contact who called you.

#### Entertainment (audio) related command

Voice command	Function	Corresponding audio source
(Go to/Play) Bluetooth (Audio)	Switches the audio source to Bluetooth® audio. Can also switch to each audio source by similarly using commands such as FM, AM, or USB.	All
Play Artist {Artist name}	Plays the selected artist.	USB

# Mazda Connect [Mazda Connect Type A]

---

## Navigation related command\*

For the navigation screen voice commands, refer to the separate navigation system manual.

### NOTE

- *Some commands cannot be used depending on the vehicle specifications.*
- *Some commands cannot be used depending on the device connection conditions and the use conditions.*
- *The commands indicated in this manual are some examples of usable voice commands. Some commands cannot be used depending on the vehicle specifications.*

## ▼ Appendix

### Gracenote® Database

When a USB device or Bluetooth® device is connected to this unit and the audio is played, the album name, artist name, genre and title information are automatically displayed if there is a match in the vehicle's database compilation to the music being played. The information stored in this device uses database information in the Gracenote® music recognition service. This application or device contains software from Gracenote, Inc. of Emeryville, California ("Gracenote"). The software from Gracenote (the "Gracenote Software") enables this application to perform disc and/or file identification and obtain music-related information, including name, artist, track, and title information ("Gracenote Data") from online servers or embedded databases (collectively, "Gracenote Servers") and to perform other functions. You may use Gracenote Data only by means of the intended End-User functions of this application or device.

You agree that you will use Gracenote Data, the Gracenote Software, and Gracenote Servers for your own personal non-commercial use only. You agree not to assign, copy, transfer or transmit the Gracenote Software or any Gracenote Data to any third party. **YOU AGREE NOT TO USE OR EXPLOIT GRACENOTE DATA, THE GRACENOTE SOFTWARE, OR GRACENOTE SERVERS, EXCEPT AS EXPRESSLY PERMITTED HEREIN.**

You agree that your non-exclusive license to use the Gracenote Data, the Gracenote Software, and Gracenote Servers will terminate if you violate these restrictions. If your license terminates, you agree to cease any and all use of the Gracenote Data, the Gracenote Software, and Gracenote Servers. Gracenote reserves all rights in Gracenote Data, the Gracenote Software, and the Gracenote Servers, including all ownership rights. Under no circumstances will Gracenote become liable for any payment to you for any information that you provide. You agree that Gracenote, Inc. may enforce its rights under this Agreement against you directly in its own name.

The Gracenote service uses a unique identifier to track queries for statistical purposes. The purpose of a randomly assigned numeric identifier is to allow the Gracenote service to count queries without knowing anything about who you are. For more information, see the web page for the Gracenote Privacy Policy for the Gracenote service.

## Mazda Connect [Mazda Connect Type A]

---

The Gracenote Software and each item of Gracenote Data are licensed to you “AS IS.” Gracenote makes no representations or warranties, express or implied, regarding the accuracy of any Gracenote Data from in the Gracenote Servers. Gracenote reserves the right to delete data from the Gracenote Servers or to change data categories for any cause that Gracenote deems sufficient. No warranty is made that the Gracenote Software or Gracenote Servers are error-free or that functioning of Gracenote Software or Gracenote Servers will be uninterrupted. Gracenote is not obligated to provide you with new enhanced or additional data types or categories that Gracenote may provide in the future and is free to discontinue its services at any time.

GRACENOTE DISCLAIMS ALL WARRANTIES EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE, AND NON-INFRINGEMENT. GRACENOTE DOES NOT WARRANT THE RESULTS THAT WILL BE OBTAINED BY YOUR USE OF THE GRACENOTE SOFTWARE OR ANY GRACENOTE SERVER. IN NO CASE WILL GRACENOTE BE LIABLE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES OR FOR ANY LOST PROFITS OR LOST REVENUES.

© Gracenote, Inc. 2009

### Updating the database

The Gracenote® media database can be updated using USB device.

1. Connect a USB device containing the software for updating Gracenote®.
2. Select the  icon on the home screen to display the Settings screen.
3. Select the **System** tab and select **Music Database Update**.
4. Select **Search**. The list of the update package stored in the USB device and the version are displayed.
5. Select the package to use the update.
6. Select **Install**.

### **NOTE**

*Gracenote® can be downloaded from the Mazda Hands-free Website.*

### Apple CarPlay

Apple CarPlay allows you to make calls, send or receive messages, and listen to music using your iPhone® with the vehicle's audio system, or search for destinations using the maps. In addition, voice recognition operation is possible using Siri®.

# Mazda Connect [Mazda Connect Type A]



- YOU EXPRESSLY ACKNOWLEDGE AND AGREE THAT USE OF APPLE CARPLAY (“THE APPLICATION”) IS AT YOUR SOLE RISK AND THAT THE ENTIRE RISK AS TO SATISFACTORY QUALITY, PERFORMANCE, ACCURACY AND EFFORT IS WITH YOU TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, AND THAT THE APPLICATION AND INFORMATION ON THE APPLICATION IS PROVIDED “AS IS” AND “AS AVAILABLE”, WITH ALL FAULTS AND WITHOUT WARRANTY OF ANY KIND, AND MAZDA HEREBY DISCLAIMS ALL WARRANTIES AND CONDITIONS WITH RESPECT TO THE APPLICATION AND INFORMATION ON THE APPLICATION, EITHER EXPRESS, IMPLIED OR STATUTORY, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES AND/OR CONDITIONS OF MERCHANTABILITY, SATISFACTORY QUALITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY, QUIET ENJOYMENT, AND NONINFRINGEMENT OF THIRD PARTY RIGHTS. AS EXAMPLES, AND WITHOUT LIMITATION, MAZDA DISCLAIMS ANY WARRANTY REGARDING THE ACCURACY OF DATA PROVIDED BY THE APPLICATION, SUCH AS THE ACCURACY OF DIRECTIONS, ESTIMATED TRAVEL TIME, SPEED LIMITS, ROAD CONDITIONS, NEWS, WEATHER, TRAFFIC, OR OTHER CONTENT PROVIDED BY APPLE, ITS AFFILIATES, OR THIRD PARTY PROVIDERS; MAZDA DOES NOT GUARANTEE AGAINST LOSS OF APPLICATION DATA, WHICH MAY BE LOST AT ANY TIME; MAZDA DOES NOT GUARANTEE THAT THE APPLICATION OR ANY SERVICES PROVIDED THROUGH THEM WILL BE PROVIDED AT ALL TIMES OR THAT ANY OR ALL SERVICES WILL BE AVAILABLE AT ANY PARTICULAR TIME OR LOCATION. FOR EXAMPLE, SERVICES MAY BE SUSPENDED OR INTERRUPTED WITHOUT NOTICE FOR REPAIR, MAINTENANCE, SECURITY FIXES, UPDATES, ETC., SERVICES MAY BE UNAVAILABLE IN YOUR AREA OR LOCATION, ETC. IN ADDITION, YOU UNDERSTAND THAT CHANGES IN THIRD PARTY TECHNOLOGY OR GOVERNMENT REGULATION MAY RENDER THE SERVICES AND/OR APPLICATIONS OBSOLETE AND/OR UNUSABLE.
- TO THE EXTENT NOT PROHIBITED BY LAW, IN NO EVENT SHALL MAZDA OR ITS AFFILIATES BE LIABLE FOR PERSONAL INJURY, OR ANY INCIDENTAL, SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES WHATSOEVER, INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, CORRUPTION OR LOSS OF DATA, FAILURE TO TRANSMIT OR RECEIVE ANY DATA, BUSINESS INTERRUPTION OR ANY OTHER COMMERCIAL DAMAGES OR LOSSES, ARISING OUT OF OR RELATED TO THE APPLICATION OR YOUR USE OF OR INABILITY TO USE THE APPLICATION OR INFORMATION ON THE APPLICATION.
- *When using Apple CarPlay, please avoid distraction and use Apple CarPlay responsibly. Stay fully aware of driving conditions and always obey applicable laws.*

## NOTE

- Apple CarPlay is provided by Apple® and its use is subject to your agreement to the Apple CarPlay terms of use, which are included as part of the Apple iOS terms of use.
- When using Apple CarPlay, location, speed, and other vehicle data is transferred to your iPhone®. For further details, refer to Apple®’s Privacy Policy.

## Mazda Connect [Mazda Connect Type A]

---

### Android Auto™

Android Auto™ is an application which allows the operation of an Android™ Smartphone using the vehicle's audio. Android Auto™ functions such as the phone, messages, music, and map can be used with the vehicle's audio system.

#### CAUTION

➤ *YOU EXPRESSLY ACKNOWLEDGE AND AGREE THAT USE OF ANDROID AUTO™ (“THE APPLICATION”) IS AT YOUR SOLE RISK AND THAT THE ENTIRE RISK AS TO SATISFACTORY QUALITY, PERFORMANCE, ACCURACY AND EFFORT IS WITH YOU TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, AND THAT THE APPLICATION AND INFORMATION ON THE APPLICATION IS PROVIDED “AS IS” AND “AS AVAILABLE,” WITH ALL FAULTS AND WITHOUT WARRANTY OF ANY KIND, AND MAZDA HEREBY DISCLAIMS ALL WARRANTIES AND CONDITIONS WITH RESPECT TO THE APPLICATION AND INFORMATION ON THE APPLICATION, EITHER EXPRESS, IMPLIED OR STATUTORY, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES AND/OR CONDITIONS OF MERCHANTABILITY, SATISFACTORY QUALITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY, QUIET ENJOYMENT, AND NONINFRINGEMENT OF THIRD PARTY RIGHTS. AS EXAMPLES, AND WITHOUT LIMITATION, MAZDA DISCLAIMS ANY WARRANTY REGARDING THE ACCURACY OF DATA PROVIDED BY THE APPLICATION, SUCH AS THE ACCURACY OF DIRECTIONS, ESTIMATED TRAVEL TIME, SPEED LIMITS, ROAD CONDITIONS, NEWS, WEATHER, TRAFFIC, OR OTHER CONTENT PROVIDED BY GOOGLE, ITS AFFILIATES, OR THIRD PARTY PROVIDERS; MAZDA DOES NOT GUARANTEE AGAINST LOSS OF APPLICATION DATA, WHICH MAY BE LOST AT ANY TIME; MAZDA DOES NOT GUARANTEE THAT THE APPLICATION OR ANY SERVICES PROVIDED THROUGH THEM WILL BE PROVIDED AT ALL TIMES OR THAT ANY OR ALL SERVICES WILL BE AVAILABLE AT ANY PARTICULAR TIME OR LOCATION. FOR EXAMPLE, SERVICES MAY BE SUSPENDED OR INTERRUPTED WITHOUT NOTICE FOR REPAIR, MAINTENANCE, SECURITY FIXES, UPDATES, ETC., SERVICES MAY BE UNAVAILABLE IN YOUR AREA OR LOCATION, ETC. IN ADDITION, YOU UNDERSTAND THAT CHANGES IN THIRD PARTY TECHNOLOGY OR GOVERNMENT REGULATION MAY RENDER THE SERVICES AND/OR APPLICATIONS OBSOLETE AND/OR UNUSABLE.*

*TO THE EXTENT NOT PROHIBITED BY LAW, IN NO EVENT SHALL MAZDA OR ITS AFFILIATES BE LIABLE FOR PERSONAL INJURY, OR ANY INCIDENTAL, SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES WHATSOEVER, INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, CORRUPTION OR LOSS OF DATA, FAILURE TO TRANSMIT OR RECEIVE ANY DATA, BUSINESS INTERRUPTION OR ANY OTHER COMMERCIAL DAMAGES OR LOSSES, ARISING OUT OF OR RELATED TO THE APPLICATION OR YOUR USE OF OR INABILITY TO USE THE APPLICATION OR INFORMATION ON THE APPLICATION.*

➤ *When using Android Auto™, please avoid distraction and use Android Auto™ responsibly. Stay fully aware of driving conditions and always obey applicable laws.*

# Mazda Connect [Mazda Connect Type A]

---

## NOTE

- *Android Auto™ is provided by Google and its use is subject to your agreement to the Android Auto™ terms of use.*
- *When using Android Auto™, location, speed, and other vehicle data is transferred to your smart phone. For further details, refer to Google's Privacy Policy.*

## **Trademark**

- Manufactured under license by Dolby Laboratories, Inc.. Dolby and the double-D symbol are trademarks of Dolby Laboratories.
- Aha™, the Aha™ logo, and the Aha™ trade dress are trademarks or registered trademarks of Harman International Industries, Inc., used with permission.
- Stitcher™, the Stitcher™ logo, and the Stitcher™ trade dress are trademarks or registered trademarks of Stitcher, Inc., used with permission.
- iPhone, iPod touch, iPod nano, Siri and Apple Music are trademarks of Apple Inc., registered in the U.S. and other countries.
- Apple CarPlay is trademarks of Apple Inc.
- iOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license.
- “Made for iPhone” and “Made for iPod” mean that an accessory has been designed to connect specifically to iPhone or iPod, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards.

Please note that the use of this accessory with iPhone or iPod may affect wireless performance.

Made for  
iPhone 7 Plus  
iPhone 7  
iPhone SE  
iPhone 6s Plus  
iPhone 6s  
iPhone 6 Plus  
iPhone 6  
iPhone 5s  
iPhone 4s  
iPod touch (7th generation)  
iPod touch (6th generation)

## Mazda Connect [Mazda Connect Type A]

---

iPod touch (5th generation)



- Google, Android, Android Auto and other related marks are trademarks of Google LLC.
- AudioPilot is a registered trademark of Bose Corporation.
- Centerpoint is a registered trademark of Bose Corporation.
- Windows Media and Microsoft are registered trademarks of Microsoft Corporation U.S. in the United States and other countries.

This product is protected by certain intellectual property rights of Microsoft Corporation and third parties.

Use or distribution of such technology outside of this product is prohibited without a license from Microsoft or an authorised Microsoft subsidiary and third parties.

- The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Panasonic Corporation is under license. Other trademarks and trade names are those of their respective owners.



- SDHC Logo is a trademark of SD-3C, LLC.



- Gracenote, the Gracenote logo and logotype are either a registered trademark or a trademark of Gracenote, Inc. in the United States and/or other countries.




# Mazda Connect [Mazda Connect Type B]

## What is Mazda Connect ?


### ▼ What is Mazda Connect ?

For vehicles with the following display type, refer to the following page because your vehicle is equipped with Mazda Connect (Type A).

Refer to What is Mazda Connect ? on page 5-70.

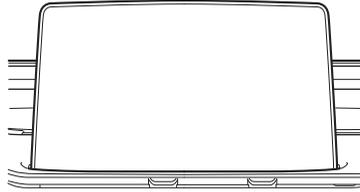

This manual only indicates a part of the information for Mazda Connect. For details, check the Web owner's manual at the Mazda site for each country.

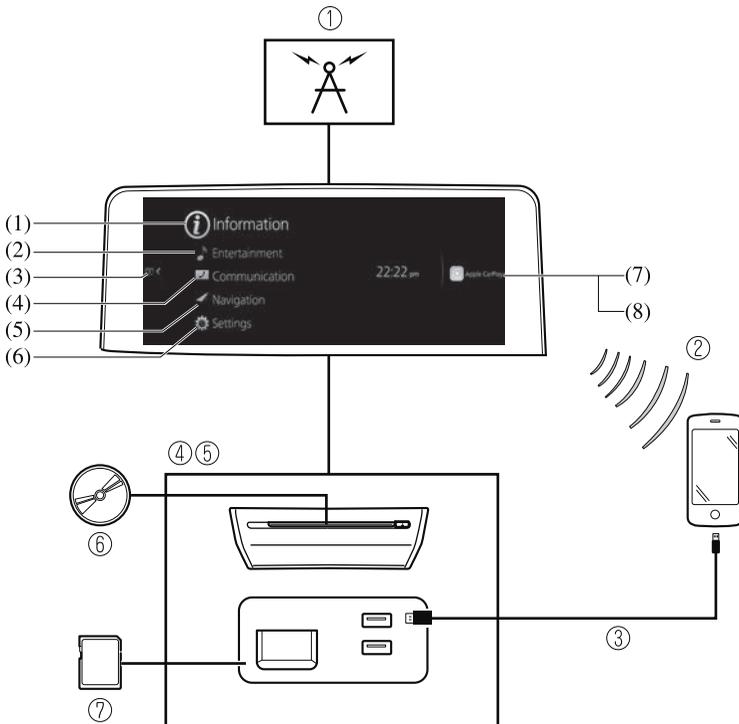

1. Radio

## Mazda Connect [Mazda Connect Type B]

2. Bluetooth® Audio/Hands-Free Call/SMS (Short Message Service)
3. USB Audio/USB Video
4. USB port\*1/SD card slot\*2
5. CD/DVD player\*
6. CD/DVD
7. SD card (Navigation system)\*

\*1 The location of the USB slot differs depending on the vehicle specifications.

\*2 The SD card slot is for the navigation system only. For vehicles with the navigation system, the SD card (Mazda genuine) with stored map data is inserted into the SD card slot.

No.	Menu	Explanation
(1)	Information	<p><b><u>Fuel Efficiency Monitor:</u></b> Monitor fuel efficiency in real time and view fuel efficiency history.</p> <p><b><u>Vehicle Status Monitor:</u></b> View important vehicle maintenance messages, information, and intervals.</p>
(2)	Entertainment	<p>FM AM DAB* Bluetooth USB1 Audio/USB2 Audio USB1 Video/USB2 Video Disc*/CD*/DVD* Audio Off</p>
(3)	Notifications	Displays text messages received by the mobile device paired to Mazda Connect and notifications from the vehicle. The number of notifications is displayed, and if they exceed 100, 99+ is displayed. If a serious problem occurs, the background colour changes to amber or red.
(4)	Communication	By connecting your mobile device, such as a Smartphone, to Mazda Connect via Bluetooth®, you can use the hands-free call and short message functions.
(5)	Navigation	<p>The navigation system (vehicles with navigation system) can be used when the SD card for the navigation system is inserted.</p> <p>If the SD card for the navigation system is not inserted, the compass indicating the direction in which the vehicle is moving is displayed. The compass may not indicate the correct bearing when the vehicle is stopped or travelling at a slow speed.</p> <p>For the navigation system operation, refer to the navigation system manual.</p>

# Mazda Connect [Mazda Connect Type B]

No.	Menu	Explanation
(6)	Settings	<p>You can change the settings for the Mazda Connect screen, sound settings, and the vehicle functions.</p> <p><b><u>In-Vehicle Displays:</u></b> Configures settings and content for all in-vehicle displays.</p> <p><b><u>Sound Settings:</u></b> Configures the in-vehicle listening experience.</p> <p><b><u>Safety Settings:</u></b> Configures safety and driver assistance features.</p> <p><b><u>Vehicle Settings:</u></b> Configures vehicle convenience features.</p> <p><b><u>Connectivity Settings:</u></b> Configures Bluetooth and other device connectivity settings.</p> <p><b><u>System Settings:</u></b> Configures language, time, and other general settings.</p>
(7)	Apple CarPlay	You can use Apple CarPlay by connecting an iPhone® compatible with Apple CarPlay to the USB port.
(8)	Android Auto	You can use Android Auto™ by connecting an Android™ Smartphone compatible with Android Auto™ to the USB port.

## WARNING

### **Always adjust Mazda Connect while the vehicle is stopped:**

*Do not adjust Mazda Connect with the Commander switch while driving the vehicle.*

*Adjusting Mazda Connect with the Commander switch while driving the vehicle is dangerous as it could distract your attention from the vehicle operation which could lead to a serious accident.*

*Even if the audio remote control switches are equipped on the steering wheel, learn to use the switches without looking down at them so that you can keep your maximum attention on the road while driving the vehicle.*

### **Do not allow the connection plug cord to get tangled with the shift lever/selector lever:**

*Allowing the plug cord to become tangled with the shift lever/selector lever is dangerous as it could interfere with driving, resulting in an accident.*

## Mazda Connect [Mazda Connect Type B]

---

***Do not adjust a mobile device or a similar product while driving the vehicle:***

*Adjusting a mobile device or a similar product while driving the vehicle is dangerous as it could distract your attention from the vehicle operation which could lead to a serious accident. Always adjust a mobile device or a similar product while the vehicle is stopped.*



*For the purposes of safe driving, adjust the audio volume to a level that allows you to hear sounds outside of the vehicle including car horns and particularly emergency vehicle sirens.*

***NOTE***

- Do not use Mazda Connect for a long time with the engine stopped. Otherwise, the battery power could be depleted.*
- If a mobile phone or CB radio is used in or near the vehicle, it could cause noise to occur from the audio system. However, this does not indicate a problem.*

# Mazda Connect [Mazda Connect Type B]

## Mazda Connect Basic Operations

### ▼ Mazda Connect Basic Operations

#### NOTE

The explanation of functions described in this manual may differ from the actual operation, and the shapes of screens and buttons and the letters and characters displayed may also differ from the actual appearance.

Additionally, depending on future software updates, the content may successively change without notice.


### ▼ Commander Switch Operation

The commander switch can be used to switch to each function and to operate each function. Set the palm of your hand on the commander knob so that your fingers can touch each of the switches.

You can switch the screens without having to look down at your hand.

#### NOTE

For safety reasons, some operations are disabled while driving the vehicle.

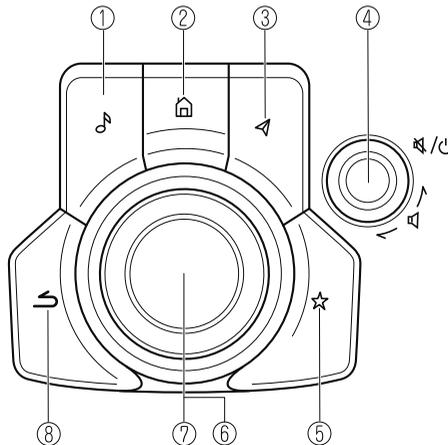

# Mazda Connect [Mazda Connect Type B]

The shape of the switches varies depending on the vehicle specifications.

No.	Item	Explanation
1		<p><b><u>Entertainment button:</u></b></p> <p>The audio source screen last used is displayed.</p> <p><b>(During Apple CarPlay or Android Auto™ music playback)</b> Displays the Apple CarPlay or Android Auto™ now playing screen.</p>
2		<p><b><u>Home button:</u></b></p> <p>Displays the home screen.</p> <p><b>(While Apple CarPlay or Android Auto™ is displayed)</b> Displays the Apple CarPlay or Android Auto™ home screen.</p> <p><b>(While Apple CarPlay or Android Auto™ is connected)</b> Press and hold while the Mazda Connect screen is displayed to switch the screen from Mazda Connect to Apple CarPlay or Mazda Connect to Android Auto™. In addition, press and hold while the Apple CarPlay or Android Auto™ screen is displayed to switch to the Mazda Connect screen.</p>
3		<p><b><u>Map button:</u></b></p> <p>Displays the navigation screen (vehicles with navigation system). In order for the navigation system to function, the SD card for the navigation system is required. If the SD card for the navigation system is not inserted, the compass indicating the direction in which the vehicle is moving is displayed. For the navigation system operation, refer to the navigation system manual.</p> <p><b>(During Apple CarPlay or Android Auto™ route guidance)</b> Displays the Apple CarPlay or Android Auto™ map screen.</p> <p><b>NOTE</b> <i>With an active Mazda Navigation route, pressing the Map button will repeat the navigation voice guidance.</i></p>


# Mazda Connect [Mazda Connect Type B]

No.	Item	Explanation
4		<p><b><u>Volume knob:</u></b></p> <p><b>Volume adjustment</b></p> <p>Adjust the volume by turning the volume knob.</p> <p>If you adjust the volume during voice guidance, the volume of the voice guidance will change.</p> <p>If you adjust the volume during a hands-free call, the conversation volume will change.</p> <p>Press the volume knob to mute/pause the audio. Press the knob again to resume.</p> <p><b>Power off/on</b></p> <p>Press and hold to turn off the Mazda Connect power and turn off the screen. Press and hold again to turn on the Mazda Connect power.</p> <p><b>NOTE</b></p> <p><i>If you press the volume knob to mute an audio source which can be paused, such as Apple CarPlay, USB audio, or Bluetooth® audio, while it is playing, the song playback pauses. Press the volume knob again to cancel the mute and the pause at the same time.</i></p>
5		<p><b><u>Favourites button:</u></b></p> <p>Displays the favourites screen.</p> <p>Press and hold to register AM/FM stations, contacts, navigation destinations, or any highlighted menu items to create easily accessible shortcuts.</p>
6		<p><b><u>Commander knob (selection):</u></b></p> <p>Rotate or slide the commander knob to highlight/select the on-screen functions you want to use.</p>
7		<p><b><u>Commander knob (select):</u></b></p> <p>Depress the commander knob to select the desired on-screen function you want to use.</p>
8		<p><b><u>Back button:</u></b></p> <p>Returns to previous screen.</p>

# Mazda Connect [Mazda Connect Type B]

## ▼ Audio Remote Control Switch Operation

The audio remote control switch is on the left side of the steering wheel. You can operate basic audio functions, pick up/hang up the phone, or activate voice control using the switch.

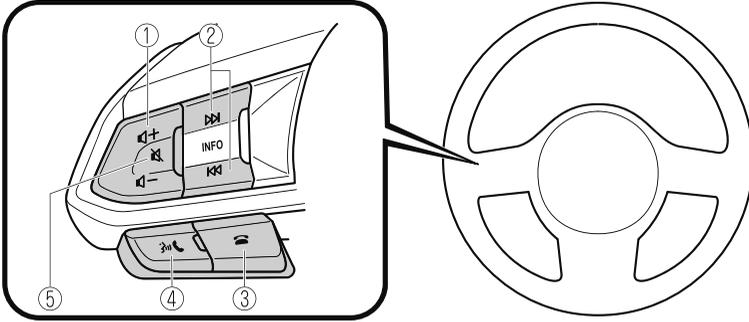

The shape of the switches may differ depending on the vehicle specifications.


No.	Item	Explanation
1		<p><b>Volume adjustment button:</b></p> <p>Press the (+) or (-) button to adjust the volume.</p> <p>If you adjust the volume during voice guidance, the volume of the voice guidance will change.</p> <p>If you adjust the volume during a hands-free call, the conversation volume will change.</p>

# Mazda Connect [Mazda Connect Type B]

No.	Item	Explanation
2	 (SEEK UP)	<p><b><u>Seek Switch:</u></b></p> <p><b>Selecting a radio station</b></p> <p><b>(FM/AM radio)</b>            Radio stations saved to your Favourites can be selected by pressing the seek switch while listening to FM/AM radio. The station will change to the previous or next favourite station each time you press the seek switch. If you want to manually tune to the next available station before or after the currently selected station, press and hold the seek switch until it beeps and the tuner will select the next available station.</p> <p><b>(DAB radio)*</b>            You can call up radio stations registered to your Favourites by pressing the seek switch while listening to DAB radio. The radio station changes each time you press the seek switch.</p>
	 (SEEK DOWN)	<p>In addition, if you press and hold the seek switch until you hear a beep, the service switches to the next or previous service. If there is no next or previous service in the selected Ensemble, Ensemble switches.</p> <p><b>Playback Control</b></p> <p>Music and video files can be cued when listening to stored content via USB, Bluetooth®, and audio or video. Slide the volume knob right to skip to the next track or slide it to the left to go back to the previous track. You can also slide and hold the volume knob to fast forward or rewind the track.</p>
3		<p><b><u>Hang-up button:</u></b></p> <p><b>(During a call)</b>            Press the button to end the call.</p> <p><b>(While receiving a call)</b>            Press the button to refuse a call.</p>
4		<p><b><u>Talk/Pick-up button:</u></b></p> <p><b>(While receiving a call)</b>            Press the button to answer the call.</p>
5		<p><b><u>Mute button:</u></b></p> <p>Press the button to mute.            Press it again to cancel the mute.</p> <p><b>NOTE</b>  <i>If you press the mute button to mute an audio source which can be paused, such as Apple CarPlay, USB audio, or Bluetooth® audio, while it is playing, the song playback pauses. Press the mute button again to cancel the mute and the pause at the same time.</i></p>

# Mazda Connect [Mazda Connect Type B]

## ▼ Operation Using Voice Recognition Function

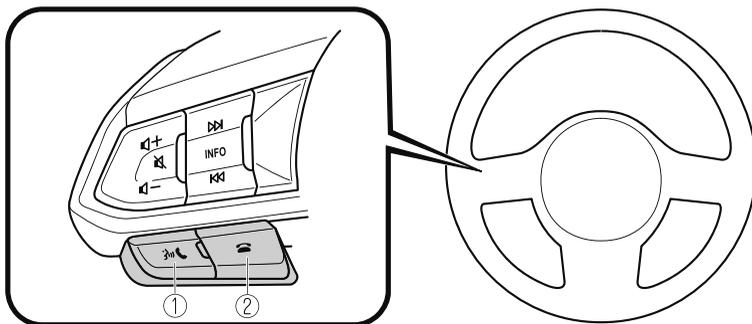

The shape of the switches may differ depending on the vehicle specifications.

No.	Item	Explanation
1		<p><b><u>Talk/Pick-up button:</u></b></p> <p>When the button is pressed, the voice recognition top screen is displayed and the voice recognition is activated.</p> <p><b>(While voice guidance is being announced)</b> Press the button to skip the voice guidance.</p>
2		<p><b><u>Hang-up button:</u></b></p> <p>Press the button to end the voice recognition.</p>

### Voice recognition activation

When the talk/pick-up button on the audio remote control switch is pressed, top screen of the voice recognition will be displayed.

#### **NOTE**

When an Apple CarPlay or Android Auto™ compatible device is connected, the Mazda Connect voice recognition system is disabled to allow the use of Siri® or Android Auto™ voice recognition at any time with the talk/pick-up button.

### Commands usable at any time

“Help” - Can be used to check for usable voice commands.

“Back” - Returns to the previous screen. When a voice command is spoken while on the telephone number input screen, the content that was previously input is deleted.

“Cancel” - The voice recognition is ended.

### Ending voice recognition

Do any one of the following operations:


- Press the hang-up button.

# Mazda Connect [Mazda Connect Type B]

- Press and hold the talk/Pick-up button.
- Say the word, “Cancel”.

## Convenient operating tips for using the voice recognition function

Examples of effective voice commands in various categories are displayed on the voice recognition screen.

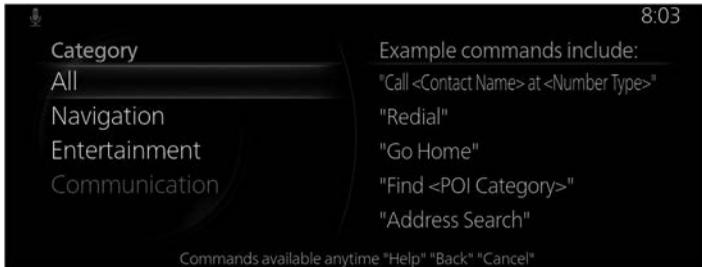

### **NOTE**

- The voice command examples shown in this manual are only a partial list of the available commands. Some commands may be unusable depending on the vehicle specifications.
- Some commands cannot be used depending on the device connection conditions and the use conditions.
- When the Barge-In setting is on, voice commands can be made even while the voice guidance is being announced. For details on Barge-In, refer to the Settings section in the Mazda Connect Owner's Manual.
- For details on voice commands which can be used on the navigation screen, refer to the navigation system manual.

To prevent misunderstood voice commands, be aware of the following points:

- Connect your mobile phone to Bluetooth® before operating the mobile phone using voice recognition.
- After pressing the talk/pick-up button, wait for the beep before speaking a command.
- Speaking in a slightly louder voice will improve voice recognition, but an excessively loud voice is unnecessary. Try to speak in a slightly louder voice than when talking to other passengers in the vehicle.
- You do not need to speak slowly. Speak at a normal speed.
- When calling a person in the device's phonebook, the recognition rate increases the longer the name is. Errors may occur with names that are short such as “Mama”, “Home”, or “wife”.
- Speak clearly, without pausing between words or numbers.
- Voice commands other than those specified, cannot be recognised. Speak in the wording specified by the voice commands.

## Mazda Connect [Mazda Connect Type B]

---

- It is not necessary to face the microphone or be near it. Speak the voice commands while maintaining a safe driving position.
- Close the windows and the sunroof\* to reduce loud noises from outside the vehicle and to prevent the airflow of the air-conditioning system from being a disturbance when using Bluetooth® Hands-Free.
- Make sure that the air flow from the air conditioner is not blowing on the microphone.
- If the voice recognition is poor with the guidance volume set to high, set the Barge-In to OFF.

### Examples of available voice commands

The specified name and number are put into the {}.

#### **Common**

- Back
- Help (You can listen to help guidance at each screen.)
- {Line Number} (You can select the line number on the screen.)
- Next Page
- Previous Page
- Cancel

#### **Menu**

- All
- Navigation
- Entertainment
- Communication

#### **Setting**

- Voice Recognition Settings
- Display Off

#### **Music**

- Play Artist (You can also use “Play Artist {Artist name}”.)
- Play Album (You can also use “Play Album {Album Name}”.)
- Play Playlist (You can also use “Play Playlist {Playlist Name}”.)
- Play Song (You can also use “Play Song {Song Name}”.)
- Play Audiobook (You can also use “Play Audiobook {Audiobook Name}”.)
- Play Podcast (You can also use “Play Podcast {Podcast Name}”.)

#### **Radio**

- Tune to {Frequency} AM
- Tune to {Frequency} FM
- Tune to DAB {DAB Station Name}

# Mazda Connect [Mazda Connect Type B]

---

## Source

- Change Source (You can also use “Change Source to USB”<sup>\*1</sup> and “USB”<sup>\*1</sup>.)
- Audio OFF (You can also use “Change Source to Audio OFF”.)

## Phone

- Dial Phone Number (You can also use “Dial {Phone Number}”.)
- Call History
- Call a Contact (You can also use “Call {Contact Name}” and “Call {Contact Name} at {Number Type}”.)
- Redial

\*1 : Audio source names other than “USB” can also be used as follows:

Bluetooth/AM/FM/DAB/Disc/USB1 Audio/USB2 Audio/USB1 Video/USB2 Video

## ▼ Appendix

### Gracenote® Database

When audio CDs are played, the unit searches the database stored in the vehicle for the album name, artist name, genre, title, and album art, and if there is a match in the vehicle's database compilation to the music being played, each type of music information is automatically added (Album art only for MP3/WMA/AAC CDs and when playing USB audio and Bluetooth® audio). The database information stored in this device uses database information in the Gracenote® music recognitions service.

### Apple CarPlay



➤ *YOU EXPRESSLY ACKNOWLEDGE AND AGREE THAT USE OF APPLE CARPLAY (“THE APPLICATION”) IS AT YOUR SOLE RISK AND THAT THE ENTIRE RISK AS TO SATISFACTORY QUALITY, PERFORMANCE, ACCURACY AND EFFORT IS WITH YOU TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, AND THAT THE APPLICATION AND INFORMATION ON THE APPLICATION IS PROVIDED “AS IS” AND “AS AVAILABLE”, WITH ALL FAULTS AND WITHOUT WARRANTY OF ANY KIND, AND MAZDA HEREBY DISCLAIMS ALL WARRANTIES AND CONDITIONS WITH RESPECT TO THE APPLICATION AND INFORMATION ON THE APPLICATION, EITHER EXPRESS, IMPLIED OR STATUTORY, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES AND/OR CONDITIONS OF MERCHANTABILITY, SATISFACTORY QUALITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY, QUIET ENJOYMENT, AND NONINFRINGEMENT OF THIRD PARTY RIGHTS.*

## Mazda Connect [Mazda Connect Type B]

---

AS EXAMPLES, AND WITHOUT LIMITATION, MAZDA DISCLAIMS ANY WARRANTY REGARDING THE ACCURACY OF DATA PROVIDED BY THE APPLICATION, SUCH AS THE ACCURACY OF DIRECTIONS, ESTIMATED TRAVEL TIME, SPEED LIMITS, ROAD CONDITIONS, NEWS, WEATHER, TRAFFIC, OR OTHER CONTENT PROVIDED BY APPLE, ITS AFFILIATES, OR THIRD PARTY PROVIDERS; MAZDA DOES NOT GUARANTEE AGAINST LOSS OF APPLICATION DATA, WHICH MAY BE LOST AT ANY TIME; MAZDA DOES NOT GUARANTEE THAT THE APPLICATION OR ANY SERVICES PROVIDED THROUGH THEM WILL BE PROVIDED AT ALL TIMES OR THAT ANY OR ALL SERVICES WILL BE AVAILABLE AT ANY PARTICULAR TIME OR LOCATION. FOR EXAMPLE, SERVICES MAY BE SUSPENDED OR INTERRUPTED WITHOUT NOTICE FOR REPAIR, MAINTENANCE, SECURITY FIXES, UPDATES, ETC., SERVICES MAY BE UNAVAILABLE IN YOUR AREA OR LOCATION, ETC.

IN ADDITION, YOU UNDERSTAND THAT CHANGES IN THIRD PARTY TECHNOLOGY OR GOVERNMENT REGULATION MAY RENDER THE SERVICES AND/OR APPLICATIONS OBSOLETE AND/OR UNUSABLE. TO THE EXTENT NOT PROHIBITED BY LAW, IN NO EVENT SHALL MAZDA OR ITS AFFILIATES BE LIABLE FOR PERSONAL INJURY, OR ANY INCIDENTAL, SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES WHATSOEVER, INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, CORRUPTION OR LOSS OF DATA, FAILURE TO TRANSMIT OR RECEIVE ANY DATA, BUSINESS INTERRUPTION OR ANY OTHER COMMERCIAL DAMAGES OR LOSSES, ARISING OUT OF OR RELATED TO THE APPLICATION OR YOUR USE OF OR INABILITY TO USE THE APPLICATION OR INFORMATION ON THE APPLICATION.

- *When using Apple CarPlay, please avoid distraction and use Apple CarPlay responsibly. Stay fully aware of driving conditions and always obey applicable laws.*

### **NOTE**

- Apple CarPlay is provided by Apple® and its use is subject to your agreement to the Apple CarPlay terms of use, which are included as part of the Apple iOS terms of use.*
- When using Apple CarPlay, location, speed, and other vehicle data is transferred to your iPhone®. For further details, refer to Apple®'s Privacy Policy.*

# Mazda Connect [Mazda Connect Type B]

## Android Auto™



- *YOU EXPRESSLY ACKNOWLEDGE AND AGREE THAT USE OF ANDROID AUTO™ (“THE APPLICATION”) IS AT YOUR SOLE RISK AND THAT THE ENTIRE RISK AS TO SATISFACTORY QUALITY, PERFORMANCE, ACCURACY AND EFFORT IS WITH YOU TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, AND THAT THE APPLICATION AND INFORMATION ON THE APPLICATION IS PROVIDED “AS IS” AND “AS AVAILABLE,” WITH ALL FAULTS AND WITHOUT WARRANTY OF ANY KIND, AND MAZDA HEREBY DISCLAIMS ALL WARRANTIES AND CONDITIONS WITH RESPECT TO THE APPLICATION AND INFORMATION ON THE APPLICATION, EITHER EXPRESS, IMPLIED OR STATUTORY, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES AND/OR CONDITIONS OF MERCHANTABILITY, SATISFACTORY QUALITY, FITNESS FOR A PARTICULAR PURPOSE, ACCURACY, QUIET ENJOYMENT, AND NONINFRINGEMENT OF THIRD PARTY RIGHTS. AS EXAMPLES, AND WITHOUT LIMITATION, MAZDA DISCLAIMS ANY WARRANTY REGARDING THE ACCURACY OF DATA PROVIDED BY THE APPLICATION, SUCH AS THE ACCURACY OF DIRECTIONS, ESTIMATED TRAVEL TIME, SPEED LIMITS, ROAD CONDITIONS, NEWS, WEATHER, TRAFFIC, OR OTHER CONTENT PROVIDED BY GOOGLE, ITS AFFILIATES, OR THIRD PARTY PROVIDERS; MAZDA DOES NOT GUARANTEE AGAINST LOSS OF APPLICATION DATA, WHICH MAY BE LOST AT ANY TIME; MAZDA DOES NOT GUARANTEE THAT THE APPLICATION OR ANY SERVICES PROVIDED THROUGH THEM WILL BE PROVIDED AT ALL TIMES OR THAT ANY OR ALL SERVICES WILL BE AVAILABLE AT ANY PARTICULAR TIME OR LOCATION. FOR EXAMPLE, SERVICES MAY BE SUSPENDED OR INTERRUPTED WITHOUT NOTICE FOR REPAIR, MAINTENANCE, SECURITY FIXES, UPDATES, ETC., SERVICES MAY BE UNAVAILABLE IN YOUR AREA OR LOCATION, ETC. IN ADDITION, YOU UNDERSTAND THAT CHANGES IN THIRD PARTY TECHNOLOGY OR GOVERNMENT REGULATION MAY RENDER THE SERVICES AND/OR APPLICATIONS OBSOLETE AND/OR UNUSABLE. TO THE EXTENT NOT PROHIBITED BY LAW, IN NO EVENT SHALL MAZDA OR ITS AFFILIATES BE LIABLE FOR PERSONAL INJURY, OR ANY INCIDENTAL, SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES WHATSOEVER, INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, CORRUPTION OR LOSS OF DATA, FAILURE TO TRANSMIT OR RECEIVE ANY DATA, BUSINESS INTERRUPTION OR ANY OTHER COMMERCIAL DAMAGES OR LOSSES, ARISING OUT OF OR RELATED TO THE APPLICATION OR YOUR USE OF OR INABILITY TO USE THE APPLICATION OR INFORMATION ON THE APPLICATION.*
- *When using Android Auto™, please avoid distraction and use Android Auto™ responsibly. Stay fully aware of driving conditions and always obey applicable laws.*

## Mazda Connect [Mazda Connect Type B]

---

### **NOTE**

- *Android Auto™ is provided by Google and its use is subject to your agreement to the Android Auto™ terms of use.*
- *When using Android Auto™, location, speed, and other vehicle data is transferred to your smart phone. For further details, refer to Google Privacy Policy.*

### **Trademark**

- Manufactured under license by Dolby Laboratories, Inc.. Dolby and the double-D symbol are trademarks of Dolby Laboratories.
- iPhone, iPod touch, iPod nano, Siri and Apple Music are trademarks of Apple Inc., registered in the U.S. and other countries.
- Apple CarPlay is trademarks of Apple Inc.
- iOS is a trademark or registered trademark of Cisco in the U.S. and other countries and is used under license.
- “Made for iPhone” and “Made for iPod” mean that an accessory has been designed to connect specifically to iPhone or iPod, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards.  
Please note that the use of this accessory with iPhone or iPod may affect wireless performance.

Made for

iPhone 7 Plus

iPhone 7

iPhone SE

iPhone 6s Plus

iPhone 6s

iPhone 6 Plus

iPhone 6

iPhone 5s

iPhone 5c

iPhone 5

iPhone 4s

iPod touch (6th generation)

iPod touch (5th generation)

# Mazda Connect [Mazda Connect Type B]

iPod nano (7th generation)



- Google, Android, Android Auto and other related marks are trademarks of Google LLC.
- AudioPilot is a registered trademark of Bose Corporation.
- Centerpoint is a registered trademark of Bose Corporation.
- Windows Media and Microsoft are registered trademarks of Microsoft Corporation U.S. in the United States and other countries.

This product is protected by certain intellectual property rights of Microsoft Corporation and third parties.

Use or distribution of such technology outside of this product is prohibited without a license from Microsoft or an authorised Microsoft subsidiary and third parties.

- The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Panasonic Corporation is under license. Other trademarks and trade names are those of their respective owners.



- SDHC Logo is a trademark of SD-3C, LLC.



- Gracenote, the Gracenote logo and logotype are either a registered trademark or a trademark of Gracenote, Inc. in the United States and/or other countries.



## **Mazda Connect [Mazda Connect Type B]**

---

### **Regarding the license for the audio amplifier (except vehicles with Bose audio)**

#### License for CMSIS-RTOS RTX Implementation

Copyright (c) 1999-2009 KEIL, 2009-2015 ARM Germany GmbH, 2013-2016 ARM Ltd  
All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:


- Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer
- Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- Neither the name of ARM nor the names of its contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS “AS IS” AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED.

IN NO EVENT SHALL COPYRIGHT HOLDERS AND CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

## Sunvisors

When you need a sunvisor, lower it for use in front or swing it to the side.

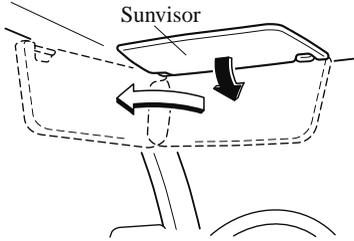


### ▼ Vanity Mirrors

To use the vanity mirror, lower the sunvisor.

If your vehicle is equipped with a vanity mirror light, it will illuminate when you open the cover.

To prevent the battery from being discharged, the vanity mirror will only illuminate in the tilt range shown in the figure.

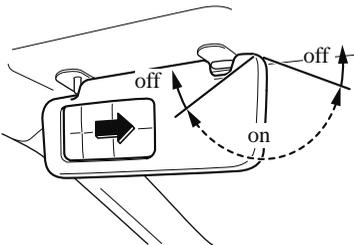

## Interior Lights


### NOTE

*Do not leave the lights on for long periods while the engine is turned off. Otherwise the battery power could be depleted.*

### Overhead Lights

#### Type A

Switch Position	Overhead Lights
OFF	Light off
DOOR	<ul style="list-style-type: none"> <li>• Light is on when any door is open</li> <li>• Light is on or off when the illuminated entry system is on</li> </ul>
ON	Light on




### NOTE

*The rear map lights also turn on and off when the overhead light switch is operated.*

# Interior Equipment

## Type B


Switch	Overhead Lights
 (DOOR OFF)	The DOOR OFF switch can be switched between the DOOR position and DOOR OFF position. <b>DOOR position</b> <ul style="list-style-type: none"> <li>• The lights turn on when any of the doors is opened.</li> <li>• The lights turn on/off in conjunction with the illuminated entry system.</li> </ul> <b>DOOR OFF position</b> <ul style="list-style-type: none"> <li>• The lights do not turn on even if any of the doors is opened.</li> <li>• The lights do not turn on/off in conjunction with the illuminated entry system.</li> </ul>
 (ON/OFF)	Press the switch to turn it on. Press the switch again to turn off the lights.

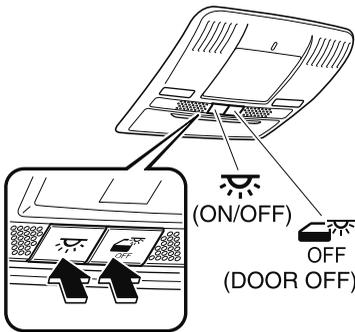

## Front Map Lights

### Type A

When the overhead light switch is in the door or off position, press the lens to illuminate the front map lights, and then press the lens again to turn them off.




### NOTE

*The front map lights will not turn off even if the lens is pressed in the following cases:*

- The overhead light switch is in the ON position.
- The overhead light switch is in the door position with the door open.
- The illuminated entry system is on.

### Type B

Press the switch to illuminate the front map lights, and then press the switch again to turn them off.

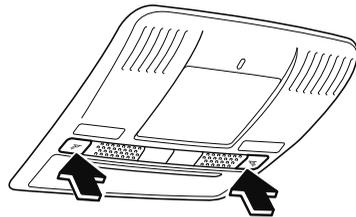

### NOTE


*The front map lights will not turn off even if the switch is pressed in the following cases:*

- The overhead lights turn on by operating the overhead ON/OFF switch (☞☞).
- The overhead lights turn on in conjunction with a door opening/closing.
- The illuminated entry system is on.

## Rear Map Lights

### Type A

When the overhead light switch is in the door or off position, press the lens to illuminate a rear map light, and then press the lens again to turn it off.




### NOTE

- Once the rear map lights have been turned off, they will turn on and off depending on the position to which the overhead light is switched.
- The rear map lights will not turn off even if the lens is pressed in the following cases:
  - The overhead light switch is ON.
  - The overhead light switch is in the door position with the door open.
  - The illuminated entry system is on.

### Type B

Press the switch to illuminate the rear map lights, and then press the switch again to turn them off.




### NOTE

- Once the rear map lights have been turned off, they will turn on and off in conjunction with the overhead light operation.
- The rear map lights will not turn off even if the switch is pressed in the following cases:
  - The overhead lights turn on by operating the overhead ON/OFF switch (☞☞).
  - The overhead lights turn on in conjunction with a door opening/closing.
  - The illuminated entry system is on.

# Interior Equipment


## Luggage Compartment Lights

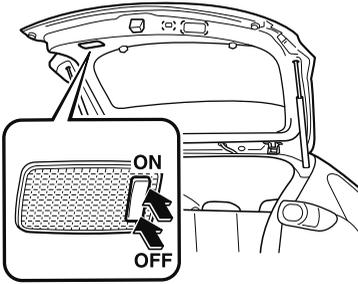

Switch Position	Luggage Compartment Light
OFF	Light off
ON	Light on when the liftgate is open

## Ambient Light\*

An ambient light continuously turn on when the ignition is switched ON.  
 An ambient light dim when the position lights or headlights are turned on.

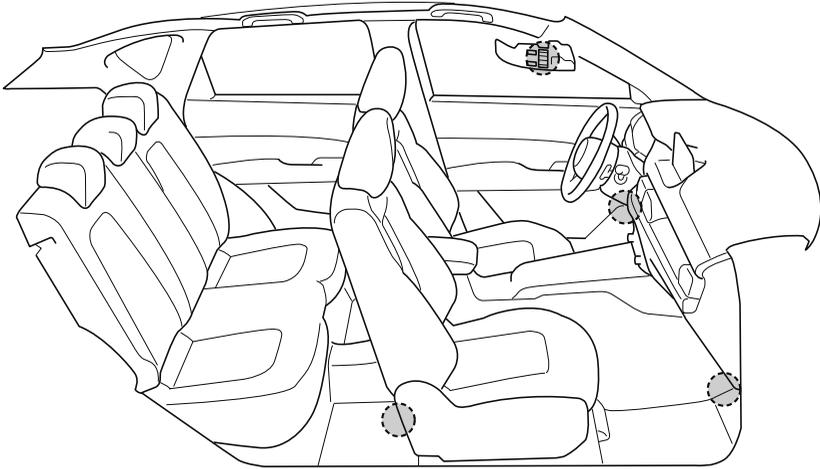

 Ambient light

### **NOTE**

- An ambient light turn on or off in conjunction with the illuminated entry system when the ignition is switched OFF.
  - The ambient light illumination level can be changed while the position lights or headlights are turned on.
- Refer to the Settings section in the Mazda Connect Owner's Manual.

### ▼ Illuminated Entry System

The overhead lights turn on when any of the following operations is done with the overhead light switch in the DOOR position.

The ambient lights turn on regardless of the overhead light switch position.

- The driver's door is unlocked with the ignition is switched OFF.
- The ignition is switched OFF with all doors closed.

#### NOTE


- *The illumination time differs depending on the operation.*
- **Battery saver**  
*If an interior light is left on with the ignition switched OFF, the light turns off automatically after a certain period of time has passed to prevent battery depletion.*
- *The operation of the illuminated entry system can be changed. Refer to the Settings section in the Mazda Connect Owner's Manual.*
- **(Type B)**  
*The illumination entry system does not operate in conjunction with the overhead lights when the overhead lights are turned on using the overhead light ON/OFF switch.*

## Accessory Sockets


Only use genuine Mazda accessories or the equivalent requiring no greater than 120 W (DC 12 V, 10 A).

The ignition must be switched to ACC or ON.


### Front

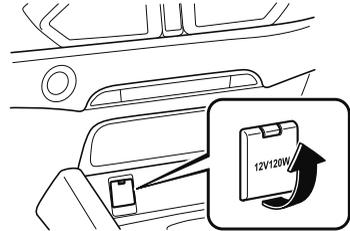

### Centre

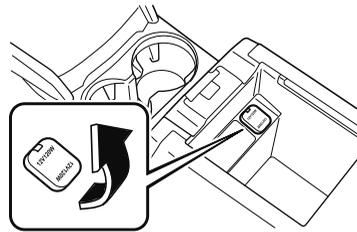

### Rear

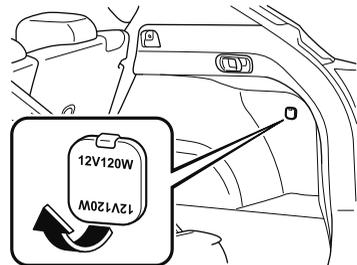

# Interior Equipment

---

## **⚠ CAUTION**


- *To prevent accessory socket damage or electrical failure, pay attention to the following:*
  - *Do not use accessories that require more than 120 W (DC 12 V, 10 A).*
  - *Do not use accessories that are not genuine Mazda accessories or the equivalent.*
  - *Close the cover when the accessory socket is not in use to prevent foreign objects and liquids from getting into the accessory socket.*
  - *Correctly insert the plug into the accessory socket.*
  - *Do not insert the cigarette lighter into the accessory socket.*
- *Noise may occur on the audio playback depending on the device connected to the accessory socket.*
- *Depending on the device connected to the accessory socket, the vehicle's electrical system may be affected, which could cause the warning light to illuminate. Disconnect the connected device and make sure that the problem is resolved. If the problem is resolved, disconnect the device from the socket and switch the ignition off. If the problem is not resolved, consult an expert repairer (we recommend an Authorised Mazda Repairer).*

### **NOTE**

*To prevent discharging of the battery, do not use the socket for long periods with the engine off or idling.*

## **Connecting the accessory socket**


1. Open the lid.
2. Pass the connection plug cord through the cutout of the console and insert the plug into the accessory socket.

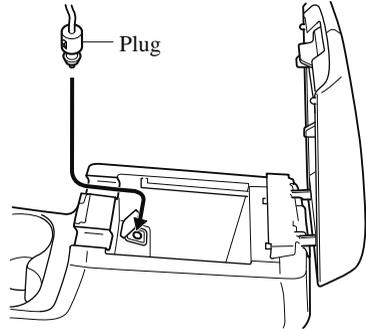

## USB Power Outlet\*

The USB power outlets can be used regardless of whether the ignition is switched to ACC or ON.

Only use USB devices that have a maximum power consumption of 10.5W (DC5V, 2.1A) or below.



### CAUTION

- To prevent USB power outlets damage or electrical failure, pay attention to the following:
  - Do not use USB devices that require more than 10.5 W (DC 5 V, 2.1 A).
  - Close the lid when the USB power outlets are not in use to prevent foreign objects and liquids from getting into the USB power outlets.
  - Correctly connect the USB connector into the USB power outlets.


### NOTE

- The USB power outlets are designed only for charging and they cannot be used for connecting to the vehicle's audio system.
- To prevent discharging of the battery, do not use the USB power outlets for long periods with the engine off or idling.

### How to connect

The groove in the armrest box can be used to pass the cord of the device into the box to connect it to the USB power outlets.

1. Open the lid.
2. Route the cord through the groove in the armrest box and insert the USB connector into the USB power outlets.

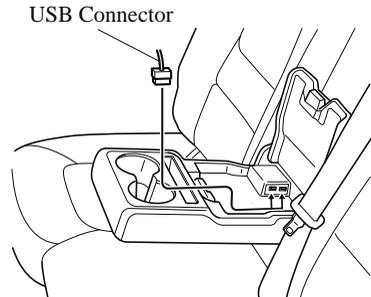


# Interior Equipment

## Wireless Charger (Qi)\*

You can charge mobile devices such as Smartphones which comply with the Qi Wireless Charging standard.

Only use mobile devices that have a maximum power consumption of 5 W, or 15 W or below. The maximum power consumption differs depending on the mobile device.

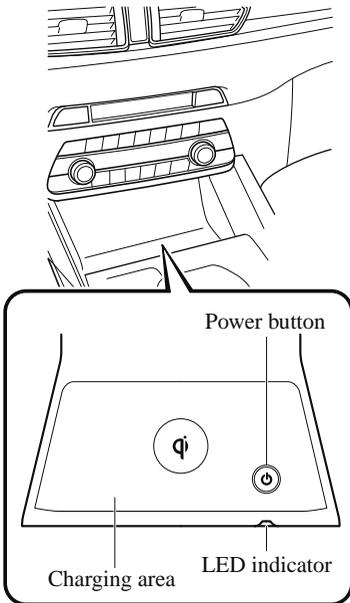

- Before using the Wireless Charger (Qi) near people who use medical devices, ask the medical device manufacturer or your physician if radio waves from the Wireless Charger (Qi) will affect the device.
- The Wireless Charger (Qi) can be disabled to prevent it from affecting medical devices. Consult an expert repairer (we recommend an Authorised Mazda Repairer) for details.

**Heed the following cautions. Otherwise, the Wireless Charger (Qi) may malfunction or be damaged, which could cause a fire, burns due to heat generation, or an accident such as electrical shock.**

- Do not install, remove, disassemble, or change the wiring of the Wireless Charger (Qi). If the Wireless Charger (Qi) needs to be installed or removed, consult an expert repairer (we recommend an Authorised Mazda Repairer).
- Do not use the Wireless Charger (Qi) when it is malfunctioning. In addition, if smoke, abnormal noise, or abnormal smell is emitted from the Wireless Charger (Qi), stop the vehicle in a safe place, switch the ignition OFF, and consult an expert repairer (we recommend an Authorised Mazda Repairer).
- When using the Wireless Charger (Qi) to store items on, turn off the Wireless Charger (Qi).
- Do not place any metal object between the charging area and the mobile device. Also, do not apply items such as a metallic sticker to the Wireless Charger (Qi).

### WARNING

**Radio waves from the Wireless Charger (Qi) may affect the operation of medical devices such as implanted-type cardiac pacemakers or defibrillators.**

- *When charging, do not place any item other than the mobile device to be charged on the Wireless Charger (Qi). In addition, do not place any metal object, IC card, coin, or magnetic item near the charging area.*
- *Remove dust or dirt from the charging area before use.*
- *Do not apply strong force or impact to the Wireless Charger (Qi) or get it wet.*
- *Use only mobile devices which support the Wireless Charger (Qi).*

## How to use

1. Start the engine.
2. The power for the Wireless Charger (Qi) turns on and the LED indicator turns on.
  - The power can be turned on/off by pressing the power button on the Wireless Charger (Qi) for about 3 seconds.
  - When the power is turned off, the LED indicator turns off.
3. Place a device compliant with the Qi Wireless Charging standard in the centre of the charging area on the tray.
  - The LED indicator turns on in amber or green when charging starts.
  - For details on the LED indicator, refer to the following LED indicator table.
  - Charging starts when all the doors and liftgate are closed.
  - The function to reduce noise on the radio operates if the power button is pressed for about 1 second during charging. Use it when noise occurs on the radio due to interference by

the Wireless Charger (Qi). Press the power button again for about 1 second to cancel the function.

## LED indicator

The status of the Wireless Charger (Qi) can be checked using the LED indicator.

Status	Illumination/flash pattern
OFF	Does not turn on
Stand-by (charging is possible)	Turns on in white
Normal charging	Turns on in amber
Fast charging*1	Turns on in green
Normal charging (charging efficiency is low)	Flashes in amber
Fast charging*1 (charging efficiency is low)	Flashes in green
Stand-by (charging is not possible)	Flashes in white
Charging is stopped due to high temperature or foreign matter detected	Flashes in red
Charging is stopped due to internal problem or malfunction	Turns on in red

- \*1 Some mobile devices can switch between normal charging and fast charging.

## CAUTION

- *While a mobile device is placed on the charging area, keep the vehicle key away from the Wireless Charger (Qi). The vehicle key may not be detected due to radio wave interference by the Wireless Charger (Qi).*

## Interior Equipment

---

- Charging may not operate normally under the following conditions:
  - The mobile device is fully charged.
  - There is foreign matter between the mobile device and the charging area.
  - The temperature of the mobile device is high.
  - The mobile device is placed with the charging side facing upward.
  - The mobile device is placed in a position extremely deviating from the centre of the charging area.
  - Your vehicle is in an area where strong radio waves or electrical noise occur such as near a television tower, power plant, or airport.
  - The Near Field Communication (NFC) function setting of the mobile device is on (depends on the model of the mobile device).
- Keep the following items away from the charging area. Otherwise the data stored on the mobile device could be erased or the device could malfunction.
  - Magnetic items such as magnets, magnetic cards, and magnetic recording media.
  - High precision devices such as wristwatches.
- Before using the Wireless Charger (Qi), make sure to back up the data stored on the mobile device. The data on the mobile device could be deleted.
- Do not wipe the Wireless Charger (Qi) using oil, alcohol, or thinner, or spray hairspray or insecticide onto it. Otherwise, it could cause damage or cracking.

- Do not leave mobile devices in the cabin. The temperature inside the cabin may become very hot, causing the devices to malfunction.

### NOTE

- A mobile device larger than the charging area cannot be charged. In addition, even if the mobile device is in the charging area, the charging efficiency may decrease or charging may not be possible depending on where the mobile device is placed.
- If the function to reduce noise on the radio is used, fast charging may be disabled depending on the mobile device being charged.
- If the LED indicator is flashing in amber or green, the charging efficiency is low. Check that there is no foreign matter between the mobile device and the charging area, and position the mobile device near the centre of the charging area.
- Depending on the mobile device case or accessories used, the mobile device may not charge, or the charging efficiency may be reduced resulting in a longer charging time. If charging does not start even when a mobile device is placed on the charging area, remove the mobile device case or any accessories.
- While the keyless entry is operating, charging may stop temporarily, however, this does not indicate a problem.
- During charging, the Wireless Charger (Qi) and the mobile device become warm, however, this does not indicate a problem.

- *If the mobile device temperature rises during charging, charging may stop due to the protection function of the device. If that happens, wait until the mobile device cools down sufficiently and then recharge it.*
- *When using the Wireless Charger (Qi), applications using the Near Field Communication (NFC) function may activate, but this does not indicate a problem with the Wireless Charger (Qi).*
- *While i-stop is operating, charge amount may be temporarily restricted and charging may be temporarily cancelled, however, this does not indicate a problem.*

### Trademarks

“Qi” and the Qi symbol are trademarks or registered trademarks of the Wireless Power Consortium (WPC).



## Cup Holder

### **WARNING**


**Never use a cup holder to hold hot liquids while the vehicle is moving:**

*Using a cup holder to hold hot liquids while the vehicle is moving is dangerous. If the contents spill, you could be scalded.*

**Do not put anything other than cups or drink cans in cup holders:**

*Putting objects other than cups or drink cans in a cup holder is dangerous. During sudden braking or manoeuvring, occupants could be hit and injured, or objects could be thrown around the vehicle, causing interference with the driver and the possibility of an accident. Only use a cup holder for cups or drink cans.*

### ▼ Front

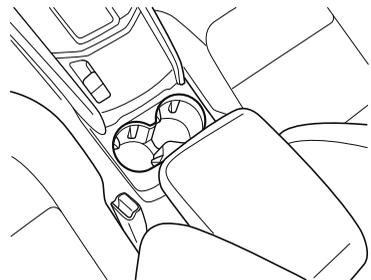

# Interior Equipment

## ▼ Rear\*


The rear cup holder is on the rear centre armrest.



## Bottle Holder


Bottle holders are on the inside of the doors.

### Front



Bottle holder

### Rear



Bottle holder

### CAUTION

*Do not use the bottle holders for containers without caps. The contents may spill when opening/closing the door or while driving the vehicle.*

## Storage Compartments

### WARNING

#### **Keep storage boxes closed when driving:**

Driving with the storage boxes open is dangerous. To reduce the possibility of injury in an accident or a sudden stop, keep the storage boxes closed when driving.

#### **When loading cargo, make sure that it is completely secured:**

If the cargo is not completely secured, it may move or collapse while driving or during sudden braking, resulting in injury or an accident.

#### **Do not put articles in storage spaces with no lid:**

Putting articles in storage spaces with no lid is dangerous as they could be thrown around the cabin if the vehicle is suddenly accelerated and cause injury depending on how the article is stored.


### CAUTION

Do not leave lighters or eyeglasses in the storage boxes while parked under the sun. A lighter could explode or the plastic material in eyeglasses could deform and crack from high temperature.


### ▼ Overhead Console

This console box is designed to store eyeglasses or other accessories. Push and release to open.

#### Type A

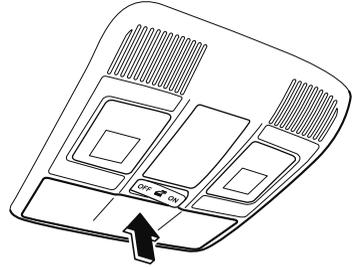


#### Type B

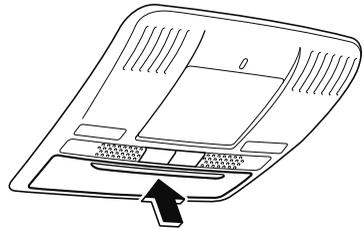

### ▼ Glove Compartment

To open the glove compartment, pull the latch toward you.

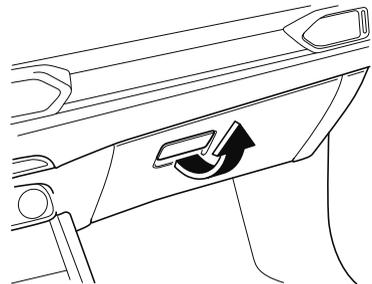


To close the glove compartment, firmly press in the centre of the glove compartment lid.

# Interior Equipment

---


## ▼ Centre Console

To open, pull the release latch.




## Storage tray

The storage tray can be removed.

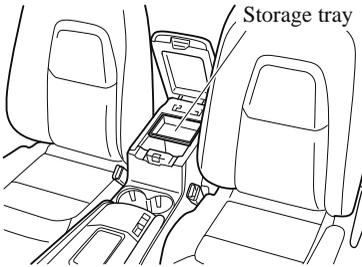

## ▼ Armrest Box\*

To open, push the button and pull up the lid.




## ▼ Luggage Compartment

### Cargo Securing Loops

Use the cargo securing loops in the luggage compartment to secure cargo with a rope or net. The tensile strength of the loops is 196 N (20 kgf, 44 lbf). Do not apply excessive force to the cargo securing loops as it will damage them.

#### Trim side

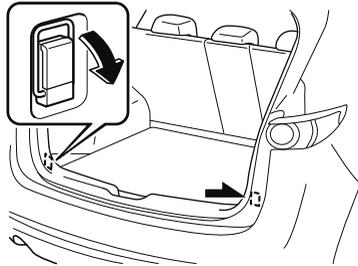


#### Luggage board side



*When not using the cargo securing loops, return them to their original positions. If the cargo securing loops are not returned to their original positions and cargo is placed on the top of them, the cargo securing loops could be deformed or damaged.*

When using the cargo securing loops, hook them to the pins.

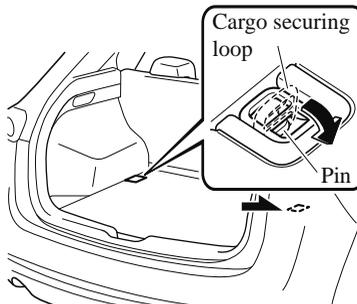

### Cargo Sub-Compartment

The cargo sub-compartment is located under the luggage board, and it can be used to store small items.


# Interior Equipment

---


## **⚠ CAUTION**

- Do not apply excessive force to the luggage board when setting it up. Otherwise, it could deform or damage the luggage board.
- Return the luggage board to its original position before driving the vehicle. If the vehicle is driven with the luggage board set up, it could cause an unexpected accident.
- When not using the handle, return it to its original position. If the handle is not returned to its original position and cargo is placed, it could contact the handle and the handle could be deformed or damaged.

1. Lift up the luggage board.



2. Insert the luggage board into the left and right grooves.

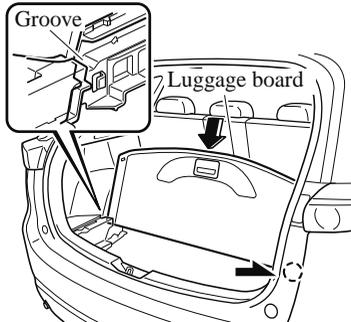

## **Luggage Board**

The height of the floor surface can be adjusted by changing the installation position of the luggage board.

## Reversible Luggage Board\*


The luggage board can be used with the underside facing up, depending on the intended use. The underside is made of stain-resistant material which is easy to clean.




*Do not spray large amounts of liquid such as water on the luggage board. If a large amount of water or other liquid is poured or sprayed on the luggage board, the water or other liquid may leak down and wet the luggage under the board.*

### When using the luggage board in the upper level

1. Place the front luggage board.

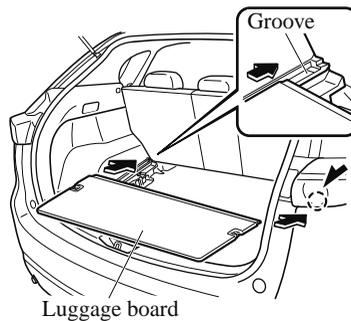

2. Insert the left and right hollows or holes of the rear luggage board into the pins.

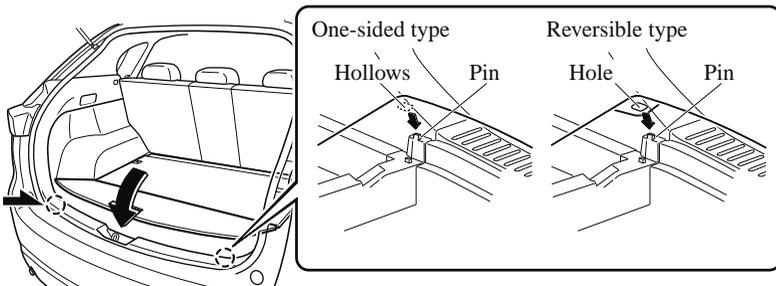

3. Remove in the reverse order of the installation procedure.


### When using the luggage board in the lower level

1. When using the cargo securing loops, return them to their original positions. Refer to Cargo Securing Loops on page 5-119


# Interior Equipment

---

- Slide the front luggage board into the lower grooves and install.

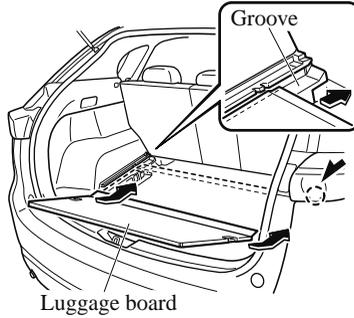

- Insert the left and right hollows or holes of the rear luggage board into the pins.

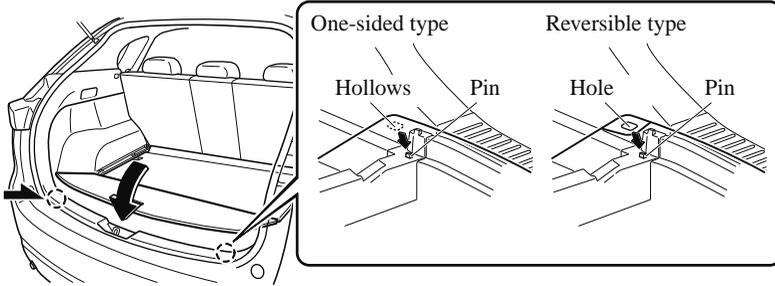

- Remove in the reverse order of the installation procedure.

## NOTE

### **Loading golf bags**

*(Some golf bags may not fit using the following methods depending on their sizes.)*

*Up to four golf bags can be carried in the luggage compartment.*

***(With luggage compartment cover)***

*When loading four golf bags, remove the luggage compartment cover and store it in the cargo sub-compartment.*

*Refer to Luggage Compartment Cover on page 3-27.*



*For vehicles with a spare tyre, up to three golf bags can be carried in the luggage compartment because there is no space to store the luggage compartment cover.*

*Bottom: Place the first and second golf bags in the luggage compartment with the bottoms pointed to the right.*

# Interior Equipment

---

*Top: Place the third golf bag with its bottom pointed to the left and the fourth golf bag with its bottom pointed to the right in the luggage compartment.*

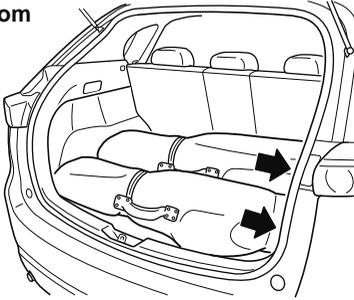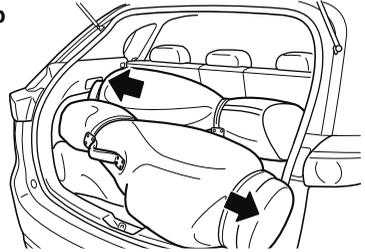**Bottom****Top**

The arrows indicate the bottoms of the golf bags.  
The illustration shows the loading of four golf bags.

# Interior Equipment


## ▼ Rear Coat Hooks

### **WARNING**

**Never hang heavy or sharp objects on the assist grips and coat hooks:**

*Hanging heavy or sharp-ended objects such as a coat hanger from the assist grips or coat hooks is dangerous as they can fly off and hit an occupant in the cabin if a curtain air bag was to deploy, which could result in serious injury or death.*

Always hang clothes on the coat hooks and the assist grips without hangers.



## Removable Ashtray\*

The removable ashtray can be fixed and used in either of the front cup holders.

### **WARNING**

**Only use the removable ashtray in its fixed position, and make sure it is completely inserted:**


*Using an ashtray removed from its fixed position or not completely inserted is dangerous. Cigarettes could roll around or spill out of the ashtray into the vehicle and start a fire. Moreover, cigarette stubs will not extinguish themselves completely even if the ashtray lid is closed.*

### **CAUTION**

*Do not use the ashtray for rubbish. You might start a fire.*

To use the ashtray, insert it straight into the cup holder.

To remove the ashtray, pull it upward.

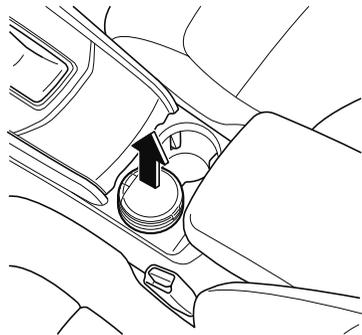

# 6

## Maintenance and Care

How to keep your Mazda in top condition.

<b>Essential Information.....</b>	<b>6-2</b>		
Introduction.....	6-2		
<b>Scheduled Maintenance.....</b>	<b>6-3</b>		
Scheduled Maintenance.....	6-3		
Maintenance Table.....	6-4		
<b>Owner Maintenance.....</b>	<b>6-19</b>		
Owner Maintenance			
Precautions.....	6-19		
Bonnet.....	6-21		
Engine Compartment			
Overview.....	6-23		
Engine Oil.....	6-25		
Engine Coolant.....	6-31		
Brake/Clutch Fluid.....	6-33		
		Window and Headlight Washer	
		Fluid.....	6-34
		AdBlue® (With Selective Catalytic	
		Reduction (SCR) System).....	6-34
		Body Lubrication.....	6-38
		Wiper Blades.....	6-39
		Battery.....	6-44
		Key Battery Replacement.....	6-47
		Tyres.....	6-49
		Light Bulbs.....	6-53
		Fuses.....	6-57
		<b>Appearance Care.....</b>	<b>6-64</b>
		Exterior Care.....	6-64
		Interior Care.....	6-70

# Essential Information

---

## Introduction

Be careful not to hurt yourself when inspecting your vehicle, replacing a tyre, or doing some kind of maintenance such as car washing.

In particular, wear thick work gloves such as cotton gloves when touching areas that are difficult to see while inspecting or working on your vehicle. Doing inspections or procedures with your bare hands could cause injury.

If you are unsure about any procedure this manual describes, we strongly urge you to have a reliable and qualified technician perform the work, consult an expert repairer (we recommend an Authorised Mazda Repairer).

Authorised Mazda technicians and genuine Mazda parts are dedicated to your vehicle. Without this expertise and the parts that have been designed and made especially for your Mazda, inadequate, incomplete, and insufficient servicing may result in problems. This could lead to vehicle damage or an accident and injuries.


For expert advice and quality service, consult an expert repairer (we recommend an Authorised Mazda Repairer).

The owner should retain evidence that proper maintenance has been performed as prescribed.

A claim against a warranty will not qualify if it results from lack of maintenance and not from defective material or authorised workmanship.

The malfunction diagnosis connector is designed exclusively for connecting the specially designed device to perform on-board diagnosis.

Do not connect any devices other than the specially designed malfunction diagnosis devices for servicing. If any device other than the malfunction diagnosis device is connected, it may affect the vehicle's electrical devices or lead to damage such as battery depletion.

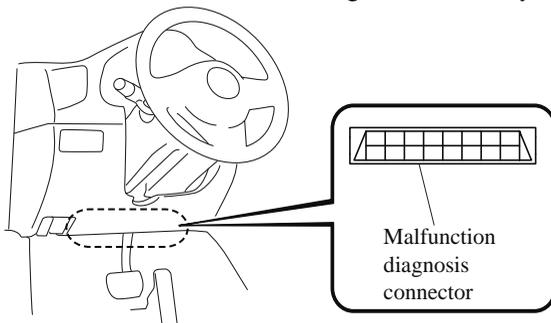

## Scheduled Maintenance

**NOTE**

*After the prescribed period, continue to follow the described maintenance at the recommended intervals.*

**Emission control and related systems**

The ignition and fuel systems are highly important to the emission control system and to efficient engine operation. Do not tamper with them.

All inspections and adjustments must be made by an expert repairer, we recommend an Authorised Mazda Repairer.

# Scheduled Maintenance

## Maintenance Table

Each maintenance table is based on the environmental conditions for each country and region.

Perform the appropriate maintenance according to the maintenance table for your country or region.

For the maintenance table that applies to your country or region, refer to the following guide.

### ▼ Country/Region Maintenance Table Guide

Country/Region	Maintenance Table	Country/Region	Maintenance Table	Country/Region	Maintenance Table
ALBANIA	1	ALGERIA	4	ANDORRA	1
ANGOLA	4	ANTIGUA	4	ARMENIA	2
ARUBA	4	AUSTRIA	1	AZERBAIJAN	2
B.VIRGIN	4	BAHRAIN	4	BARBADOS	4
BELARUS	2	BELGIUM	1	BERMUDA	4
BOLIVIA	4	BOSNIA AND HERZEGOVINA	1	BOTSWANA	4
BRUNEI	4	BULGARIA	1	BURUNDI	4
CAMBODIA	4	CAMEROON	4	CANARY ISLANDS	4
CHILE	4	COLOMBIA	4	COMMONWEALTH OF DOMINICA	4
COSTA RICA	4	CROATIA	1	CURACAO	4
CYPRUS	4	CZECH	1	DENMARK	1
DOMINICAN REPUBLIC (LHD)	4	ECUADOR	4	EGYPT	4
EL SALVADOR	4	ESTONIA	1	ETHIOPIA	4
F.GUIANA	4	FAEROE	4	FIJI	4
FINLAND	1	FRANCE	1	GABON	4
GEORGIA	4	GERMANY	1	GHANA	4
GREECE	1	GRENADA	4	GUADELOUPE	4
GUATEMALA	4	HAITI	4	HONDURAS	4
HONG KONG	4	HUNGARY	1	ICELAND	1
INDONESIA	4	IRAN	4	IRAQ	4
IRELAND	1	ISRAEL	3	ITALY	1
IVORY COAST	4	JAMAICA	4	JORDAN	4
KAZAKHSTAN	2	KENYA	4	KUWAIT	4
LAOS	4	LATVIA	1	LEBANON	4

## Scheduled Maintenance

Country/Region	Maintenance Table	Country/Region	Maintenance Table	Country/Region	Maintenance Table
LESOTHO	4	LIBYA	4	LIECHTENSTEIN	1
LITHUANIA	1	LUXEMBOURG	1	MACAU	4
MACEDONIA	1	MADAGASCAR	4	MALAYSIA	4
MALTA	4	MARSHALL ISLANDS	4	MARTINIQUE	4
MAURITIUS	4	MOLDOVA	1	MONACO	1
MONGOLIA	4	MONTENEGRO	1	MOROCCO	4
MOZAMBIQUE	4	MYANMAR	4	NAMIBIA	4
NEPAL	4	NEW CALEDONIA	4	NICARAGUA	4
NIGERIA	4	NORWAY	1	OMAN	4
PANAMA	4	PAPUA NEW GUINEA	4	PARAGUAY	4
PERU	4	POLAND	1	PORTUGAL	1
QATAR	4	REUNION	4	ROMANIA	1
RUSSIA	2	SAN MARINO	1	SAUDI ARABIA	4
SERBIA	1	SEYCHELLES	4	SINGAPORE	4
SLOVAKIA	1	SLOVENIA	1	SOUTH AFRICA	4
SPAIN	1	SRI LANKA	4	ST.LUCIA	4
ST.MARTIN	4	ST.VINCENT	4	SURINAM	4
SWAZILAND	4	SWEDEN	1	SWITZERLAND	1
SYRIA	4	TAHITI	4	TAIWAN	4
TANZANIA	4	THAILAND	4	THE NETHERLANDS	1
THE PHILIPPINES	4	TRINIDAD AND TOBAGO	4	TUNISIA	4
TURKEY	4	UAE	4	UK	1
UKRAINE	1	URUGUAY	4	USTT	4
VANUATU	4	VATICAN	1	VIETNAM	4
ZIMBABWE	4	Country/Region, not listed in the chart	4		

# Scheduled Maintenance

## ▼ Table 1

### My Mazda Service

My Mazda Service is the maintenance monitoring feature that alerts you of maintenance needs by turning on the wrench indicator light and/or displaying a specific message in the instrument panel.

### For vehicles in applicable countries/regions, except Ukraine.

In any case, every maintenance must be done within 20,000 km or 12 months at the latest after the previous maintenance, whichever of the three events (20,000 km, 12 months or display/wrench indication) occurs first.

### For SKYACTIV-G 2.0 and SKYACTIV-G 2.5 in Ukraine.

In any case, every maintenance must be done within 15,000 km or 12 months at the latest after the previous maintenance, whichever of the three events (15,000 km, 12 months or display/wrench indication) occurs first.

### For SKYACTIV-D 2.2 in Ukraine.

In any case, every maintenance must be done within 10,000 km or 12 months at the latest after the previous maintenance, whichever of the three events (10,000 km, 12 months or display/wrench indication) occurs first.

Maintenance		1st	2nd	3rd	4th	5th	6th	7th	8th	9th	10th	11th	12th
<b>SKYACTIV-G 2.0 and SKYACTIV-G 2.5</b>													
Spark plugs*1		Replace every 120,000 km (75,000 miles).											
Air filter*2				R			R			R			R
Fuel lines and hoses			I		I		I		I		I		I
Evaporative system (if equipped)				I			I			I			I
Engine oil & filter*3*4		R	R	R	R	R	R	R	R	R	R	R	R
<b>SKYACTIV-D 2.2</b>													
Engine oil & filter*3*4*5*6		R	R	R	R	R	R	R	R	R	R	R	R
Fuel filter				R			R			R			R
Fuel lines and hoses		Except Ukraine			I		I		I		I		I
		Ukraine		I	I	I	I	I	I	I	I	I	I
Air filter*2		C	C	R	C	C	R	C	C	R	C	C	R
Urea solution (AdBlue®) for SCR system		*7	*7	*8	*7	*7	*8	*7	*7	*8	*7	*7	*8
<b>SKYACTIV-G 2.0, SKYACTIV-G 2.5 and SKYACTIV-D 2.2</b>													
Drive belts*9				I			I			I			I
Cooling system			I		I		I		I		I		I

# Scheduled Maintenance

Maintenance	1st	2nd	3rd	4th	5th	6th	7th	8th	9th	10th	11th	12th
Engine coolant*10	Replace at first 200,000 km (125,000 miles) or 10 years; after that, every 100,000 km (62,500 miles) or 5 years.											
Battery*11	I	I	I	I	I	I	I	I	I	I	I	I
Brake lines, hoses and connections	I	I	I	I	I	I	I	I	I	I	I	I
Brake fluid*12		R		R		R		R		R		R
Parking brake	I	I	I	I	I	I	I	I	I	I	I	I
Disc brakes	I	I	I	I	I	I	I	I	I	I	I	I
Steering operation and linkages		I		I		I		I		I		I
Manual transaxle oil	Replace every 180,000 km (112,500 miles).											
Front and rear suspension, ball joints and wheel bearing axial play		I		I		I		I		I		I
Driveshaft dust boots		I		I		I		I		I		I
Exhaust system and heat shields	Inspect every 80,000 km (50,000 miles) or 5 years.											
Bolts and nuts on chassis and body		T		T		T		T		T		T
Body condition (for rust, corrosion and perforation)	I	I	I	I	I	I	I	I	I	I	I	I
Cabin air filter (if equipped)		R		R		R		R		R		R
Tyres (including spare tyre) (with inflation pressure adjustment)*13	I	I	I	I	I	I	I	I	I	I	I	I
Emergency flat tyre repair kit (if equipped)*14	I	I	I	I	I	I	I	I	I	I	I	I
Self-test with Mazda Modular Diagnostic System (M-MDS)*15*16 SKYACTIV-G 2.0 and SKY- ACTIV-G 2.5	Ukraine	I	I	I	I	I	I	I	I	I	I	I

### Chart symbols:

**I:** Inspect: Inspect and clean, repair, adjust, fill up, or replace if necessary.

**R:** Replace

**L:** Lubricate

**C:** Clean

**T:** Tighten

**D:** Drain

### Remarks:

\*1 In the countries below, inspect the spark plugs at every 10,000 km (6,250 miles) or 12 months before replacing them at the said interval.

Albania, Bosnia and Herzegovina, Bulgaria, Croatia, Latvia, Macedonia, Moldova, Montenegro, Romania, Serbia, Slovakia, Ukraine

\*2 If the vehicle is operated in very dusty or sandy areas, clean and if necessary, replace the air filter more often than the recommended intervals.

\*3 For vehicles in applicable countries/regions, except SKYACTIV-D 2.2 in Ukraine: Flexible setting is factory preset for some countries in Europe. Consult an expert repairer (we recommend an Authorised Mazda

## Scheduled Maintenance

---

Repairer) for details. Flexible setting can be set if the vehicle is operated mainly where none of the following conditions apply.

- a) Purpose of vehicle use is police car, taxi or driving school car.
- b) Driving in dusty conditions
- c) Extended periods of idling or low speed operation

Once the flexible maintenance is selected, the vehicle calculates the remaining oil life based on engine operating conditions and lets you know when an oil change is due by illuminating the wrench indicator light in the instrument cluster.

Reset the engine oil data whenever replacing the engine oil regardless of the message/wrench indicator light display.

- \*4 For vehicles in applicable countries/regions, except SKYACTIV-D 2.2 in Ukraine: If the vehicle is operated primarily under any of the following conditions, replace the engine oil and oil filter at every 10,000 km (6,250 miles) or shorter.
  - a) Purpose of vehicle use is police car, taxi or driving school car.
  - b) Driving in dusty conditions
  - c) Extended periods of idling or low speed operation
  - d) Driving for long period in cold temperatures or driving regularly at short distance only
  - e) Driving in extremely hot conditions
  - f) Driving in mountainous conditions continually
- \*5 For SKYACTIV-D 2.2 in Ukraine: If the vehicle is operated primarily under any of the following conditions, replace the engine oil and oil filter at every 5,000 km (3,125 miles) or 6 months.
  - a) Purpose of vehicle use is police car, taxi or driving school car.
  - b) Driving in dusty conditions
  - c) Extended periods of idling or low speed operation
  - d) Driving for long period in cold temperatures or driving regularly at short distance only
  - e) Driving in extremely hot conditions
  - f) Driving in mountainous conditions continually
- \*6 For SKYACTIV-D 2.2, reset the engine oil data whenever replacing the engine oil regardless of the message/wrench indicator light display.
- \*7 Top up with new AdBlue® in the urea tank.
- \*8 If more than 10,000 km are driven per year, top up with new AdBlue® in the tank.  
If less than 10,000 km are driven per year, drain the tank, then fill it up with new AdBlue®.
- \*9 Also inspect the air conditioner drive belts, if equipped.  
If the vehicle is operated primarily under any of the following conditions, inspect the drive belts at every 20,000 km (12,500 miles) or 12 months.
  - a) Driving in dusty conditions
  - b) Extended periods of idling or low speed operation
  - c) Driving for long period in cold temperatures or driving regularly at short distance only
  - d) Driving in extremely hot conditions
  - e) Driving in mountainous conditions continually
  - f) Driving for long period in extremely wet or heavy rain condition
- \*10 Use of FL-22 is recommended when replacing engine coolant. Using engine coolant other than FL-22 may cause serious damage to the engine and cooling system.
- \*11 Inspect the battery electrolyte level, specific gravity and outer appearance. The sealed battery only requires an outer appearance inspection.
- \*12 If the brakes are used extensively (for example, continuous hard driving or mountain driving) or if the vehicle is operated in extremely humid climates, replace the brake fluid annually.
- \*13 Tyre rotation is recommended every 10,000 km (6,250 miles).
- \*14 Check the tyre repair fluid expiration date every year when performing the periodic maintenance. Replace the tyre repair fluid bottle with new one before the expiration date.
- \*15 If DTC P1200 is stored, clean the fuel system by using Mazda genuine deposit cleaner.

## Scheduled Maintenance

---

If the required tool (M-MDS) is not available, clean the fuel system by using Mazda genuine deposit cleaner without performing self-test.

Using non-genuine deposit cleaner could cause internal damage to the fuel system.

- \*16 If the vehicle is operated primarily under any of the following conditions, perform "Self-test with Mazda Modular Diagnostic System (M-MDS)" at every 10,000 km (6,250 miles).
- a) The vehicle is idled for long periods or driven at low speeds, such as with police cars, taxis, or driver's education school car.
  - b) Driving under extremely high temperature conditions.

# Scheduled Maintenance

**▼ Table 2**

Maintenance Interval	Number of months or kilometres, whichever comes first.												
	Months	12	24	36	48	60	72	84	96	108	120	132	144
	×1000 km	15	30	45	60	75	90	105	120	135	150	165	180
Drive belts*1		I	I	I	I	I	I	I	I	I	I	I	I
Engine oil	Flexible*2	Replace when indicator is ON. (Max interval:12months or 15,000 km)											
	Other than flexible*3	R	R	R	R	R	R	R	R	R	R	R	R
	Azerbaijan/ Armenia*4	Replace every 5,000 km or 6 months.											
Engine oil filter	Flexible*2	Replace when indicator is ON. (Max interval:12months or 15,000 km)											
	Other than flexible*3	R	R	R	R	R	R	R	R	R	R	R	R
	Azerbaijan/ Armenia*5	Replace every 10,000 km or 12 months.											
Cooling system		I		I		I		I		I		I	
Engine coolant*6	Replace at first 195,000 km or 10 years; after that, every 90,000 km or 5 years.												
Air filter*7	Russia/ Belarus/ Kazakhstan	C	C	R	C	C	R	C	C	R	C	C	R
	Azerbaijan/ Armenia	C	R	C	R	C	R	C	R	C	R	C	R
Fuel filter	Russia/ Belarus/ Kazakhstan	Replace every 120,000 km.											
	Azerbaijan/ Armenia	Replace every 60,000 km.											
Fuel lines and hoses		I		I		I		I		I		I	
Spark plugs	I	I	I	I	I	I	I	R	I	I	I	I	
Evaporative system (if equipped)				I				I				I	
Battery*8	I	I	I	I	I	I	I	I	I	I	I	I	
Brake lines, hoses and connections	I	I	I	I	I	I	I	I	I	I	I	I	
Brake fluid*9		R		R		R		R		R		R	
Parking brake	I	I	I	I	I	I	I	I	I	I	I	I	
Disc brakes	I	I	I	I	I	I	I	I	I	I	I	I	
Steering operation and linkages	I	I	I	I	I	I	I	I	I	I	I	I	
Manual transaxle oil						R					R		

# Scheduled Maintenance

Maintenance Interval	Number of months or kilometres, whichever comes first.												
	Months	12	24	36	48	60	72	84	96	108	120	132	144
	×1000 km	15	30	45	60	75	90	105	120	135	150	165	180
Front and rear suspension, ball joints and wheel bearing axial play	I	I	I	I	I	I	I	I	I	I	I	I	I
Driveshaft dust boots	I	I	I	I	I	I	I	I	I	I	I	I	I
Exhaust system and heat shields	I	I	I	I	I	I	I	I	I	I	I	I	I
Bolts and nuts on chassis and body	T	T	T	T	T	T	T	T	T	T	T	T	T
Hinges and catches	L	L	L	L	L	L	L	L	L	L	L	L	L
All electrical system	I	I	I	I	I	I	I	I	I	I	I	I	I
Body condition (for rust, corrosion and perforation)	Inspect annually.												
Cabin air filter (if equipped)		R			R			R			R		R
Tyres (including spare tyre) (with inflation pressure adjustment)* <sup>10</sup>	I	I	I	I	I	I	I	I	I	I	I	I	I
Emergency flat tyre repair kit (if equipped)* <sup>11</sup>	Inspect annually.												

## Chart symbols:

**I:** Inspect: Inspect and clean, repair, adjust, fill up, or replace if necessary.

**R:** Replace

**L:** Lubricate

**C:** Clean

**T:** Tighten

**D:** Drain

## Remarks:

\*1 Also inspect the air conditioner drive belts, if equipped.

If the vehicle is operated primarily under any of the following conditions, inspect the drive belts at every 7,500 km or 6 months.

- Driving in dusty conditions
- Extended periods of idling or low speed operation
- Driving for long period in cold temperatures or driving regularly at short distance only
- Driving in extremely hot conditions
- Driving in mountainous conditions continually
- Driving for long period in extremely wet or heavy rain condition

\*2 Flexible setting can be set if the vehicle is operated mainly where none of the following conditions apply.

- Purpose of vehicle use is police car, taxi or driving school car.
- Driving in dusty conditions
- Extended periods of idling or low speed operation

The vehicle calculates the remaining oil life based on engine operating conditions and lets you know when an oil change is due by illuminating the wrench indicator light in the instrument cluster.

Replace the engine oil and filter when message/wrench indicator light is ON. And they must be changed at least once a year or within 15,000 km since last engine oil and filter change.

The system must be reset whenever replacing the engine oil regardless of the message/wrench indicator light display.

\*3 If the vehicle is operated primarily under any of the following conditions, replace the engine oil and oil filter at every 7,500 km or 6 months.

## Scheduled Maintenance

- a) Purpose of vehicle use is police car, taxi or driving school car.
  - b) Driving in dusty conditions
  - c) Extended periods of idling or low speed operation
  - d) Driving for long period in cold temperatures or driving regularly at short distance only
  - e) Driving in extremely hot conditions
  - f) Driving in mountainous conditions continually
- \*4 If the vehicle is operated primarily under any of the following conditions, replace the engine oil at every 2,500 km or 3 months.
- a) Purpose of vehicle use is police car, taxi or driving school car.
  - b) Driving in dusty conditions
  - c) Extended periods of idling or low speed operation
  - d) Driving for long period in cold temperatures or driving regularly at short distance only
  - e) Driving in extremely hot conditions
  - f) Driving in mountainous conditions continually
- \*5 If the vehicle is operated primarily under any of the following conditions, replace the engine oil filter at every 5,000 km or 6 months.
- a) Purpose of vehicle use is police car, taxi or driving school car.
  - b) Driving in dusty conditions
  - c) Extended periods of idling or low speed operation
  - d) Driving for long period in cold temperatures or driving regularly at short distance only
  - e) Driving in extremely hot conditions
  - f) Driving in mountainous conditions continually
- \*6 Use of FL-22 is recommended when replacing engine coolant. Using engine coolant other than FL-22 may cause serious damage to the engine and cooling system.
- \*7 If the vehicle is operated in very dusty or sandy areas, clean the air filter at every 7,500 km or 6 months.
- \*8 Inspect the battery electrolyte level, specific gravity and outer appearance. The sealed battery only requires an outer appearance inspection.
- \*9 If the brakes are used extensively (for example, continuous hard driving or mountain driving) or if the vehicle is operated in extremely humid climates, replace the brake fluid annually.
- \*10 Tyre rotation is recommended every 10,000 km.
- \*11 Check the tyre repair fluid expiration date every year when performing the periodic maintenance. Replace the tyre repair fluid bottle with new one before the expiration date.

▼ **Table 3**

Maintenance Interval	Number of months or kilometres, whichever comes first												
	Months	12	24	36	48	60	72	84	96	108	120	132	144
	×1000 km	15	30	45	60	75	90	105	120	135	150	165	180
Spark plugs	Replace every 120,000 km or 6 years.												
Fuel filter	Replace every 135,000 km.												
Evaporative system (if equipped)				I				I					I
Fuel lines and hoses		I		I		I		I		I		I	
Drive belts*1	I	I	I	I	I	I	I	I	I	I	I	I	I
Engine oil & oil filter*2	R	R	R	R	R	R	R	R	R	R	R	R	R
Air filter*3	C	C	C	R	C	C	C	R	C	C	C	C	R
Cooling system		I		I		I		I		I		I	

# Scheduled Maintenance

Maintenance Interval	Number of months or kilometres, whichever comes first												
	Months	12	24	36	48	60	72	84	96	108	120	132	144
	×1000 km	15	30	45	60	75	90	105	120	135	150	165	180
Engine coolant*4	Replace at first 195,000 km or 10 years; after that, every 90,000 km or 5 years.												
Battery*5	I	I	I	I	I	I	I	I	I	I	I	I	I
Brake lines, hoses and connections	I	I	I	I	I	I	I	I	I	I	I	I	I
Brake fluid*6	I	R	I	R	I	R	I	R	I	R	I	R	I
Parking brake	I	I	I	I	I	I	I	I	I	I	I	I	I
Power brake unit (Brake booster) and hoses	I	I	I	I	I	I	I	I	I	I	I	I	I
Disc brakes	I	I	I	I	I	I	I	I	I	I	I	I	I
Steering operation and linkages		I		I		I		I		I		I	
Front and rear suspension, ball joints and wheel bearing axial play	I	I	I	I	I	I	I	I	I	I	I	I	I
Driveshaft dust boots			I			I			I			I	
Exhaust system and heat shields	Inspect every 75,000 km.												
Bolts and nuts on chassis and body	T	T	T	T	T	T	T	T	T	T	T	T	T
Body condition (for rust, corrosion and perforation)	Inspect annually.												
Cabin air filter (if equipped)		R		R		R		R		R		R	
Tyres (including spare tyre) (with inflation pressure adjustment)	I	I	I	I	I	I	I	I	I	I	I	I	I
Emergency flat tyre repair kit (if equipped)*7	Inspect annually.												

### Chart symbols:

**I:** Inspect; Inspect and clean, repair, adjust, fill up, or replace if necessary.

**R:** Replace

**L:** Lubricate

**C:** Clean

**T:** Tighten

**D:** Drain

### Remarks:

\*1 Also inspect the air conditioner drive belts, if equipped.

If the vehicle is operated primarily under any of the following conditions, inspect the drive belts at every 10,000 km or shorter.

- Driving in dusty conditions
- Extended periods of idling or low speed operation
- Driving for long period in cold temperatures or driving regularly at short distance only
- Driving in extremely hot conditions
- Driving in mountainous conditions continually
- Driving for long period in extremely wet or heavy rain condition

\*2 If the vehicle is operated primarily under any of the following conditions, replace the engine oil and oil filter at every 10,000 km or shorter.

# Scheduled Maintenance

- a) Purpose of vehicle use is police car, taxi or driving school car.
  - b) Driving in dusty conditions
  - c) Extended periods of idling or low speed operation
  - d) Driving for long period in cold temperatures or driving regularly at short distance only
  - e) Driving in extremely hot conditions
  - f) Driving in mountainous conditions continually
- \*3 If the vehicle is operated in very dusty or sandy areas, clean and if necessary, replace the air filter more often than the recommended intervals.
- \*4 Use of FL-22 is recommended when replacing engine coolant. Using engine coolant other than FL-22 may cause serious damage to the engine and cooling system.
- \*5 Inspect the battery electrolyte level, specific gravity and outer appearance. The sealed battery only requires an outer appearance inspection.
- \*6 If the brakes are used extensively (for example, continuous hard driving or mountain driving) or if the vehicle is operated in extremely humid climates, replace the brake fluid annually.
- \*7 Check the tyre repair fluid expiration date every year when performing the periodic maintenance. Replace the tyre repair fluid bottle with new one before the expiration date.

▼ Table 4

Maintenance Interval	Number of months or kilometres (miles), whichever comes first.																
	Months	6	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96
	×1000 km	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160
×1000 miles	6.25	12.5	18.75	25	31.25	37.5	43.75	50	56.25	62.5	68.75	75	81.25	87.5	93.75	100	
<b>SKYACTIV-G 2.0, SKYACTIV-G 2.5 AND SKYACTIV-G 2.5T</b>																	
Spark plugs*1	Except SKY-ACTIV-G 2.5T	Replace every 120,000 km (75,000 miles).															
	SKYACTIV-G 2.5T	Replace every 60,000 km (37,500 miles).															
Engine oil*2*3	Except below countries	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R
	Georgia/ Cambodia/ Gabon/ Ghana/ Cameroon/ Burundi/ Mozambique/ Mongolia/ Tanzania/ Paraguay	Replace every 5,000 km (3,125 miles) or 6 months.															

# Scheduled Maintenance

Maintenance Interval	Number of months or kilometres (miles), whichever comes first.																
	Months	6	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96
	×1000 km	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160
	×1000 miles	6.25	12.5	18.75	25	31.25	37.5	43.75	50	56.25	62.5	68.75	75	81.25	87.5	93.75	100
Engine oil filter*2	Except below countries	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R
	Georgia/ Cambodia	Replace every 10,000 km (6,250 miles) or 1 year.															
	Gabon/ Ghana/ Cameroon/ Burundi/ Mozambique/ Mongolia/ Tanzania/ Paraguay	Replace every 5,000 km (3,125 miles) or 6 months.															
Fuel filter	Except Taiwan	Replace every 60,000 km (37,500 miles).															
	Taiwan	Replace every 80,000 km (50,000 miles).															
Evaporative system (if equipped)		I		I		I		I		I		I		I		I	
<b>SKYACTIV-D 2.2</b>																	
Engine oil*2*3	Except below countries	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R
	Philippines	Replace every 5,000 km (3,125 miles) or 6 months.															
Engine oil filter*2	Except below countries	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R	R
	Philippines	Replace every 10,000 km (6,250 miles) or 1 year.															
Fuel filter	Except below countries				R				R				R				R
	Thailand			R			R		R			R			R		
	Malaysia/ Philippines		R		R		R		R		R		R		R		R
<b>SKYACTIV-G 2.0, SKYACTIV-G 2.5, SKYACTIV-G 2.5T AND SKYACTIV-D 2.2</b>																	
Drive belts*4		I	I	I	I	I	I	I	I	I	I	I	I	I	I	I	I
Cooling system			I		I		I		I		I		I		I		I
Engine coolant*5	Replace at first 200,000 km (125,000 miles) or 10 years; after that, every 100,000 km (62,500 miles) or 5 years.																
Air filter*6	Except below countries		C		C		R		C		C		R		C		C
	Georgia		C		R		C		R		C		R		C		R
Fuel lines and hoses		I		I		I		I		I		I		I		I	
Battery*7		I		I		I		I		I		I		I		I	
Brake lines, hoses and connections		I		I		I		I		I		I		I		I	

# Scheduled Maintenance

Maintenance Interval	Number of months or kilometres (miles), whichever comes first.																	
	Months	6	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	
	×1000 km	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	
	×1000 miles	6.25	12.5	18.75	25	31.25	37.5	43.75	50	56.25	62.5	68.75	75	81.25	87.5	93.75	100	
Brake fluid* <sup>8</sup>	I	I	I	R	I	I	I	R	I	I	I	R	I	I	I	R		
Parking brake	I	I	I	I	I	I	I	I	I	I	I	I	I	I	I	I		
Power brake unit (Brake booster) and hoses		I		I		I		I		I		I		I		I		
Disc brakes	I	I	I	I	I	I	I	I	I	I	I	I	I	I	I	I		
Steering operation and linkages		I		I		I		I		I		I		I		I		
Manual transaxle oil											R							
Front and rear suspension, ball joints and wheel bearing axial play		I		I		I		I		I		I		I		I		
Driveshaft dust boots				I				I					I			I		
Exhaust system and heat shields	Inspect every 80,000 km (50,000 miles).																	
Bolts and nuts on chassis and body		T		T		T		T		T		T		T		T		
Body condition (for rust, corrosion and perforation)	Inspect annually.																	
Cabin air filter (if equipped)		R		R		R		R		R		R		R		R		
Tyres (including spare tyre) (with inflation pressure adjustment)	I	I	I	I	I	I	I	I	I	I	I	I	I	I	I	I		
Tyre rotation	Rotate every 10,000 km (6,250 miles).																	
Emergency flat tyre repair kit (if equipped)* <sup>9</sup>	Inspect annually.																	
Self-test with Mazda Modular Diagnostic System (M-MDS)* <sup>10</sup> * <sup>11</sup> * <sup>12</sup> SKYACTIV-G	Except Thailand	I	I	I	I	I	I	I	I	I	I	I	I	I	I	I		
Fuel system clean.* <sup>13</sup> * <sup>14</sup> SKYACTIV-G	Thailand	C	C	C	C	C	C	C	C	C	C	C	C	C	C	C		

### Chart symbols:

**I:** Inspect: Inspect and clean, repair, adjust, fill up, or replace if necessary.

**R:** Replace

**L:** Lubricate

**C:** Clean

**T:** Tighten

**D:** Drain

### Remarks:

\*1 In the countries below, inspect the spark plugs at every 10,000 km (6,250 miles) or 1 year before replacing them at the said interval.

## Scheduled Maintenance

---

Algeria, Angola, Bahrain, Bolivia, Burundi, B. Virgin, Cambodia, Cameroon, Chile, Costa Rica, Cote d'Ivoire, Curacao, El Salvador, Gabon, Ghana, Georgia, Guatemala, Haiti, Honduras, Hong Kong, Iran, Jordan, Kenya, Macau, Madagascar, Malaysia, Mongolia, Mozambique, Myanmar, Nigeria, Nicaragua, Oman, Panama, Papua New Guinea, Paraguay, Peru, Philippines, Senegal, Seychelles, Syria, Tanzania, United Arab Emirates, Vietnam, Zaire, Zimbabwe

- \*2 If the vehicle is operated primarily under any of the following conditions, replace the engine oil and oil filter more often than the recommended intervals.
  - a) Purpose of vehicle use is police car, taxi or driving school car.
  - b) Driving in dusty conditions
  - c) Extended periods of idling or low speed operation
  - d) Driving for long period in cold temperatures or driving regularly at short distance only
  - e) Driving in extremely hot conditions
  - f) Driving in mountainous conditions continually
- \*3 For SKYACTIV-D 2.2 and SKYACTIV-G 2.5T, reset the engine oil data whenever replacing the engine oil regardless of the message/wrench indicator light display.
- \*4 Also inspect the air conditioner drive belts, if equipped.  
If the vehicle is operated primarily under any of the following conditions, inspect the drive belts more often than the recommended intervals.
  - a) Driving in dusty conditions
  - b) Extended periods of idling or low speed operation
  - c) Driving for long period in cold temperatures or driving regularly at short distance only
  - d) Driving in extremely hot conditions
  - e) Driving in mountainous conditions continually
  - f) Driving for long period in extremely wet or heavy rain condition
- \*5 Use of FL-22 is recommended when replacing engine coolant. Using engine coolant other than FL-22 may cause serious damage to the engine and cooling system.
- \*6 If the vehicle is operated in very dusty or sandy areas, clean and if necessary, replace the air filter more often than the recommended intervals.
- \*7 Inspect the battery electrolyte level, specific gravity and outer appearance. If the vehicle is operated in extremely hot and cold areas, inspect the battery electrolyte level, specific gravity and appearance every 10,000 km (6,250 miles) or 6 months. The sealed battery only requires an outer appearance inspection.
- \*8 If the brakes are used extensively (for example, continuous hard driving or mountain driving) or if the vehicle is operated in extremely humid climates, replace the brake fluid annually.
- \*9 Check the tyre repair fluid expiration date every year when performing the periodic maintenance. Replace the tyre repair fluid bottle with new one before the expiration date.
- \*10 If DTC P1200 is stored, clean the fuel system by using Mazda genuine deposit cleaner.  
If the required tool (M-MDS) is not available, clean the fuel system by using Mazda genuine deposit cleaner without performing self-test.  
Using non-genuine deposit cleaner could cause internal damage to the fuel system.
- \*11 If the vehicle is driven primarily under any of the following conditions, perform "Mazda Modular Diagnostic System (M-MDS)" at every 5,000 km.
  - a) The vehicle is idled for long periods or driven at low speeds, such as with police cars, taxis, or driver's education school car.
  - b) Driving under extremely high temperature conditions.
- \*12 Applicable countries are as follows:  
SKYACTIV-G: Algeria, Angola, Antigua, Aruba, Bahrain, Barbados, Bermuda, Bolivia, Botswana, Brunei, Burundi, Cambodia, Cameroon, Colombia, Common Wealth of Dominica, Curacao, Ecuador, El Salvador, Gabon, Ghana, Grenada, Haiti, Honduras, Indonesia, Iraq, Ivory coast, Jordan, Kenya, Kuwait, Laos, Lesotho, Libya, Macau, Madagascar, Malaysia, Marshall islands, Mongolia, Morocco, Myanmar, Namibia, Nicaragua, Nigeria, Oman, Paraguay, Peru, Qatar, Seychelles, South Africa, Sri Lanka, St. Lucia, St. Martin, St. Vincent, Syria, Tanzania, Philippines, Trinidad and Tobago, Tunisia, USTT, Vanuatu, Vietnam, Zimbabwe

## Scheduled Maintenance

---

- \*13 Use Mazda genuine deposit cleaner. Using non-genuine deposit cleaner could cause an internal damage to the fuel system.
- \*14 If the vehicle is operated primarily under any of the following conditions, clean the fuel system at every 5,000 km (3,125 miles).
  - a) Purpose of vehicle use is police car, taxi or driving school car.
  - b) Extended periods of idling or low speed operation
  - c) Driving in extremely hot conditions

## Owner Maintenance Precautions

### Routine Service

We highly recommend that these items be inspected before driving.

- Engine Oil Level (page 6-30)
- Engine Coolant Level (page 6-31)
- Brake and clutch Fluid Level (page 6-33)
- Washer Fluid Level (page 6-34)
- Battery Maintenance (page 6-46)
- Tyre Inflation Pressure (page 6-49)

Improper or incomplete service may result in problems. This section gives instructions only for items that are easy to perform.

As explained in the Introduction (page 6-2), several procedures can be done only by a qualified service technician with special tools.

Improper do-it yourself maintenance during the warranty period may affect warranty coverage. For details, read the separate Mazda Warranty statement provided with the vehicle. If you are unsure about any servicing or maintenance procedure, have it done by an expert repairer (we recommend an Authorised Mazda Repairer).

There are strict environmental laws regarding the disposal of waste oil and fluids. Please dispose of your waste properly and with due regard to the environment.

Entrust the oil and fluid changes of your vehicle to an expert repairer (we recommend an Authorised Mazda Repairer).



***Do not perform maintenance work if you lack sufficient knowledge and experience or the proper tools and equipment to do the work. Have maintenance work done by a qualified technician:***

*Performing maintenance work on a vehicle is dangerous if not done properly. You can be seriously injured while performing some maintenance procedures.*

## Owner Maintenance

---

***If you must run the engine while working under the bonnet, make certain that you remove all jewellery (especially rings, bracelets, watches, and necklaces) and all neckties, scarves, and similar loose clothing before getting near the engine or cooling fan which may turn on unexpectedly:***

*Working under the bonnet with the engine running is dangerous. It becomes even more dangerous when you wear jewellery, loose clothing or have long hair or a long beard. Either can become entangled in moving parts and result in injury.*



 ***Pull over to a safe location, then switch the ignition off and make sure the fan is not running before attempting to work near the cooling fan:***

*Working near the cooling fan when it is running is dangerous. The fan could continue running indefinitely even if the engine has stopped and the engine compartment temperature is high. You could be hit by the fan and seriously injured.*

***Do not leave items in the engine compartment:***

*After you have finished checking or doing servicing in the engine compartment, do not forget and leave items such as tools or rags in the engine compartment.*

*Tools or other items left in the engine compartment could cause engine damage or a fire leading to an unexpected accident.*

## Bonnet


### WARNING

**Always check that the bonnet is closed and securely locked:**


*A bonnet that is not closed and securely locked is dangerous as it could fly open while the vehicle is moving and block the driver's vision which could result in a serious accident.*

#### ▼ Opening the Bonnet


1. With the vehicle parked, pull the release handle to unlock the bonnet.

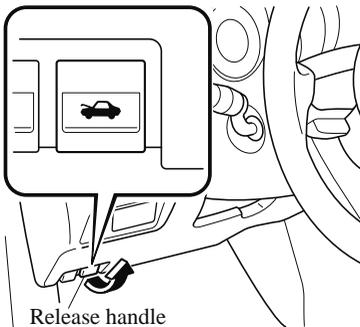

2. Insert your hand into the bonnet opening, slide the latch lever to the right, and lift up the bonnet.

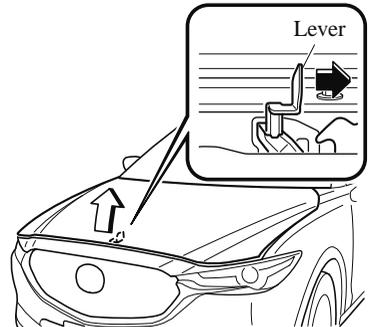

3. Grasp the support rod in the padded area and secure it in the support rod hole indicated by the arrow to hold the bonnet open.

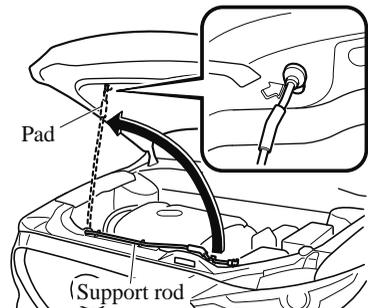


# Owner Maintenance

---

## ▼ Closing the Bonnet

1. Check under the bonnet area to make certain all filler caps are in place and all loose items (e.g. tools, oil containers, etc.) have been removed.
2. Lift the bonnet, grasp the padded area on the support rod, and secure the support rod in the clip. Verify that the support rod is secured in the clip before closing the bonnet.

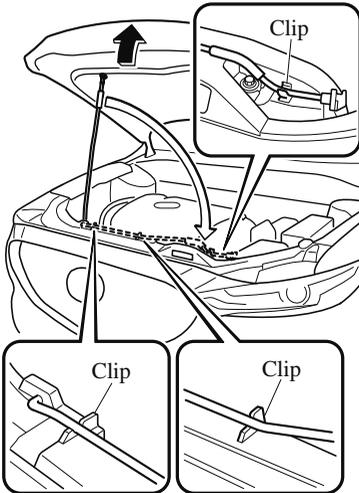


3. Lower the bonnet slowly to a height of about 20 cm (7.9 in) above its closed position and then let it drop.

### **⚠ CAUTION**


*When closing the bonnet, do not push it excessively such as by applying your weight. Otherwise, the bonnet could be deformed.*

## Engine Compartment Overview

### SKYACTIV-G 2.0 and SKYACTIV-G 2.5

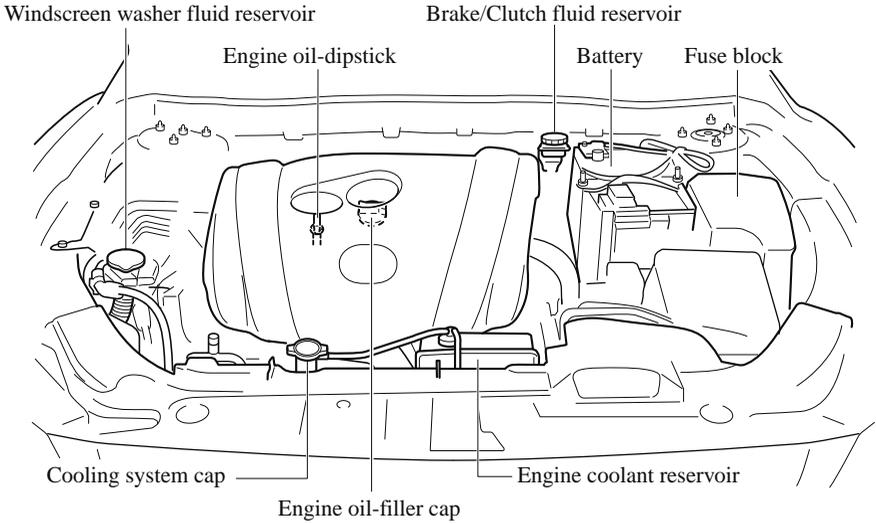


### SKYACTIV-G 2.5T

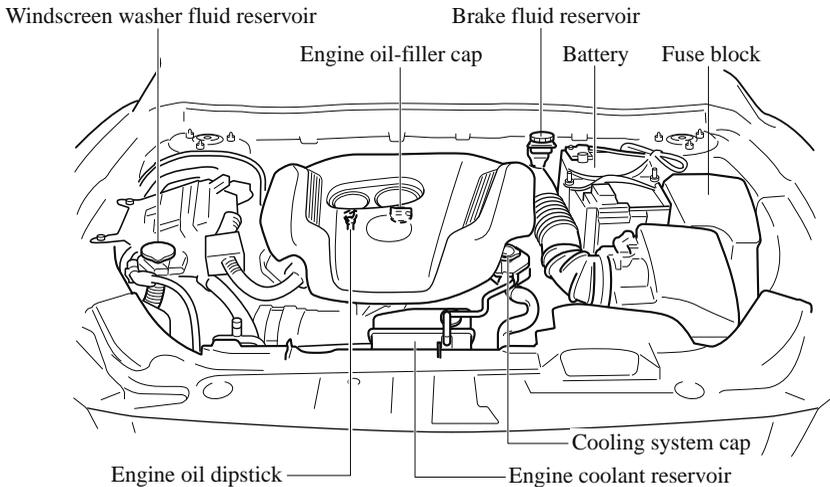

# Owner Maintenance

---

## SKYACTIV-D 2.2

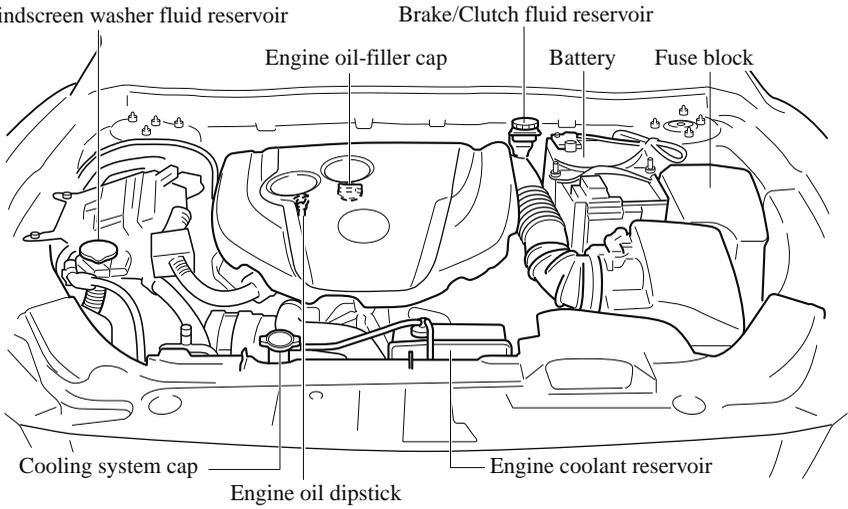

## Engine Oil

### NOTE

Changing the engine oil should be done by an expert repairer (we recommend an Authorised Mazda Repairer).

### ▼ Recommended Oil

In order to keep the maintenance interval (page 6-3) and to protect the engine from damage caused by poor lubrication, it is vitally important to make use of engine oil with the correct specification. Do not use oils which do not meet the following specifications or requirements. Use of unsuitable oil may lead to engine damage which is not covered by the Mazda Warranty.

#### SKYACTIV-G 2.0 and SKYACTIV-G 2.5 (Europe and Taiwan)

Temperature Range SAE Viscosity Numbers	
Grade	°C -40 -30 -20 -10 0 10 20 30 40
	°F -40 -20 0 20 40 60 80 100
<b>Recommended oils</b>	
Mazda Original Oil Supra-X 0W-20	◀ 0W-20 ▶
Mazda Original Oil Ultra 5W-30	◀ 5W-30 ▶
<b>Alternative Oil Quality</b>	
API SN <sup>*1</sup> or higher, or ACEA A5/B5	◀ 0W-20 ▶
	◀ 5W-30 ▶

\*1 Use API SM or higher in Kazakhstan.

#### (Except Europe and Taiwan)

Temperature Range SAE Viscosity Numbers	
Grade	°C -40 -30 -20 -10 0 10 20 30 40
	°F -40 -20 0 20 40 60 80 100
API SL or higher	◀ 10W-30 ▶
	◀ 5W-20 5W-30 ▶
	◀ 0W-20 0W-30 ▶

# Owner Maintenance

## SKYACTIV-G 2.5T (Taiwan)

Temperature Range SAE Viscosity Numbers	
Grade	
Recommended oils	
Mazda Original Oil Ultra 5W-30	
Alternative Oil Quality	
API SN or higher, or ACEA A5/B5	0W-30
	5W-30

### (Except Taiwan)

Temperature Range SAE Viscosity Numbers	
Grade	
API SM or higher	

**SKYACTIV-D 2.2  
(Europe and Taiwan)**

Temperature Range SAE Viscosity Numbers	
Grade	°C -40 -30 -20 -10 0 10 20 30 40
	°F -40 -20 0 20 40 60 80 100
<b>Recommended oils</b>	
Mazda Original Oil Supra DPF 0W-30	◀ 0W-30 ▶
Mazda Original Oil Ultra DPF 5W-30	◀ 5W-30 ▶
<b>Alternative Oil Quality</b>	
ACEA C3	0W-30 ▶ 0W-30 ▶
	5W-30 ▶ 5W-30 ▶

**(Except Europe and Taiwan)**

Temperature Range SAE Viscosity Numbers	
Grade	°C -40 -30 -20 -10 0 10 20 30 40
	°F -40 -20 0 20 40 60 80 100
ACEA C3	◀ 5W-30 ▶ ◀ 0W-30 ▶

Engine oil viscosity, or thickness, has an effect on fuel economy and cold-weather operation (starting and oil flow).

Low-viscosity engine oils can provide improved fuel economy and cold-weather performance.

When choosing an oil, consider the temperature range your vehicle will operate in before the next oil change.

Then select the recommended viscosity from the chart.

## Owner Maintenance

---

### CAUTION

- Using oils of viscosity besides those recommended for specific temperature ranges could result in engine damage.
- **(SKYACTIV-D 2.2)**  
SKYACTIV-D 2.2 uses specified oil. Please confirm the specification in owner's manual. **If engine oil other than the specified oil is used, the Diesel Particulate Filter effective period of use will be shortened or the Diesel Particulate Filter may be damaged.**


### NOTE

#### **(SKYACTIV-G 2.0, SKYACTIV-G 2.5, and SKYACTIV-G 2.5T)**

- It is normal for all engines to consume engine oil under normal driving conditions. Engine oil consumption may be as high as 0.8 L/1,000 km (1 L/800 miles). This may be a result of evaporation, internal ventilation or burning of the lubricating oil in the working engine. Oil consumption may be higher when the engine is new due to the running-in process. Oil consumption is also dependant on engine speed and engine load. Under extreme driving conditions, oil consumption may be higher.

#### **(SKYACTIV-D 2.2)**

- Inspect the engine oil level periodically. When inspecting the engine oil, if the engine oil level exceeds the "X" mark on the dipstick, replace the engine oil. This should be done by an expert repairer (we recommend an Authorised Mazda Repairer). When replacing the engine oil, inspect the oil level using the oil dipstick and refill so that the engine oil level is within the range between MIN and MAX as shown in the figure.



#### **(SKYACTIV-G 2.5T, SKYACTIV-D 2.2)**

- Whenever the engine oil is replaced, the vehicles engine control unit needs to be reset as soon as possible. Otherwise the wrench indicator light or engine oil warning light may turn on. To reset the engine control unit, consult an expert repairer (we recommend an Authorised Mazda Repairer) or refer to the vehicle engine control unit reset procedure on page 6-29.

**▼ Vehicle Engine Control Unit Reset Procedure****NOTE**

The following procedure is for SKYACTIV-G 2.5T and SKYACTIV-D 2.2 vehicles, and for SKYACTIV-G 2.0 and SKYACTIV-G 2.5 vehicles with the engine oil flexible maintenance setting selected.

After replacing the engine oil, have a repair shop such as an expert repairer (we recommend an Authorised Mazda Repairer), perform the initialization (engine oil data resetting) of the recorded value. If the value recorded by the computer is not initialized, the wrench indicator light may not turn off or it may turn on earlier than normal.


**NOTE**

The initialization (engine oil data resetting) of the recorded value can be performed using the instrument panel illumination knob in the instrument cluster as following:


1. Switch the ignition **OFF**.
2. Switch the ignition **ON** with the instrument panel illumination knob pressed and continue pressing the knob for about 5 seconds until the master warning light  flashes.

**Type A**

Instrument panel illumination knob

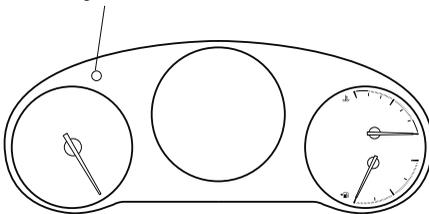**Type B, Type C**

Instrument panel illumination knob

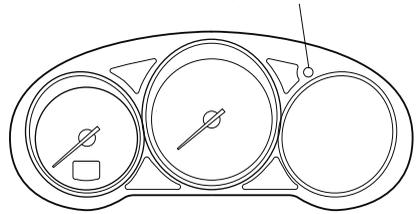


3. After the master warning light  flashes for several seconds, the initialization is completed.

# Owner Maintenance


## ▼ Inspecting Engine Oil Level

1. Be sure the vehicle is on a level surface.
2. Warm up the engine to normal operating temperature.
3. Turn it off and wait at least 5 minutes for the oil to return to the sump.
4. Pull out the dipstick, wipe it clean, and reinsert it fully.

**SKYACTIV-G 2.0, SKYACTIV-G 2.5, and SKYACTIV-G 2.5T**

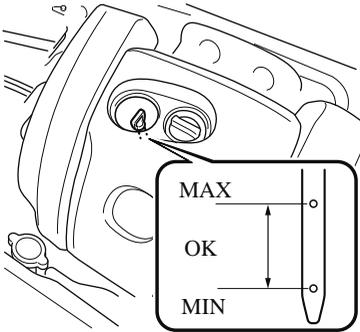

**SKYACTIV-D 2.2**

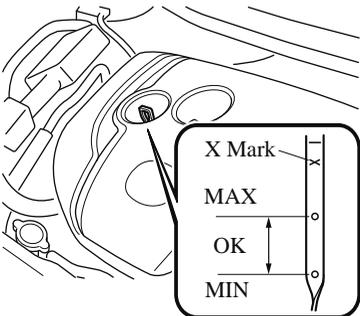

## NOTE

**(SKYACTIV-D 2.2)**

*When inspecting the engine oil level, pull out the dipstick straight without twisting. In addition, when inserting the dipstick, always insert it without twisting so that the “X” mark faces the front of the vehicle.*

5. Pull it out again and examine the level. The level is normal if it is between the MIN and MAX marks. If it is near or below MIN, add enough oil to bring the level to MAX.



*Do not overfill the engine oil. This may cause engine damage.*

6. Make sure the O-ring on the dipstick is positioned properly before reinserting the dipstick.
7. Reinsert the dipstick fully.

## Engine Coolant

### ▼ Inspecting Coolant Level

#### WARNING

**Do not use a match or live flame in the engine compartment. DO NOT ADD COOLANT WHEN THE ENGINE IS HOT:**

A hot engine is dangerous. If the engine has been running, parts of the engine compartment can become very hot. You could be burned. Carefully inspect the engine coolant in the coolant reservoir, but do not open it.



**Pull over to a safe location, then switch the ignition off and make sure the fan is not running before attempting to work near the cooling fan:**

Working near the cooling fan when it is running is dangerous. The fan could continue running indefinitely even if the engine has stopped and the engine compartment temperature is high. You could be hit by the fan and seriously injured.



**Do not remove either cooling system cap when the engine and radiator are hot:**

When the engine and radiator are hot, scalding coolant and steam may shoot out under pressure and cause serious injury.

#### NOTE


Changing the coolant should be done by an expert repairer (we recommend an Authorised Mazda Repairer).

Inspect the antifreeze protection and coolant level in the coolant reservoir at least once a year—at the beginning of the winter season—and before travelling where temperatures may drop below freezing.

Inspect the condition and connections of all cooling system and heater hoses. Replace any that are swollen or deteriorated.


The coolant should be at full in the radiator and between the F and L marks on the coolant reservoir when the engine is cool.

**SKYACTIV-G 2.0 and SKYACTIV-G 2.5**

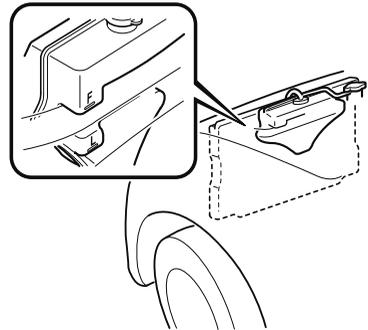


## Owner Maintenance

### SKYACTIV-G 2.5T

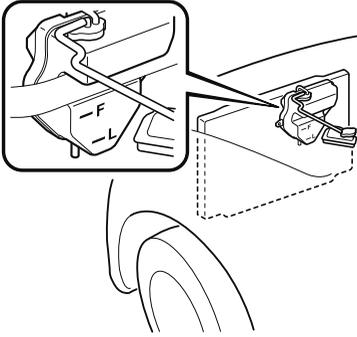

### SKYACTIV-D 2.2

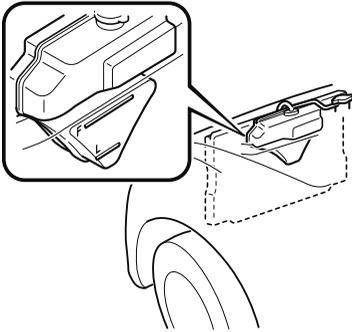

If it is at or near L, add enough coolant to the coolant reservoir to provide freezing and corrosion protection and to bring the level to F.

Securely tighten the coolant reservoir tank cap after adding coolant.



➤ *Radiator coolant will damage paint.  
Rinse it off quickly if spilled.*

➤ *If the "FL22" mark is shown on or near the cooling system cap, use of FL-22 is recommended when replacing engine coolant. Using engine coolant other than FL-22 may cause serious damage to the engine and cooling system.*



If the coolant reservoir is empty or new coolant is required frequently, consult an expert repairer (we recommend an Authorised Mazda Repairer).

## Brake/Clutch Fluid

### ▼ Inspecting Brake/Clutch Fluid Level

#### **WARNING**

***If the brake/clutch fluid level is low, have the brakes inspected:***


*A low brake/clutch fluid level is dangerous. A low level could indicate brake lining wear or a brake system leak which could cause the brakes to fail and lead to an accident.*

The brakes and clutch draw fluid from the same reservoir.


Inspect the fluid level in the reservoir regularly. It should be kept between the MAX and MIN lines.

The level normally drops with accumulated distance, a condition associated with wear of brake and clutch linings. If it is excessively low, have the brake/clutch system inspected by an expert repairer (we recommend an Authorised Mazda Repairer).

#### Left-hand drive model

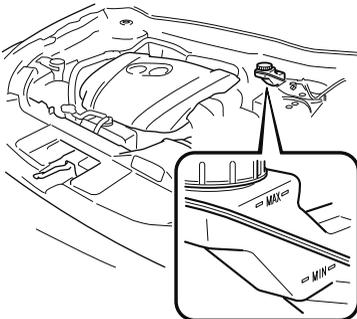

#### Right-hand drive model

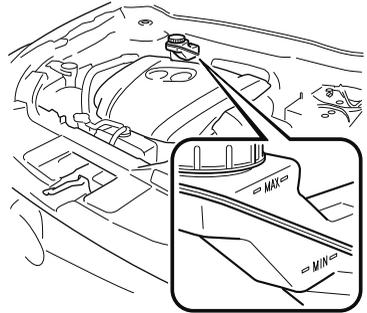

## Owner Maintenance

### Window and Headlight Washer Fluid


#### ▼ Inspecting Washer Fluid Level

#### WARNING

**Use only windscreen washer fluid or plain water in the reservoir:**

Using radiator antifreeze as washer fluid is dangerous. If sprayed on the windscreen, it will dirty the windscreen, affect your visibility, and could result in an accident.

Inspect fluid level in the washer fluid reservoir; add fluid if necessary.

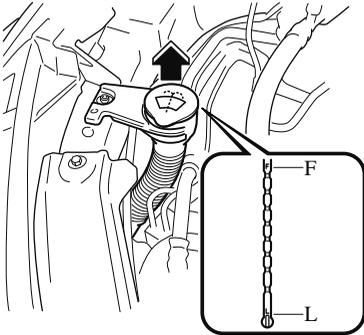

The top of the float should be between F and L.

Use plain water if washer fluid is unavailable.

But use only washer fluid in cold weather to prevent it from freezing.

#### **NOTE**

Front and rear washer fluid is supplied from the same reservoir.

### AdBlue® (With Selective Catalytic Reduction (SCR) System)

#### AdBlue® Handling

#### CAUTION

- If AdBlue® gets in your mouth, wash your mouth with a large amount of water immediately and seek medical attention. If AdBlue® is mistakenly swallowed, drink 1 to 2 cups of water immediately and seek medical attention.
- If AdBlue® gets in your eyes, rinse them with running water immediately and seek medical attention.
- Do not use AdBlue® when 2 years have elapsed from the production date indicated on the container or the use period has expired. If AdBlue® with an expired use period is used, the Selective Catalytic Reduction (SCR) System may not operate normally.
- Do not store AdBlue® in the vehicle. AdBlue® may deteriorate or the interior may be damaged due to fluid leakage from the container.
- If AdBlue® gets on the painted surface or the interior, wash it off with water or wipe it off with a wet cloth immediately. Otherwise, it may damage the painted surface or the interior.
- If AdBlue® crystals form on the painted surface or the interior, wipe them off with a wet cloth. Otherwise, it may damage the painted surface or the interior.
- Store AdBlue® in a place out of the reach of children.

- Do not put AdBlue® into a different container. There may be foreign matter in the container. If AdBlue® containing foreign matter is used, it could cause a problem with the SCR system. In addition, changing containers is dangerous because it increases the risk of accidental ingestion.

**NOTE**

- AdBlue® is a colourless, transparent, odourless, and nonpoisonous solution (urea: 32.5 %, aqueous solution (AUS32)).
- Store AdBlue® in a cool, dark place.
- AdBlue® freezes at  $-11\text{ }^{\circ}\text{C}$  ( $12\text{ }^{\circ}\text{F}$ ), however, when the temperature increases, the AdBlue® returns to its original condition.
- When opening the container, there may be a smell of ammonia. Open the container in a well-ventilated area.
- If AdBlue® gets on your hands, wash them with running water immediately.

**▼ AdBlue® Replenishment**

- Use a Mazda genuine product or a product conforming to ISO22241-1 for AdBlue®. If incompatible AdBlue® is used, the Selective Catalytic Reduction (SCR) system may not operate normally. For the recommended AdBlue®, consult the nearest expert repairer (we recommend an Authorised Mazda Repairer).
- Do not dilute AdBlue® with water. If diluted AdBlue® is used, it could cause a problem with the SCR system or damage it.

- Do not add any fluid other than AdBlue® to the urea tank. If any fluid other than AdBlue® is added, it could cause a problem with the SCR system or damage it. Do not switch the ignition ON, and contact an expert repairer (we recommend an Authorised Mazda Repairer).
- When adding AdBlue®, use a bottle with an anti-spill nozzle. If a bottle without an anti-spill nozzle or a commercial dispenser at a petrol station is used, it could cause leakage or the AdBlue® fluid to spray out.
- Do not overfill the AdBlue® fluid. If AdBlue® is added unnecessarily, it could cause a problem with the urea tank or damage it. Always use a bottle with an auto-stop function and stop adding fluid when the auto-stop function operates.

**NOTE**

- When adding AdBlue® during low temperatures ( $-11\text{ }^{\circ}\text{C}$  ( $12\text{ }^{\circ}\text{F}$ ) or less), move the vehicle to a warm location. If the AdBlue® starts to freeze, it may not flow correctly and the correct amount may not have been added. In addition, if the fluid freezes in the urea tank, you may not be able to tell if the correct amount of fluid was added.

## Owner Maintenance

- Replenishment of AdBlue® by an expert repairer (we recommend an Authorised Mazda Repairer) is recommended. If you want to replenish the AdBlue® yourself, follow the replenishment procedure below.

### Replenishment Procedure

1. Check the remaining amount of AdBlue® on the multi-information display.

#### (Instrument cluster (Type A))

Refer to Remaining AdBlue® and Maximum Driving Distance Display (SKYACTIV-D 2.2) on page 4-30.

#### (Instrument cluster (Type B))

Refer to Remaining AdBlue® and Maximum Driving Distance Display (SKYACTIV-D 2.2) on page 4-50. 4.0 L (1.1 US gal, 0.88 Imp gal) of AdBlue® or more needs to be added.

#### NOTE


The replenishment amount (reference) according to the AdBlue® level (%) indication is as follows:

Percentage (%) indication for remaining amount	Reference replenishment amount*1
100 — 85	Replenishment unnecessary
80 — 70	About 4.0 L (1.1 US gal, 0.88 Imp gal)
65 — 60	About 5.0 L (1.3 US gal, 1.1 Imp gal)
55 — 50	About 6.0 L (1.6 US gal, 1.3 Imp gal)
45 — 35	About 7.0 L (1.8 US gal, 1.5 Imp gal)
30 — 25	About 8.0 L (2.1 US gal, 1.8 Imp gal)


Percentage (%) indication for remaining amount	Reference replenishment amount*1
25 — 15	About 9.0 L (2.4 US gal, 2.0 Imp gal)
10 — 0	About 10.0 L (2.64 US gal, 2.20 Imp gal)

\*1 Even if AdBlue® is added at the indicated replenishment amount, 100 % may not be indicated on the display.

2. Stop the vehicle on level ground.
3. Switch the ignition OFF.
4. Open the fuel-filler flap.  
Refer to Refuelling on page 3-36.
5. Open the cap of the AdBlue® filler port.

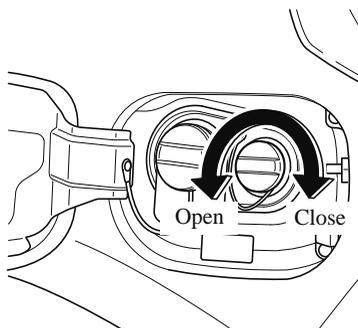

6. Remove the cap of a bottle containing AdBlue®, insert the bottle into the AdBlue® filler port, and screw it in lightly until it stops.




**⚠ CAUTION**

If too much AdBlue® is added, the SCR system might display a warning. Contact an expert repairer (we recommend an Authorised Mazda Repairer) if a warning is displayed. If the warning remains displayed, the urea tank may have a problem or it may be damaged.

**NOTE**

- If excessive force is applied when pressing in the bottom of the bottle, the bottle or the AdBlue® filler port may be damaged.
- When the urea tank is full, stop adding AdBlue® because the flow from the bottle slows down by the bottle's auto-stop function. If you continue adding AdBlue®, the urea tank will overflow.

7. Press in the bottom of the bottle straight and add AdBlue®.

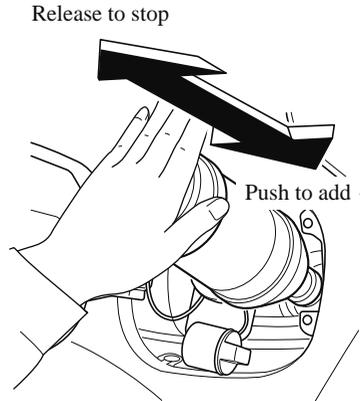

8. Remove the bottle in the reverse order of the insertion. At this time, be careful of AdBlue® dripping from the bottle.
9. Tighten the cap of the AdBlue® filler port until you hear two or more click sounds.
10. Switch the ignition ON once.
11. Check the following while the vehicle is stopped.
- No AdBlue® level warning indication is displayed on the multi-information display.
  - The AdBlue® level (%) indication on the multi-information display shows an increase.
- (Instrument cluster (Type A))**  
Refer to Remaining AdBlue® and Maximum Driving Distance Display (SKYACTIV-D 2.2) on page 4-30.
- (Instrument cluster (Type B))**  
Refer to Remaining AdBlue® and Maximum Driving Distance Display (SKYACTIV-D 2.2) on page 4-50.
12. Switch the ignition OFF.

## Owner Maintenance

---

**If the above indications remain unchanged even after one minute has passed with the vehicle stopped:**

- If you have already added 4.0 L (1.1 US gal, 0.88 Imp gal) of AdBlue® according to the AdBlue® level (%) indication on the multi-information display, prepare an additional 4.0 L (1.1 US gal, 0.88 Imp gal) of AdBlue® or more and add it following the replenishment procedure.
- If you added the correct amount of AdBlue®, the AdBlue® level (%) indication on the multi-information display will show an increase while the vehicle is being driven. If the AdBlue® level (%) shows no increase or the speed restriction does not cancel even while driving the vehicle, consult an expert repairer (we recommend an Authorised Mazda Repairer).

### Body Lubrication

All moving points of the body, such as door and bonnet hinges and locks, should be lubricated each time the engine oil is changed. Use a nonfreezing lubricant on locks during cold weather.

Make sure the bonnet's secondary latch keeps the bonnet from opening when the primary latch is released.

## Wiper Blades

### CAUTION

- *Hot waxes applied by automatic car washers have been known to affect the wiper's ability to clean windows.*
- *To prevent damage to the wiper blades, do not use petrol, paraffin, paint thinner, or other solvents on or near them.*
- *When the wiper lever is in the AUTO position and the ignition is switched ON, the wipers may move automatically in the following cases:*
  - *If the windscreen above the rain sensor is touched.*
  - *If the windscreen above the rain sensor is wiped with a cloth.*
  - *If the windscreen is struck with a hand or other object.*
  - *If the rain sensor is struck with a hand or other object from inside the vehicle.*

*Be careful not to pinch hands or fingers as it may cause injury, or damage the wipers. When washing or servicing the vehicle, make sure the wiper lever is in the OFF position.*

Contamination of either the windscreen or the blades with foreign matter can reduce wiper effectiveness. Common sources are insects, tree sap, and hot wax treatments used by some commercial car washes.

If the blades are not wiping properly, clean the window and blades with a good cleaner or mild detergent; then rinse thoroughly with clean water. Repeat if necessary.

### ▼ Replacing Windscreen Wiper Blades

When the wipers no longer clean well, the blades are probably worn or cracked. Replace them.

### CAUTION

- *To prevent damage to the wiper arms and other components, do not try to sweep the wiper arm by hand.*
- *Do not bend the blade rubber unnecessarily when replacing it. Otherwise, the metal stiffener in the blade may deform and the windscreen wiper operation may be adversely affected.*

### NOTE

*When raising both windscreen wiper arms, raise the driver's side wiper arm first. When lowering the wiper arms, slowly lower the wiper arm from the passenger's side first while supporting it with your hand. Forcefully lowering the wiper arms could damage the wiper arm and blade, and may scratch or crack the windscreen.*

Replace the wiper blades using the following procedure.

1. Raise the wiper arm.


### CAUTION

*To prevent damage to the windscreen let the wiper arm down easily, do not let it slap down on the windscreen.*


# Owner Maintenance

---


- Slide the blade component in the direction of the arrow while pressing the wiper arm tab to remove the blade component from the wiper arm.

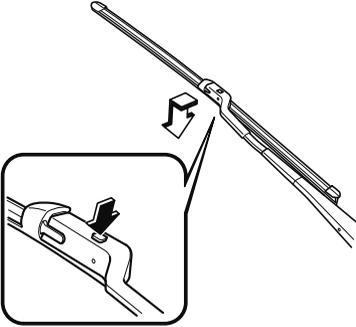

- Pull the blade rubber in the direction of the arrow and slide it to a position where the blade holder groove can be checked.

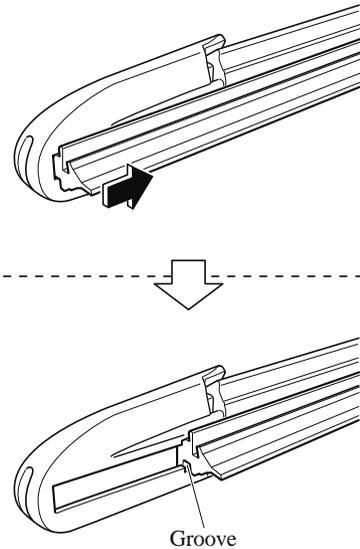


- Pull the end of the blade rubber from the blade holder groove in the direction of the arrow and remove the blade rubber from the blade holder.

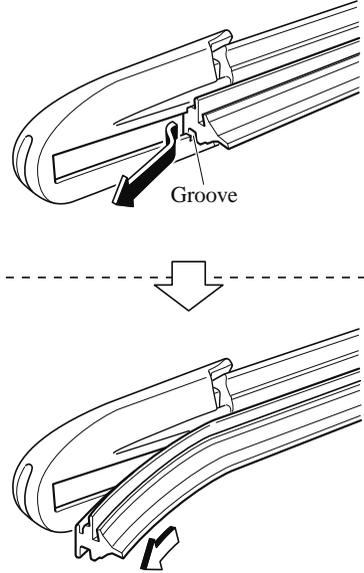


# Owner Maintenance


5. Insert the end of the new blade rubber into the groove of the blade holder until it contacts the end of the blade holder.

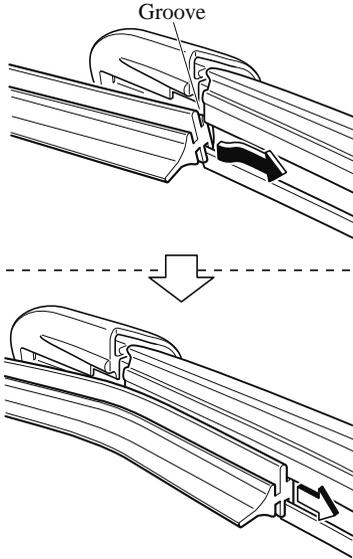

6. After pulling the blade rubber in the direction of the arrow and sliding the blade rubber to a position to check the blade holder groove, slide the blade rubber end in the opposite direction.

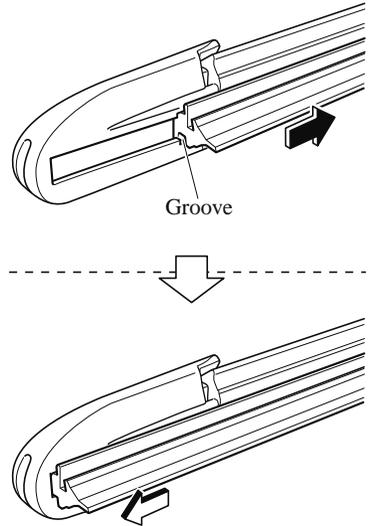


7. Make sure that the blade rubber is correctly installed to the blade holder.  
8. Align the wiper arm tabs with the blade component grooves.

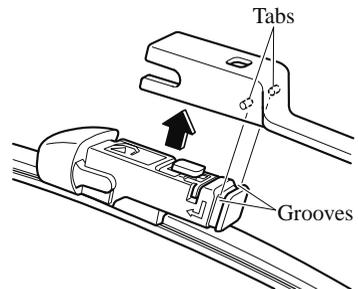


# Owner Maintenance

9. Align the blade component projection with the wiper arm notch.

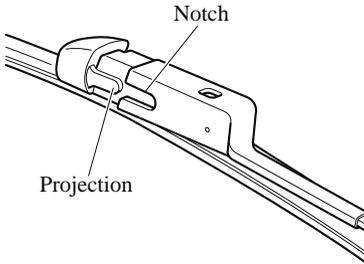

10. Slide the blade component and install it to the wiper arm.

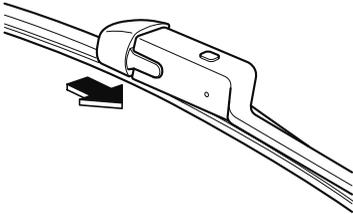

11. Slowly lower the wiper arm onto the windscreen.


## ▼ Replacing Rear Window Wiper Blade

When the wiper no longer cleans well, the blade is probably worn or cracked. Replace it.




*To prevent damage to the wiper arm and other components, do not move the wiper by hand.*

1. Raise the wiper arm and rotate the wiper blade to the right until it unlocks, then remove the blade.

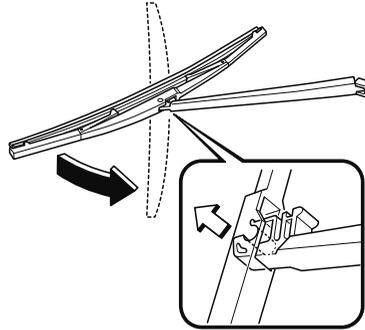


*To prevent damage to the rear window, do not let the wiper arm fall on it.*

2. Pull down the blade rubber and slide it out of the blade holder.




3. Remove the metal stiffeners from the blade rubber and install them in the new blade.

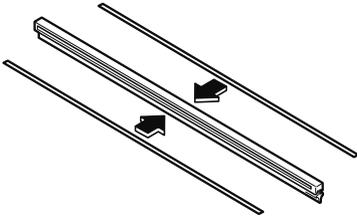

**⚠ CAUTION**

*Do not bend or discard the stiffeners.  
You need to use them again.*

4. Carefully insert the new blade rubber. Then install the blade assembly in the reverse order of removal.



# Owner Maintenance

---

## Battery

### **WARNING**

***Wash hands after handling the battery and related accessories:***

*Battery posts, terminals and related accessories contain lead and lead compounds, chemicals known to the State of California to cause cancer and reproductive harm.*



***Read the following precautions carefully before using the battery or inspecting to ensure safe and correct handling:***



***Always wear eye protection when working near the battery:***

*Working without eye protection is dangerous. Battery fluid contains SULPHURIC ACID which could cause blindness if splashed into your eyes. Also, hydrogen gas produced during normal battery operation, could ignite and cause the battery to explode.*



***Wear eye protection and protective gloves to prevent contact with battery fluid:***

*Spilled battery fluid is dangerous.*

*Battery fluid contains SULPHURIC ACID which could cause serious injuries if it gets in eyes, or on the skin or clothing. If this happens, immediately flush your eyes with water for 15 minutes or wash your skin thoroughly and get medical attention.*



***Always keep batteries out of the reach of children:***

*Allowing children to play near batteries is dangerous. Battery fluid could cause serious injuries if it gets in the eyes or on the skin.*



**Keep flames and sparks away from open battery cells and do not allow metal tools to contact the positive (+) or negative (-) terminal of the battery when working near a battery. Do not allow the positive (+) terminal to contact the vehicle body:**

Flames and sparks near open battery cells are dangerous. Hydrogen gas, produced during normal battery operation, could ignite and cause the battery to explode. An exploding battery can cause serious burns and injuries. Keep all flames including cigarettes and sparks away from open battery cells.




**Keep all flames and sparks away from open battery cells because hydrogen gas is produced from open battery cells while charging the battery or adding battery fluid:**

Flames and sparks near open battery cells are dangerous. Hydrogen gas, produced during normal battery operation, could ignite and cause the battery to explode. An exploding battery can cause serious burns and injuries. Keep all flames including cigarettes and sparks away from open battery cells.

#### **NOTE**


Before performing battery maintenance, remove the battery cover.

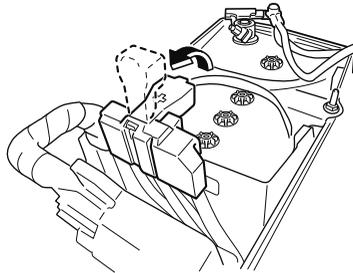

## Owner Maintenance

---

### ▼ Battery Maintenance

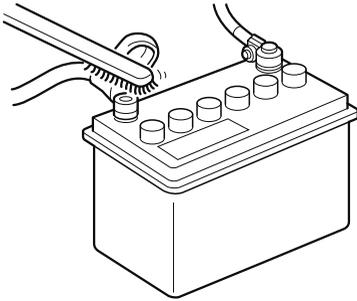


To get the best service from a battery:

- Keep it securely mounted.
- Keep the top clean and dry.
- Keep terminals and connections clean, tight, and coated with petroleum jelly or terminal grease.
- Rinse off spilled electrolyte immediately with a solution of water and baking soda.
- If the vehicle will not be used for an extended time, disconnect the battery leads and charge the battery every 6 weeks.

### ▼ Inspecting Electrolyte Level

A low level of electrolyte fluid will cause the battery to discharge quickly.

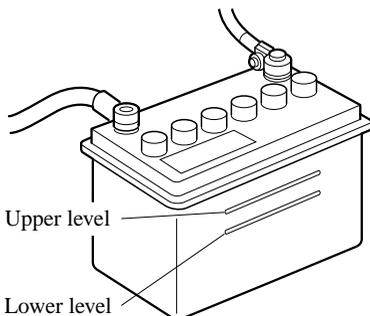

Inspect the electrolyte level at least once a week. If it is low, remove the caps and add enough distilled water to bring the level between the upper and lower level (illustration).

### Do not overfill.

Examine the specific gravity of the electrolyte with a hydrometer, especially during cold weather. If it is low, recharge the battery.

### ▼ Battery Recharging

#### NOTE

- *Before performing maintenance or recharging the battery, turn off all accessories and stop the engine.*
- *To disconnect the battery, remove the negative lead first. Install it last when connecting the battery.*
- *Be sure to remove the caps before recharging the battery.*
- *(With i-stop system) Do not quick-charge the battery.*
- *If the battery quickly discharges because, for example, the lights were left on too long with the engine off, slow-charge it as required by battery size and charger capacity.*
- *If the battery gradually discharges because of high electric load while the vehicle is being used, recharge it as required by battery size and charger capacity.*

### ▼ Battery Replacement

Contact an expert repairer (we recommend an Authorised Mazda Repairer) for battery replacement.

## Key Battery Replacement

If the buttons on the transmitter are inoperable and the operation indicator light does not flash, the battery may be dead.

Replace with a new battery before the transmitter becomes unusable.

### **CAUTION**

- *Make sure the battery is installed correctly. Battery leakage could occur if it is not installed correctly.*
- *When replacing the battery, be careful not to touch any of the internal circuitry and electrical terminals, bend the electrical terminals, or get dirt in the transmitter as the transmitter could be damaged.*
- *There is the danger of explosion if the battery is not correctly replaced.*
- *Dispose of used batteries according to the following instructions.*
  - *Insulate the plus and minus terminals of the battery using cellophane or equivalent tape.*
  - *Never disassemble.*
  - *Never throw the battery into fire or water.*
  - *Never deform or crush.*
- *Replace only with the same type battery (CR2032 or equivalent).*

The following conditions indicate that the battery power is low:

- The KEY indicator light (green) flashes in the instrument cluster for about 30 seconds after the engine is switched OFF (for vehicles with a type A/type B instrument cluster (page 4-22, 4-42),


messages are displayed in the instrument cluster).

- The system does not operate and the operation indicator light on the transmitter does not flash when the buttons are pressed.
- The system's operational range is reduced.


Replacing the battery at an expert repairer (we recommend an Authorised Mazda Repairer), is recommended to prevent damage to the key. If replacing the battery by yourself, follow the instruction.

### Replacing the key battery

1. Remove the lower cover while sliding the knob in the direction of the arrow.




2. Press in the tab to unlock the upper cover.




# Owner Maintenance

---


3. Insert a tape-wrapped flathead screwdriver into the gap and slide it in the direction of the arrow.




4. Twist the flathead screwdriver in the direction of the arrow and remove the upper cover.

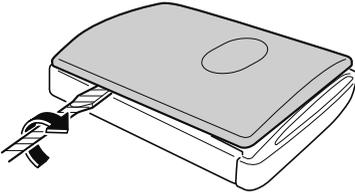


5. Remove the cap using the tape-wrapped flathead screwdriver.




6. Remove the battery using tape-wrapped flathead screwdriver.




7. Insert a new battery into the transmitter so that the positive pole is facing up.
8. Install the cap.

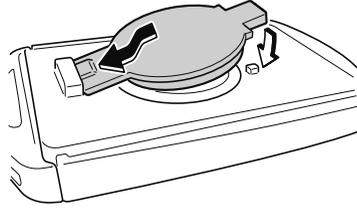

9. Install the upper cover.



10. Insert the tabs of the lower cover into the slots of the transmitter and install the lower cover.

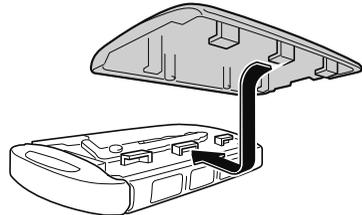

## Tyres

For reasons of proper performance, safety, and better fuel economy, always maintain recommended tyre inflation pressures and stay within the recommended load limits and weight distribution.

### WARNING

#### **Using Different Tyre Types:**

*Driving your vehicle with different types of tyres is dangerous. It could cause poor handling and poor braking; leading to loss of control.*

*Except for the limited use of the temporary spare tyre, use only the same type tyres (radial, bias-belted, bias-type) on all four wheels.*

#### **Using Wrong-Sized Tyres:**

*Using any other tyre size than what is specified for the vehicle (page 9-10) is dangerous. It could seriously affect ride, handling, ground clearance, tyre clearance, and speedometer calibration. This could cause you to have an accident. Use only tyres that are the correct size specified for the vehicle.*

#### ▼ Tyre Inflation Pressure

### WARNING

#### **Always inflate the tyres to the correct pressure:**

*Overinflation or underinflation of tyres is dangerous. Adverse handling or unexpected tyre failure could result in a serious accident.*

*Refer to Tyres on page 9-10.*

#### **Use only a Mazda-genuine tyre valve cap:**

*Use of a non-genuine part is dangerous as the correct tyre air pressure cannot be maintained if the tyre valve becomes damaged. If the vehicle is driven under this condition, the tyre air pressure will decrease which could result in a serious accident. Do not use any part for the tyre valve cap that is not a Mazda-genuine part.*

Inspect all tyre pressures monthly (including the spare\*) when the tyres are cold. Maintain recommended pressures for the best ride, handling, and minimum tyre wear.

Refer to the specification charts (page 9-10).

#### **NOTE**

- *Always check tyre pressure when tyres are cold.*
- *Warm tyres normally exceed recommended pressures. Do not release air from warm tyres to adjust the pressure.*
- *Underinflation can cause reduced fuel economy, uneven and accelerated tyre wear, and poor sealing of the tyre bead, which will deform the wheel and cause separation of tyre from rim.*
- *Overinflation can produce a harsh ride, uneven and accelerated tyre wear, and a greater possibility of damage from road hazards.*

*Keep your tyre pressure at the correct levels. If one frequently needs inflating, have it inspected.*

## Owner Maintenance

---

### ▼ Tyre Rotation



#### WARNING

#### **Rotate tyres periodically:**


*Irregular tyre wear is dangerous. To equalize tread wear for maintaining good performance in handling and braking, rotate the tyres every 10,000 km (6,250 miles), or sooner if irregular wear develops.*

During rotation, inspect them for correct balance.

#### NOTE

#### **(Without temporary spare tyre)**

*Because your vehicle is not equipped with a spare tyre, you cannot do a tyre rotation safely with the jack that comes with your vehicle. Have an expert repairer (we recommend an Authorised Mazda Repairer) perform tyre rotation.*



Forward

Do not include (TEMPORARY USE ONLY) spare tyre in rotation.

Also, inspect them for uneven wear and damage. Abnormal wear is usually caused by one or a combination of the following:

- Incorrect tyre pressure
- Improper wheel alignment
- Out-of-balance wheel
- Severe braking

After rotation, inflate all tyre pressures to specification (page 9-10) and inspect the wheel nuts for tightness.



#### CAUTION

*Rotate unidirectional tyres and radial tyres that have an asymmetrical tread pattern or studs only from front to rear, not from side to side. Tyre performance will be reduced if rotated from side to side.*

## ▼ Replacing a Tyre




### **Always use tyres that are in good condition:**

*Driving with worn tyres is dangerous. Reduced braking, steering, and traction could result in an accident.*

**Replace all four tyres at the same time:**  
*Replacing just one tyre is dangerous. It could cause poor handling and poor braking resulting in loss of vehicle control. Mazda strongly recommends that you replace all four tyres at the same time.*

If a tyre wears evenly, a wear indicator will appear as a solid band across the tread.

Replace the tyre when this happens.



You should replace the tyre before the band crosses the entire tread.

## ▼ Temporary Spare Tyre\*

Inspect the temporary spare tyre at least monthly to make sure it is properly inflated and stored.

### **NOTE**

*The temporary spare tyre condition gradually deteriorates even if it has not been used.*

The temporary spare tyre is easier to handle because of its construction which is lighter and smaller than a conventional tyre. This tyre should be used only for an emergency and only for a short distance.

Use the temporary spare tyre only until the conventional tyre is repaired, which should be as soon as possible.

Refer to Tyre on page 9-10.



- *Do not use your temporary spare tyre rim with a snow tyre or a conventional tyre. Neither will properly fit and could damage both tyre and rim.*
- *The temporary spare tyre has a tread life of less than 5,000 km (3,000 miles). The tread life may be shorter depending on driving conditions.*
- *The temporary spare tyre is for limited use, however, if the tread wear solid-band indicator appears, replace the tyre with the same type of temporary spare (page 6-51).*

# Owner Maintenance

---

## ▼ Replacing a Wheel



***Always use wheels of the correct size on your vehicle:***

*Using a wrong-sized wheel is dangerous. Braking and handling could be affected, leading to loss of control and an accident.*



*A wrong-sized wheel may adversely affect:*

- *Tyre fit*
- *Wheel and bearing life*
- *Ground clearance*
- *Snow-chain clearance*
- *Speedometer calibration*
- *Headlight aim*
- *Bumper height*
- *Tyre Pressure Monitoring System\**


### **NOTE**

- *When replacing a wheel, make sure the new one is the same as the original factory wheel in diameter, rim width, and offset (inset/outset).*
- *For details, contact an expert repairer (we recommend an Authorised Mazda Repairer).*



Proper tyre balancing provides the best riding comfort and helps reduce tread wear. Out-of-balance tyres can cause vibration and uneven wear, such as cupping and flat spots.

## Light Bulbs

Type A

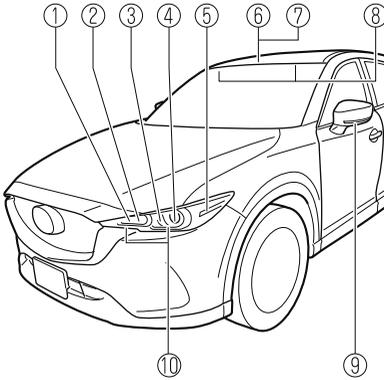

Type B

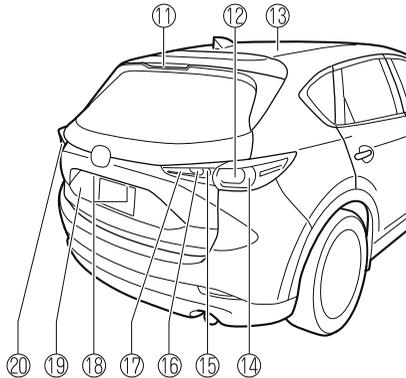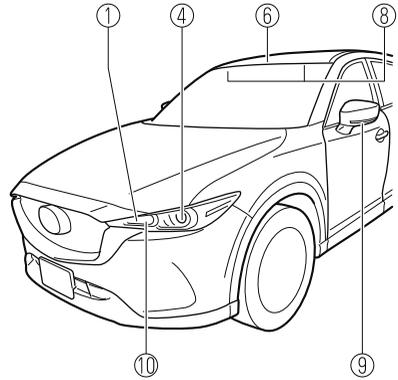

- ① Front direction indicator lights
- ② Headlights (High beam)\*
- ③ Running lights
- ④ Headlights (High/Low beam)
- ⑤ Headlights (Wide-range low beam)\*
- ⑥ Overhead lights/Front map lights
- ⑦ Ambient lights\*
- ⑧ Vanity mirror lights\*
- ⑨ Side direction indicator lights

## Owner Maintenance

---

- ⑩ Running lights\*/Position lights
- ⑪ High-mount brake light
- ⑫ Rear direction indicator lights
- ⑬ Rear map lights
- ⑭ Brake lights/Tail lights
- ⑮ Tail lights\*
- ⑯ Reverse lights
- ⑰ Rear fog light (Right-hand drive model)\*
- ⑱ Number plate lights
- ⑲ Luggage compartment light
- ⑳ Rear fog light (Left-hand drive model)\*

### **WARNING**

**Never touch the glass portion of a halogen bulb with your bare hands and always wear eye protection when handling or working around the bulbs:**

*When a halogen bulb breaks, it is dangerous. These bulbs contain pressurised gas. If one is broken, it will explode and serious injuries could be caused by the flying glass.*

*If the glass portion is touched with bare hands, body oil could cause the bulb to overheat and explode when lit.*

**Always keep halogen bulbs out of the reach of children:**

*Playing with a halogen bulb is dangerous. Serious injuries could be caused by dropping a halogen bulb or breaking it some other way.*

### **CAUTION**

*When removing the lens or lamp unit using a flathead screwdriver, make sure that the flathead screwdriver does not contact the interior terminal. If the flathead screwdriver contacts the terminal, a short circuit may occur.*

#### **NOTE**

- To replace the bulb, contact an expert repairer (we recommend an Authorised Mazda Repairer).*
- If the halogen bulb is accidentally touched, it should be cleaned with rubbing alcohol before being used.*
- Use the protective cover and carton for the replacement bulb to dispose of the old bulb promptly and out of the reach of children.*

#### **▼ Replacing Exterior Light Bulbs**

All the exterior light bulbs are LED type. The LED bulb cannot be replaced as a single unit because it is an integrated unit. The LED bulb has to be replaced with the unit. If a replacement is necessary, consult

an expert repairer (we recommend an Authorised Mazda Repairer).

### ▼ Replacing Interior Light Bulbs

The interior lights have either LEDs or normal bulbs.

#### LED type

- Overhead lights/Front map lights
- Rear map lights
- Vanity mirror lights\*
- Luggage compartment light
- Ambient lights\*


The LED bulb cannot be replaced as a single unit because it is an integrated unit. The LED bulb has to be replaced with the unit. If a replacement is necessary, consult an expert repairer (we recommend an Authorised Mazda Repairer).

#### Bulb type

#### **Overhead light/Front map lights, Rear map lights, Vanity mirror lights\***


1. Wrap a flathead screwdriver with a soft cloth to prevent damage to the lens, and then remove the lens by carefully prying on the edge of the lens with a flathead screwdriver.
2. Disconnect the bulb by pulling it out.

#### **Overhead light/Front map lights**

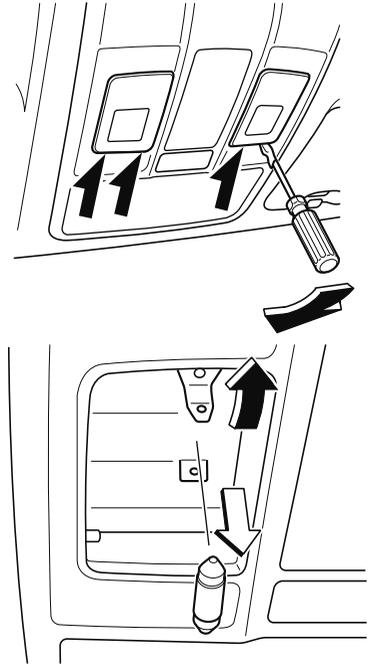


# Owner Maintenance

## Rear map lights

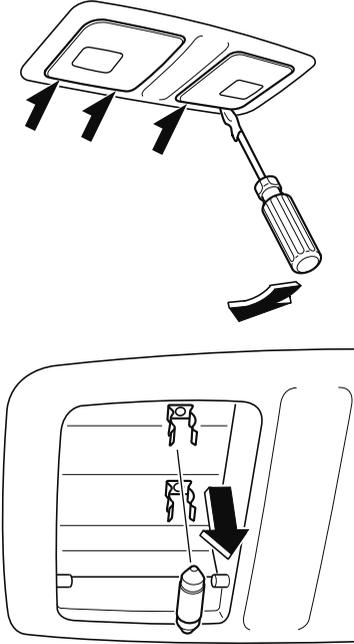


## Vanity mirror lights\*



3. Install the new bulb in the reverse order of the removal procedure.

## Luggage compartment light

1. Wrap a small flathead screwdriver with a soft cloth to prevent damage to the lens and remove the lens unit by carefully prying on the edge of the lens unit with the flathead screwdriver.

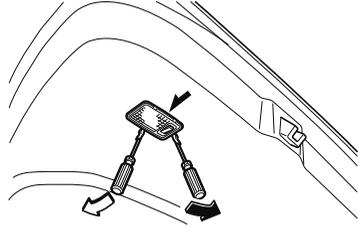


2. Disconnect the electrical connector from the bulb by pressing the tab on the connector with your finger and pulling the connector.




**⚠ CAUTION**

*When replacing the bulb always disconnect the connector first. Otherwise, electric and electronic devices could be shorted.*

3. Insert the flathead screwdriver into the gap between the lens and the lens unit, and then slide the screwdriver to detach the lens.



4. Disconnect the bulb by pulling it out.



5. Install the new bulb in the reverse order of the removal procedure.

## Fuses

Your vehicle's electrical system is protected by fuses.

If any lights, accessories, or controls do not work, inspect the appropriate circuit protector. If a fuse has blown, the inside element will be melted.


If the same fuse blows again, avoid using that system and consult an expert repairer (we recommend an Authorised Mazda Repairer) as soon as possible.

### ▼ Fuse Replacement

#### Replacing the fuses on the vehicle's left side


If the electrical system does not work, first inspect the fuses on the vehicle's left side.

1. Make sure the ignition is switched off, and other switches are off.
2. Open the fuse panel cover.

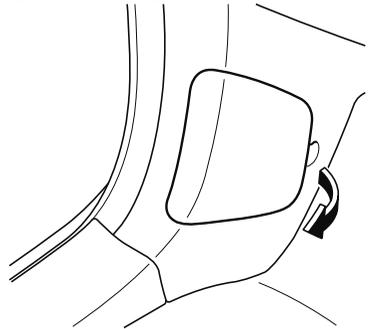


# Owner Maintenance

3. Pull the fuse straight out with the fuse puller provided on the fuse block located in the engine compartment.

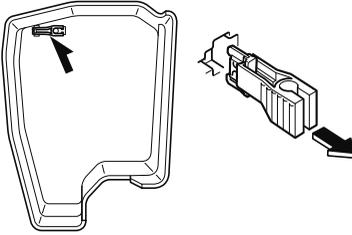

4. Inspect the fuse and replace it if it is blown.



Normal



Blown

5. Insert a new fuse of the same amperage rating, and make sure it fits tightly. If it does not fit tightly, have an expert install it. Consult an expert repairer (we recommend an Authorised Mazda Repairer).

If you have no spare fuses, borrow one of the same rating from a circuit not essential to vehicle operation, such as the AUDIO or OUTLET circuit.

## CAUTION

*Always replace a fuse with a genuine Mazda fuse or equivalent of the same rating. Otherwise you may damage the electric system.*

6. Reinstall the cover and make sure that it is securely installed.


### Replacing the fuses under the bonnet

If the headlights or other electrical components do not work and the fuses in the cabin are normal, inspect the fuse block under the bonnet.

If a fuse is blown, it must be replaced.

Follow these steps:

1. Make sure the ignition is switched off, and other switches are off.
2. Remove the fuse block cover.

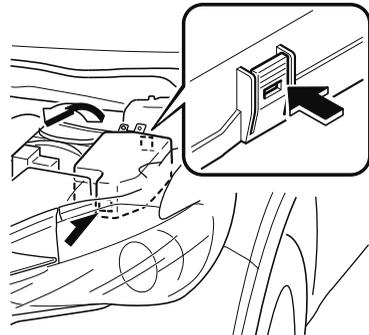

3. If any fuse but the MAIN fuse is blown, replace it with a new one **of the same amperage rating.**



Normal



Blown

** WARNING**


***Do not replace the main fuse by yourself. Have an expert repairer (we recommend an Authorised Mazda Repairer) perform the replacement: Replacing the fuse by yourself is dangerous because the MAIN fuse is a high current fuse. Incorrect replacement could cause an electrical shock or a short circuit resulting in a fire.***

4. Reinstall the cover and make sure that it is securely installed.

# Owner Maintenance

## ▼ Fuse Panel Description

### Fuse block (Engine compartment)

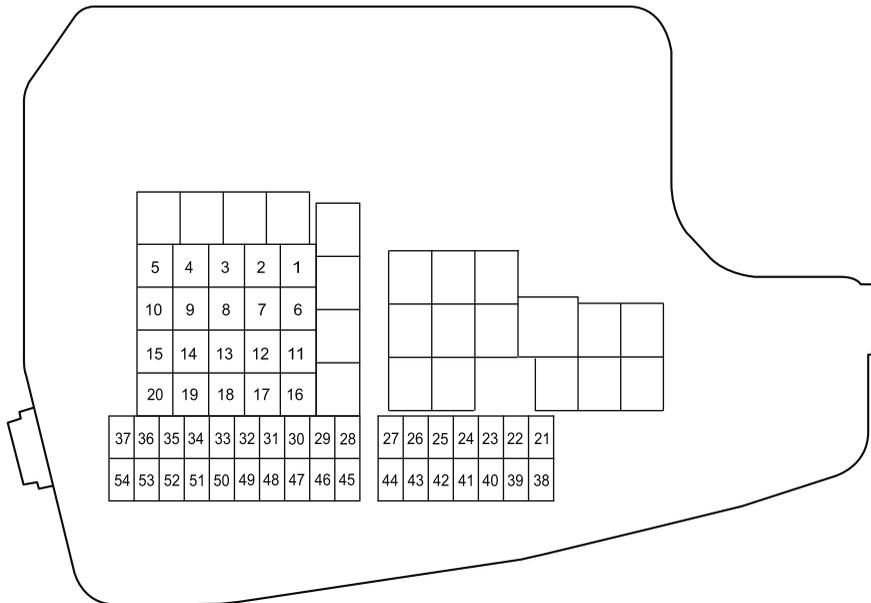

DESCRIPTION	FUSE RATING	PROTECTED COMPONENT	
1	CABIN.+B	50 A	For protection of various circuits
2	IG2	30 A	For protection of various circuits
3	INJECTOR ENG.SUB	30 A	Engine control system*
4	SCR1 EVVT	20 A	Engine control system*
5	P.WINDOW1	30 A	Power windows*
6	R.HEATER	20 A	—
7	ADD FAN DE	40 A	Cooling fan*
8	WIPER.DEI	20 A	Windscreen wiper de-icer*
9	DEFOG	30 A	Rear window defogger
10	DCDC DE	40 A	For protection of various circuits*
11	EPB R	20 A	Electric parking brake (EPB) (RH)
12	EPB L	20 A	Electric parking brake (EPB) (LH)


# Owner Maintenance

DESCRIPTION		FUSE RATING	PROTECTED COMPONENT
13	AUDIO DCDC REG	30 A	Audio system*, For protection of various circuit*
14	FAN GE	30 A	Cooling fan*
15	ENG.MAIN	40 A	Engine control system
16	ABS/DSC M	50 A	ABS, Dynamic stability control system
17	FAN DE	40 A	Cooling fan*
18	WIPER	20 A	Front window wiper and washer
19	HEATER	40 A	Air conditioner
20	ADD FAN GE	30 A	Cooling fan*
21	ENGINE.IG1	7.5 A	Engine control system
22	C/U IG1	15 A	For protection of various circuits
23	AUDIO2	7.5 A	Audio system
24	METER2	7.5 A	Instrument cluster*
25	ENGINE3	15 A	Engine control system
26	ENGINE2	15 A	Engine control system
27	ENGINE1	15 A	Engine control system*
28	AT	15 A	Transaxle control system*, Ignition switch
29	H/CLEAN	20 A	Headlight washer*
30	A/C	7.5 A	Air conditioner
31	AT PUMP	15 A	Transaxle control system*
32	HORN	15 A	Horn
33	R.WIPER	15 A	Rear window wiper
34	H/L HI	20 A	Headlight high beam
35	ST.HEATER	15 A	Heated steering wheel*
36	FOG	15 A	—
37	ENG.+B	7.5 A	Engine control system
38	H/L LOW L	15 A	Headlight low beam (LH)
39	ENGINE4	15 A	Engine control system*
40	INTERIOR1	15 A	For protection of various circuit
41	METER1	10 A	Instrument cluster
42	SRS1	7.5 A	Air bag
43	AUDIO1	15 A	Audio system
44	BOSE	25 A	Bose Sound System-equipped model*, Audio system
45	ABS/DSC S	30 A	ABS, Dynamic stability control system
46	FUEL PUMP	15 A	Fuel system*

# Owner Maintenance

DESCRIPTION		FUSE RATING	PROTECTED COMPONENT
47	FUEL WARM	25 A	Fuel warmer*
48	TAIL	15 A	Tail lights, Number plate lights
49	SCR2 FUEL PUMP2	25 A	Engine control system*
50	HAZARD	25 A	Hazard warning flashers, Direction indicator lights, Tail lights
51	H/L LOW R	15 A	Headlight low beam (RH)
52	OUTLET	25 A	Accessory sockets
53	STOP	10 A	Brake lights
54	ROOM	25 A	For protection of various circuit

## Fuse block (Left side)

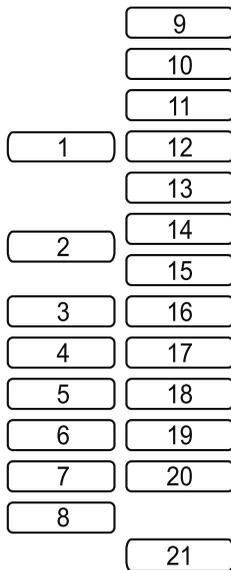

DESCRIPTION		FUSE RATING	PROTECTED COMPONENT
1	P.SEAT D	30 A	Power seat*
2	P.WINDOW3	30 A	Power windows
3	R.OUTLET3	15 A	—
4	P.WINDOW2	25 A	Power windows
5	ESCL	15 A	Electronic steering lock

**Owner Maintenance**

DESCRIPTION		FUSE RATING	PROTECTED COMPONENT
6	D.LOCK	25 A	Power door locks
7	SEAT WARM	20 A	Seat warmer*
8	SUNROOF	10 A	Sunroof*
9	F.OUTLET	15 A	Accessory sockets
10	MIRROR	7.5 A	Power control mirror
11	R.OUTLET1	15 A	Accessory sockets*
12	SCR3	15 A	Engine control system*
13	SCR4	15 A	Engine control system*
14	R.OUTLET2	15 A	Accessory sockets
15	USB	7.5 A	USB power outlet*
16	PLG	20 A	Power liftgate*
17	M.DEF	7.5 A	Mirror defogger*
18	R.SEAT W	20 A	Seat warmer*
19	INTERIOR2	15 A	For protection of various circuit
20	AT IND	7.5 A	AT shift indicator*
21	P.SEAT P	30 A	Power seat*

# Appearance Care

---

## Exterior Care

The paintwork on your Mazda represents the latest technical developments in composition and methods of application.

Environmental hazards, however, can harm the paint's protective properties, if proper care is not taken.

Here are some examples of possible damage, with tips on how to prevent them.

### Etching Caused by Acid Rain or Industrial Fallout

#### Occurrence

Industrial pollutants and vehicle emissions drift into the air and mix with rain or dew to form acids. These acids can settle on a vehicle's finish. As the water evaporates, the acid becomes concentrated and can damage the finish.

And the longer the acid remains on the surface, the greater the chance is for damage.

#### Prevention

It is necessary to wash and wax your vehicle to preserve its finish according to the instructions in this section. These steps should be taken immediately after you suspect that acid rain has settled on your vehicle's finish.

### Damage Caused by Bird Dropping, Insects, or Tree Sap

#### Occurrence

Bird droppings contain acids. If these are not removed they can eat away the clear and colour base coat of the vehicle's paintwork.

When insects stick to the paint surface and decompose, corrosive compounds form. These can erode the clear and colour base coat of the vehicle's paintwork if they are not removed.

Tree sap will harden and adhere permanently to the paint finish. If you scratch the sap off while it is hard, some vehicle paint could come off with it.

#### Prevention

It is necessary to have your Mazda washed and waxed to preserve its finish according to the instructions in this section. This should be done as soon as possible.

Bird droppings can be removed with a soft sponge and water. If you are travelling and these are not available, a moistened tissue may also take care of the problem. The cleaned area should be waxed according to the instructions in this section.

Insects and tree sap are best removed with a soft sponge and water or a commercially available chemical cleaner.

Another method is to cover the affected area with dampened newspaper for 1 to 2 hours. After removing the newspaper, rinse off the loosened debris with water.

## Water Marks

### Occurrence

Rain, fog, dew, and even tap water can contain harmful minerals such as salt and lime. If moisture containing these minerals settles on the vehicle and evaporates, the minerals will concentrate and harden to form white rings. The rings can damage your vehicle's finish.

### Prevention

It is necessary to wash and wax your vehicle to preserve its finish according to the instructions in this section. These steps should be taken immediately after you find water marks on your vehicle's finish.

## Paint Chipping

### Occurrence

Paint chipping occurs when gravel thrown in the air by another vehicle's tyres hits your vehicle.

### How to avoid paint chipping

Keeping a safe distance between you and the vehicle ahead reduces the chances of having your paint chipped by flying gravel.

### NOTE

- *The paint chipping zone varies with the speed of the vehicle. For example, when travelling at 90 km/h (56 mph), the paint chipping zone is 50 m (164 ft).*
- *In low temperatures a vehicle's finish hardens. This increases the chance of paint chipping.*

- *Chipped paint can lead to rust forming on your Mazda. Before this happens, repair the damage by using Mazda touch-up paint according to the instructions in this section. Failure to repair the affected area could lead to serious rusting and expensive repairs.*

Follow **all** label and container directions when using a chemical cleaner or polish. Read all warnings and cautions.

## ▼ Maintaining the Finish

### Washing



- *When the ignition is switched ON and the wiper lever is in the AUTO position, the windscreen wipers may operate automatically in the following cases:*
  - *The area of the windscreen above the rain sensor is touched or wiped with a cloth.*
  - *The windscreen or the rain sensor area in the cabin is hit.*

*When the ignition is switched ON and the wiper lever is in the AUTO position, do not touch the windscreen or the windscreen wipers. Otherwise, the windscreen wipers will operate automatically which could catch your fingers or damage the windscreen wipers.*

*When removing ice or snow, or cleaning the windscreen, always make sure the wiper lever is in the OFF position.*

## Appearance Care

---

- Do not spray water in the engine compartment. Otherwise, it could result in engine-starting problems or damage to electrical parts.
- When washing and waxing the vehicle, be careful not to apply excessive force to any single area of the vehicle roof. Otherwise, you could dent the vehicle.
- **(Vehicles with hands-free liftgate)**  
When washing the vehicle, turn off the hands-free liftgate using the Mazda Connect or do not bring the transmitter into the area around the liftgate. Otherwise, the liftgate could open unexpectedly resulting in an accident. Refer to Power Liftgate on page 3-21.

To help protect the finish from rust and deterioration, wash your Mazda thoroughly and frequently, at least once a month, with lukewarm or cold water.

If the vehicle is washed improperly, the paint surface could be scratched. Here are some examples of how scratching could occur.

Scratches occur on the paint surface when:

- The vehicle is washed without first rinsing off dirt and other foreign matter.
- The vehicle is washed with a rough, dry, or dirty cloth.
- The vehicle is washed at a car wash that uses brushes that are dirty or too stiff.
- Cleansers or wax containing abrasives are used.

### NOTE

- Mazda is not responsible for scratches caused by automatic car washes or improper washing.

- Scratches are more noticeable on vehicles with darker paint finishes.

To minimize scratches on the vehicle's paint finish:

- Rinse off any dirt or other foreign matter using lukewarm or cold water before washing.
- Use plenty of lukewarm or cold water and a soft cloth when washing the vehicle. Do not use a nylon cloth.
- Rub gently when washing or drying the vehicle.
- Take your vehicle only to a car wash that keeps its brushes well maintained.
- Do not use abrasive cleansers or wax that contain abrasives.

### CAUTION

- Do not use steel wool, abrasive cleaners, or strong detergents containing highly alkaline or caustic agents on chrome-plated or anodised aluminium parts. This may damage the protective coating; also, cleaners and detergents may discolour or deteriorate the paint.

Pay special attention to removing salt, dirt, mud, and other foreign material from the underside of the wings, and make sure the drain holes in the lower edges of the doors and rocker panels are clean.

Insects, tar, tree sap, bird droppings, industrial fallout, and similar deposits can damage the finish if not removed immediately. When prompt washing with

plain water is ineffective, use a mild soap made for use on vehicles.

Thoroughly rinse off all soap with lukewarm or cold water. Do not allow soap to dry on the finish.

After washing the vehicle, dry it with a clean chamois to prevent water spots from forming.



***Dry off brakes that have become wet by driving slowly, releasing the accelerator pedal and lightly applying the brakes several times until the brake performance returns to normal:***

*Driving with wet brakes is dangerous. Increased stopping distance or the vehicle pulling to one side when braking could result in a serious accident. Light braking will indicate whether the brakes have been affected.*

#### **When using an automatic car wash**

- Retract the door mirrors.
- The automatic car wash brushes could reduce the paint lustre or hasten paint deterioration.

#### **When using a high water pressure car wash**

High water temperature and high water pressure car washers are available depending on the type of car wash machine. If the car washer nozzle is put too close to the vehicle, the force of the spray could damage or deform the molding, affect the sealability of parts, and allow water to penetrate the interior. Keep

a sufficient space (30 cm (12 in) or more) between the nozzle and the vehicle. In addition, do not spend too much time spraying the same area of the vehicle, and be very careful when spraying between gaps in doors and around windows.

#### **Waxing**

Your vehicle needs to be waxed when water no longer beads on the finish. Always wash and dry the vehicle before waxing it. In addition to the vehicle body, wax the metal trim to maintain its lustre.

1. Use wax which contains no abrasives. Wax containing abrasives will remove paints and could damage bright metal parts.
2. Use a good grade of natural wax for metallic, mica, and solid colours.
3. When waxing, coat evenly with the sponge supplied or a soft cloth.
4. Wipe off the wax with a soft cloth.



#### ***(Vehicles with hands-free liftgate)***

*When waxing the vehicle, turn off the hands-free liftgate using the Mazda Connect or do not bring the transmitter into the area around the liftgate. The liftgate could open unexpectedly resulting in an accident.*

*Refer to Power Liftgate on page 3-21.*

#### ***NOTE***

*A spot remover to remove oil, tar, and similar materials will usually also take off the wax. Rewax these areas even if the rest of the vehicle does not need it.*

## Appearance Care

---

### ▼ Paint Damage Touch-up

Repair damage to the finish caused by stone chipping, damage during parking etc., by using Mazda touch-up paint before rust begins to form. First, remove the dirt and grease with a clean soft cloth.

If rust has already begun to form:

1. Remove rust completely with sandpaper.
2. Wipe with a clean soft cloth.
3. Apply rust preventive primer to the area.
4. After drying it completely, apply a suitable top coat material to the area.

Of course there will be no problem if you assign the work to an expert repairer (we recommend an Authorised Mazda Repairer).

### ▼ Cavity Protection

Cavities are treated for protection at the factory, but additional protective treatment after the vehicle has been put into use will extend the life of the body.

Consult an expert repairer (we recommend an Authorised Mazda Repairer) concerning this additional precaution.

### ▼ Bright-Metal Maintenance

- Use tar remover to remove road tar and insects. Never do this with a knife or similar tool.
- To prevent corrosion on bright-metal surfaces, apply wax or chrome preservative and rub it to a high lustre.
- During cold weather or in coastal areas, cover bright-metal parts with a coating of wax or preservative heavier than usual. It would also help to coat them

with noncorrosive petroleum jelly or some other protective compound.



*Do not use steel wool, abrasive cleaners, or strong detergents containing highly alkaline or caustic agents on chrome-plated or anodised aluminium parts. This may result in damage to the protective coating and cause discolouration or paint deterioration.*

## ▼ Undercoating

This special coating is applied to the critical parts of the underside to protect vehicles from damage caused by chemicals or stones. This coating is liable to be damaged with time. Check this coating periodically.

Should repairs be necessary, consult an expert repairer (we recommend an Authorised Mazda Repairer). They are well informed on how repairs should be made.

## ▼ Aluminium Wheel Maintenance\*

A protective coating is provided over the aluminium wheels. Special care is needed to protect this coating.



*Do not use any detergent other than mild detergent. Before using any detergent, verify the ingredients. Otherwise, the product could discolour or stain the aluminium wheels.*

### NOTE

- *Do not use a wire brush or any abrasive cleaner, polishing compound, or solvent on aluminium wheels. They may damage the coating.*
- *Always use a sponge or soft cloth to clean the wheels.*  
*Rinse the wheels thoroughly with lukewarm or cold water. Also, be sure to clean the wheels after driving on dusty or salted roads to help prevent corrosion.*

- *Avoid washing your vehicle in an automatic car wash that uses high-speed or hard brushes.*
- **(19-inch wheel vehicle)**  
*If your aluminium wheels lose lustre, apply wax which contains no polishing powder.*

## ▼ Plastic Part Maintenance

- When cleaning the plastic lenses of the lights, do not use petrol, paraffin, rectified spirit, paint, thinner, highly acidic detergents, or strongly alkaline detergents. Otherwise, these chemical agents can discolour or damage the surfaces resulting in a significant loss in functionality. If plastic parts become inadvertently exposed to any of these chemical agents, flush with water immediately.
- If plastic parts such as the bumpers become inadvertently exposed to chemical agents or fluids such as petrol, oil, engine coolant, or battery fluid, it could cause discolouration, staining, or paint peeling. Wipe off any such chemical agents or fluids using a soft cloth immediately.
- High water temperature and high water pressure car washers are available depending on the type of high pressure car washer device. If the car washer nozzle is put too close to the vehicle or aimed at one area for an extended period of time, it could deform plastic parts or damage the paint.
- Do not use wax containing compounds (polish). Otherwise, it could result in paint damage.
- In addition, do not use an electrical or air tool to apply wax. Otherwise, the

## Appearance Care

---

frictional heat generated could result in deformation of plastic parts or paint damage.

### Interior Care

#### **WARNING**

***Do not spray water into the vehicle cabin:***  
*Spraying water into the vehicle cabin is dangerous as electrical devices such as the audio and switches could get wet resulting in a malfunction or vehicle fire.*

#### **NOTE**

- *Do not wipe the interior using alcohol, chlorine bleach, or organic solvents such as thinner, benzene, and petrol. Otherwise, it may cause discolouration or stains.*
- *Rubbing hard with a stiff brush or cloth may cause damage.*

If the vehicle interior becomes soiled by any of the following, wipe it off immediately using a soft cloth. Leaving it uncleaned could cause discolouration, stains, cracks, or peeling of the coating, and it will make it hard to wipe off later.

- Beverage or fragrance
- Grease or oil
- Soiling

#### **▼ Seat Belt Maintenance**

1. Clean the soiled area by lightly dabbing it with a soft cloth soaked in a mild detergent (approx. 5%) diluted with water.
2. Wipe off the remaining detergent using a cloth soaked in clean water and wrung out well.

- Before retracting seat belts which have been pulled out for cleaning, dry them off thoroughly and make sure there is no remaining moisture on them.



***If a seat belt appears frayed or has abrasions, have it replaced by an expert repairer (we recommend an Authorised Mazda Repairer):***

*If a seat belt is used under such a condition, it cannot function at its full capacity which could result in serious injury or death.*

***Use a mild detergent to remove soiling from a seat belt:***

*If organic solvents are used for cleaning the seat belts or they become stained or bleached, there is the possibility of them becoming weakened and as a result, they may not function at their full capacity which could cause serious injury or death.*

### **NOTE**

*Clean seat belts diligently if they get dirty. Leaving them uncleaned will make it difficult to clean them later, and it may affect the smooth retracting of the seat belt.*

### ▼ Vinyl Upholstery Maintenance

Remove dust and dirt from the vinyl upholstery using a brush or vacuum. Remove soiling from vinyl upholstery using a leather and vinyl upholstery cleaner.

### ▼ Upholstery and Synthetic Leather Maintenance

#### Fabric

- Clean the soiled area by lightly dabbing it with a soft cloth soaked in a mild detergent (approx. 5%) diluted with water.
- Wipe off the remaining detergent using a cloth soaked in clean water and wrung out well.

#### Synthetic leather

- Remove dust and sand using a vacuum cleaner.
- Wipe the soiled area with a soft cloth soaked in a mild detergent (approx. 5%) diluted with water.
- Wipe off the remaining detergent using a cloth soaked in clean water and wrung out well.

### ▼ Leather Upholstery Maintenance\*

- Remove dust and sand using a vacuum cleaner.
- Wipe off the soiled area with a soft cloth and a suitable, special cleaner or a soft cloth soaked in a mild detergent (about 5%) diluted with water.
- Wipe off the remaining detergent using a cloth soaked in clean water and wrung out well.
- Remove moisture with a dry, soft cloth and allow the leather to further dry in a well-ventilated, shaded area. If the leather gets wet such as from rain, remove the moisture and dry it as soon as possible.

## Appearance Care

### NOTE

- Because genuine leather is a natural material, its surface is not uniform and it may have natural scars, scratches, and wrinkles.
- To maintain the quality for as long as possible, periodical maintenance, about twice a year, is recommended.
- If the leather upholstery comes into contact with any of the following, clean it immediately.  
Leaving it uncleaned could cause premature wear, mold, or stains.
  - Sand or dirt
  - Grease or oil, such as hand cream
  - Alcohol, such as in cosmetic or hair dressing items
- If the leather upholstery gets wet, promptly remove moisture with a dry cloth. Remaining moisture on the surface may cause deterioration such as hardening and shrinkage.
- Exposure to direct sunlight for long periods may cause deterioration and shrinkage. When parking the car under direct sunlight for long periods, shade the interior using sunshades.
- Do not leave vinyl products on the leather upholstery for long periods. They may affect the leather quality and colouring. If the cabin temperature becomes hot, the vinyl may deteriorate and adhere to the genuine leather.

### ▼ Plastic Part Maintenance



Do not use polishing agents. Depending on the product ingredients, they could cause discolouration, stains, cracks or peeling of the coating.

### ▼ Instrument Panel Top (Soft pad) Maintenance

Extremely soft material is used for the soft pad surface. If the soft pad surface is rubbed harshly with a dry cloth, it could result in the surface being damaged and leaving white scratch marks.

1. Wipe the soiled area with a soft cloth soaked in a mild detergent (approx. 5%) diluted with water.
2. Wipe off the remaining detergent using a cloth soaked in clean water and wrung out well.

### ▼ Active Driving Display Maintenance\*

#### Windscreen type

The dust-proof sheet has a coating. When cleaning, do not use a hard or rough-surface cloth, or cleaning detergent. In addition, if a chemical solvent gets on the active driving display, wipe it off immediately. The dust-proof sheet could be damaged and the surface coating could be scratched. Use a fine, soft cloth such as those used for cleaning eyeglasses.

### NOTE

Use of compressed air when cleaning the dust-proof sheet is recommended.

### **Auto flip-up type**

The combiner and mirror surface have a special coating. When cleaning it, do not use a hard cloth, a cloth with a rough surface, or cleaning detergent. Use a fine-textured, soft cloth.

If a chemical solvent gets on the combiner or mirror surface, wipe it off immediately. Otherwise, they could be damaged and the surface coating could be scratched.

### **▼ Panel Maintenance**

If a panel becomes soiled, wipe it off with a soft cloth soaked in clean water and thoroughly wrung out.

If some areas require further cleaning, use the following procedure:

1. Wipe the soiled area with a soft cloth soaked in a mild detergent (approx. 5 %) diluted with water.
2. Wipe off the remaining detergent using a cloth soaked in clean water and wrung out well.

### **NOTE**

*Be particularly careful when cleaning shiny surface panels and metallic parts such as plating as they can be scratched easily.*

### **▼ Cleaning the Window Interiors**

If the windows become covered with an oily, greasy, or waxy film, clean them with glass cleaner. Follow the directions on the container.



- *Do not scrape or scratch the inside of the window glass. It could damage the thermal filaments and the aerial lines.*

- *When washing the inside of the window glass, use a soft cloth dampened in lukewarm water, gently wiping the thermal filaments and the aerial lines. Use of glass cleaning products could damage the thermal filaments and the aerial lines.*

# MEMO

# 7

## If Trouble Arises

Helpful information on what to do if a problem arises with the vehicle.

<b>Mazda ERA-GLONASS</b> .....	7-2	<b>Overheating</b> .....	7-36
Mazda ERA-GLONASS* .....	7-2	Overheating.....	7-36
<b>Parking in an Emergency</b> .....	7-13	<b>Emergency Towing</b> .....	7-38
Parking in an Emergency.....	7-13	Towing Description.....	7-38
Roadside Emergency Triangle		Towing Hooks.....	7-40
Retaining Strap* .....	7-13	<b>Warning/Indicator Lights and</b>	
<b>Flat Tyre</b> .....	7-14	<b>Warning Sounds</b> .....	7-42
Spare Tyre and Tool Storage.....	7-14	If a Warning Light Turns On or	
Emergency Flat Tyre Repair Kit* .....		Flashes.....	7-42
.....	7-18	Message Indicated in Multi-	
Changing a Flat Tyre (With Spare		information Display.....	7-60
Tyre).....	7-25	Message Indicated on	
<b>Battery Runs Out</b> .....	7-31	Display.....	7-63
Jump-Starting.....	7-31	Warning Sound is Activated.....	7-65
<b>Emergency Starting</b> .....	7-34	<b>When Liftgate Cannot be</b>	
Starting a Flooded Engine		<b>Opened</b> .....	7-72
(SKYACTIV-G 2.0, SKYACTIV-G		When Liftgate Cannot be	
2.5, and SKYACTIV-G 2.5T).....	7-34	Opened.....	7-72
Push-Starting.....	7-34	<b>Active Driving Display Does Not</b>	
Running Out of Fuel (SKYACTIV-D		<b>Operate</b> .....	7-73
2.2).....	7-35	If the Active Driving Display Does	
		Not Operate.....	7-73

# Mazda ERA-GLONASS


## Mazda ERA-GLONASS\*


When an emergency situation such as an accident or sudden illness occurs, the Mazda ERA-GLONASS dials the call centre automatically or the user can make a call to the call centre manually to enable a voice call.

The system operates automatically when the vehicle receives an impact of a certain level or more in a collision, or it can be operated manually using the Emergency call switch if an emergency situation arises such as sudden illness.

The call centre operator confirms the status via the voice call, confirms the vehicle's position information using the GPS/GLONASS\*<sup>1</sup>, and calls the police or emergency services.

\*1 GPS/GLONASS, short for “Global Positioning System/Global Navigation Satellite System”, is a system that obtains the vehicle's current location by receiving radio waves emitted from the GPS/GLONASS (operated by the Russian Federation) satellites to the ground.

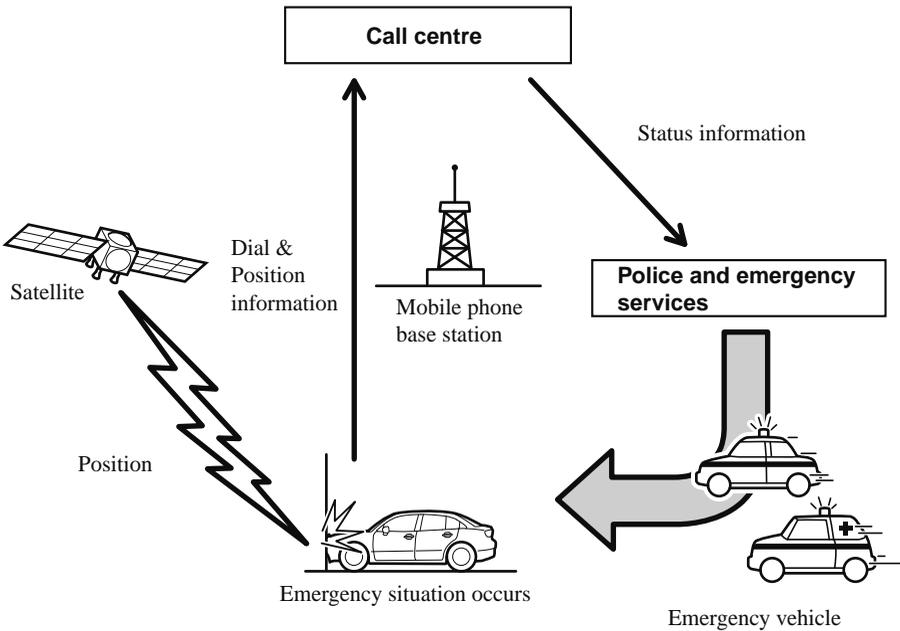


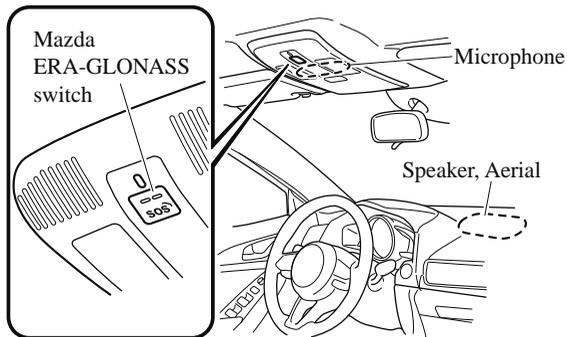**▼ Component Parts of Mazda ERA-GLONASS****⚠ WARNING**

***When using the Mazda ERA-GLONASS, keep medical devices such as an implanted heart pacemaker or defibrillator about 22 cm (8.7 in) or more away from the vehicle's aerial: Otherwise, the operation of the medical device may be affected by radio waves.***

# Mazda ERA-GLONASS

## ▼ Flow of Mazda ERA-GLONASS

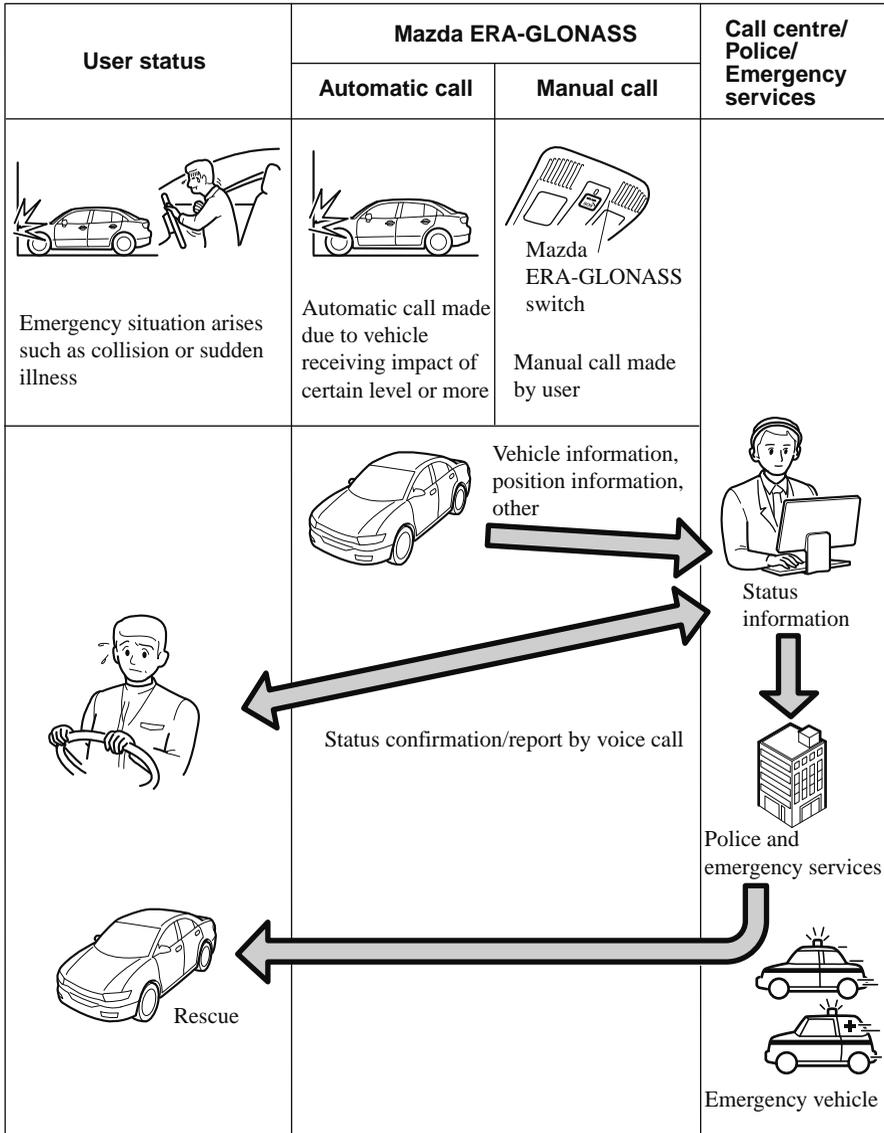

 <b>CAUTION</b>
--

- Do not disassemble the Mazda ERA-GLONASS. Otherwise, it could become damaged and may not function in an emergency.
- The Mazda ERA-GLONASS has a special built-in battery so that it can operate even if the power supply from the vehicle is cut such as in an accident.  
Heed the following cautions. If the Mazda ERA-GLONASS is not used correctly it may not operate.
  - The built-in battery is not a rechargeable type battery. Do not attempt to recharge the battery.
  - The built-in battery life is 3 years. Have the built-in battery replaced at an expert repairer (we recommend an Authorised Mazda Repairer) periodically.
  - If the built-in battery power is low due to natural discharge and the system determines that there is a problem, the Mazda ERA-GLONASS cannot be used. If the system determines that there is a problem, the indicator light (red) in the Emergency call switch turns on to notify the driver. Have the vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer). Refer to Indicator light/Beep sound on page 7-9.

**NOTE**

- The Mazda ERA-GLONASS can be used when the ignition is switched ON.
- There are two ways the Mazda ERA-GLONASS makes calls; automatically or manually.
- The Mazda ERA-GLONASS may not make a connection under the following conditions or depending on the use environment. If the Mazda ERA-GLONASS does not connect, make a call from another telephone such as the nearest available public telephone.
  - The vehicle is outside of a mobile phone network area
  - The vehicle is in a weak radio wave transmission environment (such as inside tunnels, underground parking areas, shadow of buildings, and mountain areas)
  - The vehicle does not receive an impact of a certain level or more even if an accident has occurred.
  - An extremely serious collision occurs resulting in damage to the Mazda ERA-GLONASS.
  - The position information cannot be obtained when signals cannot be received from the GNSS satellites, however, voice calls are possible.
- When a voice call is made by the Mazda ERA-GLONASS, the audio system is muted so that it does not interfere with the call.
- It may take some time for the call centre to respond after the Mazda ERA-GLONASS first starts operating.
- If you are unable to respond to an operator's questions after the voice call begins, the operator may proceed with emergency procedures at their own discretion.

## Mazda ERA-GLONASS

---

- Even if it is difficult for you to hear the operator's voice, your voice may be heard by the call centre. Continue explaining your circumstances.
- If the Mazda ERA-GLONASS operates while you are making a call with your mobile phone using Bluetooth® Hands-Free, the call may be interrupted.
- It may not be possible to receive a call using the Bluetooth® Hands-Free normally while the Mazda ERA-GLONASS is operating.
- A voice call with an operator may not be possible if the speaker or microphone is broken. If the speaker or microphone is broken, always have the vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).
- The Mazda ERA-GLONASS may not operate normally outside of the following temperature range: If the Mazda ERA-GLONASS does not operate normally, make a call from another telephone such as the nearest available public telephone.  
Operation temperature range: -40 °C (-40 °F) to 85 °C (185 °F)
- There may be a difference between the position information sent to the call centre and the actual position of the vehicle where the call was made. Indicate landmarks around the position of the vehicle where the call is being made to the operator during the voice call.

### Automatic emergency calls

If the vehicle receives an impact of a certain level or more in a collision, vehicle information is automatically sent to the call centre.

When the transmission of the vehicle information is completed or about 20 seconds have elapsed since the transmission began, the voice call with the call centre starts.




*If an automatic call is made, the built-in battery power may be depleted and emergency calls may not be possible in the event that an emergency occurs again. After an automatic emergency call has been made, have the built-in battery replaced by an expert repairer (we recommend an Authorised Mazda Repairer).*


### **NOTE**

- Automatic emergency calls cannot be cancelled by the user.
  - The call centre will end an emergency call. The user cannot end the emergency call.
  - If the vehicle receives an impact of a certain level or more in a collision, an automatic call is made even if the air bags do not deploy.
  - If a call is disconnected or a call cannot be made to the call centre correctly, an automatic call is made again to the call centre. Redialing cannot be cancelled.
1. If the vehicle receives an impact of a certain level or more in a collision, the Mazda ERA-GLONASS begins operating automatically.

- The indicator light (green) on the Emergency call switch flashes slowly (0.5 second intervals) and the call is made to the call centre.



- When the connection is established with the call centre, the indicator light (green) flashes somewhat quickly (0.3 second intervals) and the beep sounds simultaneously, and the transmission of the vehicle information begins.
- When the transmission of the vehicle information is completed or about 20 seconds have elapsed since the transmission began, the beep sounds and the voice call with the call centre starts.
- If the connection fails, the indicator light (red) turns on and the indicator light (green) flashes quickly (0.15 second intervals) and the beep sounds simultaneously. In this case, make a manual connection using the Emergency call switch because an automatic connection is not possible.



### **Manual emergency calls**

With the ignition switched ON, long-press the Emergency call switch and after releasing your finger from the switch, the vehicle information is automatically transmitted to the call centre.

When the transmission of the vehicle information is completed or about 20 seconds have elapsed since the transmission began, the voice call with the call centre starts.

### **NOTE**


- Only make calls manually for conditions requiring urgent treatment such as illness or serious injury.*

# Mazda ERA-GLONASS

---


- When making emergency calls manually, stop the vehicle in a safe location before making the call.
- The call centre will end an emergency call. The user cannot end the emergency call.
- If a call is disconnected or a call cannot be made to the call centre correctly, an automatic call is made again to the call centre. To cancel the redialing, refer to Manual emergency call cancellation.

1. Make sure that the ignition is switched ON.
2. Long-press the Emergency call switch on the overhead console and then release your finger from the switch.




Mazda ERA-GLONASS switch

3. The indicator light (green) on the Emergency call switch flashes slowly (0.5 second intervals) and the call is made to the call centre.



4. When the connection is established with the call centre, the indicator light (green) flashes somewhat quickly (0.3 second intervals) and the beep sounds simultaneously, and the transmission of the vehicle information begins.
5. When the transmission of the vehicle information is completed or about 20 seconds have elapsed since the transmission began, the beep sounds and the voice call with the call centre starts.

6. If the connection fails, the indicator light (red) turns on and the indicator light (green) flashes quickly (0.15 second intervals), and the beep sounds simultaneously. Make a manual emergency call again.

**NOTE**

If a call to the call centre does not connect even though the indicator light shows a call is possible, make a call to the police or other authority by means other than the Mazda ERA-GLONASS.

**Manual emergency call cancellation**

A manual emergency call can be cancelled even after the Emergency call switch has been pressed by pressing the switch again, as long as the call with the call centre has not begun. If the call cannot be cancelled and the call with the call centre has begun, tell the operator that the call is mistaken.

**▼ Indicator Light/Beep Sound**

The indicator light turns on/flashes and beep sounds are activated to notify the driver of the system operation status or if there is a problem with the system.

Status	Indicator light			Beep sound status	On/flashing conditions
	Green	Red	Flash interval		
Diagnosis	Turns on	Turns on	—	—	When the ignition is switched ON, it turns on and then turns off after a few seconds.  <b>NOTE</b> <i>A manual emergency call is not possible during diagnosis.</i>
Normal	Turns off	Turns off	—	—	The system is operating normally.

# Mazda ERA-GLONASS

Status	Indicator light			Beep sound status	On/flashing conditions
	Green	Red	Flash interval		
Malfunction	Turns off	Turns on	—	3 beeps (Slow intermittent sound)	<ul style="list-style-type: none"> <li>• A system malfunction is detected.</li> <li>• The remaining power of the built-in battery is low.</li> </ul> <div style="border: 1px solid black; padding: 5px; margin: 10px 0;">  <b>CAUTION</b> </div> <p><i>If the indicator light (red) remains on constantly, the system will not operate normally. Have the vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer) as soon as possible.</i></p>
Call being made with call centre	Flashes	Turns off	Slow (0.5 second intervals)	The beep does not sound, but the ringback tone can be heard.	An emergency call is being made by the Mazda ERA-GLONASS.
Vehicle information is being transmitted	Flashes	Turns off	Somewhat quick (0.3 second intervals)	Continuous intermittent sound	Vehicle information is being transmitted to the call centre.
Start of voice call	Turns on	Turns off	—	1 beep	During a voice call with the call centre.
During voice call	Turns on	Turns off	—	—	
Connection failure	Flashes	Turns on	Quick (0.15 second intervals)	3 beeps (Fast intermittent sound)	When an emergency call fails to connect.

## ▼ Test Mode

The test mode function makes sure that the Mazda ERA-GLONASS can operate normally. Have your vehicle tested at an expert repairer (we recommend an Authorised Mazda Repairer) when performing the test mode.

### Method to start test mode

Switch the ignition ON while the parking brake is applied, and wait 2 minutes with the vehicle stopped.


# Mazda ERA-GLONASS

After that, perform the following procedure.


Turn on the hazard warning lights.




**Within 5 seconds**  
Move the signal lever up to right turn




**Within 1 second**  
Return the signal lever to off




**Within 1 second**  
Move the signal lever up to right turn




**Within 1 second**  
Return the signal lever to off




**Within 1 second**  
Move the signal lever up to right turn




**Within 1 second**  
Return the signal lever to off




**Within 1 second**  
Move the signal lever down to left turn




**Within 1 second**  
Return the signal lever to off



**Within 1 second**  
Move the signal lever down to left turn



**Within 1 second**  
Return the signal lever to off




**Within 5 seconds**  
Turn off the hazard warning lights.



Both red and green Mazda ERA-GLONASS switch indicator lights turn on.




**Within 5 seconds**  
Press the Mazda ERA-GLONASS switch for one second or longer and release it.



## Mazda ERA-GLONASS

---

After the procedure is completed, the test mode is performed in the following order automatically.

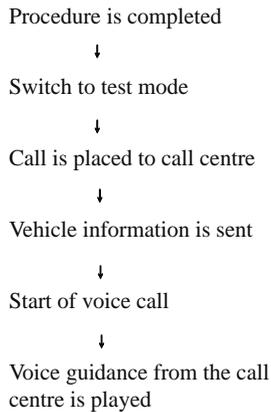

### **NOTE**


*Communication with the call centre may fail if the reception is poor. Perform the test mode in a location with good reception.*

The test mode finishes automatically.

## Parking in an Emergency

### Parking in an Emergency

The hazard warning lights should always be used when you stop on or near a roadway in an emergency.



The hazard warning lights warn other drivers that your vehicle is a traffic hazard and that they must take extreme caution when near it.




Depress the hazard warning flasher and all the direction indicators will flash. The hazard warning indicator lights in the instrument cluster flash simultaneously.

#### NOTE

- The direction indicators do not work when the hazard warning lights are on.
- Check local regulations about the use of hazard warning lights while the vehicle is being towed to verify that it is not in violation of the law.

### Roadside Emergency Triangle Retaining Strap\*

Keep the roadside emergency triangle in the left side trim and secure it with the strap.

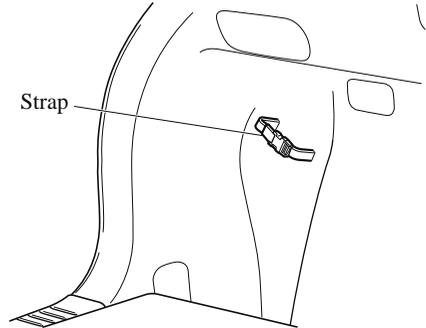

# Flat Tyre

## Spare Tyre and Tool Storage


### NOTE

Your vehicle may or may not be equipped with a spare tyre, jack, wheel brace, and tool bag. For details, consult an expert repairer (we recommend an Authorised Mazda Repairer).


Spare tyre and tools are stored in the locations illustrated in the diagram.

### With spare tyre

#### Type A

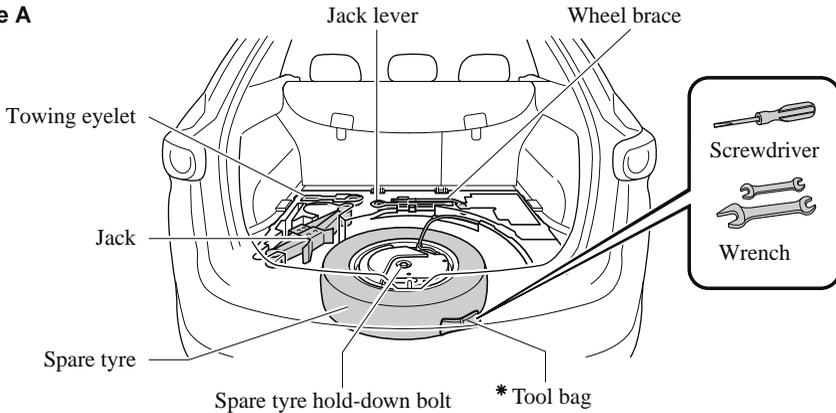


#### Type B

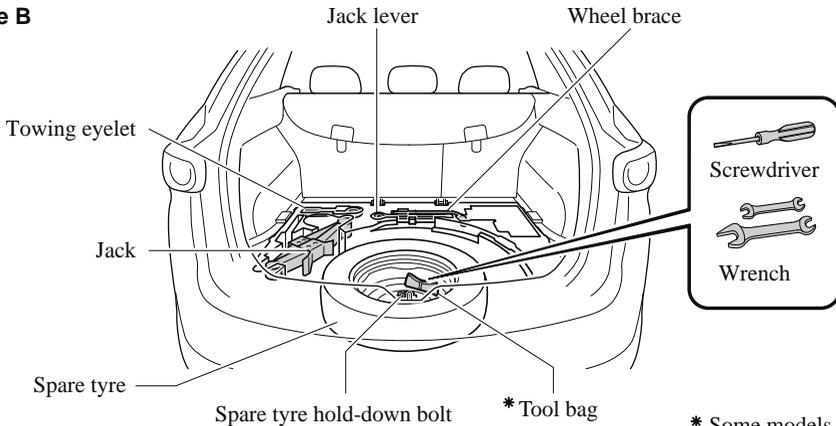


\* Some models.

**Without spare tyre**  
**Type A**

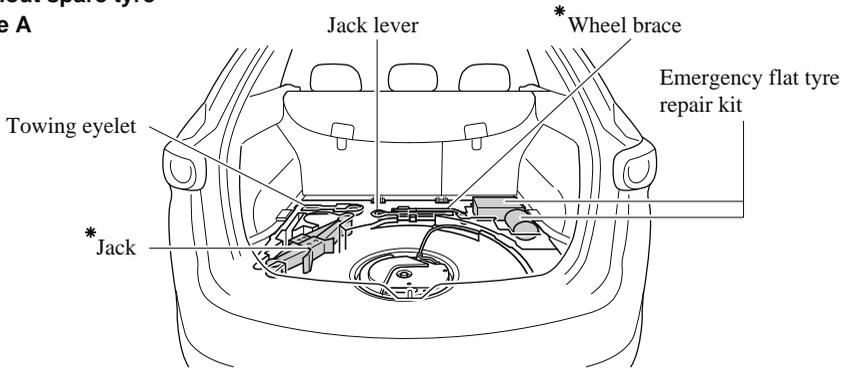

**Type B**

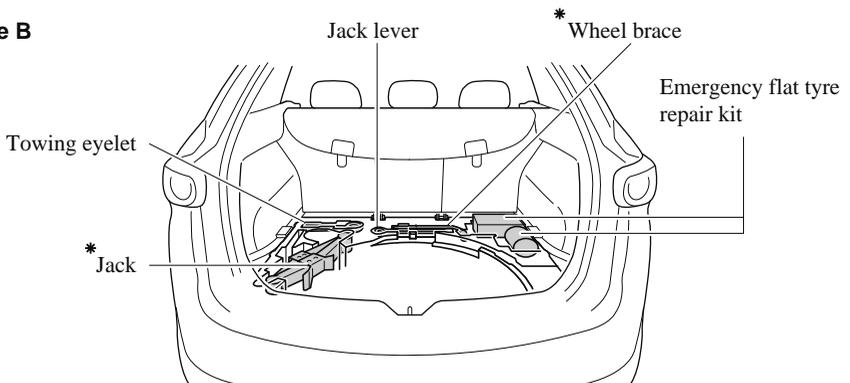



\* Some models.

# Flat Tyre


## ▼ Jack\*

### To remove the jack

1. Open the luggage board, and lift it.



2. Remove the jack.



### To secure the jack

Perform the removal procedure in reverse.

### Maintenance

- Always keep the jack clean.

- Make sure the moving parts are kept free from dirt or rust.
- Make sure the screw thread is adequately lubricated.

## ▼ Spare Tyre\*

Your Mazda has a temporary spare tyre. The temporary spare tyre is lighter and smaller than a conventional tyre, and is designed only for emergency use and should be used only for VERY short periods. Temporary spare tyres should NEVER be used for long drives or extended periods.

### **⚠ WARNING**

**Do not install the temporary spare tyre on the front wheels (driving wheels):**

*Driving with the temporary spare tyre on one of the front driving wheels is dangerous. Handling will be affected. You could lose control of the vehicle, especially on ice or snow bound roads, and have an accident. Move a regular tyre to the front wheel and install the temporary spare tyre to the rear.*


### **⚠ CAUTION**

- When using the temporary spare tyre, driving stability may decrease compared to when using only the conventional tyre. Drive carefully.
- To avoid damage to the temporary spare tyre or to the vehicle, observe the following precautions:
  - Do not exceed 80 km/h (50 mph).


- Avoid driving over obstacles. Also, do not drive through an automatic car wash. This tyre's diameter is smaller than a conventional tyre, so the ground clearance is reduced.
- Do not use a tyre chain on this tyre because it will not fit properly.
- Do not use your temporary spare tyre on any other vehicle, it has been designed only for your Mazda.
- Use only one temporary spare tyre on your vehicle at the same time.

**To remove the spare tyre**

1. Open the luggage board, and remove it.

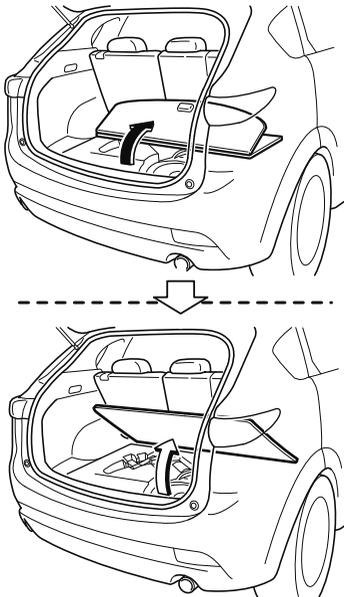


2. For vehicles equipped with a sub-woofer, uncouple the connector.

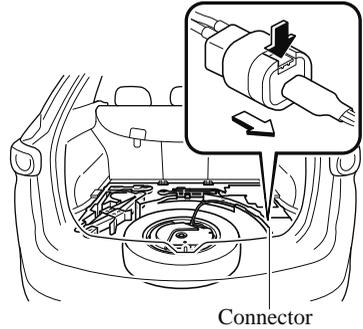

**NOTE**

*Extra strength may be required to uncouple the connector. Be sure to squeeze the tab firmly.*


3. For vehicles equipped with a sub-woofer, loosen the hold-down bolt and remove the woofer and spare tyre.



## Flat Tyre

For vehicles not equipped with a sub-woofer, turn the spare tyre hold-down bolt anticlockwise and remove the spare tyre.

Spare tyre hold-down bolt



### To secure the spare tyre

Store the spare tyre in the reverse order of removal. After storing, verify that the spare tyre is stored securely.

## Emergency Flat Tyre Repair Kit\*

The emergency flat tyre repair kit included with your Mazda is for a temporary repair of a slightly damaged flat tyre resulting from running over nails or similar sharp objects on the road surface.

Perform the emergency flat tyre repair without removing the nail or similar sharp object which punctured the tyre.

### **NOTE**

*Your vehicle is not equipped with a spare tyre. In the event of a flat tyre, use the emergency flat tyre repair kit to repair the tyre temporarily. When doing the repair, refer to the instructions included in the emergency flat tyre repair kit. If an emergency repair was performed on a flat tyre using the emergency flat tyre repair kit, have an expert repairer (we recommend an Authorised Mazda Repairer), repair or replace the tyre as soon as possible.*

### ▼ About the Emergency Flat Tyre Repair Kit

The emergency flat tyre repair kit includes the following items.



Tyre sealant



Injection hose




Compressor



Spare valve core



Valve core tool



Instructions



Speed restriction sticker



### **WARNING**

**Do not allow children to touch the tyre sealant:**

- *Ingestion of tyre sealant is dangerous. In the event tyre sealant is accidentally swallowed, drink large amounts of water immediately and seek medical assistance.*
- *Tyre sealant that comes into contact with the eyes and skin is dangerous. If tyre sealant enters the eyes or contacts the skin, flush immediately with large amounts of water and seek medical assistance.*

### **NOTE**


- *The tyre sealant cannot be reused. Purchase new tyre sealant at an expert repairer (we recommend an Authorised Mazda Repairer).*
- *The emergency flat tyre repair kit cannot be used in the following cases. Consult an expert repairer (we recommend an Authorised Mazda Repairer).*
  - *The period of effective use for the tyre sealant has expired. (The period of effectiveness is indicated on the bottle label.)*
  - *The tear or puncture exceeds about 4 mm (0.16 in).*
  - *The damage has occurred to an area of the tyre other than the tread.*
  - *The vehicle has been driven with nearly no air remaining in the tyre.*
  - *The tyre has come off the wheel rim.*
  - *Damage to the wheel rim has occurred.*
  - *The tyre has 2 or more punctures.*

### ▼ Using the Emergency Flat Tyre Repair Kit


1. Park on a level surface off the right-of-way and set the parking brake.
2. Put a vehicle with an automatic transaxle in Park (P), a manual transaxle in Reverse (R) or 1, and turn off the engine.
3. Turn on the hazard warning flasher.

# Flat Tyre

4. Unload passengers and luggage, and remove the emergency flat tyre repair kit.



5. Shake the tyre sealant well.



**⚠ CAUTION**


*If the bottle is shaken after the injection hose is screwed on, tyre sealant could spray out from the injection hose. Tyre sealant contacting clothing or other objects may be impossible to remove. Shake the bottle before screwing on the injection hose.*

**NOTE**


*The tyre sealant can be used at outside temperatures down to  $-30^{\circ}\text{C}$  ( $-22^{\circ}\text{F}$ ).*

*In extremely cold temperatures ( $0^{\circ}\text{C}$  ( $32^{\circ}\text{F}$ ) or below), the tyre sealant hardens easily and injection of the sealant will be difficult. Warm the sealant inside the vehicle before doing the injection work.*

6. Remove the cap from the bottle. Screw on the injection hose with the bottle's inner cap left on to break the inner cap.




7. Remove the valve cap from the flat tyre. Press the back of a valve core tool to the core of the tyre valve and bleed all the remaining air.

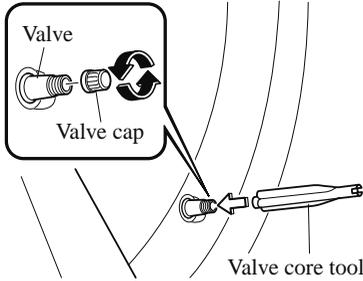

**⚠ CAUTION**

*If there is air remaining in the tyre when the valve core is removed, the valve core could fly out. Remove the valve core carefully.*


8. Turn the valve core anticlockwise with the valve core tool and remove the valve core.

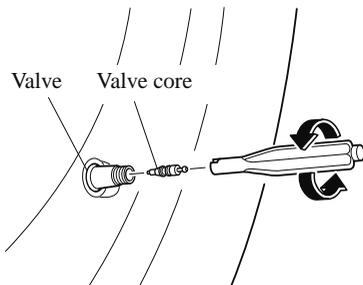


**NOTE**

*Store the valve core in a place where it will not get dirty.*

9. Remove the plug from the injection hose and insert the injection hose into the valve.

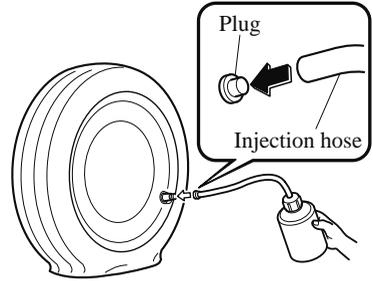

10. Hold the bottom of the bottle upright, squeeze the bottle with your hands, and inject the entire amount of tyre sealant into the tyre.

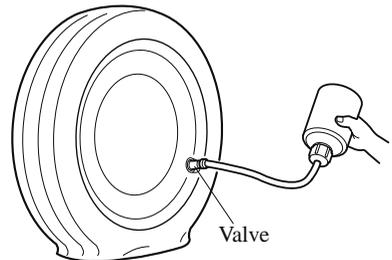

**NOTE**

*The tyre sealant cannot be reused. Purchase a new tyre sealant kit at an expert repairer (we recommend an Authorised Mazda Repairer).*


# Flat Tyre

11. Pull out the injection hose from the valve. Reinsert the valve core into the valve and turn it clockwise to install it.

### NOTE

*Do not throw away the empty tyre sealant bottle after use. Return the empty tyre sealant bottle to an expert repairer (we recommend an Authorised Mazda Repairer), when replacing the tyre. The empty tyre sealant bottle will need to be used to extract and dispose of the used sealant from the tyre.*

12. Adhere the speed restriction sticker to the speedometer.




## WARNING


**Attach the speed restriction sticker in a place where it can be viewed easily by the driver:**

- Applying the speed restriction sticker to the steering wheel is dangerous as it could interfere with the air bag deployment and result in serious injury.
- Do not apply the sticker to any position other than the position indicated in the illustration of the speedometer.

13. Install the compressor hose to the tyre valve.



14. Insert the compressor plug into the interior accessory socket and switch the ignition to ACC (page 5-109).

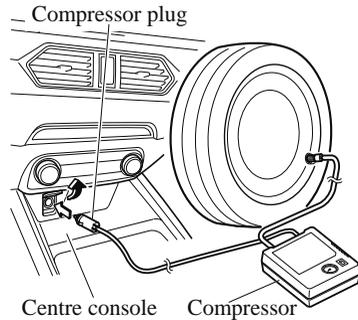

## CAUTION

- Before pulling out the compressor plug from the electrical socket, make sure the compressor power switch is off.
  - The compressor turns on and off with the push-button switch.
15. Turn the compressor switch on and inflate the tyre carefully to the correct inflation pressure.

 **WARNING**

**Never operate the compressor above 300 kPa (3.1 kgf/cm<sup>2</sup>, 3 bar, 43.5 psi):** Operating the compressor above 300 kPa (3.1 kgf/cm<sup>2</sup>, 3 bar, 43.5 psi) is dangerous. When the inflation pressure rises above 300 kPa (3.1 kgf/cm<sup>2</sup>, 3 bar, 43.5 psi), heated air will be exhausted from the back of the compressor and you could be burned.

**NOTE**

- Check the tyre inflation pressure label (driver's door frame) for the correct tyre inflation pressure.
- Do not use the compressor for longer than 10 minutes because using the compressor for long periods could damage it.
- If the tyre does not inflate, repair of the tyre may not be possible. If the tyre does not reach the correct inflation pressure within a 10-minute period, it probably has received more extensive damage. When this happens, the emergency flat tyre repair kit cannot be used to repair the tyre. Contact an expert repairer (we recommend an Authorised Mazda Repairer).
- If the tyre has been over-inflated, loosen the screw cap on the compressor and bleed some of the air out.

16. When the tyre has been inflated to the proper inflation pressure, turn the compressor switch off and remove the compressor hose from the tyre valve.
17. Install the tyre valve cap.

18. Put the emergency flat tyre repair kit in the boot and continue driving.

 **CAUTION**

- Drive carefully to an expert repairer (we recommend an Authorised Mazda Repairer) and keep the vehicle speed below 80 km/h (50 mph).
- If the vehicle is driven 80 km/h (50 mph) or higher, the vehicle might begin to vibrate.

**NOTE**

**(With Tyre Pressure Monitoring System)**

*If the tyre is not properly inflated, the tyre pressure monitoring system warning light will illuminate (page 7-46).*

19. After driving the vehicle for 10 minutes or 5 km (3 miles), check the tyre pressure with the tyre pressure gauge equipped with the compressor. If the tyre pressure has fallen below the correct tyre pressure, inflate the tyre to the correct pressure again following the steps from number 14.

 **CAUTION**

- If the tyre inflation pressure falls below 130 kPa (1.3 kgf/cm<sup>2</sup> or bar, 18.9 psi), repair cannot be done with the repair kit. Park the vehicle on a level surface off the right-of-way and contact an expert repairer (we recommend an Authorised Mazda Repairer).

## Flat Tyre

---

➤ If the tyre inflation pressure continues to remain low after repeating steps 13 to 20, park the vehicle on a level surface off the right-of-way and contact an expert repairer (we recommend an Authorised Mazda Repairer).

### **NOTE**

When checking the tyre inflation pressure with the tyre pressure gauge on the compressor unit, make sure the compressor switch is turned off.

20. The emergency flat tyre repair is completed if the tyre air pressure does not decrease. Drive the vehicle carefully to the nearest expert repairer (we recommend an Authorised Mazda Repairer) promptly and have the tyre replaced. Mazda recommends that the tyre be replaced with a new one. If the tyre is to be repaired and reused, consult an expert repairer (we recommend an Authorised Mazda Repairer).

Peel off the speed restriction sticker after replacing the tyre.



➤ For a tyre which has undergone an emergency flat tyre repair using the emergency flat tyre repair kit, Mazda recommends that the tyre be replaced with a new one as soon as possible. If the tyre is to be repaired and reused, consult an expert repairer (we recommend an Authorised Mazda Repairer).

➤ The wheel can be reused after any sealant adhering to it is wiped off and carefully inspected. However, replace the tyre valve with a new one.

### ▼ Inspecting the Emergency Flat Tyre Repair Kit

Inspect the emergency flat tyre repair kit at regular intervals.

- Check the tyre sealant period of effective use.
- Check the operation of the tyre compressor.

### **NOTE**

The tyre sealant has a period of effective use. Check the period of effective use indicated on the bottle label and do not use it if it has expired. Have the tyre sealant replaced at an expert repairer (we recommend an Authorised Mazda Repairer) before the period of effective use has expired.

## Changing a Flat Tyre (With Spare Tyre)

### NOTE

*If the following occurs while driving, it could indicate a flat tyre.*

- *Steering becomes difficult.*
- *The vehicle begins to vibrate excessively.*
- *The vehicle pulls in one direction.*

If you have a flat tyre, drive slowly to a level spot that is well off the road and out of the way of traffic to change the tyre. Stopping in traffic or on the shoulder of a busy road is dangerous.

### **WARNING**

#### **Be sure to follow the directions for changing a tyre:**

*Changing a tyre is dangerous if not done properly. The vehicle can slip off the jack and seriously injure someone.*

*No person should place any portion of their body under a vehicle that is supported by a jack.*


#### **Never allow anyone inside a vehicle supported by a jack:**

*Allowing someone to remain in a vehicle supported by a jack is dangerous. The occupant could cause the vehicle to fall resulting in serious injury.*

### NOTE

*Make sure the jack is well lubricated before using it.*

1. Park on a hard, level surface off the right-of-way and firmly set the parking brake.
2. Put a vehicle with an automatic transaxle in Park (P), a manual transaxle in Reverse (R) or 1, and turn off the engine.
3. Turn on the hazard warning flasher.
4. Have passengers get out of the vehicle and away from the vehicle and traffic.
5. Remove any luggage, the jack, tools, and spare tyre (page 7-14).
6. Block the wheel diagonally opposite the flat tyre. When blocking a wheel, place a tyre block both in front and behind the tyre.

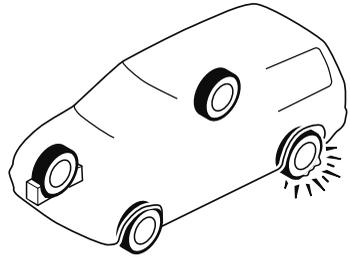

### NOTE

*When blocking a tyre, use rocks or wood blocks of sufficient size if possible to hold the tyre in place.*

# Flat Tyre


## ▼ Removing a Flat Tyre

### **WARNING**

**When jacking-up a vehicle, always shift the shift lever to 1st or R position (manual transaxle vehicle) or shift the selector lever to P position (automatic transaxle vehicle), apply the parking brake, and place wheel blocks in the position diagonally opposed to the jack:**

*Changing a flat tyre without using wheel blocks is dangerous because the vehicle may move and fall off the jack even with the shift lever in 1st or R position, or the selector lever is in P position, which could result in an accident.*


1. If your vehicle is equipped with steel wheels, pry off the centre cap with the bevelled end of the jack lever.

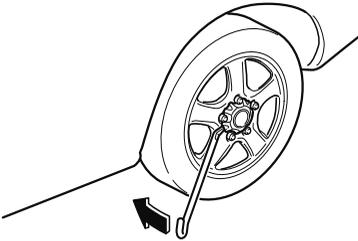


### **CAUTION**

*Use the jack lever when removing the centre cap. Using your hands to remove it may cause an injury. In addition, using a tool other than the jack lever may cause damage to the wheel or the centre cap.*


2. Loosen the wheel nuts by turning them anticlockwise one turn each, but do not remove any wheel nuts until the tyre has been raised off the ground.

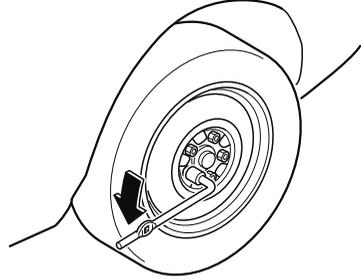


3. Place the jack on the ground.
4. Turn the jack screw in the direction shown in the figure and adjust the jack head so that it is close to the jack-up position.

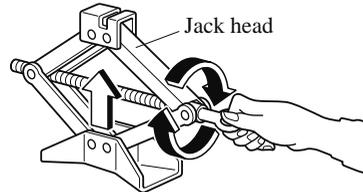

5. Place the jack under the jack-up position closest to the tyre being changed with the jack head squarely under the jack-up point.

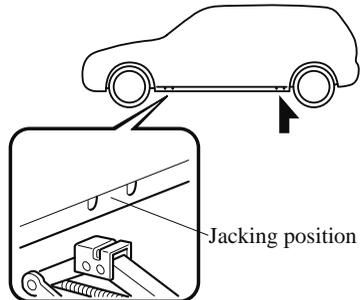

- Continue raising the jack head gradually by rotating the screw with your hand until the jack head is inserted into the jack-up position.

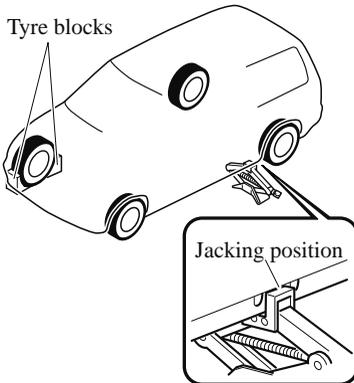

**⚠ WARNING**

**Use only the front and rear jacking positions recommended in this manual:**

Attempting to jack the vehicle in positions other than those recommended in this manual is dangerous. The vehicle could slip off the jack and seriously injure or even kill someone. Use only the front and rear jacking positions recommended in this manual.

**Do not jack up the vehicle in a position other than the designated jack-up position or place any objects on or under the jack:**

Jacking up the vehicle in a position other than the designated jack-up position or placing objects on or under the jack is dangerous as it could deform the vehicle body or the vehicle could fall off the jack resulting in an accident.

**Use only the jack provided with your Mazda:**

Using a jack that is not designed for your Mazda is dangerous. The vehicle could slip off the jack and seriously injure someone.


**Never place objects under the jack:**

Jacking the vehicle with an object under the jack is dangerous. The jack could slip and someone could be seriously injured by the jack or the falling vehicle.

**NOTE**

When raising the jack head into the jacking position and aligning the groove in the jack head with the rail under the vehicle body, the top of the jack head contacts the vehicle's underbody without the rail contacting the bottom of the groove.

- Insert the jack lever and attach the wheel brace to tyre jack.

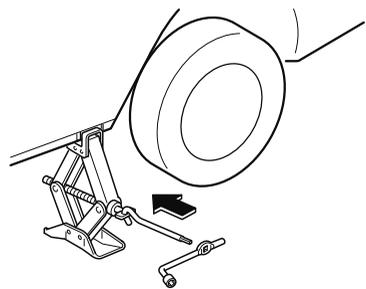

# Flat Tyre

- Turn the jack handle clockwise and raise the vehicle high enough so that the spare tyre can be installed. Before removing the wheel nuts, make sure your Mazda is firmly in position and that it cannot slip or move.



## **WARNING**

***Do not jack up the vehicle higher than is necessary:***

*Jacking up the vehicle higher than is necessary is dangerous as it could destabilize the vehicle resulting in an accident.*

***Do not start the engine or shake the vehicle while it is jacked up:***

*Starting the engine or shaking the vehicle while it is jacked up is dangerous as it could cause the vehicle to fall off the jack resulting in an accident.*


***Never go under the vehicle while it is jacked up:***

*Going under the vehicle while it is jacked up is dangerous as it could result in death or serious injury if the vehicle were to fall off the jack.*

- Remove the wheel nuts by turning them anticlockwise; then remove the wheel and centre cap.

## ▼ **Mounting the Spare Tyre**

- Remove dirt and grime from the mounting surfaces of the wheel and hub, including the hub bolts, with a cloth.

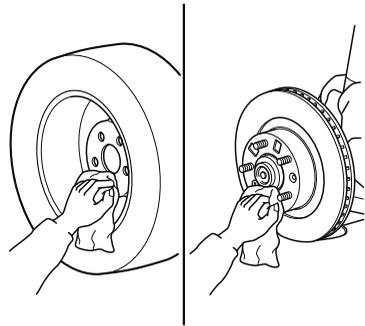


## **WARNING**

***Make sure the mounting surfaces of the wheel, hub and wheel nuts are clean before changing or replacing tyres:***

*When changing or replacing a tyre, not removing dirt and grime from the mounting surfaces of the wheel, hub and hub bolts is dangerous. The wheel nuts could loosen while driving and cause the tyre to come off, resulting in an accident.*

- Mount the spare tyre.

3. Install the wheel nuts with the bevelled edge inward; tighten them by hand.

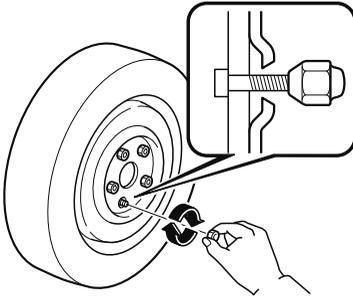


**⚠ WARNING**

**Do not apply oil or grease to wheel nuts and bolts and do not tighten the wheel nuts beyond the recommended tightening torque:**

*Applying oil or grease to wheel nuts and bolts is dangerous. The wheel nuts could loosen while driving and cause the tyre to come off, resulting in an accident. In addition, wheel nuts and bolts could be damaged if tightened more than necessary.*

4. Turn the wheel brace anticlockwise and lower the vehicle.
5. Use the wheel brace to tighten the nuts in the order shown.

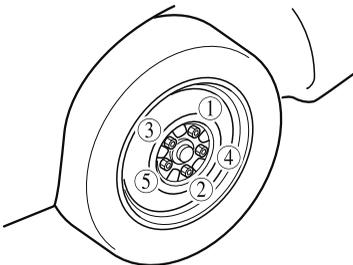

If you are unsure of how tight the nuts should be, have them inspected at an expert repairer (we recommend an Authorised Mazda Repairer).

Nut tightening torque	
N·m (kgf·m, ft·lbf)	108—147 (12—14, 80—108)

**⚠ WARNING**

**Always securely and correctly tighten the wheel nuts:**

*Improperly or loosely tightened wheel nuts are dangerous. The wheel could wobble or come off. This could result in loss of vehicle control and cause a serious accident.*

**Be sure to reinstall the same nuts you removed or replace them with metric nuts of the same configuration:**

*Because the wheel studs and wheel nuts on your Mazda have metric threads, using a non-metric nut is dangerous. On a metric stud, it would not secure the wheel and would damage the stud, which could cause the wheel to slip off and cause an accident.*

6. Remove the tyre blocks and store the tools and jack.
7. Store the damaged tyre in the luggage compartment.
8. Check the inflation pressure. Refer to Tyres on page 9-10.
9. Have the flat tyre repaired or replaced as soon as possible.

# Flat Tyre

---

 **WARNING**

***Do not drive with any tyres that have incorrect air pressure:***

*Driving on tyres with incorrect air pressure is dangerous. Tyres with incorrect pressure could affect handling and result in an accident. When you check the regular tyres' air pressure, check the spare tyre, too.*

***NOTE***

*To prevent the jack and tool from rattling, store them properly.*

## Jump-Starting

Jump-starting is dangerous if done incorrectly. So follow the procedure carefully. If you feel unsure about jump-starting, we strongly recommend that you have a competent service technician do the work.

### **WARNING**



#### **Follow These Precautions Carefully:**

To ensure safe and correct handling of the battery, read the following precautions carefully before using the battery or inspecting it.



**Keep flames and sparks away from open battery cells and do not allow metal tools to contact the positive (+) or negative (-) terminal of the battery when working near a battery. Do not allow the positive (+) terminal to contact the vehicle body:**

Flames and sparks near open battery cells are dangerous. Hydrogen gas, produced during normal battery operation, could ignite and cause the battery to explode. An exploding battery can cause serious burns and injuries. Keep all flames including cigarettes and sparks away from open battery cells.



**Keep all flames and sparks away from open battery cells because hydrogen gas is produced from open battery cells while charging the battery or adding battery fluid:**

Flames and sparks near open battery cells are dangerous. Hydrogen gas, produced during normal battery operation, could ignite and cause the battery to explode. An exploding battery can cause serious burns and injuries. Keep all flames including cigarettes and sparks away from open battery cells.

#### **Do not jump-start a frozen battery or one with a low fluid level:**

Jump-starting a frozen battery or one with a low fluid level is dangerous. It may rupture or explode, causing serious injury.

#### **Connect the negative lead to a good ground point away from the battery:**

Connecting the end of the second jumper lead to the negative (-) terminal of the discharged battery is dangerous.

A spark could cause the gas around the battery to explode and injure someone.

## Battery Runs Out

---

**Route the jumper leads away from parts that will be moving:**

Connecting a jumper lead near or to moving parts (cooling fans, belts) is dangerous. The lead could get caught when the engine starts and cause serious injury.




Use only a 12 V booster system. You can damage a 12 V starter, ignition system, and other electrical parts beyond repair with a 24 V power supply (two 12 V batteries in series or a 24 V motor generator set).

**NOTE**

Do not use vehicles with i-ELOOP as a booster vehicle.

1. Move the booster vehicle so that its battery is as close as possible to your vehicle's battery.
2. Make sure that the power such as for the headlights and air conditioner is turned off.
3. Remove the battery cover.

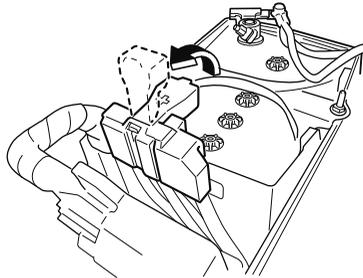

4. Turn off the booster vehicle's engine and connect the jumper leads in the following order.  
Make sure that the jumper leads are securely connected so that they do not disconnect due to engine vibrations.

**1st lead**

- ① Positive (+) terminal on the discharged battery
- ② Positive (+) terminal on booster vehicle's battery


**2nd lead**

- ③ Negative (-) terminal on booster vehicle's battery

# Battery Runs Out

④ Location shown in the figure (do not connect to the negative (-) terminal of the battery)

Connect leads in numerical order and disconnect in reverse order.

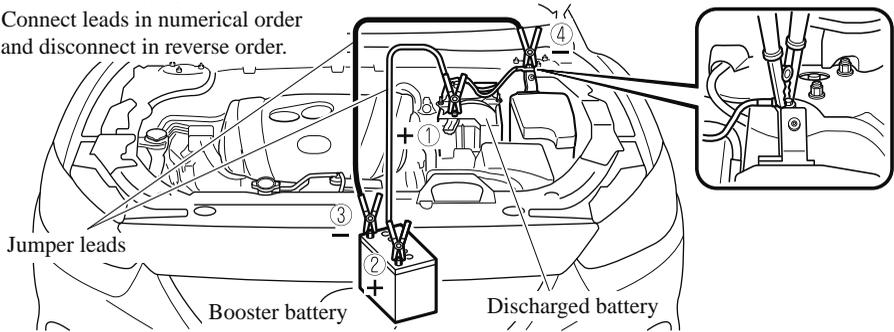

5. Start the booster vehicle's engine and rev the engine.
6. Start the engine of your vehicle. Run the engines for about 3 minutes to temporarily charge the battery of your vehicle.
7. **(Vehicles with i-ELOOP)**  
The i-ELOOP charging indication message may display in the instrument cluster after the engine is started. The message is no longer displayed when the engine is running and the charging is completed. Make sure that the message is no longer displayed.

## i-ELOOP

### i-ELOOP charging

#### **NOTE**

*If the vehicle is driven while the message is displayed, a sound is activated. If you turn the steering wheel while the message is displayed, it will feel heavier than normal, but this does not indicate a problem. The steering operation will return to normal after the message has disappeared.*

*Do not disconnect the jumper leads while the message is displayed.*

8. Disconnect the jumper leads in the reverse order of their connection.
9. Install the battery cover.
10. Have your vehicle inspected by an expert repairer (we recommend an Authorised Mazda Repairer) as soon as possible.

## Emergency Starting

---

### Starting a Flooded Engine (SKYACTIV-G 2.0, SKYACTIV-G 2.5, and SKYACTIV-G 2.5T)

If the engine fails to start, it may be flooded (excessive fuel in the engine).

Follow this procedure:

1. If the engine does not start within 5 seconds on the first try, wait 10 seconds and try again.
2. Make sure the parking brake is on.
3. Depress the accelerator all the way and hold it there.
4. Depress the clutch pedal (Manual transaxle) or the brake pedal (Automatic transaxle), then press the push button start. If the engine starts, release the accelerator immediately because the engine will suddenly rev up.
5. If the engine fails to start, crank it without depressing the accelerator.

If the engine still does not start using the previous procedure, have your vehicle inspected by an expert repairer (we recommend an Authorised Mazda Repairer).

### Push-Starting

Do not push-start your Mazda.



***Never tow a vehicle to start it:***

*Towing a vehicle to start it is dangerous. The vehicle being towed could surge forward when its engine starts, causing the 2 vehicles to collide. The occupants could be injured.*



*Do not push-start a vehicle that has a manual transaxle. It can damage the emission control system.*

***NOTE***

*You cannot start a vehicle with an automatic transaxle by pushing it.*

## Running Out of Fuel (SKYACTIV-D 2.2)

### **CAUTION**

*Do not try starting the engine for more than 10 seconds at a time. Doing so, could damage the starter. If the engine does not start on the first try wait about 20 seconds before trying again.*

If your vehicle runs out of fuel, add at least 10 L (2.6 US gal, 2.2 Imp gal) of diesel fuel, and try to restart the engine. Because air can get into fuel lines when a vehicle runs out of fuel, your engine may take longer to start. If the engine does not start the first time, try starting it several more times. If it still does not start, contact an expert repairer (we recommend an Authorised Mazda Repairer).

# Overheating

## Overheating

If the temperature gauge indicates overheating or the high engine coolant temperature warning light turns on, the vehicle loses power, or you hear a loud knocking or pinging noise, the engine is probably too hot.

### **WARNING**



***Pull over to a safe location, then switch the ignition off and make sure the fan is not running before attempting to work near the cooling fan:***

*Working near the cooling fan when it is running is dangerous. The fan could continue running indefinitely even if the engine has stopped and the engine compartment temperature is high. You could be hit by the fan and seriously injured.*



***Do not remove either cooling system cap when the engine and radiator are hot:***

*When the engine and radiator are hot, scalding coolant and steam may shoot out under pressure and cause serious injury.*

***Open the bonnet ONLY after steam is no longer escaping from the engine:***

*Steam from an overheated engine is dangerous. The escaping steam could seriously burn you.*

If the temperature gauge indicates overheating or the high engine coolant temperature warning light turns on:

1. Drive safely to the side of the road and park off the right-of-way.
2. Put a vehicle with an automatic transaxle in park (P), a manual transaxle in neutral.
3. Apply the parking brake.
4. Turn off the air conditioner.
5. Check whether coolant or steam is escaping from the engine compartment.

### **If steam is coming from the engine compartment:**

Do not go near the front of the vehicle. Stop the engine. Wait until the steam dissipates, then open the bonnet and start the engine.

### **If neither coolant nor steam is escaping:**

Open the bonnet and idle the engine until it cools.

### **CAUTION**

*If the cooling fan does not operate while the engine is running, the engine temperature will increase. Stop the engine and call an expert repairer (we recommend an Authorised Mazda Repairer).*


6. Make sure the cooling fan is operating, then turn off the engine after the temperature has decreased.

7. When cool, check the coolant level.  
If it is low, look for coolant leaks from the radiator and hoses.


**If you find a leak or other damage, or if coolant is still leaking:**

Stop the engine and call an expert repairer (we recommend an Authorised Mazda Repairer).


**SKYACTIV-G 2.0 and SKYACTIV-G 2.5**

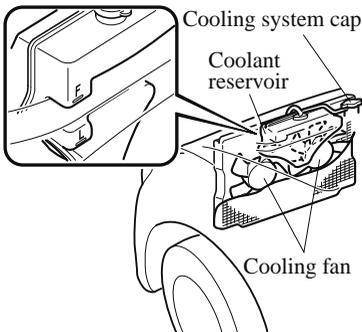

**SKYACTIV-G 2.5T**

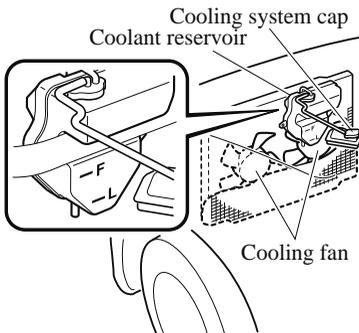

**SKYACTIV-D 2.2**

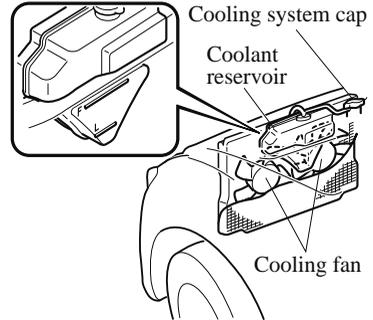

**If you find no problems, the engine is cool, and no leaks are obvious:**

Carefully add coolant as required (page 6-31).

**⚠ CAUTION**


*If the engine continues to overheat or frequently overheats, have the cooling system inspected. The engine could be seriously damaged unless repairs are made. Consult an expert repairer (we recommend an Authorised Mazda Repairer).*

# Emergency Towing

## Towing Description

We recommend that towing be done only by an expert repairer (we recommend an Authorised Mazda Repairer) or a commercial tow-truck service.

Proper lifting and towing are necessary to prevent damage to the vehicle. Particularly when towing a AWD vehicle, where all the wheels are connected to the drive train, proper transporting of the vehicle is absolutely essential to avoid damaging the drive system. Government and local laws must be followed.

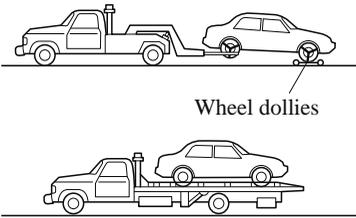

A towed FWD vehicle should have its drive wheels (front wheels) off the ground. If excessive damage or other conditions prevent this, use wheel dollies.

When towing a FWD vehicle with the rear wheels on the ground, release the parking brake.


Refer to Electric Parking Brake (EPB) on page 4-109.

A towed AWD vehicle must have all its wheels off the ground.

## ⚠ WARNING


### **Always tow a AWD vehicle with all four wheels off the ground:**

*Towing a AWD vehicle with either the front or rear wheels on the ground is dangerous as the drive train could be damaged, or the vehicle could trail away from the tow truck and cause an accident. If the drive train has been damaged, transport the vehicle on a flatbed truck.*

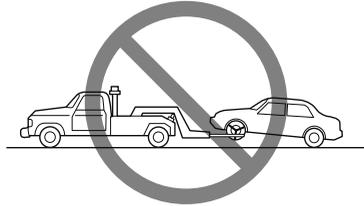


## ⚠ CAUTION

➤ *Do not tow the vehicle pointed backward with driving wheels on the ground. This may cause internal damage to the transaxle.*

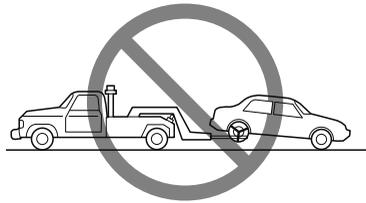


## Emergency Towing

- Do not tow with sling-type equipment. This could damage your vehicle. Use wheel-lift or flatbed equipment.

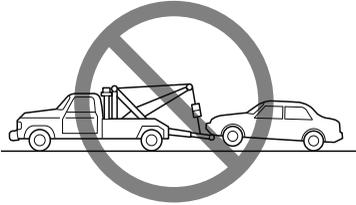

- If the parking brake cannot be released when towing the vehicle, transport the vehicle with all front and rear wheels raised off the ground as shown in the figure. If the vehicle is towed without raising the wheels off the ground, the brake system could be damaged.

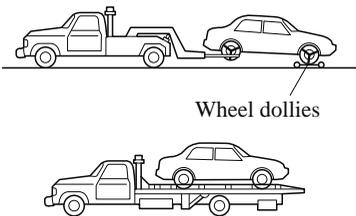

If towing service is not available in an emergency, the vehicle may be towed with all four wheels on the ground using the towing hook at the front of the vehicle. Only tow the vehicle on paved surfaces for short distances at low speeds.

### **CAUTION**

Follow these instructions when towing the vehicle with all wheels on the ground.

1. Shift to neutral (Manual transaxle), or the N position (Automatic transaxle).
2. Switch the ignition to ON.
3. Release the parking brake.  
Refer to Electric Parking Brake (EPB) on page 4-109.

Remember that power assist for the brakes and steering will not be available when the engine is not running.

# Emergency Towing

## Towing Hooks

### ⚠ CAUTION

- The towing eyelet should be used in an emergency (to get the vehicle out of a ditch or a snow bank, for example).
- When using the towing eyelets, always pull the lead or chain in a straight direction with respect to the eyelet. Never apply a sideways force.


### NOTE

When towing with chain or lead, wrap the chain or lead with a soft cloth near the bumper to prevent damage to the bumper.


### ▼ Towing Hooks

1. Remove the towing eyelet and the wheel brace from the luggage compartment (page 7-14).
2. Wrap a flathead screwdriver or similar tool with a soft cloth to prevent damage to a painted bumper, and open the cap located on the front or rear bumper.

#### Front

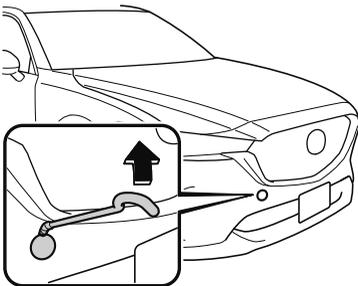

#### Rear

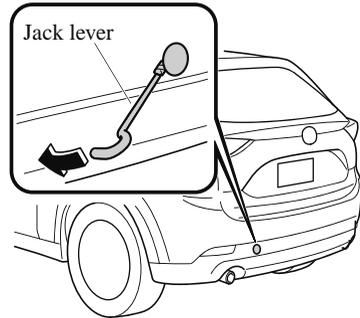

### ⚠ CAUTION


Do not use excessive force as it may damage the cap or scratch the painted bumper surface.


### NOTE

Remove the cap completely and store it so as not to lose it.

3. Securely install the towing eyelet using the wheel brace or equivalent. Consult an expert repairer (we recommend an Authorised Mazda Repairer).

#### Front

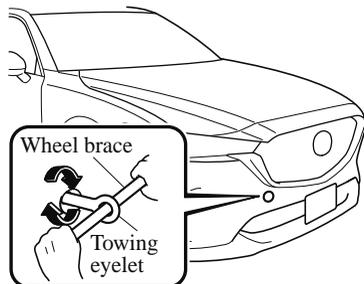

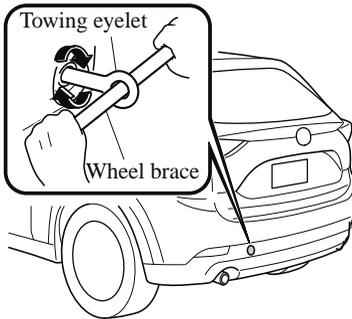**Rear**

4. Hook the towing rope to the towing eyelet.

**⚠ CAUTION**

- *If the towing eyelet is not securely tightened, it may loosen or disengage from the bumper when towing the vehicle. Make sure that the towing eyelet is securely tightened to the bumper.*
- *Be careful not to damage the towing eyelet and towing hook, vehicle body, or transaxle system when towing under the following conditions:*
  - *Do not tow a vehicle heavier than yours.*
  - *Do not suddenly accelerate your vehicle as it will apply a severe shock to the towing eyelet and towing hook or rope.*
  - *Do not attach any rope other than to the towing eyelet and towing hook.*

## Warning/Indicator Lights and Warning Sounds

---

### If a Warning Light Turns On or Flashes

If any warning light turns on/flashes, take appropriate action for each light. There is no problem if the light turns off, however if the light does not turn off or turns on/flashes again, consult an expert repairer (we recommend an Authorised Mazda Repairer).

The details for some warnings can be viewed on the centre display or multi-information display (Type A/Type B) in the instrument cluster.

#### Centre display

##### **Mazda Connect (Type A)**

1. If the warning light is turned on, select the  icon on the home screen to display the Applications screen.
2. Select “Vehicle Status Monitor”.
3. Select “Warning Guidance” to display the current warnings.
4. Select the applicable warning to view the warning details.

##### **Mazda Connect (Type B)**

1. Select “Information” on the home screen.
2. Select “Vehicle Status Monitor”.
3. Select the applicable warning to view the warning details.

#### **NOTE**

*You can also display the currently occurring warning by sliding the commander knob to the left while on the home screen of the centre display.*

#### **Multi-information display (Type A/Type B)**

1. Press the INFO switch on the steering switch to display the warning indication screen.  
Refer to Multi-information Display (Type A) on page 4-23.  
Refer to Multi-information Display (Type B) on page 4-43.

#### **▼ Stop Vehicle in Safe Place Immediately**

If any of the following warning lights turns on, the system may have a malfunction. Stop the vehicle in a safe place immediately and contact an expert repairer (we recommend an Authorised Mazda Repairer).

# Warning/Indicator Lights and Warning Sounds

Signal	Warning
 <p>Brake System Warning Light</p>	<p>If the brake system warning light remains illuminated the brake fluid may be low or there could be a problem with the brake system. Park the vehicle in a safe place immediately and contact an expert repairer (we recommend an Authorised Mazda Repairer).</p> <p> <b>WARNING</b></p> <p><b>Do not drive with the brake system warning light illuminated. Contact an expert repairer (we recommend an Authorised Mazda Repairer) to have the brakes inspected as soon as possible:</b></p> <p><i>Driving with the brake system warning light illuminated is dangerous. It indicates that your brakes may not work at all or that they could completely fail at any time. If this light remains illuminated, after checking that the parking brake is fully released, have the brakes inspected immediately.</i></p> <p> <b>CAUTION</b></p> <p><i>In addition, the effectiveness of the braking may diminish so you may need to depress the brake pedal more strongly than normal to stop the vehicle.</i></p>
 <p>Electronic Brake Force Distribution System Warning</p>	<p>If the electronic brake force distribution control unit determines that some components are operating incorrectly, the control unit may illuminate the brake system warning light and the ABS warning light simultaneously. The problem is likely to be the electronic brake force distribution system.</p> <p> <b>WARNING</b></p> <p><b>Do not drive with both the ABS warning light and brake warning light illuminated. Have the vehicle towed to an expert repairer (we recommend an Authorised Mazda Repairer) to have the brakes inspected as soon as possible:</b></p> <p><i>Driving when the brake system warning light and ABS warning light are illuminated simultaneously is dangerous.</i></p> <p><i>When both lights are illuminated, the rear wheels could lock more quickly in an emergency stop than under normal circumstances.</i></p>
 <p>Charging System Warning Indication/Warning Light</p>	<p>If the warning light illuminates while driving, it indicates a malfunction of the alternator or of the charging system.</p> <p>Drive to the side of the road and park off the right-of-way. Consult an expert repairer (we recommend an Authorised Mazda Repairer).</p> <p> <b>CAUTION</b></p> <p><i>Do not continue driving when the charging system warning light is illuminated because the engine could stop unexpectedly.</i></p>

# Warning/Indicator Lights and Warning Sounds

Signal	Warning
 <p>Engine Oil Warning Light</p>	<p>This warning light indicates low engine oil pressure.</p> <div data-bbox="281 276 505 328" style="border: 1px solid black; padding: 5px; margin-bottom: 10px;">  <b>CAUTION</b> </div> <p><i>Do not run the engine if the oil pressure is low. Otherwise, it could result in extensive engine damage.</i></p> <p>If the light illuminates or the warning indication is displayed while driving:</p> <ol style="list-style-type: none"> <li>1. Drive to the side of the road and park off the right-of-way on level ground.</li> <li>2. Turn off the engine and wait 5 minutes for the oil to drain back into the sump.</li> <li>3. Inspect the engine oil level. (page 6-30) If it's low, add the appropriate amount of engine oil while being careful not to overfill.</li> </ol> <div data-bbox="316 563 540 616" style="border: 1px solid black; padding: 5px; margin-bottom: 10px;">  <b>CAUTION</b> </div> <p><i>Do not run the engine if the oil level is low. Otherwise, it could result in extensive engine damage.</i></p> <ol style="list-style-type: none"> <li>4. Start the engine and check the warning light.</li> </ol> <p>If the light remains illuminated even though the oil level is normal or after adding oil, stop the engine immediately and have your vehicle towed to an expert repairer (we recommend an Authorised Mazda Repairer).</p>
 <p>(Red) High Engine Coolant Temperature Warning Indication/Warning Light</p>	<p>The light flashes when the engine coolant temperature is extremely high, and illuminates when the engine coolant temperature increases further.</p> <p><b><u>Handling Procedure</u></b></p> <p><b>Flashing light</b> Drive slowly to reduce engine load until you can find a safe place to stop the vehicle and wait for the engine to cool down.</p> <p><b>Illuminated light</b> This indicates the possibility of overheating. Park the vehicle in a safe place immediately and stop the engine. Refer to Overheating on page 7-36.</p> <div data-bbox="281 1102 505 1155" style="border: 1px solid black; padding: 5px; margin-bottom: 10px;">  <b>CAUTION</b> </div> <p><i>Do not drive the vehicle with the high engine coolant temperature warning light illuminated. Otherwise, it could result in damage to the engine.</i></p>

# Warning/Indicator Lights and Warning Sounds

Signal	Warning
 <p>Power Steering Malfunction Indication*</p>	<p>The message is displayed if the electric power steering has a malfunction. If the message is displayed, stop the vehicle in a safe place and do not operate the steering wheel. There is no problem if the message in the display turns off after a while. Contact an expert repairer (we recommend an Authorised Mazda Repairer) if the message is displayed continuously.</p> <p><b>NOTE</b></p> <ul style="list-style-type: none"> <li>• If the message is displayed, the power steering will not operate normally. In this case, the steering wheel can still be operated, however, the operation may feel heavy compared to normal, or the steering wheel could vibrate when turning.</li> <li>• Repeatedly jerking the steering wheel left and right while the vehicle is stopped or moving extremely slowly will cause the power steering system to go into protective mode which will make the steering feel heavy, but this does not indicate a problem. If this occurs, park the vehicle safely and wait several minutes for the system to return to normal.</li> </ul>
 <p>Power Steering Malfunction Indicator Light*</p>	<p>The light illuminates/flashes if the electric power steering has a malfunction. If the light illuminates/flashes, stop the vehicle in a safe place and do not operate the steering wheel. There is no problem if the light turns off after a while. Contact an expert repairer (we recommend an Authorised Mazda Repairer) if the light illuminates/flashes continuously.</p> <p><b>NOTE</b></p> <ul style="list-style-type: none"> <li>• If the indicator light illuminates/flashes, the power steering will not operate normally. If this happens, the steering wheel can still be operated, however, the operation may feel heavy compared to normal, or the steering wheel could vibrate when turning.</li> <li>• Repeatedly jerking the steering wheel left and right while the vehicle is stopped or moving extremely slowly will cause the power steering system to go into protective mode which will make the steering feel heavy, but this does not indicate a problem. If this occurs, park the vehicle safely and wait several minutes for the system to return to normal.</li> </ul>

# Warning/Indicator Lights and Warning Sounds



---

## ▼ Contact Expert Repairer (We Recommend Authorised Mazda Repairer) and Have Vehicle Inspected

If any of the following warning lights or the indicator light turns on/flashes, the system may have a malfunction. Contact an expert repairer (we recommend an Authorised Mazda Repairer) to have your vehicle inspected.

Signal	Warning
 <p>ABS Warning Light</p>	<p>If the ABS warning light stays on while you're driving, the ABS control unit has detected a system malfunction. If this occurs, your brakes will function normally as if the vehicle had no ABS.</p> <p>Should this happen, consult an expert repairer (we recommend an Authorised Mazda Repairer) as soon as possible.</p> <p><b>NOTE</b></p> <ul style="list-style-type: none"> <li>• When the engine is jump-started to charge the battery, uneven rpm occurs and the ABS warning light may illuminate. If this occurs, it is the result of the weak battery and does not indicate an ABS malfunction. Recharge the battery.</li> <li>• The brake assist system does not operate while the ABS warning light is illuminated.</li> </ul>

# Warning/Indicator Lights and Warning Sounds

Signal	Warning
 <p>Master Warning Indication/Warning Light</p>	<p><b>With Multi-information Display (Type A/Type B)</b></p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;"> <p><b>Multi-information Display</b></p> <p><b>Type A</b></p>  </div> <div style="text-align: center;"> <p><b>Type B</b></p>  </div> </div> <p><b>(Master warning indication)</b>          Displays when notification of the system malfunctions is required. Check the message indicated in the display and consult an expert repairer (we recommend an Authorised Mazda Repairer).</p> <p><b>(Master warning light)</b>          The master warning light displays when a warning message occurs. This indicates a malfunction with the vehicle system. Check the message indicated in the display and consult an expert repairer (we recommend an Authorised Mazda Repairer). For details, refer to the explanations for the warning/indicator lights, in the warning/indicator lights section, which match the symbol in the upper part of the display. If a message is not indicated in the display, operate the INFO switch to display the “Warning” screen.          Refer to Message Indicated in Multi-information Display (Type A) on page 4-23.          Refer to Message Indicated in Multi-information Display (Type B) on page 4-43.</p> <p><b>With Multi-information Display (Type C)</b></p> <p>The light illuminates continuously if any one of the following occurs. Consult an expert repairer (we recommend an Authorised Mazda Repairer).</p> <ul style="list-style-type: none"> <li>• There is a malfunction in the battery management system.</li> <li>• There is a malfunction in the brake switch.</li> <li>• <b>(SKYACTIV-D 2.2)</b> <ul style="list-style-type: none"> <li>• There is a malfunction in the engine's hydraulic control.</li> <li>• There is a malfunction in the engine's timing chain.</li> <li>• There is a malfunction in the blow-by heater.</li> <li>• There is a malfunction in the oil level sensor.</li> </ul> </li> </ul>
 <p>Electric Parking Brake (EPB) Warning Indication/Warning Light</p>	<p>The warning light illuminates when the system has a malfunction. Have your vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).</p>

# Warning/Indicator Lights and Warning Sounds

Signal	Warning
 <p>(Red) Brake Pedal Operation Demand Warning Light*</p>	<p><b><u>When only flashing</u></b></p> <p>Flashes if there is the possibility of the vehicle not being held in the stopped position by the AUTOHOLD function, such as on steep slopes. Depress and hold your foot on the brake pedal.</p> <p><b><u>When flashing and beep sound is activated at the same time</u></b></p> <p>The warning light flashes and the beep sound is activated for about 5 seconds if there is a problem with the system. If the warning light flashes and the warning sound is activated, immediately depress the brake pedal and stop using the AUTOHOLD function then contact an expert repairer (we recommend an Authorised Mazda Repairer).</p> <div data-bbox="244 523 476 576" style="background-color: black; color: white; padding: 5px; text-align: center;">  <b>WARNING</b> </div> <p><b><i>Immediately depress the brake pedal if the warning light flashes and the beep sound is activated while using the AUTOHOLD function:</i></b> <i>Because the AUTOHOLD function is cancelled forcibly, the vehicle may move unexpectedly and result in an accident.</i></p>
 <p>Electric Parking Brake (EPB) Indication/Indicator Light</p>	<p>This warning has the following functions:</p> <p><b><u>Parking brake warning/Indicator light inspection</u></b></p> <p>The light illuminates when the parking brake is applied with the ignition switched to START or ON. It turns off when the parking brake is released.</p> <p><b><u>When the light is turned on</u></b></p> <p>If the light remains turned on even if the parking brake is released, an expert repairer (we recommend an Authorised Mazda Repairer).</p> <p><b><u>When the light is flashing</u></b></p> <p>The light flashes if the Electric Parking Brake (EPB) has a malfunction. If the light remains flashing even if the Electric Parking Brake (EPB) switch is operated, consult an expert repairer (we recommend an Authorised Mazda Repairer) as soon as possible.</p>

# Warning/Indicator Lights and Warning Sounds

Signal	Warning
 Check Engine Light	<p>If this light illuminates while driving, the vehicle may have a problem. It is important to note the driving conditions when the light illuminated and consult an expert repairer (we recommend an Authorised Mazda Repairer).</p> <p>The check engine light may illuminate in the following cases:</p> <ul style="list-style-type: none"> <li>• The engine's electrical system has a problem.</li> <li>• The emission control system has a problem.</li> <li>• <b>(Except SKYACTIV-D 2.2)</b> The fuel tank level being very low or approaching empty.</li> </ul> <p>If the check engine light remains on, or it flashes continuously, do not drive at high speeds and consult an expert repairer (we recommend an Authorised Mazda Repairer) as soon as possible.</p> <div style="background-color: black; color: white; padding: 5px; text-align: center;">  <b>WARNING</b> </div> <p><b><i>If the check engine light turns on, do not disconnect the battery leads.</i></b>  <i>If the battery leads are disconnected and then reconnected, the engine could be damaged and catch on fire.</i></p>
<p><b>i-stop</b> (Amber) i-stop Warning Light*</p>	<p><b><u>When the light is turned on</u></b></p> <p>A problem in the system may be indicated under the following conditions. Have your vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).</p> <ul style="list-style-type: none"> <li>• The light does not turn on when the ignition is switched ON.</li> <li>• The light continues to remain on even though the i-stop OFF switch has been pressed while the engine is running.</li> </ul> <p><b><u>When the light is flashing</u></b></p> <p>The light continues to flash if the system has a malfunction. Have your vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).</p>
<p><b>i-ELOOP</b> i-ELOOP Warning Indication*</p>	<p>The Warning indication turns on if there is any malfunction in the i-ELOOP system. Consult an expert repairer (we recommend an Authorised Mazda Repairer).</p>

# Warning/Indicator Lights and Warning Sounds

Signal	Warning
 <p>Selective Catalytic Reduction (SCR) Warning Indication/Warning Light*</p>	<p><b><u>If the light turns on</u></b></p> <p>The amount of AdBlue® is low or too much was added. Check the message indicated on the display and consult an expert repairer (we recommend an Authorised Mazda Repairer).</p> <p><b>NOTE</b> <i>If the vehicle continues to be driven while the SCR warning light is turned on, the vehicle's speed may be restricted.</i></p> <p><b><u>If the light is flashing</u></b></p> <p>There is a problem with the SCR system or the remaining amount of AdBlue® is extremely low. Check the message indicated on the display and have the vehicle inspected by an expert repairer (we recommend an Authorised Mazda Repairer).</p> <div data-bbox="244 598 468 651" style="border: 1px solid black; padding: 5px; text-align: center;">  <b>CAUTION</b> </div> <p><i>If the vehicle continues to be driven while the SCR warning light is flashing, the vehicle may stop running. If the SCR warning light flashes, have the vehicle inspected immediately at an expert repairer (we recommend an Authorised Mazda Repairer).</i></p>
<p><b>AT</b></p> <p>Automatic Trans-axle Warning Indication/Warning Light*</p>	<p>The indication/light illuminates when the transaxle has a problem.</p> <div data-bbox="244 805 468 858" style="border: 1px solid black; padding: 5px; text-align: center;">  <b>CAUTION</b> </div> <p><i>If the automatic transaxle warning indication/light illuminates, the transaxle has an electrical problem. Continuing to drive your Mazda in this condition could cause damage to your transaxle. Consult an expert repairer (we recommend an Authorised Mazda Repairer) as soon as possible.</i></p>
<p><b>4WD</b></p> <p>AWD Warning Indication*</p>	<p><b><u>“4WD system malfunction” is displayed</u></b></p> <p>The indication is displayed under the following conditions. The system may have a malfunction. Have the vehicle checked at an expert repairer (we recommend an Authorised Mazda Repairer).</p> <ul style="list-style-type: none"> <li>• When there is a malfunction in the AWD system.</li> <li>• When there is a large difference between the tyre size of the front and rear wheels.</li> </ul> <p><b><u>“4WD system high-load” is displayed</u></b></p> <p>The indication is displayed under the following conditions. Park the vehicle in a safe place and check that the warning indication light turns off, and then drive the vehicle. Contact an expert repairer (we recommend an Authorised Mazda Repairer) if the indication is continuously displayed.</p> <ul style="list-style-type: none"> <li>• When the differential oil temperature is excessively high.</li> <li>• When there is a large difference between the front and rear wheel rotation, such as when trying to remove the vehicle from mud.</li> </ul>

# Warning/Indicator Lights and Warning Sounds

Signal	Warning
<p><b>4WD</b> AWD Warning Light*</p>	<p><b>When the light is turned on</b></p> <p>The light turns on under the following conditions. The system may have a malfunction. Have the vehicle checked at an expert repairer (we recommend an Authorised Mazda Repairer).</p> <ul style="list-style-type: none"> <li>• When there is a malfunction in the AWD system.</li> <li>• When there is a large difference between the tyre size of the front and rear wheels.</li> </ul> <p><b>When the light is flashing</b></p> <p>Park the vehicle in a safe place. After a few moments, if the warning light stops flashing, you can resume driving. If the light does not stop flashing, contact an expert repairer (we recommend an Authorised Mazda Repairer).</p> <ul style="list-style-type: none"> <li>• When the differential oil temperature is excessively high.</li> <li>• When there is a large difference between the front and rear wheel rotation, such as when trying to remove the vehicle from mud.</li> </ul>
<p> (Turns on) TCS/DSC Indicator Light</p>	<p>If the light stays on, the TCS, DSC or the brake assist system may have a malfunction and they may not operate correctly. Take your vehicle to an expert repairer (we recommend an Authorised Mazda Repairer).</p>
<p> Air Bag/Seat Belt Pretensioner System Warning Light</p>	<p>A system malfunction is indicated if the warning light constantly flashes, constantly illuminates or does not illuminate at all when the ignition is switched ON. If any of these occur, consult an expert repairer (we recommend an Authorised Mazda Repairer) as soon as possible. The system may not operate in an accident.</p> <p> <b>WARNING</b></p> <p><b><i>Never tamper with the air bag/pretensioner systems and always have an expert repairer (we recommend an Authorised Mazda Repairer) perform all servicing and repairs: Self-servicing or tampering with the systems is dangerous. An air bag/pretensioner could accidentally activate or become disabled causing serious injury or death.</i></b></p>

# Warning/Indicator Lights and Warning Sounds

Signal	Warning
 <p>(Flashing) Tyre Pressure Monitoring System Warning Light*</p>	<p>If the tyre pressure monitoring system has a malfunction, the tyre pressure warning light flashes. Have your vehicle checked by an expert repairer (we recommend an Authorised Mazda Repairer) as soon as possible.</p> <div data-bbox="244 325 474 373" style="border: 1px solid black; padding: 5px; margin: 10px 0;">  <b>WARNING</b> </div> <p><b><i>If the tyre pressure monitoring system warning light illuminates or flashes, or the tyre pressure warning beep sound is heard, decrease vehicle speed immediately and avoid sudden manoeuvring and braking:</i></b></p> <p><i>If the tyre pressure monitoring system warning light illuminates or flashes, or the tyre pressure warning beep sound is heard, it is dangerous to drive the vehicle at high speeds, or perform sudden manoeuvring or braking. Vehicle drivability could worsen and result in an accident.</i></p> <p><i>To determine if you have a slow leak or a flat, pull over to a safe position where you can check the visual condition of the tyre and determine if you have enough air to proceed to a place where air may be added and the system monitored again by an expert repairer (we recommend an Authorised Mazda Repairer) or a tyre repair station.</i></p> <p><b><i>Do not ignore the TPMS Warning Light:</i></b></p> <p><i>Ignoring the TPMS warning light is dangerous, even if you know why it is illuminated. Have the problem taken care of as soon as possible before it develops into a more serious situation that could lead to tyre failure and a dangerous accident.</i></p>
 <p>(Amber) KEY Warning Indication*</p>	<p><b>“Keyless System malfunction” is displayed</b></p> <p>This message is displayed if the advanced keyless entry &amp; push button start system has a problem. Contact an expert repairer (we recommend an Authorised Mazda Repairer).</p> <div data-bbox="244 957 468 1005" style="border: 1px solid black; padding: 5px; margin: 10px 0;">  <b>CAUTION</b> </div> <p><i>If the message is indicated, or the push button start indicator light (amber) flashes, the engine may not start. If the engine cannot be started, try starting it using the emergency operation for starting the engine, and have the vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer) as soon as possible.</i></p> <p><i>Refer to Emergency Operation for Starting the Engine on page 4-10.</i></p> <p><b>“Set Power to OFF” is displayed</b></p> <p>This message is displayed when the driver's door is opened without switching the ignition off.</p> <p><b>“Key not found” is displayed</b></p> <p>This message is displayed when any of the following operations is performed with the key out of the operational range or placed in areas inside the cabin where it is difficult for the key to be detected.</p> <ul style="list-style-type: none"> <li>• The push button start is pressed with the ignition switched off</li> <li>• The ignition is switched on</li> <li>• All doors are closed without switching the ignition off</li> </ul>

# Warning/Indicator Lights and Warning Sounds

Signal	Warning
 <p>(Red) (Turns on) KEY Warning Light*</p>	<p>If any malfunction occurs in the keyless entry system, it illuminates continuously.</p> <div style="border: 1px solid black; padding: 5px; display: inline-block;">  <b>CAUTION</b> </div> <p><i>If the key warning indicator light illuminates or the push button start indicator light (amber) flashes, the engine may not start. If the engine cannot be started, try starting it using the emergency operation for starting the engine, and have the vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer) as soon as possible.</i></p> <p>Refer to Emergency Operation for Starting the Engine on page 4-10.</p>
 <p>Security Indicator Light</p>	<p>If the engine does not start with the correct key, and the security indicator light remains illuminated or flashing, try the following: Make sure the key is within the operational range for signal transmission. Switch the ignition off, and then restart the engine. If the engine does not start after 3 or more tries, contact an expert repairer (we recommend an Authorised Mazda Repairer).</p>
 <p>(Amber) High Beam Control System (HBC) Warning Indication/ Warning Light*</p>	<p>The light remains turned on if there is a problem with the system. Have your vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).</p> <p><b>NOTE</b> <i>If the Forward Sensing Camera (FSC) field of view is impaired during bad weather conditions (such as rain, fog, and snow) and when the windscreen is dirty, the warning indication/warning light for the High Beam Control System (HBC) may display/turn on. However, this does not indicate a problem.</i></p>
 <p>(Amber) Adaptive LED Headlights (ALH) Warning Indication/ Warning Light*</p>	<p>The light remains turned on if there is a problem with the system. Have your vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).</p> <p><b>NOTE</b> <i>If the Forward Sensing Camera (FSC) field of view is impaired during bad weather conditions (such as rain, fog, and snow) and when the windscreen is dirty, the warning indication/warning light for the Adaptive LED Headlights (ALH) may display/turn on. However, this does not indicate a problem.</i></p>
 <p>Blind Spot Monitoring (BSM) Warning Indication*</p>	<p>The Warning indication turns on if there is any malfunction in the Blind Spot Monitoring (BSM). Have your vehicle inspected by an expert repairer (we recommend an Authorised Mazda Repairer).</p> <p><b>NOTE</b> <i>If the vehicle is driven on a road with less traffic and few vehicles that the radar sensors can detect, the system may pause. However, it does not indicate a malfunction.</i></p>

# Warning/Indicator Lights and Warning Sounds

Signal	Warning
 <p>Blind Spot Monitoring (BSM) OFF Indicator Light*</p>	<p>A problem in the system may be indicated under the following conditions. Have your vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).</p> <ul style="list-style-type: none"> <li>• The light does not turn on when the ignition is switched ON.</li> <li>• The light remains on even when the Blind Spot Monitoring (BSM) system can be operated.</li> <li>• The light turns on while driving the vehicle.</li> </ul> <p><b>NOTE</b>  <i>If the vehicle is driven on a road with less traffic and few vehicles that the radar sensors can detect, the system may pause (The Blind Spot Monitoring (BSM) OFF indicator light in the instrument cluster illuminates). However, it does not indicate a malfunction.</i></p>
 <p>(Amber) Driver Attention Alert (DAA) Warning Indication*</p>	<p>The message is displayed when the system has a malfunction. Have your vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).</p>
 <p>(Amber) Mazda Radar Cruise Control (MRCC) Warning Indication*</p>	<p>The message is displayed when the system has a malfunction. Have your vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).</p>
 <p>(Amber) Mazda Radar Cruise Control with Stop &amp; Go function (MRCC with Stop &amp; Go function) Warning Indication*</p>	<p>The message is displayed when the system has a malfunction. Have your vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).</p>
 <p>Cruising &amp; Traffic Support (CTS) Warning Indication*</p>	<p>The message is displayed when the system has a malfunction. Have your vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).</p>

# Warning/Indicator Lights and Warning Sounds

Signal	Warning
 <p>Lane-keep Assist System (LAS) &amp; Lane Departure Warning System (LDWS) Warning Indication*</p>	<p>The message is displayed when the system has a malfunction. Have your vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer). The system does not operate when the warning message is displayed.</p> <div style="border: 1px solid black; padding: 5px; display: inline-block;">  <b>CAUTION</b> </div> <ul style="list-style-type: none"> <li>➤ <i>Always use tyres for all wheels that are of the specified size, and the same manufacture, brand, and tread pattern. In addition, do not use tyres with significantly different wear patterns on the same vehicle. If such improper tyres are used, the system may not operate normally.</i></li> <li>➤ <i>When an emergency spare tyre is used, the system may not operate normally.</i></li> </ul>
 <p>LED Headlight Warning Light</p>	<p>This light illuminates if there is a malfunction in the LED headlight. Have your vehicle inspected by an expert repairer (we recommend an Authorised Mazda Repairer).</p>

## ▼ Taking Action

Take the appropriate action and verify that the warning light turns off.

Signal	Warning	Action to be taken
 <p>(Amber) Smart Brake Support/ Smart City Brake Support (SBS/SCBS) Warning Indication/ Warning Light*</p>	<p>The light turns on if the windscreen or the radar sensor are dirty, or there is a malfunction in the system.</p>	<p>Verify the reason why the warning light is illuminated on the centre display. If the reason why the warning light is illuminated is due to a dirty windscreen, clean the windscreen. If the warning light is illuminated because of a dirty radar sensor, clean the front emblem. For any other reasons, have the vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).</p>
 <p>Low Fuel Warning Indication/Warning Light</p>	<p>The light turns on when the remaining fuel is about 9.0 L (2.3 US gal, 1.9 Imp gal).</p> <p><b>NOTE</b> <i>The light illumination timing may vary because fuel inside the fuel tank moves around according to the driving conditions and the vehicle posture.</i></p>	<p>Add fuel.</p>
 <p>Engine Oil Level Warning Light</p>	<p>This warning light indicates that the engine oil level is around the MIN mark (page 6-30).</p>	<p>Add 1 L (0.3 US gal, 0.2 Imp gal) of engine oil (page 6-25).</p>

# Warning/Indicator Lights and Warning Sounds

Signal	Warning	Action to be taken
<p><b>120</b> km/h 120km/h Warning Light*</p>	<p>The 120 km/h warning light illuminates when the vehicle speed exceeds 120 km/h.</p>	<p>Lower the vehicle speed.</p>
<p> <small>PASSENGER</small> Seat Belt Warning Light (Front seat)</p>	<p>The seat belt warning light turns on if the driver or front passenger's seat is occupied and the seat belt is not fastened with the ignition switched ON.</p> <p>If the driver or front passenger's seat belt is unfastened (only when the front passenger's seat is occupied) and the vehicle is driven at a speed faster than about 20 km/h (12 mph), the warning light flashes. After a short time, the warning light stops flashing, but remains illuminated. If a seat belt remains unfastened, the warning light flashes again for a given period of time.</p> <p><b>NOTE</b></p> <ul style="list-style-type: none"> <li>• If the driver or front passenger's seat belt is unfastened after the warning light turns on, and the vehicle speed exceeds 20 km/h (12 mph), the warning light flashes again.</li> <li>• To allow the front passenger occupant classification sensor to function properly, do not place and sit on an additional seat cushion on the front passenger's seat. The sensor may not function properly because the additional seat cushion could cause sensor interference.</li> <li>• If a small child is seated on the front passenger's seat, the warning light may not operate.</li> </ul>	<p>Fasten the seat belts.</p>
<p><b>REAR</b>   (Red) Seat Belt Warning Light (Rear seat)</p>	<p>If the rear seat belts are not fastened while the ignition is switched ON, the driver and the passenger are alerted by the warning light.</p> <p>The warning light operates even if there is no passenger on the rear seat.</p> <p><b>NOTE</b></p> <p>If a rear seat belt is not fastened by a certain period of time after the engine has been started, the warning light turns off.</p>	<p>Fasten the seat belts.</p>

# Warning/Indicator Lights and Warning Sounds

Signal	Warning	Action to be taken
 Low Washer Fluid Level Warning Indication/Warning Light*	This warning light indicates that little washer fluid remains.	Add washer fluid (page 6-34).
 Door-Ajar/Liftgate-Ajar Warning Indication/Warning Light	The light turns on if any door/liftgate is not closed securely.	Close the door/liftgate securely.

## Tyre Pressure Monitoring System Warning Light (Turns on)\*



Take the appropriate action and verify that the warning light turns off.

Warning
<p>When the warning light illuminates, and the warning beep sound is heard when tyre pressure is too low in one or more tyres.</p> <div style="background-color: black; color: white; padding: 5px; display: inline-block;">  <b>WARNING</b> </div> <p><b>If the tyre pressure monitoring system warning light illuminates or flashes, or the tyre pressure warning beep sound is heard, decrease vehicle speed immediately and avoid sudden manoeuvring and braking:</b>            If the tyre pressure monitoring system warning light illuminates or flashes, or the tyre pressure warning beep sound is heard, it is dangerous to drive the vehicle at high speeds, or perform sudden manoeuvring or braking. Vehicle drivability could worsen and result in an accident.            To determine if you have a slow leak or a flat, pull over to a safe position where you can check the visual condition of the tyre and determine if you have enough air to proceed to a place where air may be added and the system monitored again by an expert repairer (we recommend an Authorised Mazda Repairer) or a tyre repair station.</p> <p><b>Do not ignore the TPMS Warning Light:</b>            Ignoring the TPMS warning light is dangerous, even if you know why it is illuminated. Have the problem taken care of as soon as possible before it develops into a more serious situation that could lead to tyre failure and a dangerous accident.</p>

## Warning/Indicator Lights and Warning Sounds

---

### Action to be taken

Inspect the tyres and adjust to the specified inflation pressure (page 6-49).

### CAUTION

*When replacing/repairing the tyres or wheels or both, have the work done by an Authorised expert repairer (we recommend an Authorised Mazda Repairer), or the tyre pressure sensors may be damaged.*

### NOTE

- Perform tyre pressure adjustment when the tyres are cold. Tyre pressure will vary according to the tyre temperature, therefore let the vehicle stand for 1 hour or only drive it 1.6 km (1 mile) or less before adjusting the tyre pressures. When pressure is adjusted on hot tyres to the cold inflation pressure, the TPMS warning light/beep may turn on after the tyres cool and pressure drops below specification. Also, an illuminated TPMS warning light, resulting from the tyre air pressure dropping due to cold ambient temperature, may turn off if the ambient temperature rises. In this case, it will also be necessary to adjust the tyre air pressures. If the TPMS warning light illuminates due to a drop in tyre air pressure, make sure to check and adjust the tyre air pressures.*
- After adjusting the tyre air pressures, it may require some time for the TPMS warning light to turn off. If the TPMS warning light remains illuminated, drive the vehicle at a speed of at least 25 km/h (16 mph) for 10 minutes, and then verify that it turns off.*
- Tyres lose air naturally over time and the TPMS cannot tell if the tyres are getting too soft over time or you have a flat. However, when you find one low tyre in a set of four—that is an indication of trouble; you should have someone drive the vehicle slowly forward so you can inspect any low tyre for cuts and any metal objects sticking through tread or sidewall. Put a few drops of water in the valve stem to see if it bubbles indicating a bad valve. Leaks need to be addressed by more than simply refilling the trouble tyre as leaks are dangerous — take it to an expert repairer (we recommend an Authorised Mazda Repairer) which has all the equipment to fix tyres, TPMS systems and order the best replacement tyre for your vehicle.*

*If the warning light illuminates again even after the tyre pressures are adjusted, there may be a tyre puncture.*

# Warning/Indicator Lights and Warning Sounds

## KEY Warning Indication/Warning Light

Take the appropriate action and verify that the warning light turns off.

Signal	Cause	Action to be taken
 (White) KEY Warning Indication	The key battery is dead.	Replace the key battery (page 6-47).
 (Red) (Flashing) KEY Warning Light	The key battery is dead.	Replace the key battery (page 6-47).
	The key is not within the operation range.	Bring the key into the operation range (page 3-8).
	The key is placed in areas inside the cabin where it is difficult for the key to be detected.	
	A key from another manufacturer similar to the key is in the operation range.	Take the key from another manufacturer similar to the key out of the operation range.
	Without the ignition switched off, the key is taken out of the cabin, and then all the doors are closed.	Bring the key back into the cabin.

# Warning/Indicator Lights and Warning Sounds


## Message Indicated in Multi-information Display

If there is a notification from the vehicle, a message is displayed in the multi-information display. Check the information and take the necessary action.


(Display example)

Instrument Cluster

Type A



Type B



Depress brake pedal to release parking brake

If the warning light turns on/flashes simultaneously or a symbol is indicated in the display, check the information regarding the warning light or symbol.

Refer to If a Warning Light Turns On or Flashes on page 7-42.

Display*1	Content	Action to be taken
<b>Set Shift Lever to "P"</b>	Indicated when the push button start is pressed while the selector lever is not in the P position.	Shift the selector lever to the P position.
<b>Engine Stalled</b>	Indicated when a seat belt is unfastened and the driver's door is opened while the i-stop function is operating.	Press the push button start again to start the engine. For automatic transmission vehicles, shift the selector lever to the P position before starting the engine.)
<b>Depress brake pedal to start engine</b>	Indicated when the push button start is pressed without depressing the brake pedal.	Depress the brake pedal and press the push button start.
<b>Depress clutch pedal to start engine</b>	Indicated when the push button start is pressed without depressing the clutch pedal.	Depress the clutch pedal and press the push button start.
<b>Steering locked</b>	Indicated while the steering wheel is locked.	Release the steering lock.
<b>Depress brake pedal to release parking brake</b>	Indicates when the Electric Parking Brake (EPB) switch is operated without depressing the brake pedal.	Operate the Electric Parking Brake (EPB) switch while depressing the brake pedal.

# Warning/Indicator Lights and Warning Sounds

Display*1	Content	Action to be taken
<b>Brake Hold Unavailable Depress Brake to Hold Position</b>	Indicates when there is a problem with the brake related system while the vehicle is being held in a stop position by the AUTOHOLD function or during the Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) stop hold control.	Depress the brake pedal. Cancel the AUTOHOLD function or the Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function), and have your vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).
<b>Incline Too Steep Vehicle May Not Be Able to Hold Stopped Position</b>	Indicates the possibility of the vehicle not being held in the stopped position by the AUTOHOLD function or the Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) stop hold control, such as on steep slopes.	Depress and hold your foot on the brake pedal.
<b>Brake Pedal Must Be Depressed to Deactivate Auto Hold System</b>	Indicates when the cancel operation is done without depressing the brake pedal while the vehicle is being held in the stopped position by the AUTOHOLD function.	Cancel the AUTOHOLD function stop hold control while depressing the brake pedal.
<b>Fast Idle Due to Diesel Injector Cleaning</b>	Indicated when the engine speed increases because the engine is being cleaned internally.	The engine speed will increase while the engine is running an internal cleaning cycle with the selector lever in the P or N position (automatic transaxle) or the shift lever in the N position (manual transaxle). Do not stop the engine while the engine speed is high. When the cleaning cycle is completed, the engine speed will return to normal.
<b>Mi-Drive Unavailable Due to System Malfunction</b>	This message is indicated when the Mi-Drive switch is operated while there is a problem with the Mazda intelligent Drive Select (Mi-Drive) related system.	Have your vehicle inspected by an expert repairer (we recommend an Authorised Mazda Repairer).
<b>SPORT Mode Unavailable Due to Speed/Cruise Control Use</b>	This message is indicated when SPORT mode is selected while Mazda Radar Cruise Control (MRCC), Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function), and Cruising & Traffic Support (CTS) are operating.	When Mazda Radar Cruise Control (MRCC), Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function), and Cruising & Traffic Support (CTS) are operating, the vehicle cannot be driven in SPORT mode.
<b>Mi-Drive Canceled Due to System Malfunction</b>	This message is indicated when there is a problem with the related system during Mi-Drive operation.	Have your vehicle inspected by an expert repairer (we recommend an Authorised Mazda Repairer).

# Warning/Indicator Lights and Warning Sounds

---

Display*1	Content	Action to be taken
<b>SPORT Mode Canceled Due to Speed/Cruise Control Use</b>	This message is indicated when Mazda Radar Cruise Control (MRCC), Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function), and Cruising & Traffic Support (CTS) are turned on while the vehicle is being driven in SPORT mode.	When Mazda Radar Cruise Control (MRCC), Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function), and Cruising & Traffic Support (CTS) are operating, the vehicle cannot be driven in SPORT mode.
<b>Mi-Drive Selection Temporarily Unavailable</b>	This message is indicated when the Mi-Drive switch operation is not accepted during ABS operation.	Operate the Mi-Drive switch during steady driving.
<b>Mi-Drive Canceled</b>	This message is indicated when Mi-Drive is stopped by an operation other than by the driver.	If this message is indicated even though the Mi-Drive switch is operated again, have your vehicle inspected by an expert repairer (we recommend an Authorised Mazda Repairer).


\*1 The displayed content may differ from the actual vehicle.

# Warning/Indicator Lights and Warning Sounds

## Message Indicated on Display

If a message is displayed in the centre display (Mazda Connect), take appropriate action (in a calm manner) according to the displayed message.

(Display example)

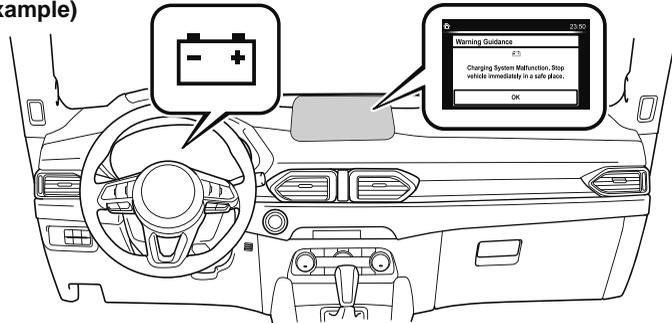

### ▼ Stop Vehicle in Safe Place Immediately

If the following messages are displayed in the centre display (Mazda Connect), a vehicle system may be malfunctioning. Stop the vehicle in a safe place and contact an expert repairer (we recommend an Authorised Mazda Repairer).


Display	Indicated Condition
	Displays if the engine coolant temperature has increased excessively.
	Displays if the charging system has a malfunction.

# Warning/Indicator Lights and Warning Sounds

---

## ▼ Verify Display Content

Displays in the following cases:

Display	Indicated Condition/Action to be taken
	<p>The following message is displayed when the temperature around the centre display is high.</p> <p>Lowering the temperature in the cabin or the temperature around the centre display by avoiding direct sunlight is recommended.</p>

# Warning/Indicator Lights and Warning Sounds

## Warning Sound is Activated

### ▼ Lights-On Reminder

If lights are on and the ignition is switched to ACC or off, a continuous beep sound will be heard when the driver's door is opened.

#### NOTE

- When the ignition is switched to ACC, the "Ignition Not Switched Off (STOP) Warning Beep" (page 7-66) overrides the lights-on reminder.
- A personalised function is available to change the sound volume for the lights-on reminder.  
Refer to the Settings section in the Mazda Connect Owner's Manual.

### ▼ Air Bag/Seat Belt Pretensioner System Warning Beep

If there is a problem with the air bag/seat belt pretensioner systems and the warning light illumination, a warning beep sound will be heard for about 5 seconds every minute.

The air bag and seat belt pretensioner system warning beep sound will continue to be heard for approximately 35 minutes. Have your vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer) as soon as possible.

## WARNING

**Do not drive the vehicle with the air bag/seat belt pretensioner system warning beep sounding:**

*Driving the vehicle with the air bag/seat belt pretensioner system warning beep sounding is dangerous. In a collision, the air bags and the seat belt pretensioner system will not deploy and this could result in death or serious injury. Contact an expert repairer (we recommend an Authorised Mazda Repairer) to have the vehicle inspected as soon as possible.*

### ▼ Seat Belt Warning Beep

#### Front seat

If the vehicle speed exceeds about 20 km/h (12 mph) with the driver or front passenger's seat belt unfastened, a warning beep sounds continuously. If the seat belt remains unfastened, the beep sound stops once and then continues for a certain period. The beep stops after the driver or front passenger's seat belt is fastened.

#### NOTE

- Placing heavy items on the front passenger seat may cause the front passenger seat belt warning function to operate depending on the weight of the item.
- To allow the front passenger seat weight sensor to function properly, do not place and sit on an additional seat cushion on the front passenger seat. The sensor may not function properly because the additional seat cushion could cause sensor interference.

## Warning/Indicator Lights and Warning Sounds

---

· When a small child sits on the front passenger seat, it is possible that the warning beep will not operate.

### Rear seat

The warning beep only sounds if a seat belt is unfastened after being fastened.

### ▼ Ignition Not Switched Off (STOP) Warning Beep

#### European models

If the driver's door is opened with the ignition switched to ACC, a beep will be heard 6 times in the cabin to notify the driver that the ignition has not been switched OFF (STOP). Under this condition, the keyless entry system will not operate, the vehicle cannot be locked, and the battery voltage will be depleted.

#### Except European models

If the driver's door is opened with the ignition switched to ACC, a beep will be heard continuously in the cabin to notify the driver that the ignition has not been switched OFF (STOP). Under this condition, the keyless entry system will not operate, the vehicle cannot be locked, and the battery voltage will be depleted.

### ▼ Key Removed from Vehicle Warning Beep

#### Vehicles with advanced keyless function

If the key is taken out of the vehicle while the ignition is not switched OFF and all the doors are closed, the beep which sounds outside of the vehicle will be heard 6 times, the beep which sounds inside the vehicle will be heard 6 times.

#### Vehicles without advanced keyless function

If the key is taken out of the vehicle while the ignition is not switched OFF and all the doors are closed, a beep will be heard in the cabin 6 times.

#### *NOTE*

*Because the key utilizes low-intensity radio waves, the Key Removed From Vehicle Warning may activate if the key is carried together with a metal object or it is placed in a poor signal reception area.*

### ▼ Request Switch Inoperable Warning Beep (With the advanced keyless function)

If the request switch is pressed with the door open or ajar, or the ignition is not switched OFF with a key being carried, a beep will be heard outside for about 2 seconds to notify the driver that the door or liftgate cannot be locked.

### ▼ Key Left-in-luggage Compartment Warning Beep (With the advanced keyless function)

If the key is left in the luggage compartment with all the doors locked and the liftgate closed, a beep will be heard outside for about 10 seconds to notify the driver that the key is in the luggage compartment. In this case, take out the key by pressing the electric liftgate opener and opening the liftgate. The key taken out of the luggage compartment may not operate because its functions have been temporarily stopped. To restore the key's functions, perform the applicable procedure (page 3-9).

# Warning/Indicator Lights and Warning Sounds

## ▼ Key Left-in-vehicle Warning Beep (With the advanced keyless function)

If all the doors and luggage compartment are locked using another key while the key is left in the cabin, the beep which sounds outside of the vehicle will be heard for about 10 seconds to notify the driver that the key is in the cabin. In this case, take out the key by opening the door. A key taken out of the vehicle using this method may not operate because its functions have been temporarily stopped. To restore the key's functions, perform the applicable procedure (page 3-9).

## ▼ Electronic Steering Lock Warning Beep

The warning beep operates if the steering wheel is not unlocked after the push button start is pressed. (page 4-4)

## ▼ Power Liftgate Warning Beep\*

If system operation precautions are necessary, the driver is notified by the warning sound.

Cautions	What to check
The beep sounds 3 times	The conditions required for the power liftgate to operate have not been met, such as an object being stuck in the liftgate.
The beep sound continues	The vehicle is being driven with the liftgate open. Stop the vehicle and close the liftgate.

## ▼ Outside Temperature Warning Beep\*

Warns the driver of the possibility of icy roads when the outside temperature is low. If the outside temperature is lower than about 4 °C (39 °F), a beep sound is heard once and the outside temperature display flashes for about 10 seconds.

### (Type A instrument cluster)

Refer to Outside Temperature Display on page 4-28.

### (Type B instrument cluster)

Refer to Outside Temperature Display on page 4-48.

### (Type C instrument cluster)

Refer to Outside Temperature Display on page 4-66.

## ▼ i-stop Warning Beep\*

- If the driver's door is opened while engine idling is stopped, the warning sound operates to notify the driver that engine idling is stopped. It stops when the driver's door is closed.

### • (European model)

The warning sound operates if the following operations are performed while the engine idling is stopped. In such cases, the engine does not restart automatically to ensure safety. Start the engine using the normal method.

### • (Manual transaxle)

With the shift lever in a position other than neutral, the driver's seat belt is unfastened and the driver's door is opened.

## Warning/Indicator Lights and Warning Sounds

---

### · (Automatic transaxle)

With the selector lever in the D or M (not in second gear fixed mode) position, the driver's seat belt is unfastened and the driver's door is opened.

### ▼ Vehicle Speed Alarm\*

The vehicle speed alarm function is designed to alarm the driver via a single beep sound and a warning indication in the instrument cluster that the previously set vehicle speed has been exceeded. You can change the vehicle speed setting at which the warning is triggered.

### ▼ 120 km/h Warning Beep\*

If the vehicle speed exceeds 120 km/h, a chime sounds for 5 seconds.

### ▼ Electric Parking Brake (EPB) Warning Beep

The warning buzzer is activated under the following conditions:

- The vehicle is driven with the parking brake applied.
- The Electric Parking Brake (EPB) switch is pulled while the vehicle is driven.

### ▼ AUTOHOLD Warning Beep

Warning light flashes/message is displayed and beep sound is activated simultaneously for about 5 seconds when using AUTOHOLD function or when AUTOHOLD switch is operated. Because a problem with AUTOHOLD function has occurred, AUTOHOLD

function does not operate even if AUTOHOLD switch is operated.

If the warning light flashes/message is displayed and the beep sound is activated simultaneously, have your vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).

### ▼ Power Steering Warning Buzzer

If the power steering system has a malfunction, the power steering malfunction indication/malfunction indicator light turns on or flashes and the buzzer operates at the same time. Refer to Stop Vehicle in Safe Place Immediately on page 7-42.

### ▼ Tyre Inflation Pressure Warning Beep\*

The warning beep sound will be heard for about 3 seconds if the tyre pressures decrease. Refer to Tyre Pressure Monitoring System on page 4-323.

### ▼ Selective Catalytic Reduction (SCR) Warning Beep\*

#### (When the SCR warning light turns off)

If the ignition is switched ON while the remaining amount of AdBlue® has decreased, a sound is activated. If the sound is activated when the ignition is switched ON, consult an expert repairer (we recommend an Authorised Mazda Repairer).

# Warning/Indicator Lights and Warning Sounds

## (When the SCR warning light turns on/ flashes)

A sound is activated under the following conditions:

- There is a problem with the SCR system.
- The ignition is switched ON when the remaining amount of AdBlue® is extremely low.

If the sound is activated at the same time the SCR warning light turns on/flashes, have your vehicle inspected by an expert repairer (we recommend an Authorised Mazda Repairer).

## ▼ Blind Spot Monitoring (BSM) Warning Beep\*

### Driving forward

The warning beep operates when the direction indicator lever is operated to the side where the Blind Spot Monitoring (BSM) warning light is illuminated.

### **NOTE**

*A personalised function is available to change the Blind Spot Monitoring (BSM) warning beep sound volume.*

*Refer to the Settings section in the Mazda Connect Owner's Manual.*

### Reversing

The Blind Spot Monitoring (BSM) warning sound is activated if there is a possibility of collision with a vehicle approaching from behind and from the rear on the left and right sides of the vehicle.

## ▼ Mazda Radar Cruise Control (MRCC) System Warnings\*

The Mazda Radar Cruise Control (MRCC) system warnings notify the driver of system malfunctions and cautions on use when required.

Check based on the beep sound.

Warning beep	What to check
The beep sounds 1 time while the Mazda Radar Cruise Control (MRCC) is operating	The vehicle speed is slower than 25 km/h (16 mph) and the Mazda Radar Cruise Control (MRCC) system has been cancelled.
<b>(European models)</b> The beep sounds 5 times while driving <b>(Except European models)</b> The beep continues to sound while the vehicle is being driven.	The distance between your vehicle and the vehicle ahead is too close. Verify the safety of the surrounding area and reduce vehicle speed.
When the Mazda Radar Cruise Control (MRCC) is operating, the beep sounds and the multi-information display indicates a problem with the Mazda Radar Cruise Control (MRCC) system.	A malfunction in the system may be indicated. Have your vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).

# Warning/Indicator Lights and Warning Sounds

## ▼ Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) System Warnings\*

The Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) system warnings notify the driver of system malfunctions and cautions on use when required. Check based on the beep sound.

Warning beep	What to check
The beep sounds 1 time while the Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) is operating	The Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) system has been cancelled.
<b>(European models)</b> The beep sounds 3 times while driving <b>(Except European models)</b> The beep continues to sound while the vehicle is being driven.	The distance between your vehicle and the vehicle ahead is too close. Verify the safety of the surrounding area and reduce vehicle speed.
When the Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) is operating, the beep sounds and the multi-information display indicates a problem with the Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) system.	A malfunction in the system may be indicated. Have your vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).

## ▼ Lane Departure Warning Sound\*

While the system is operating, if the system determines that the vehicle may depart from the lane, it sounds a warning sound.

### NOTE

- The volume of the Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS) warning sound can be changed.  
Refer to the Settings section in the Mazda Connect Owner's Manual.
- The type of the Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS) warning sound can be changed.  
Refer to the Settings section in the Mazda Connect Owner's Manual.

## ▼ Excessive Speed Warning\*

If the vehicle speed exceeds the speed limit sign displayed on the active driving display, the warning sound is activated and the area around the speed limit sign displayed on the active driving display flashes 10 times in amber, and if the vehicle speed continues to exceed the displayed speed limit sign, the indication stops flashing and remains on.

## Warning/Indicator Lights and Warning Sounds

### ▼ Speed Limiter Warning Beep\*

If the vehicle speed exceeds the set speed by about 5 km/h (3 mph) or more, a warning beep operates continuously. The warning beep operates until the vehicle speed decreases to the set speed or less.



#### **(With cruise control)**

*If the set speed is set lower than the current vehicle speed by pressing the SET/- or RES/+ switch, the warning beep is not activated for about 30 seconds even if the vehicle speed is faster than the newly set speed by 5 km/h (3 mph). Be careful not to drive over the set speed.*

#### **(With Mazda Radar Cruise Control (MRCC) or Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function))**

*If the set speed is set lower than the current vehicle speed by pressing the SET- or RES switch, the warning beep is not activated for about 30 seconds even if the vehicle speed is faster than the newly set speed by 5 km/h (3 mph). Be careful not to drive over the set speed.*

#### **NOTE**

*When the system is temporarily cancelled by depressing the accelerator pedal fully, the ASL display shows the cancel display. Even if the vehicle speed exceeds the set speed by about 5 km/h (3 mph) or more while the cancel display is displayed, the warning sound is not operated.*

### ▼ Collision warning\*

If there is a possibility of a collision with a vehicle ahead or an obstruction at the rear of the vehicle, the warning light in the instrument cluster flashes at the same time as the warning indication is displayed in the multi-information display or active driving display, and a warning sound is activated intermittently.

## When Liftgate Cannot be Opened

### When Liftgate Cannot be Opened

If the battery is dead, the liftgate cannot be unlocked and opened.


In this case, the liftgate can be unlocked by taking care of the dead battery situation.

Refer to Jump-Starting on page 7-31.

If the liftgate cannot be unlocked even if the dead battery situation has been resolved, the electrical system may have a malfunction.


In this case, the liftgate can be opened using the following procedure as an emergency measure.

1. Wrap the end of a flathead screwdriver in a cloth and remove the cover on the interior surface of the liftgate using it.

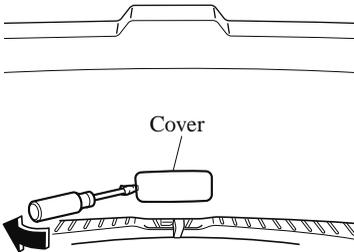


2. **(Without power liftgate)**

Turn the lever to the right to unlock the liftgate.



- (With power liftgate)**

Push the liftgate while pressing the lever down.



After performing this emergency measure, have the vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer) as soon as possible.

## Active Driving Display Does Not Operate

---

### If the Active Driving Display Does Not Operate

If the active driving display does not operate, switch the ignition off and then restart the engine. If the active driving display does not operate even with the engine restarted, have the vehicle inspected at an expert repairer (we recommend an Authorised Mazda Repairer).

# MEMO

# 8

## Customer Information

Important consumer information including warranties and add-on equipment.

<b>Warranty.....</b>	<b>8-2</b>	<b>Electromagnetic Compatibility.....</b>	<b>8-91</b>
Registering Your Vehicle in A		Electromagnetic	
Foreign Country.....	8-2	Compatibility.....	8-91
Add-On Non-Genuine Parts and			
Accessories.....	8-3		
<b>Cell Phones.....</b>	<b>8-4</b>	<b>Collection/Disposal of Old Equipment/ Used Battery.....</b>	<b>8-93</b>
Cell Phones Warning.....	8-4	Information for Users on Collection and Disposal of Old Equipment and Used Batteries.....	8-93
<b>Declaration of Conformity.....</b>	<b>8-5</b>		
Declaration of Conformity.....	8-5		

# Warranty

---

## Registering Your Vehicle in A Foreign Country

Registering your vehicle in a foreign country may be problematic depending on whether it meets the specific emission and safety standards of the country in which the vehicle will be driven. Consequently, your vehicle may require modifications at personal expense in order to meet the regulations.

In addition, you should be aware of the following issues:

Satisfactory vehicle servicing may be difficult or impossible in another country.

The fuel specified for your vehicle may be unavailable.

Parts, servicing techniques, and tools necessary to maintain and repair your vehicle may be unavailable.

There might not be an expert repairer (we recommend an Authorised Mazda Repairer) in the country you plan to take your vehicle.

The Mazda warranty is valid only in certain countries.

## Add-On Non-Genuine Parts and Accessories

Please note that technical alterations to the original state of your Mazda vehicle can affect the safety of the vehicle. Such technical alterations include not only the use of unsuitable spare parts, but also accessories, fittings or attachments, including rims and tyres.

Genuine Mazda Parts and Genuine Mazda Accessories have been specifically designed for Mazda vehicles.

Other parts and accessories than those mentioned above have not been examined and approved by Mazda unless explicitly stated by Mazda. We cannot certify the suitability of such products. Mazda is not liable for any damage caused by the use of such products.

### **WARNING**

***Be very careful in choosing and installing add-on electrical equipment, such as mobile telephones, two-way radios, stereo systems, and car alarm systems:***

*Incorrectly choosing or installing improper add-on equipment or choosing an improper installer is dangerous. Essential systems could be damaged, causing engine stalling, air-bag (SRS) activation, ABS/TCS/DSC inactivation, or a fire in the vehicle.*

Mazda assumes no responsibility for death, injury, or expenses that may result from the installation of add-on non-genuine parts or accessories.

## Cell Phones Warning

### **WARNING**

***Please comply with the legal regulations concerning the use of communication equipment in vehicles in your country:***

*Use of any electrical devices such as cell phones, computers, portable radios, vehicle navigation or other devices by the driver while the vehicle is moving is dangerous. Dialing a number on a cell phone while driving also ties-up the driver's hands. Use of these devices will cause the driver to be distracted and could lead to a serious accident. If a passenger is unable to use the device, pull off the right-of-way to a safe area before use. If use of a cell phone is necessary despite this warning, use a hands-free system to at least leave the hands free to drive the vehicle. Never use a cell phone or other electrical devices while the vehicle is moving and, instead, concentrate on the full-time job of driving.*

# Declaration of Conformity

## Declaration of Conformity

### ▼ Keyless Entry System/Immobilizer System

[EN] English	Hereby, MITSUBISHI ELECTRIC CORPORATION, HIMEJI WORKS, declares that the radio equipment type Keyless System (SKE133-02, SKE134-01, SKE136-01, SKE13E-03) is in compliance with Directive 2014/53/EU.
[BG] Bulgarian	С настоящото MITSUBISHI ELECTRIC CORPORATION, HIMEJI WORKS декларира, че този тип радиосъоръжение Keyless System (SKE133-02, SKE134-01, SKE136-01, SKE13E-03) е в съответствие с Директива 2014/53/ЕС.
[ES] Spanish	Por la presente, MITSUBISHI ELECTRIC CORPORATION, HIMEJI WORKS declara que el tipo de equipo radioeléctrico Keyless System (SKE133-02, SKE134-01, SKE136-01, SKE13E-03) es conforme con la Directiva 2014/53/UE.
[CS] Czech	Tímto MITSUBISHI ELECTRIC CORPORATION, HIMEJI WORKS prohlašuje, že typ rádiového zařízení Keyless System (SKE133-02, SKE134-01, SKE136-01, SKE13E-03) je v souladu se směrnicí 2014/53/EU.
[DA] Danish	Hermed erklærer MITSUBISHI ELECTRIC CORPORATION, HIMEJI WORKS, at radioudstyrstypen Keyless System (SKE133-02, SKE134-01, SKE136-01, SKE13E-03) er i overensstemmelse med direktiv 2014/53/EU.
[DE] German	Hiermit erkläre MITSUBISHI ELECTRIC CORPORATION, HIMEJI WORKS, dass der Funkanlagentyp Keyless System (SKE133-02, SKE134-01, SKE136-01, SKE13E-03) der Richtlinie 2014/53/EU entspricht.
[ET] Estonian	Käesolevaga deklareerib MITSUBISHI ELECTRIC CORPORATION, HIMEJI WORKS, et käesolev raadioseadme tüüp Keyless System (SKE133-02, SKE134-01, SKE136-01, SKE13E-03) vastab direktiivi 2014/53/EL nõuetele.
[EL] Greek	Με την παρούσα ο/η MITSUBISHI ELECTRIC CORPORATION, HIMEJI WORKS, δηλώνει ότι ο ραδιοεξοπλισμός Keyless System (SKE133-02, SKE134-01, SKE136-01, SKE13E-03) πληροί την οδηγία 2014/53/ΕΕ.
[FR] French	Le soussigné, MITSUBISHI ELECTRIC CORPORATION, HIMEJI WORKS, déclare que l'équipement radioélectrique du type Keyless System (SKE133-02, SKE134-01, SKE136-01, SKE13E-03) est conforme à la directive 2014/53/UE.
[HR] Croatian	MITSUBISHI ELECTRIC CORPORATION, HIMEJI WORKS ovime izjavljuje da je radijska oprema tipa Keyless System (SKE133-02, SKE134-01, SKE136-01, SKE13E-03) u skladu s Direktivom 2014/53/EU.
[IT] Italian	Il fabbricante, MITSUBISHI ELECTRIC CORPORATION, HIMEJI WORKS, dichiara che il tipo di apparecchiatura radio Keyless System (SKE133-02, SKE134-01, SKE136-01, SKE13E-03) è conforme alla direttiva 2014/53/UE.
[LV] Latvian	Ar šo MITSUBISHI ELECTRIC CORPORATION, HIMEJI WORKS deklarē, ka radioiekārta Keyless System (SKE133-02, SKE134-01, SKE136-01, SKE13E-03) atbilst Direktīvai 2014/53/ES.
[LT] Lithuanian	Aš, MITSUBISHI ELECTRIC CORPORATION, HIMEJI WORKS, patvirtinu, kad radijo įrenginių tipas Keyless System (SKE133-02, SKE134-01, SKE136-01, SKE13E-03) atitinka Direktyvą 2014/53/ES.
[HU] Hungarian	MITSUBISHI ELECTRIC CORPORATION, HIMEJI WORKS igazolja, hogy a Keyless System (SKE133-02, SKE134-01, SKE136-01, SKE13E-03) típusú rádióberendezés megfelel a 2014/53/EU irányelvnek.
[MT] Maltese	B'dan, MITSUBISHI ELECTRIC CORPORATION, HIMEJI WORKS, niddikjara li dan it-tip ta' tagħmir tar-radju Keyless System (SKE133-02, SKE134-01, SKE136-01, SKE13E-03) huwa konformi mad-Direttiva 2014/53/UE.
[NL] Dutch	Hierbij verklaar ik, MITSUBISHI ELECTRIC CORPORATION, HIMEJI WORKS, dat het type radioapparatuur Keyless System (SKE133-02, SKE134-01, SKE136-01, SKE13E-03) conform is met Richtlijn 2014/53/EU.
[PL] Polish	MITSUBISHI ELECTRIC CORPORATION, HIMEJI WORKS niniejszym oświadczam, że typ urządzenia radiowego Keyless System (SKE133-02, SKE134-01, SKE136-01, SKE13E-03) jest zgodny z dyrektywą 2014/53/UE.

# Declaration of Conformity

[PT] Portuguese	O abaixo assinado MITSUBISHI ELECTRIC CORPORATION, HIMEJI WORKS declara que o presente tipo de equipamento de rádio Keyless System (SKE133-02, SKE134-01, SKE136-01, SKE13E-03) está em conformidade com a Diretiva 2014/53/UE.
[RO] Romanian	Prin prezenta, MITSUBISHI ELECTRIC CORPORATION, HIMEJI WORKS declară că tipul de echipamente radio Keyless System (SKE133-02, SKE134-01, SKE136-01, SKE13E-03) este în conformitate cu Directiva 2014/53/UE.
[SK] Slovak	MITSUBISHI ELECTRIC CORPORATION, HIMEJI WORKS týmto vyhlasuje, že rádiové zariadenie typu Keyless System (SKE133-02, SKE134-01, SKE136-01, SKE13E-03) je v súlade so smernicou 2014/53/EÚ.
[SL] Slovenian	MITSUBISHI ELECTRIC CORPORATION, HIMEJI WORKS potrjuje, da je tip radijske opreme Keyless System (SKE133-02, SKE134-01, SKE136-01, SKE13E-03) skladen z Direktivo 2014/53/EU.
[FI] Finnish	MITSUBISHI ELECTRIC CORPORATION, HIMEJI WORKS vakuuttaa, että radiolaitetyyppi Keyless System (SKE133-02, SKE134-01, SKE136-01, SKE13E-03) on direktiivin 2014/53/EU mukainen.
[SV] Swedish	Härmed försäkras MITSUBISHI ELECTRIC CORPORATION, HIMEJI WORKS att denna typ av radioutrustning Keyless System (SKE133-02, SKE134-01, SKE136-01, SKE13E-03) överensstämmer med direktiv 2014/53/EU.

The full text of the EU declaration of conformity is available at the following internet address:<http://www.mitsubishielectric.com/bu/automotive/doc/re.html>

Manufacturer: MITSUBISHI ELECTRIC CORPORATION, HIMEJI WORKS  
840, Chiyoda-machi, Himeji, Hyogo 670-8677, Japan

Model : SKE13E-03

Operation frequency : 433.92 MHz

Maximum output power : 10mW

Model : SKE134-01, SKE133-02

Operation frequency : 125 kHz

Maximum output power : 107dB  $\mu$  V/m at. 10 meters

Model : SKE136-01

Operation frequency : 433.92 MHz

**CAUTION** - Danger of explosion if battery is incorrectly replaced.

Replace only with the same or equivalent type.

Please check and obey all local laws and regulations for the disposal of batteries or accumulations.

Never dispose of battery in fire or mechanical crushing or cutting.

If battery is incorrectly discarded or heated to high temperature (100 °C(212°F) or higher), gas may be generated inside battery, causing electrolyte leak, internal short circuit, heat generation, explosion and violent flaring.

**CAUTION** - Do not expose Hand Unit to excessive heat such as sunshine, fire or the like.

## WARNING

Do not ingest the battery, Chemical Burn Hazard

This product contains a coin/button cell battery. If the coin/button cell battery is swallowed, it can cause severe internal burns in just 2 hours and can lead to death. Keep new and used batteries away from children. If the battery compartment does not close securely, stop using the product and keep it away from children. If you think batteries might have been swallowed or placed inside any part of the body, seek immediate medical attention.

The caution mark of ISO 7000-0434 is located on the internal case.



This symbol is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the appliance.

# Declaration of Conformity

Moldova	<p>Prin prezenta, MITSUBISHI ELECTRIC CORPORATION, HIMEJI WORKS declară că tipul de echipamente radio (SKE133-02, SKE134-01, SKE136-01, SKE13E-01) este în conformitate cu Reglementarea tehnică „Punerea la dispoziție pe piață a echipamentelor radio”.</p> <p>Textul integral al declarației de conformitate este disponibil la următoarea adresă de Internet: <a href="http://www.mitsubishielectric.com/bu/automotive/doc/mda.html">http://www.mitsubishielectric.com/bu/automotive/doc/mda.html</a></p>
Україна	<p>справжнім MITSUBISHI ELECTRIC CORPORATION, HIMEJI WORKS заявляє, що тип радіобладнання (SKE133-02, SKE134-01, SKE13E-03) відповідає Технічному регламенту радіобладнання.</p> <p>Повний текст декларації про відповідність доступний на веб-сайті за такою адресою: <a href="http://www.mitsubishielectric.com/bu/automotive/doc/ukr.html">http://www.mitsubishielectric.com/bu/automotive/doc/ukr.html</a></p>
Беларусь	<p>Назва прадукту: Сістэма бязключавога доступу Мэта выкарыстання: замыканне або разблякоўка дзвярэй аўтамабіля і запуск рухавіка Радые спецыфікацыя</p> <p>Прыёмперадатчык</p> <ul style="list-style-type: none"> <li>- Мадэль: SKE13E-03</li> <li>- Рабочая частата: 433,92 МГц</li> <li>- Максімальная магутнасць: 10 мВт</li> </ul> <p>Перадатчык</p> <ul style="list-style-type: none"> <li>- Мадэль: SKE134-01, SKE133-02</li> <li>- Рабочая частата: 125 кГц</li> <li>- Максімальная магутнасць: 107 дБВ/м, на 10 метрах</li> </ul> <p>Прыёмнік</p> <ul style="list-style-type: none"> <li>- Мадэль: SKE136-01</li> <li>- Рабочая частата: 433,92 МГц</li> </ul> <p>Устаноўка: устаноўлена ў транспартным сродку Правілы і інфармацыя аб бяспэцы выкарыстання: апісаны ў гэтым кіраўніцтве Спосаб рамонт: звязьцеся з пакупніком транспартнага сродку Вытворца: MITSUBISHI ELECTRIC CORPORATION, HIMEJI WORKS 840, Chiyoda-machi, Himeji, Hyogo 670-8677, Japan</p> <p>Мясцовы прадстаўнік-агент</p> <ul style="list-style-type: none"> <li>- Кампанія: Friendly LLC</li> <li>- Адрас: 220007, г. Мінск, вул. Валадзько, 6, Рэспубліка Беларусь</li> <li>- Тэлефонны нумар: +375 17 2205545</li> <li>- Кантактная асоба: Aleksey Moroz</li> <li>- Эл. Пошта: moroz.aleksey@friendly.by</li> </ul> <p>Дата вырабу: Паказець на прадукце</p>

## FCC CAUTION

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

## FCC

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This product has been Type Approved by Jamaica: SMA -SKE13D-03/SKE135-01/SKE134-01/SKE133-02.

## 低功率電波輻射性電機管理辦法

### 第十二條

經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

### 第十四條

低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。  
前項合法通信，指依電信法規定作業之無線電通信。  
低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

# Declaration of Conformity

## Keyless System Radio approval Marking

Complies with IMDA Standards DA100926										
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="text-align: center;"><b>Oman - TRA</b></td> </tr> <tr> <td style="text-align: center;"><b>D090258</b></td> </tr> <tr> <td>R/0231/11 : SKE136-01</td> </tr> <tr> <td>R/0234/11 : SKE134-01</td> </tr> <tr> <td>R/0233/11 : SKE133-02</td> </tr> <tr> <td>R/7622/19 : SKE13E-03</td> </tr> </table>	<b>Oman - TRA</b>	<b>D090258</b>	R/0231/11 : SKE136-01	R/0234/11 : SKE134-01	R/0233/11 : SKE133-02	R/7622/19 : SKE13E-03	<b>Ghana</b> SKE136-01 NCA APPROVED: 3R8-8M-0E-13E SKE134-01 NCA APPROVED: 3R8-8M-0E-13F SKE133-02 NCA APPROVED: 3R8-8M-EX-140 SKE13E-03 NCA APPROVED: ZRO-M8-7E3-X3A			
<b>Oman - TRA</b>										
<b>D090258</b>										
R/0231/11 : SKE136-01										
R/0234/11 : SKE134-01										
R/0233/11 : SKE133-02										
R/7622/19 : SKE13E-03										
SKE13E-03 	SKE136-01 	SKE134-01 	SKE133-02 	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="text-align: center;"> <b>BOCRA</b>                      REGISTERED No:                      BOCRA/TA/2016/2606: SKE136-01                      BOCRA/TA/2016/2607: SKE133-02                      BOCRA/TA/2016/2608: SKE134-01                      BOCRA/TA/2019/4837: SKE13E-03                 </td> </tr> </table>	<b>BOCRA</b> REGISTERED No: BOCRA/TA/2016/2606: SKE136-01 BOCRA/TA/2016/2607: SKE133-02 BOCRA/TA/2016/2608: SKE134-01 BOCRA/TA/2019/4837: SKE13E-03					
<b>BOCRA</b> REGISTERED No: BOCRA/TA/2016/2606: SKE136-01 BOCRA/TA/2016/2607: SKE133-02 BOCRA/TA/2016/2608: SKE134-01 BOCRA/TA/2019/4837: SKE13E-03										

Nigeria

Connection and use of this communications equipment is permitted by the Nigerian Communications Commission

Israel

51-80577(SKE13E-03) – "מספר אישור התאמה מטעם משרד התקשורת":  
 51-80017(SKE133-02) – "מספר אישור התאמה מטעם משרד התקשורת":  
 51-80531(SKE134-01) – "מספר אישור התאמה מטעם משרד התקשורת":  
 51-80019(SKE136-01) – "מספר אישור התאמה מטעם משרד התקשורת":  
 "חל איסור לבצע פעולות במכשיר שיש בהן כדי לשנות את תכונותיו  
 האלחוטיות של המכשיר, ובכלל זה שינויי תוכנה, החלפת אנטנה מקוריית או  
 הוספת אפשרות לחיבור לאנטנה חיצונית, בלא קבלת אישור משרד התקשורת,  
 בשל החשש להפרעות אלחוטיות."

# Declaration of Conformity

Moldova



MITSUBISHI ELECTRIC CORPORATION  
HIMEJI WORKS  
840, Chiyoda-machi, Himeji, Hyogo 670-8677, Japan  
Phone +81-79-298-8994 Fax +81-79-298-8875

## DECLARAȚIA DE CONFORMITATE

### 1. Echipamentul radio:

**Descriere:** Keyless System Hand Unit  
**Marca comercială:** MITSUBISHI ELECTRIC  
**Model:** SKE13E-01

### 2. Denumirea producătorului (sau a reprezentantului sau autorizat):

Mitsubishi Electric Corporation, Himeji Works  
840, Chiyoda-machi, Himeji, Hyogo 670-8677 Japan

### 3. Prezentă declarație de conformitate este emisă pe propria răspundere a producătorului.

### 4. Obiectul declarației:

**Descriere:** Keyless System Hand Unit  
**Marca comercială:** MITSUBISHI ELECTRIC  
**Model:** SKE13E-01

### 5. Obiectul declarației descris mai sus este în conformitate cu :

**Reglementarea Tehnică "Punerea la dispoziție pe piață a echipamentelor radio", aprobată prin HG nr. 34 din 30.01.2019.**

6. Referințele standardelor naționale armonizate relevante folosite sau referințele la alte specificații tehnice, în legătură cu care se declară conformitatea. Referințele sunt enumerate împreună cu numerele de identificare și cu versiunea acestora, precum și cu data emiterii după caz :

Safety: SM EN 62368-1:2015  
EMC: SM EN 301 489-1 V1.9.2:2014  
RF: SM EN 300 220-2 V3.1.1:2017  
SM EN 300 330 V2.1.1:2017

7. Versiunea Software, Versiunea Hardware, descrierea accesoriilor și componentelor care permit echipamentului radio declarat să funcționeze conform destinației și care sunt incluse în declarația de conformitate: N/A

### 8. Informații suplimentare: N/A

Semnat pentru și în numele:

**Numele:** Masashi Nojima **Data:** 3/15/2021  
**Funcția:** Senior Manager, Vehicle Systems Control Module Design Section 1  
Electronic Control Modules Dept. A

**Semnătura:**

**Locul emiterii:** 840, Chiyoda-machi, Himeji, Hyogo 670-8677, Japan

# Declaration of Conformity



MITSUBISHI ELECTRIC CORPORATION  
HIMEJI WORKS  
840, Chiyoda-machi, Himeji, Hyogo 670-8677, Japan  
Phone +81-79-298-9994 Fax +81-79-298-8875

## DECLARAȚIA DE CONFORMITATE

1. Echipamentul radio:

Descriere: **Keyless System Hand Unit**  
Marca comercială: **MITSUBISHI ELECTRIC**  
Model: **SKE13E-02**

2. Denumirea producătorului (sau a reprezentantului sau autorizat):

Mitsubishi Electric Corporation, Himeji Works  
840, Chiyoda-machi, Himeji, Hyogo 670-8677 Japan

3. Prezența declarației de conformitate este emisă pe propria răspundere a producătorului.

4. Obiectul declarației:

Descriere: **Keyless System Hand Unit**  
Marca comercială: **MITSUBISHI ELECTRIC**  
Model: **SKE13E-02**

5. Obiectul declarației descris mai sus este în conformitate cu :

**Reglementarea Tehnică "Punerea la dispoziție pe piață a echipamentelor radio", aprobată prin HG nr. 34 din 30.01.2019.**

6. Referințele standardelor naționale armonizate relevante folosite sau referințele la alte specificații tehnice, în legătură cu care se declară conformitatea. Referințele sunt enumerate împreună cu numerele de identificare și cu versiunea acestora, precum și cu data emiterii după caz :

Safety: SM EN 62368-1:2015  
EMC: SM EN 301 489-1 V1.9.2:2014  
RF: SM EN 300 220-2 V3.1.1:2017  
SM EN 300 330 V2.1.1:2017

7. Versiunea Software, Versiunea Hardware, descrierea accesoriilor și componentelor care permit echipamentului radio declarat să funcționeze conform destinației și care sunt incluse în declarația de conformitate: N/A

8. Informații suplimentare: N/A

Semnătura pentru și în numele:

Numele: Masashi Nojima Data: 3/15/2021  
Funcția: Senior Manager, Vehicle Systems Control Module Design Section 1  
Electronic Control Modules Dept. A

Semnătura:

Locul emiterii: 840, Chiyoda-machi, Himeji, Hyogo 670-8677, Japan

# Declaration of Conformity



MITSUBISHI ELECTRIC CORPORATION  
HIMEJI WORKS  
840, Chiyoda-machi, Himeji, Hyogo 670-8677, Japan  
Phone +81-79-298-8984 Fax +81-79-298-8975

## DECLARAȚIA DE CONFORMITATE

### 1. Echipamentul radio:

**Descriere:** Keyless System Hand Unit  
**Marca comercială:** MITSUBISHI ELECTRIC  
**Model:** SKE13E-03

### 2. Denumirea producătorului (sau a reprezentantului sau autorizat):

Mitsubishi Electric Corporation, Himeji Works  
840, Chiyoda-machi, Himeji, Hyogo 670-8677 Japan

### 3. Prezentă declarație de conformitate este emisă pe propria răspundere a producătorului.

### 4. Obiectul declarației:

**Descriere:** Keyless System Hand Unit  
**Marca comercială:** MITSUBISHI ELECTRIC  
**Model:** SKE13E-03

### 5. Obiectul declarației descris mai sus este în conformitate cu :

**Reglementarea Tehnică "Punerea la dispoziție pe piață a echipamentelor radio", aprobată prin HG nr. 34 din 30.01.2019.**

6. Referințele standardelor naționale armonizate relevante folosite sau referințele la alte specificații tehnice, în legătură cu care se declară conformitatea. Referințele sunt enumerate împreună cu numerele de identificare și cu versiunea acestora, precum și cu data emiterii după caz :

Safety: SM EN 62368-1:2015  
EMC: SM EN 301 489-1 V1.9.2:2014  
RF: SM EN 300 220-2 V3.1.1:2017  
SM EN 300 330 V2.1.1:2017

7. Versiunea Software, Versiunea Hardware, descrierea accesoriilor și componentelor care permit echipamentului radio declarat să funcționeze conform destinației și care sunt incluse în declarația de conformitate: N/A

8. Informații suplimentare: N/A

Semnătura pentru și în numele:

**Numele:** Masashi Nojima **Data:** 3/15/2021  
**Funcția:** Senior Manager, Vehicle Systems Control Module Design Section 1  
Electronic Control Modules Dept. A

Semnătura:

**Locul emiterii:** 840, Chiyoda-machi, Himeji, Hyogo 670-8677, Japan

# Declaration of Conformity



MITSUBISHI ELECTRIC CORPORATION  
HIMEJI WORKS

840, Chiyoda-machi, Himeji, Hyogo 670-8677, Japan  
Phone +81-79-298-8994 Fax +81-79-298-8875

## DECLARAȚIA DE CONFORMITATE

1. Echipamentul radio:

**Descriere:** Keyless System Receiver  
**Marca comercială:** MITSUBISHI ELECTRIC  
**Model:** SKE136-01

2. Denumirea producătorului (sau a reprezentantului sau autorizat):

Mitsubishi Electric Corporation, Himeji Works  
840, Chiyoda-machi, Himeji, Hyogo 670-8677 Japan

3. Prezența declarației de conformitate este emisă pe propria răspundere a producătorului.

4. Obiectul declarației:

**Descriere:** Keyless System Receiver  
**Marca comercială:** MITSUBISHI ELECTRIC  
**Model:** SKE136-01

5. Obiectul declarației descris mai sus este în conformitate cu :

**Reglementarea Tehnică "Punerea la dispoziție pe piață a echipamentelor radio", aprobată prin HG nr. 34 din 30.01.2019.**

6. Referințele standardelor naționale armonizate relevante folosite sau referințele la alte specificații tehnice, în legătură cu care se declară conformitatea. Referințele sunt enumerate împreună cu numerele de identificare și cu versiunea acestora, precum și cu data emiterii după caz :

Safety: SM EN 62368-1:2015  
EMC: SM EN 301 489-1 V1.9.2:2014  
RF: SM EN 300 220-2 V3.1.1:2017

7. Versiunea Software, Versiunea Hardware, descrierea accesoriilor și componentelor care permit echipamentului radio declarat să funcționeze conform destinației și care sunt incluse în declarația de conformitate: N/A

8. Informații suplimentare: N/A

Semnat pentru și în numele:

**Numele:** Masashi Nojima **Data:** 3/15/2021  
**Funcția:** Senior Manager, Vehicle Systems Control Module Design Section I  
Electronic Control Modules Dept. A

Semnătura:

**Locul emiterii:** 840, Chiyoda-machi, Himeji, Hyogo 670-8677, Japan

# Declaration of Conformity



MITSUBISHI ELECTRIC CORPORATION  
HIMEJI WORKS  
840, Chiyoda-machi, Himeji, Hyogo 670-8677, Japan  
Phone +81-79-298-8984 Fax +81-79-298-8875

## DECLARAȚIA DE CONFORMITATE

1. Echipamentul radio:

**Descriere:** Keyless System LFU  
**Marca comercială:** MITSUBISHI ELECTRIC  
**Model:** SKE134-01

2. Denumirea producătorului (sau a reprezentantului sau autorizat):

Mitsubishi Electric Corporation, Himeji Works  
840, Chiyoda-machi, Himeji, Hyogo 670-8677 Japan

3. Prezența declarației de conformitate este emisă pe propria răspundere a producătorului.

4. Obiectul declarației:

**Descriere:** Keyless System LFU  
**Marca comercială:** MITSUBISHI ELECTRIC  
**Model:** SKE134-01

5. Obiectul declarației descris mai sus este în conformitate cu :

**Reglementarea Tehnică** "Punerea la dispoziție pe piață a echipamentelor radio", aprobată prin HG nr. 34 din 30.01.2019.

6. Referințele standardelor naționale armonizate relevante folosite sau referințele la alte specificații tehnice, în legătură cu care se declară conformitatea. Referințele sunt enumerate împreună cu numerele de identificare și cu versiunea acestora, precum și cu data emiterii după caz :

Safety: SM EN 62368-1:2015  
EMC: SM EN 301 489-1 V1.9.2:2014  
RF: SM EN 300 330 V2.1.1:2017

7. Versiunea Software, Versiunea Hardware, descrierea accesoriilor și componentelor care permit echipamentului radio declarat să funcționeze conform destinației și care sunt incluse în declarația de conformitate: N/A

8. Informații suplimentare: N/A

Semnat pentru și în numele:

**Numele:** Masashi Nojima **Data:** 3/15/2021  
**Funcția:** Senior Manager, Vehicle Systems Control Module Design Section 1  
Electronic Control Modules Dept. A

Semnătura:

**Locul emiterii:** 840, Chiyoda-machi, Himeji, Hyogo 670-8677, Japan

# Declaration of Conformity



MITSUBISHI ELECTRIC CORPORATION  
HIMEJI WORKS  
840, Chiyoda-machi, Himeji, Hyogo 670-8677, Japan  
Phone +81-79-298-8994 Fax +81-79-298-8875

## DECLARAȚIA DE CONFORMITATE

1. Echipamentul radio:

**Descriere:** Keyless System SSU  
**Marca comercială:** MITSUBISHI ELECTRIC  
**Model:** SKE133-02

2. Denumirea producătorului (sau a reprezentantului sau autorizat):

Mitsubishi Electric Corporation, Himeji Works  
840, Chiyoda-machi, Himeji, Hyogo 670-8677 Japan

3. Prezentă declarație de conformitate este emisă pe propria răspundere a producătorului.

4. Obiectul declarației:

**Descriere:** Keyless System SSU  
**Marca comercială:** MITSUBISHI ELECTRIC  
**Model:** SKE133-02

5. Obiectul declarației descris mai sus este în conformitate cu :

**Reglementarea Tehnică "Punerea la dispoziție pe piață a echipamentelor radio", aprobată prin HG nr. 34 din 30.01.2019.**

6. Referințele standardelor naționale armonizate relevante folosite sau referințele la alte specificații tehnice, în legătură cu care se declară conformitatea. Referințele sunt enumerate împreună cu numerele de identificare și cu versiunea acestora, precum și cu data emiterii după caz :


Safety: SM EN 62368-1:2015  
EMC: SM EN 301 489-1 V1.9.2:2014  
RF: SM EN 300 330 V2.1.1:2017

7. Versiunea Software, Versiunea Hardware, descrierea accesoriilor și componentelor care permit echipamentului radio declarat să funcționeze conform destinației și care sunt incluse în declarația de conformitate: N/A

8. Informații suplimentare: N/A

Semnat pentru și în numele:

**Numele:** Masashi Nojima **Data:** 3/15/2021  
**Funcția:** Senior Manager, Vehicle Systems Control Module Design Section 1  
Electronic Control Modules Dept. A

**Semnătura:** 

**Locul emiterii:** 840, Chiyoda-machi, Himeji, Hyogo 670-8677, Japan

# Declaration of Conformity

---

Mazda Austria Gesellschaft m. b. H.  
Ernst Diez Strasse 3, 9020 Klagenfurt, Österreich  
Telephone: 43 - 463 - 38880

# Declaration of Conformity

---

## ▼ Blind Spot Monitoring (BSM) System

Hereby, FURUKAWA AUTOMOTIVE SYSTEMS INC., declares that the radio equipment type 24GMMR1A is in compliance with Directive 2014/53/EU.

The full text of the EU declaration of conformity is available at the following internet address:

# Declaration of Conformity

<http://www.furukawaas.co.jp/english/approval/>

English	Frequency range : 24.05 GHz to 24.25 GHz Maximum radiated peak power(e.i.r.p) : 2.8 dBm Temperature range : -40°C to +85°C
Bulgarian	Честотен диапазон: 24,05 GHz до 24,25 GHz Максимално излъчвана върхова мощност (еним): 2,8 dBm Температурен диапазон: -40°C до +85°C
Czech	Frekvenční rozsah: 24,05 GHz až 24,25 GHz Maximum vyzářeného výkonu (e.i.r.p): 2,8 dBm Teplotní rozsah: -40°C až +85°C
Danish	Frekvensinterval: 24,05 GHz til 24,25 GHz Maksimalt udstrålede spidseffekt (e.i.r.p): 2,8 dBm Temperaturinterval: -40°C til +85°C
German	Frequenzbereich: 24,05 GHz bis 24,25 GHz Max. Strahlung sleistungspegel (EIRP): 2,8 dBm Temperaturbereich: -40°C bis +85°C
Estonian	Sagedusala: 24,05 GHz kuni 24,25 GHz Maksimaalne kiirguse tippvõimsus (ekvivalentne isotroopne kiirgusvõimsus): 2,8 dBm Temperatuurivahemik: -40 °C kuni +85 °C
Gaeilge	Raon miniciochta: idir 24.05 GHz agus 24.25 GHz Buaic-chumhacht radaithe uasta (e.i.r.p): 2.8 dBm Raon teochta: -40°C to +85°C
Greek	Περιοχή συχνότητας: 24,05 GHz έως 24,25 GHz Μέγιστη ακτινοβολούμενη ισχύς αιχμής (ιικα): 2,8 dBm Εύρος θερμοκρασίας: -40°C έως +85°C
Spanish	Rango de Frecuencia: 24,05 GHz a 24,25 GHz Potencia Isótropa Radiada Equivalente (e.i.r.p, por sus siglas en inglés): 2,8 dBm Rango de temperatura: -40°C a +85°C
French	Bande de fréquence: 24,05 GHz to 24,25 GHz Puissance maximale de crête rayonnée (e.i.r.p): 2,8 dBm Écart de température: -40°C à +85°C
hrvatski	Frekvencijski raspon: 24,05 GHz do 24,25 GHz Maksimalna emitirana vršna snaga (e.i.r.p): 2,8 dBm Raspon temperatura: -40°C do +85°C
Italian	Gamma di frequenza : da 24,05 GHz ta 24,25 GHz Picco massimo delle potenza irradiata (e.i.r.p): 2,8 dBm Escursione termica: da -40°C a +85°C

# Declaration of Conformity

Latvian	<p>Frekvences diapazons: 24,05 GHz līdz 24,25 GHz  Maksimālā izstarotā maksimālā jauda (e.i.r.p): 2,8 dBm  Temperatūras diapazons: -40°C līdz +85°C</p>
Lithuania	<p>Dažnio intervalas: 24,05–24,25 GHz  Didžiausioji spinduliuotės galia (EIRP): 2,8 dBm  Temperatūros intervalas: -40–+85 °C</p>
Lëtzebuergesch	<p>Frequenzberäich: 24,05 GHz bis 24,25 GHz  Maximal ausgestraalt Spëtzeleeschung (e.i.r.p): 2,8 dBm  Temperaturberäich: -40°C bis +85°C</p>
Hungarian	<p>Frekvenciartomány: 24,05 GHz - 24,25 GHz  Maximum sugárzott csúcsteljesítmény (e.i.r.p): 2,8 dBm  Hőmérsékleti tartomány: -40 °C - +85 °C</p>
Maltese	<p>Medda tal-frekwenza: 24,05 GHz sa 24,25 Ghz  L-ogħla qawwa rradjata massima (e.i.r.p): 2,8 dBm  Firxa tat-Temperatura: -40°C sa +85°C</p>
Dutch	<p>Frequentiebereik: 24,05 GHz tot 24,25 GHz  Maximaal uitgezonden vermogen (EIRP): 2,8 dBm  Temperatuurbereik: -40°C tot +85°C</p>
German	<p>Frequenzbereich: 24,05 GHz bis 24,25 GHz  Max. Strahlung leistungspegel (EIRP): 2,8 dBm  Temperaturbereich: -40°C bis +85°C</p>
Polish	<p>Zakres częstotliwości: od 24,05 GHz do 24,25 GHz  Maksymalna wypromieniowana moc (EIRP): 2,8 dBm  Zakres temperatur: od -40°C do +85°C</p>
Portuguese	<p>Alcance de frequência: 24,05 GHz a 24,25 GHz  Máximo Potência de pico irradiada (e.i.r.p): 2,8 dBm  Faixa de temperatura: -40°C a +85°C</p>
Rumanian	<p>Interval de frecvență: 24,05 GHz - 24,25 GHz  Putere de vârf maximă radiată (e.i.r.p): 2,8 dBm  Interval de temperatură: -40 °C - +85 °C</p>
Slovenian	<p>Frekvenčni razpon: 24,05 GHz do 24,25 GHz  Maksimalna zračena moč (e.i.r.p): 2,8 dBm  Temperaturni razpon: -40°C to +85°C</p>
Slovakian	<p>Frekvenčný rozsah: 24,05 GHz až 24,25 GHz  Maximum efektívneho izotropného vyžiarneho výkonu (e.i.r.p): 2,8 dBm  Teplotný rozsah: -40°C zž +85°C</p>
Finnish	<p>Taajuusalue: 24,05 – 24,25 GHz  Maksimi säteilyhuipputeho (e.i.r.p): 2,8 dBm  Lämpötila-alue: -40°C - +85°C</p>
Swedish	<p>Frekvensintervall: 24,05 GHz till 24,25 GHz  Högsta utstrålade maximal effekt (e.i.r.p): 2,8 dBm  Temperaturintervall: -40°C till +85°C</p>

# Declaration of Conformity

United Kingdom	 <p>FURUKAWA AUTOMOTIVE SYSTEMS INC., hereby declare, at our sole responsibility, that 24GMMR1A conforms to the essential requirements of the radio equipment regulations of the United Kingdom. The UK Declaration of Conformity is available at the following address: <a href="http://www.furukawaas.co.jp/english/approval/">http://www.furukawaas.co.jp/english/approval/</a></p>
Moldova	<p>Company : FURUKAWA AUTOMOTIVE SYSTEMS INC. Street : 5-1-9 Location : Higashi-yawata, Hiratsuka, Kanagawa Country : Japan</p> <p>Prin prezenta, FURUKAWA AUTOMOTIVE SYSTEMS INC. declară că tipul de echipamente radio 24GMMR1A este în conformitate cu Reglementarea tehnică "Punerea la dispoziție pe piață a echipamentelor radio". Textul integral al declarației de conformitate este disponibil la următoarea adresă de Internet: <a href="http://www.furukawaas.co.jp/english/approval/">http://www.furukawaas.co.jp/english/approval/</a></p> <p>Gama de frecvențe : 24.05 GHz ... 24.25 GHz Putere Transmit : 2.8 dBm (maxim)</p>
Ukraine	 <p>MODEL:24GMMR1A FURUKAWA ELECTRIC CO.,Ltd. Адреса виробника : FURUKAWA AUTOMOTIVE SYSTEMS INC. 1000, Amago, Koura-cho, Inukami-gun, Shiga, JAPAN</p> <p>справжнім (FURUKAWA ELECTRIC CO.,Ltd.) заявляє, що тип радіобладнання (Радіолокатор периферійного безперервного нагляду діапазоном 24 ГГц) відповідає Технічному регламенту радіобладнання; повний текст декларації про відповідність доступний на веб-сайті за такою адресою (<a href="http://www.furukawaas.co.jp/english/approval/24gmmr1a/">http://www.furukawaas.co.jp/english/approval/24gmmr1a/</a>)</p> <p>Діапазон частот: від 24,05 до 24,25 ГГц Максимальна пікова потужність випромінювання (еквівалентна ізотропній потужності): 2,8 дБм Діапазон температур: від -40 °C до + 85 °C</p>

## Declaration of Conformity

Информация о соответствии продукции требованиям Технических регламентов Таможенного союза (вкладыш к руководству по эксплуатации)	
1. Изготовитель, адрес	FLURUKAWA AUTOMOTIVE SYSTEMS INC., 1000 Amago Koura-cho, Inukami-gun, Shiga 522-0242, Japan
2. Наименование и место нахождения уполномоченного лица (импортер - если партия)	ООО «Мазда Мотор Рус» Ленинградское шоссе 16А, стр. 2, 125171 Москва, РФ
3. Информация для связи	См. п. 2
4. Торговая марка	FLURUKAWA ELECTRIC
5. Наименование и обозначение	+название: 24GMMR1A -обозначение: 24GHz Multimode Pulse Radar
6. Характеристики и параметры	Диапазон частот: 24.05~24.25ГГц Макс. Выходная мощность: <20дБм (ЭИИ/ИМ)
7. Назначение	Обнаружение положения и движения объектов в ассистентов современных систем водителей
8. Питание	8-16В постоянного тока, <1А
9. Страна производства	Япония
10. Соответствует ТРТС	ТРТС 020/2011 «Электromагнитная совместимость Технических средств»
11. Правила и условия безопасной эксплуатации (использования)	Оборудование предназначено для использования в автомобиле. При температуре воздуха от -40 до +85 °С и относительной влажности не выше 95%.
12. Правила и условия монтажа	Монтаж оборудования производится в соответствии с «Руководство по установке», прилагаемом к данному оборудованию
13. Правила и условия хранения	Оборудование должно храниться в закрытых помещениях, в заводской упаковке, при температуре окружающего воздуха -40-85°С и относительной влажности не выше 95%.
14. Правила условия перевозки (транспортирования)	Перевозка и транспортировка оборудования допускается только в заводской упаковке, любыми видами транспорта, без ограничения расстояний.
15. Правила и условия реализации	Устанавливается позой заднего бампера автомобиля
16. Правила и условия утилизации	По окончании срока службы оборудования, обратитесь к официальному дилеру для утилизации оборудования.
17. Правила условия подключения к электрической сети и другим техническим средствам, пуска, регулирование и введение в эксплуатацию	Производится в соответствии с «Руководство по установке», прилагаемом к данному оборудованию
18. Сведения об ограничениях в использовании с учетом предназначения для работы в жилых, коммерческих и производственных зонах	Оборудование предназначено для использования в жилых, коммерческих и производственных зонах без воздействия опасных и вредных производственных факторов. Оборудование предназначено для круглосуточной непрерывной эксплуатации без постоянного присутствия обслуживающего персонала
19. Информацию о мерах при неисправности оборудования	В случае обнаружения неисправности прибора свяжитесь с дилером.
20. Месяц и год изготовления и (или) информация о месте нанесения/способе определения года изготовления	Дата изготовления указана в серийном номере на коробке устройства. Серийный номер: ABCDEFGHIJKLMNOP (16 цифр) h: год (одна цифра) - Одна последняя цифра в возрасте христианского года i - j: месяц (две цифры) k - l: Дата (две цифры) m - p: серийный номер (четыре цифры) - 0001 ~ 9999
21. Знак соответствия	
21. Сведения о регистрации декларации и о соответствии	

Russian

# Declaration of Conformity

Malaysia	 MCMC HIDF18000266	Singapore	 Complies with IDA Standards [No. DA100926]
United Arab Emirates	TRA Registered No: ER46653/16 DEALER No: DA51567/16	South Africa	 ICASA TA-2016/630 APPROVED
Oman	OMAN-TRA R/3369/16 D080134	Serbia	 ICT 16
Vietnam	 THACO-MAZDA C00022019 ICT THACO-PC C00032019 ICT		
Taiwan	<p>1. Antenna name : 24GMMR1A-ANT  2. Antenna type : Planar array  3. Antenna gain (from the local testing result):  Gain(dBi)  13.2 @24.05GHz  13.4 @24.15GHz  13.5 @24.25GHz  4. Statement below in Chinese:  第十二條 經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。  第十四條 低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前項合法通信，指依電信法規定作業之無線電通信。低功率射頻電機須受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。</p>		
Paraguay	 CONATEL	Marca: FURUKAWA Modelo: 24GMMR1A Fabricante: Furukawa Automotive Systems INC. Número del Registro: 2021-02-I-0069	

# Declaration of Conformity

## ▼ Tyre Pressure Monitoring System


[Moldova]




[Indonesia]



[UAE]



[Jordan]



[Serbia]



[Taiwan]



低功率電波輻射性電機管理辦法

第十二條

經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

第十四條

低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前項合法通信，指依電信法規定作業之無線電通信。低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

[EU(CE)]

<http://continental-homologation.com/>

[Russia]



Декларация о соответствии ТР ТС 020/2011 ЕАЭС № RU Д-ДЕ.ЭМ03.В.00148 от 05.03.2018, действительна по 04.03.2023, зарегистрирована органом по сертификации продукции ФГУП Орден Трудового Красного Знамени научно-исследовательский институт радио «Исследовательский центр «Омега»

[Israel]

- א. השימוש במכשיר הוא על בסיס "משני" וסטור מרישין הפעלה אלחוסי.
- ב. כלומר - לא מוגן מהפרעות, וללא הפר למערכות אחרות.
- ג. רק "בפעולות בדיק" לשימוש עצמי של הלקוח בלבד, היציוד סטור מרישין הפעלה אלחוסי.
- ד. מתן "שירות בדיק" לצד ג' מחייב רישין מיוחד ממשרד התקשורת.
- ה. אסור להחליף את האנטנה המקורית של המכשיר, ולא לעשות בו כל שינוי טכני אחר.

[Ukraine]

<http://continental-homologation.com/>

**▼ Radio System (Audio Set and Mazda Connect (Type A))****Audio Set**

Manufacture, Address:

Üretici, Adres:

Prodhimi, Adresa:

Panasonic Corporation.

4261 Ikonobe-cho, Tsuzuki-ku, Yokohama-City Kanagawa-ken 224-8520, Japan

Importer, Address:

İthalatçı, Adres:

Importuesi, Adresa:

Mazda Motor Logistics Europe NV

Blaasveldstraat 162, 2830 Willebroek, België

Mazda Motor Poland sp.zo.o.

ul. Postępu 14B, 02-676 Warsaw, Poland

Mazda Motor Czech, s.r.o.

Türkova 2319/5b, Chodov, 149 00 Prague 4, Czech Republic

Mazda Motor Slovakia, s.r.o.

LINDNER II, Galvaniho 7/B, Bratislava – Ružinov 821 04, Slovak Republic





## Declaration of Conformity

Denmark	<p>Hierby erklærer F. Anson Corporation, at de pålideligt opererer en type OG-RM66E01MA (se link til netfilen) i henhold til EN 14635 EU.</p> <p>Den netfil er <a href="http://www.ptc.com/sonic/eu/links/DeclarationofConformity%28form%28typeverklaring%29.pdf">http://www.ptc.com/sonic/eu/links/DeclarationofConformity%28form%28typeverklaring%29.pdf</a>.</p> <p>Yderligere tekniske oplysninger er tilgængelige på <a href="http://www.ptc.com/sonic/eu/links/DeclarationofConformity%28form%28typeverklaring%29.pdf">http://www.ptc.com/sonic/eu/links/DeclarationofConformity%28form%28typeverklaring%29.pdf</a> (DoC) download-kode: OG-3M441-01MA.</p>
Poland	<p>Wykazem firmę P. Anson Corporation, że niezawodnie działa typ OG-RM66E01MA (patrz adresy linków) zgodnie z EN 14635 EU.</p> <p>W celu uzyskania <a href="http://www.ptc.com/sonic/eu/links/DeclarationofConformity%28form%28typeverklaring%29.pdf">http://www.ptc.com/sonic/eu/links/DeclarationofConformity%28form%28typeverklaring%29.pdf</a> w celu uzyskania dodatkowych informacji proszę kliknąć w poniższy adres: <a href="http://www.ptc.com/sonic/eu/links/DeclarationofConformity%28form%28typeverklaring%29.pdf">http://www.ptc.com/sonic/eu/links/DeclarationofConformity%28form%28typeverklaring%29.pdf</a> (DoC).</p> <p>Kod pobrania: OG-3M441-01MA.</p>
Portuguese	<p>Por, apresento a P. Anson Corporation, declara que o equipamento em questão do tipo OG-RM66E01MA se encontra em conformidade com a Diretiva 2014/63/EU.</p> <p>Assim, o link <a href="http://www.ptc.com/sonic/eu/links/DeclarationofConformity%28form%28typeverklaring%29.pdf">http://www.ptc.com/sonic/eu/links/DeclarationofConformity%28form%28typeverklaring%29.pdf</a> produz a informação necessária para a obtenção de qualquer informação adicional necessária (DoC - AFETIÇÃO) de OG-RM66E01MA (DECLARAÇÃO DE CONFORMIDADE) (DoC).</p> <p>Para mais detalhes: OG-3M441-01MA.</p>
Romanian	<p>Prin prezenta, P. Anson Corporation declară că echipamentul radio de tip OG-RM66E01MA este în conformitate cu Directiva 2014/63/EU.</p> <p>Accesul la <a href="http://www.ptc.com/sonic/eu/links/DeclarationofConformity%28form%28typeverklaring%29.pdf">http://www.ptc.com/sonic/eu/links/DeclarationofConformity%28form%28typeverklaring%29.pdf</a> produce informații necesare pentru obținerea de informații suplimentare (DoC - AFETIȚIUNEA) (DoC).</p> <p>Pentru mai multe detalii: OG-3M441-01MA.</p>
Serbia	<p>Ovom kompanija P. Anson Corporation izjavljuje da je radio uređaj tipa OG-RM66E01MA u skladu sa zahtevima direktiva 2014/63/EU.</p> <p>Historijski link <a href="http://www.ptc.com/sonic/eu/links/DeclarationofConformity%28form%28typeverklaring%29.pdf">http://www.ptc.com/sonic/eu/links/DeclarationofConformity%28form%28typeverklaring%29.pdf</a> omogućava da se dobiju potrebni podaci za dobijanje dodatnih informacija (DoC - AFETIĆION) (DoC).</p> <p>Ukoliko želite da saznate više o ovom uređaju, možete dobiti potrebne informacije (DoC) klikom na sledeći link: OG-3M441-01MA.</p>
Slovak	<p>Societnosť P. Anson Corporation týmto vyhlasuje, že rádiové zariadenie typu OG-RM66E01MA je v súlade so smernicou 2014/63/EÚ.</p> <p>Na odkaz <a href="http://www.ptc.com/sonic/eu/links/DeclarationofConformity%28form%28typeverklaring%29.pdf">http://www.ptc.com/sonic/eu/links/DeclarationofConformity%28form%28typeverklaring%29.pdf</a> získate potrebné informácie (DoC - AFETIÇÃO) (DoC).</p> <p>Ďalšie informácie: OG-3M441-01MA.</p>
Slovensko	<p>P. Anson Corporation pozivajo duže da se njihovo opreme OG-RM66E01MA uklada z Direktivo 2014/63/EU (kliknite na <a href="http://www.ptc.com/sonic/eu/links/DeclarationofConformity%28form%28typeverklaring%29.pdf">http://www.ptc.com/sonic/eu/links/DeclarationofConformity%28form%28typeverklaring%29.pdf</a>), v skladu zahtevov te predpisu. Ključno besedilo in prenosni kodo za dobiti dodatnih informacij: "DECLARATIUNEA CONFORMITĂȚII LA OBLIGATIUNEA OG-RM66E01MA" (DoC).</p> <p>Ukoliko želite da saznate više o ovom uređaju, možete dobiti potrebne informacije (DoC) klikom na sledeći link: OG-3M441-01MA.</p>
Svenska	<p>Härmed intygar P. Anson Corporation att utrustningen av typ OG-RM66E01MA är i överensstämmelse med EN 14635 EU.</p> <p>Öst till <a href="http://www.ptc.com/sonic/eu/links/DeclarationofConformity%28form%28typeverklaring%29.pdf">http://www.ptc.com/sonic/eu/links/DeclarationofConformity%28form%28typeverklaring%29.pdf</a> och angående ytterligare information, vänligen klicka på "DECLARATION OF CONFORMITY" (Översättning av översättningarna) (DoC).</p> <p>Typkod: OG-3M441-01MA.</p>
Turkey	<p>İşbu şekilde P. Anson Corporation, OG-RM66E01MA tip radyo ekipmanının EN 14635/EU direktifine uygun olduğunu beyan etmektedir.</p> <p><a href="http://www.ptc.com/sonic/eu/links/DeclarationofConformity%28form%28typeverklaring%29.pdf">http://www.ptc.com/sonic/eu/links/DeclarationofConformity%28form%28typeverklaring%29.pdf</a> adresine tıklayarak ek bilgi için detaylı bilgiye ulaşabilirsiniz. (DoC) indirilebilir.</p> <p>Ayrıca bilgi için: OG-3M441-01MA.</p>

# Declaration of Conformity

№ 065,2017(Україна)

Виробник

назву компанії: Panasonic Corporation  
адресу: 4051, Konohabashi, Tama-Kita, Makinoharai, Kunitakubo, 224-8620, Японія

Імпортер

назву компанії: Авіа-Інтернаціонал  
адресу: 04070, 22 в Стасюка Bendery Ave., Kiev, Ukraine

Сповідати Panasonic Corporation, заявляю, що цей радіообладнання [1]  
Відповідає Технічним вимогам у разі об'єднання  
повний текст декларації про відповідність доступний на веб-сайті за такою  
адресою:  
<http://www.panasonic.com/>  
(розділ Технічні вимоги до продукції)  
№ ЦС-НМ66-04МА



**Model No. : CQ-RM66E04MA**

**Bland : Panasonic**

**Country of origin : Malaysia**

# Declaration of Conformity

---

## Mazda Connect (Type A)

Manufacture, Address:

Üretici, Adres:

Prodhimi, Adresa:

Panasonic Corporation.

4261 Ikonobe-cho, Tsuzuki-ku, Yokohama-City Kanagawa-ken 224-8520, Japan

Importer, Address:

İthalatçı, Adres:

Importuesi, Adresa:

Mazda Motor Logistics Europe NV

Blaasveldstraat 162, 2830 Willebroek, België

Mazda Motor Poland sp.zo.o.

ul. Postępu 14B, 02-676 Warsaw, Poland

Mazda Motor Czech, s.r.o.

Tůrkova 2319/5b, Chodov, 149 00 Prague 4, Czech Republic

Mazda Motor Slovakia, s.r.o.

LINDNER II, Galvaniho 7/B, Bratislava – Ružinov 821 04, Slovak Republic

Model. No.

A: CQ-TM66E04MA, CQ-TM66E14MA,

B: CQ-TM67E04M, CQ-TM67E14M

[English]	Hereby, Panasonic Corporation declares that the radio equipment type [CQ-TM66E04MA, CQ-TM66E14MA, CQ-TM67E04M, CQ-TM67E14M] is in compliance with The Radio Equipment Regulations 2017. The full text of the UK declaration of conformity is available at the following internet address: <a href="https://www.ptc.panasonic.eu/">https://www.ptc.panasonic.eu/</a>
-----------	---

**UK  
CA**







# Declaration of Conformity

Swedish	<p>Ämne: Förklaringskonstruktion utifrån EU-kraven</p> <p>Produktsiret: 2014532U</p> <p>Webbplats: <a href="http://www.pil.com">http://www.pil.com</a> eller på "Declaration of Conformity" (Översikt om överensstämmelse) och lagringsskyltar i produktens dokumentation. Se även kändisadressenaste "DECLARATION OF CONFORMITY" (Översikt om överensstämmelse) (DoC)</p> <p>Modell: A CR-LY / FJUMA B: CO-TM1E2/M</p>
Turkish	<p>İşbu belge, Pil Corporation, yukarıda belirtilen ürünün Avrupa Birliği'nin 2014/53/AB Direktifine uyumlu olduğunu beyan etmektedir.</p> <p><a href="http://www.pil.com">http://www.pil.com</a> adresinde bulunan "Declaration of Conformity" (Ürün Üzerine Bilgi) ve depolama etiketleri, ürünün teknik dokümanları, ağırlıklı anahtar kelimeyi arama kutusuna girilen son "DECLARATION OF CONFORMITY" (ÜYÜMLÜLÜK BEYANI) ni (DoC) içerir.</p> <p>Anahtar kelime: A:CR-LY/FJUMA B: CO-TM1E2/M</p>

# Declaration of Conformity

No.055.2017(Ukraine)

Виробник

компанія Panasonic Corporation  
адресу 4261 Honcho-cho, Tsuzuki-ku, Yokohama-shi, Kanagawa-ken, 224-8602, Japan

імпортер

компанія "Аш" Інтелектуальні  
адресу 04073, 22-й Близький Дандеру Авіа, Київ, Україна

компанія Panasonic Corporation вважає, що після дослідження [с] відповідних технічних параметрів однієї з моделей повинні бути доступні провідні дані доступні на веб-сайті за такою адресою:  
<https://service.panasonic.ua/>  
(розділ Технічне регулювання)  
[с] CO TM66E04MA, CO TM66E14MA, CO TM67E04M, CO TM67E14Y



**Model No. : CQ-TM66E04MA / CQ-TM66E14MA**  
**Bland : Panasonic**  
**Country of origin : Malaysia**

## Declaration of Conformity

---

The EAC logo consists of the letters 'EAC' in a bold, black, sans-serif font. The letters are closely spaced and have a slightly irregular, hand-drawn appearance.

Model No. : CQ-RM66E04MA

Bland : Panasonic

Country of origin : Malaysia

The EAC logo consists of the letters 'EAC' in a bold, black, sans-serif font. The letters are closely spaced and have a slightly irregular, hand-drawn appearance.

Model No. : CQ-TM66E04MA / CQ-TM66E14MA

Bland : Panasonic

Country of origin : Malaysia

**▼ Radio System (Mazda Connect (Type B))****Mazda Connect (Type B)**

Manufacture, Address:

Üretici, Adres:

Prodhimi, Adresa:

Panasonic Corporation.

4261 Ikonobe-cho, Tsuzuki-ku, Yokohama-City Kanagawa-ken 224-8520, Japan

Importer, Address:

İthalatçı, Adres:

Importuesi, Adresa:

Mazda Motor Logistics Europe NV

Blaasveldstraat 162, 2830 Willebroek, België

Mazda Motor Poland sp.z.o.o.

ul. Postępu 14B, 02-676 Warsaw, Poland

Mazda Motor Czech, s.r.o.

Türkova 2319/5b, Chodov, 149 00 Prague 4, Czech Republic

Mazda Motor Slovakia, s.r.o.

LINDNER II, Galvaniho 7/B, Bratislava – Ružinov 821 04, Slovak Republic





# Declaration of Conformity

Polish	Niniejszym firma Panasonic oświadcza, że powyższy powyższy produkt spełnia wymagania określone w dyrektywie 2014/53/EU. Wezjdź na stronę <a href="http://www.ptc.panasonic.eu/">http://www.ptc.panasonic.eu/</a> kliknij "Declaration of Conformity (Declaratie de conformitate)", w polu wyszukaj frazę słów kluczowych wprowadź dodatkowe poniżej słowo kluczowe i pobierz najnowszą wersję "DECLARATION OF CONFORMITY (DECLARATIE DE CONFORMITATE)" (DoC). Słowo kluczowe: QCFM28E04M
Portuguese	Pela presente, a Panasonic Corporation declara que o equipamento de rádio de tipo II referido encontra-se em conformidade com a Directiva 2014/53/UE. Aceda a <a href="http://www.ptc.panasonic.eu/">http://www.ptc.panasonic.eu/</a> , clique em "Declaration of Conformity (Declaração de conformidade)", introduza o palavra-chave indicada abaixo na caixa de pesquisa ou palavra-chave para descobrir a mais recente "DECLARATION OF CONFORMITY (DECLARAÇÃO DE CONFORMIDADE)" (DoC). Palavra-chave: QCFM28E04M
Romanian	Prin prezenta document Panasonic Corporation declară că echipamentul radio de tip II enumerat mai sus este în conformitate cu Directiva 2014/53/UE. Accesați site-ul <a href="http://www.ptc.panasonic.eu/">http://www.ptc.panasonic.eu/</a> , faceți clic pe "Declaration of Conformity (Declarația de conformitate)", introduceți cuvântul cheie de mai jos în câmpul de căutare sau apăsați pe icona de căutare pentru a descoperi cea mai recentă "DECLARATION OF CONFORMITY (DECLARAȚIE DE CONFORMITATE)" (DoC). Cuvânt-cheie: QCFM28E04M
Serbian	Ovim izjavljujem Panasonic Corporation izjavljuje, da je ovaj uređaj u skladu sa zahtevima direktive 2014/53/EU. Posetite stranicu <a href="http://www.ptc.panasonic.eu/">http://www.ptc.panasonic.eu/</a> , kliknite na "Declaration of Conformity (Izjava o usklađenosti)", dajte u vedenu ključnu reč u polje za pretragu, ukucajte reč i pretražite ili u dokument "DECLARATION OF CONFORMITY (Izjava o usklađenosti)" (DoC = Izjava o usklađenosti). Ključna reč: QCFM28E04M
Slovak	Súčasnou spoločnosť Panasonic Corporation týmto vyhlasujem, že rádiové zariadenie vyššie uvedené spĺňa požiadavky smernice 2014/53/EU. Navštívte <a href="http://www.ptc.panasonic.eu/">http://www.ptc.panasonic.eu/</a> kliknite na tlačidlo "Declaration of Conformity (Vyhlásenie o zhode)", zadajte v zložkovom poli slovo kľúčové do vyhľadávacieho poľa a prevezmite najnovšiu "DECLARATION OF CONFORMITY (VYHLÁSENIE O ZHODE)" (DoC). Kľúčové slovo: QCFM28E04M
Slovene	Panasonic Corporation potrjuje, da je za ta, navedeni tip radijske opreme skladen z Direktivo 2014/53/EU. Obiščite <a href="http://www.ptc.panasonic.eu/">http://www.ptc.panasonic.eu/</a> , kliknite "Declaration of Conformity (Izjava o skladnosti)", v okence za iskanje vnesite sporno ključno besedilo in premerite najnovejšo izjavo o skladnosti "DECLARATION OF CONFORMITY (IZJAVA O SKLADNOSTI)" (DoC). Ključna beseda: QCFM28E04M
Swedish	Härmed intygar Panasonic Corporation att radoutrustningen överensstämmer med direktiv 2014/53/EU. Gå till <a href="http://www.ptc.panasonic.eu/">http://www.ptc.panasonic.eu/</a> , klicka på "Declaration of Conformity (Överensstämmelse)" och ange sökordet i sökfältet. Sökordet är den ord som du ska ange i fältet "DECLARATION OF CONFORMITY" (Överensstämmelse) (DoC). Nyckelord: QCFM28E04M
Turkey	Bu belge, Panasonic Corporation, yukarıda listelenen radyo ekipmanı tipinin 2014/53/AB Direktifine uygun olduğunu beyan etmektedir. <a href="http://www.ptc.panasonic.eu/">http://www.ptc.panasonic.eu/</a> adresindeki "Declaration of Conformity (Uygunluk beyanı)" başlığına tıklayarak sonradan sağladığımız linkten en son "DECLARATION OF CONFORMITY (UYGUNLUK BEYANI)" (DoC) ni indirebilirsiniz. Anahtar kelime: QCFM28E04M

# Declaration of Conformity

---

Manufacture, Address:

Üretici, Adres:

Prodhimi, Adresa:

Panasonic Corporation.

4261 Ikonobe-cho, Tsuzuki-ku, Yokohama-City Kanagawa-ken 224-8520, Japan

Importer, Address:

İthalatçı, Adres:

Importuesi, Adresa:

Mazda Motor Logistics Europe NV

Blaasveldstraat 162, 2830 Willebroek, België

Mazda Motor Poland sp.z o.o.

ul. Postępu 14B, 02-676 Warsaw, Poland

Mazda Motor Czech, s.r.o.

Türkova 2319/5b, Chodov, 149 00 Prague 4, Czech Republic

Mazda Motor Slovakia, s.r.o.

LINDNER II, Galvaniho 7/B, Bratislava – Ružinov 821 04, Slovak Republic

Model. No.

A: CQ-TM66E04MA, CQ-TM66E14MA,

B: CQ-TM67E04M, CQ-TM67E14M

[English]	Hereby, Panasonic Corporation declares that the radio equipment type [CQ-TM66E04MA, CQ-TM66E14MA, CQ-TM67E04M, CQ-TM67E14M] is in compliance with The Radio Equipment Regulations 2017. The full text of the UK declaration of conformity is available at the following internet address: <a href="https://www.ptc.panasonic.eu/">https://www.ptc.panasonic.eu/</a>
-----------	---

**UK  
CA**



## Declaration of Conformity

English	<p>Parasaitis Corporation valdētāja ir šā odošā izstrādājumā izstrādātājam</p> <p>līdzīgā dēvējamā (D01466A) izstrādātājam izstrādātājam</p> <p>virsiem ir "DECLARATION OF CONFORMITY (SVAATIMUSTENUMAKSUSLUSVARLUTUS) (DoC)" ar acatāvisā virsējo vārdu</p> <p><a href="http://www.pdc.com/usa/">http://www.pdc.com/usa/</a></p> <p>virsiem ir šāda: "The Declaration of Conformity (Consentment) is a statement of the manufacturer's compliance with the requirements of the applicable regulatory standards."</p> <p>Virsiem ir šāda: "DECLARATION OF CONFORMITY (SVAATIMUSTENUMAKSUSLUSVARLUTUS) (DoC)"</p>
French	<p>Par la présente, Parasaitis Corporation déclare que le produit décrit ci-dessous est conforme avec la directive 2011/65/CE.</p> <p>Virsiem ir šāda: "The Declaration of Conformity (Consentment) is a statement of the manufacturer's compliance with the requirements of the applicable regulatory standards."</p> <p>Virsiem ir šāda: "DECLARATION OF CONFORMITY (SVAATIMUSTENUMAKSUSLUSVARLUTUS) (DoC)"</p>
Chinese	<p>本公司特此声明符合以下规定，并符合以下规定。本公司特此声明符合以下规定。</p> <p>Virsiem ir šāda: "The Declaration of Conformity (Consentment) is a statement of the manufacturer's compliance with the requirements of the applicable regulatory standards."</p> <p>Virsiem ir šāda: "DECLARATION OF CONFORMITY (SVAATIMUSTENUMAKSUSLUSVARLUTUS) (DoC)"</p>
Italian	<p>Parasaitis Corporation dichiara che il prodotto descritto di seguito è conforme con la direttiva 2011/65/CE.</p> <p>Virsiem ir šāda: "The Declaration of Conformity (Consentment) is a statement of the manufacturer's compliance with the requirements of the applicable regulatory standards."</p> <p>Virsiem ir šāda: "DECLARATION OF CONFORMITY (SVAATIMUSTENUMAKSUSLUSVARLUTUS) (DoC)"</p>
Spanish	<p>Por medio de la presente Parasaitis Corporation declara que el producto descrito a continuación es conforme con la Directiva 2011/65/CE.</p> <p>Virsiem ir šāda: "The Declaration of Conformity (Consentment) is a statement of the manufacturer's compliance with the requirements of the applicable regulatory standards."</p> <p>Virsiem ir šāda: "DECLARATION OF CONFORMITY (SVAATIMUSTENUMAKSUSLUSVARLUTUS) (DoC)"</p>
Polish	<p>Parasaitis Corporation oświadczam, że produkt opisany poniżej jest zgodny z dyrektywą 2011/65/UE.</p> <p>Virsiem ir šāda: "The Declaration of Conformity (Consentment) is a statement of the manufacturer's compliance with the requirements of the applicable regulatory standards."</p> <p>Virsiem ir šāda: "DECLARATION OF CONFORMITY (SVAATIMUSTENUMAKSUSLUSVARLUTUS) (DoC)"</p>
Portuguese	<p>Por meio desta, Parasaitis Corporation declara que o produto descrito a seguir está em conformidade com a Diretiva 2011/65/CE.</p> <p>Virsiem ir šāda: "The Declaration of Conformity (Consentment) is a statement of the manufacturer's compliance with the requirements of the applicable regulatory standards."</p> <p>Virsiem ir šāda: "DECLARATION OF CONFORMITY (SVAATIMUSTENUMAKSUSLUSVARLUTUS) (DoC)"</p>
Russian	<p>Настоящим Parasaitis Corporation заявляет, что описанный ниже продукт соответствует требованиям директивы 2011/65/ЕU.</p> <p>Virsiem ir šāda: "The Declaration of Conformity (Consentment) is a statement of the manufacturer's compliance with the requirements of the applicable regulatory standards."</p> <p>Virsiem ir šāda: "DECLARATION OF CONFORMITY (SVAATIMUSTENUMAKSUSLUSVARLUTUS) (DoC)"</p>
Ukrainian	<p>Parasaitis Corporation заявляє, що описаний нижче виріб відповідає вимогам директиви 2011/65/ЄU.</p> <p>Virsiem ir šāda: "The Declaration of Conformity (Consentment) is a statement of the manufacturer's compliance with the requirements of the applicable regulatory standards."</p> <p>Virsiem ir šāda: "DECLARATION OF CONFORMITY (SVAATIMUSTENUMAKSUSLUSVARLUTUS) (DoC)"</p>
Arabic	<p>Parasaitis Corporation تعلن عن توافق المنتج المذكور مع متطلبات توجيه 2011/65/CE.</p> <p>Virsiem ir šāda: "The Declaration of Conformity (Consentment) is a statement of the manufacturer's compliance with the requirements of the applicable regulatory standards."</p> <p>Virsiem ir šāda: "DECLARATION OF CONFORMITY (SVAATIMUSTENUMAKSUSLUSVARLUTUS) (DoC)"</p>
Hebrew	<p>Parasaitis Corporation מצהייר כי המוצר המפורט לעיל מתאים לדרישות הדיקטיווה 2011/65/CE.</p> <p>Virsiem ir šāda: "The Declaration of Conformity (Consentment) is a statement of the manufacturer's compliance with the requirements of the applicable regulatory standards."</p> <p>Virsiem ir šāda: "DECLARATION OF CONFORMITY (SVAATIMUSTENUMAKSUSLUSVARLUTUS) (DoC)"</p>
Japanese	<p>Parasaitis Corporation は、ここに記述されている製品の製造に、EU指令 2011/65/EU に準拠していることを宣言します。</p> <p>Virsiem ir šāda: "The Declaration of Conformity (Consentment) is a statement of the manufacturer's compliance with the requirements of the applicable regulatory standards."</p> <p>Virsiem ir šāda: "DECLARATION OF CONFORMITY (SVAATIMUSTENUMAKSUSLUSVARLUTUS) (DoC)"</p>
Malay	<p>Parasaitis Corporation menyatakan bahawa produk yang dinyatakan di atas ini mematuhi arahan Direktif 2011/65/UE.</p> <p>Virsiem ir šāda: "The Declaration of Conformity (Consentment) is a statement of the manufacturer's compliance with the requirements of the applicable regulatory standards."</p> <p>Virsiem ir šāda: "DECLARATION OF CONFORMITY (SVAATIMUSTENUMAKSUSLUSVARLUTUS) (DoC)"</p>
Korean	<p>Parasaitis Corporation hereby declares that the product described above complies with the requirements of Directive 2011/65/EC.</p> <p>Virsiem ir šāda: "The Declaration of Conformity (Consentment) is a statement of the manufacturer's compliance with the requirements of the applicable regulatory standards."</p> <p>Virsiem ir šāda: "DECLARATION OF CONFORMITY (SVAATIMUSTENUMAKSUSLUSVARLUTUS) (DoC)"</p>
Dutch	<p>Parasaitis Corporation verklaart dat de hierboven beschreven producten conform zijn met Richtlijn 2011/65/EG.</p> <p>Virsiem ir šāda: "The Declaration of Conformity (Consentment) is a statement of the manufacturer's compliance with the requirements of the applicable regulatory standards."</p> <p>Virsiem ir šāda: "DECLARATION OF CONFORMITY (SVAATIMUSTENUMAKSUSLUSVARLUTUS) (DoC)"</p>



# Declaration of Conformity

## ▼ Audio System (Audio Set and Mazda Connect (Type A))

### Audio Set

Bългарски [Bulgarian]	С настоящото Visteon Corporation декларира, че този тип радиосъоръжение MAZ е в съответствие с Директива 2014/53/ЕС. Цялостният текст на ЕС декларацията за съответствие може да се намери на следния интернет адрес: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Čeština [Czech]	Tímto Visteon Corporation prohlašuje, že typ radiového zařízení MAZ je v souladu se směrnicí 2014/53/EU. Uplně znění EU prohlášení o shodě je k dispozici na této internetové adrese: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Dansk [Danish]	Herved erklærer Visteon Corporation, at radioudstyrstypen MAZ er i overensstemmelse med direktiv 2014/53/EU. EU-overensstemmelseserklæringens fulde tekst kan findes på følgende internetadresse: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Deutsch [German]	Hiermit erkläre Visteon Corporation, dass der Funkanlagentyp MAZ der Richtlinie 2014/53/EU entspricht. Der vollständige Text der EU-Konformitätserklärung ist unter der folgenden Internetadresse verfügbar: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Eesti [Estonian]	Kaesolevaga deklareerib Visteon Corporation, et kaesolev radioseadme tüüp MAZ vastab direktiivi 2014/53/EU nõuetele. EU vastavusdeklaratsiooni täielik tekst on kättesaadav järgmisel internetiaadressil: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
English	Hereby, Visteon Corporation declares that the radio equipment type MAZ is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Español [Spanish]	Por la presente, Visteon Corporation declara que el tipo de equipo radioeléctrico MAZ es conforme con la Directiva 2014/53/UE. El texto completo de la declaración UE de conformidad está disponible en la dirección Internet siguiente: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Ελληνική [Greek]	Με την παρούσα ο/η Visteon Corporation, δηλώνει ότι ο ραδιοεξοπλισμός MAZ πληροί την οδηγία 2014/53/ΕΕ. Το πλήρες κείμενο της δήλωσης συμμόρφωσης ΕΕ διατίθεται στην ακόλουθη ιστοσελίδα στο διαδίκτυο: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Français [French]	Le soussigné, Visteon Corporation, déclare que l'équipement radioélectrique du type MAZ est conforme à la directive 2014/53/UE. Le texte complet de la déclaration UE de conformité est disponible à l'adresse internet suivante: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Hrvatski [Croatian]	Visteon Corporation ovime izjavljuje da je radijska oprema tipa MAZ u skladu s Direktivom 2014/53/EU. Cjeloviti tekst EU izjave o sukladnosti dostupan je na sljedećoj internetskoj adresi: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Italiano [Italian]	Il fabbricante, Visteon Corporation, dichiara che il tipo di apparecchiatura radio MAZ è conforme alla direttiva 2014/53/UE. Il testo completo della dichiarazione di conformità UE è disponibile al seguente indirizzo Internet: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Latvisių valoda [Latvian]	Ar šo Visteon Corporation deklarā, ka radioiekārtā MAZ atbilst Direktīvai 2014/53/ES. Pilns ES atbilstības deklarācijas teksts ir pieejams šādā internetā vietnē: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Lietuvių kalba [Lithuanian]	Aš, Visteon Corporation, patvirtinu, kad radijo įrenginių tipas MAZ atitinka Direktyvą 2014/53/ES. Visas ES atitikties deklaracijos tekstas prieinamas šiuo interneto adresu: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Nederlands [Dutch]	Hierbij verklaar ik, Visteon Corporation, dat het type radioapparatuur MAZ conform is met Richtlijn 2014/53/UE. De volledige tekst van de EU-conformiteitsverklaring kan worden geraadpleegd op het volgende internetadres: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Malta [Maltese]	B'ian, Visteon Corporation, niddikjara li dan il-tip ta' tagħmir tar-radju MAZ huwa konformi mad-Direttiva 2014/53/UE. Il-test kollu tad-dikjarazzjoni ta' konformita tal-UE huwa disponibbli f'dan l-indirizz tal-Internet li dej: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Magyar [Hungarian]	Visteon Corporation igazolja, hogy a MAZ típusú radioberendezés megfelel a 2014/53/EU irányelvnek. Az EU-megfelelésegi nyilatkozat teljes szövege elérhető a következő internetes címen: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Polski [Polish]	Visteon Corporation niniejszym oświadcza, że typ urządzenia radiowego MAZ jest zgodny z dyrektywą 2014/53/UE. Pełny tekst deklaracji zgodności UE jest dostępny pod następującym adresem internetowym: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Portugues [Portuguese]	O(a) abaixo assinado(a) Visteon Corporation declara que o presente tipo de equipamento de radio MAZ esta em conformidade com a Diretiva 2014/53/UE. O texto integral da declaracao de conformidade esta disponivel no seguinte endereco de Internet: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Română [Romanian]	Prin prezenta, Visteon Corporation declară că tipul de echipamente radio MAZ este în conformitate cu Directiva 2014/53/UE. Textul integral al declarației UE de conformitate este disponibil la următoarea adresă internet: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Slovenščina [Slovenian]	Visteon Corporation potrjuje, da je tip radijske opreme MAZ skladen z Direktivo 2014/53/EU. Celotno besedilo izjave EU o skladnosti je na voljo na naslednjem spletnem naslovu: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Slovenčina [Slovak]	Visteon Corporation týmto vyhlasuje, že rádiové zariadenie typu MAZ je v súlade so smernicou 2014/53/EU. Uplnè EU vyhlásenie o zhode je k dispozícii na tejto internetovej adrese: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Suomi [Finnish]	Visteon Corporation vakuuttaa, että radiolaitetyyppi MAZ on direktiivin 2014/53/EU mukainen. EU-vaatimustenmukaisuusvakuutuksen täysimittainen teksti on saatavilla seuraavassa internetosoitteessa: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Svenska [Swedish]	Härmed försäkrar Visteon Corporation att denna typ av radioutrustning MAZ överensstämmer med direktiv 2014/53/UE. Den fullständiga texten till EU-försäkran om överensstämmelse finns på följande webbadress: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Íslenska [Icelandic]	Hér með Visteon Corporation lýsir yfir að tegund þráðlausan búnað MAZ er í samræmi við tilskipun 2014/53/ESB. The fullur texti af ESB-samræmisýfirlýsingu er í búi á eftirfarandi veffangi: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Norsk [Norwegian]	Herved Visteon Corporation erklærer at radioutstyr type MAZ er i samsvar med direktiv 2014/53/UE. Den fullstendige teksten i EU-samsvarserklæringen er tilgjengelig på følgende internetadresse: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Türkçe [Turkish]	Burada, Visteon Corporation radyo ekipmanı türünün MAZ 2014/53/UE direktiflerine uyumlu olduğunu beyan eder. Uyumu beyanının tam metni belirtilen internet sitesinde mevcuttur: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>

Frequency Range	2400-2483.5MHz
Output Power	< 4dBm

# Declaration of Conformity

Model: MAZ  
 Brand: Visteon  
 Manufacturer: Visteon Corporation  
 Address: One Village Center, Van Buren Township  
 48111-5711 Michigan  
 United States of America


CE MARK: 

Israel 51-55444 מספר אישור אלחוט של משרד התקשורת הוא 51-55444  
 אמר להחליף את האנטנה המקורית של המכשיר ולא  
 לעשות בו כל שינוי טכני אחר

Jordan The manufacturer: Visteon Corporation  
 Equipment type: MAZ  
 TRC's type approval certificate number: T/4/11/11/4973

Jamaica This product has been Type Approved by Jamaica: SMA – "MAZ"

Singapore



South Africa



Algeria

' Agréé par l'ARPT' 'Référéncé d'agrément'

Morocco



Serbia



UAE



Moldova



Botswana



Taiwan

Product Name: Bluetooth Telematic Device  
 Model Name: MAZ  
 Applicant Name: Visteon Corporation

等語

此功率電波程序電機管理辦法

第十二條經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功

率或變更原設計之特性及功能。

第十四條低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停

用，並改善至無干擾時方得繼續使用。

前項合法通信，指一電信法規定作業之無線電通信設備及其他合法通信或工業、科學及醫療用電

電設備射頻電機設備之干擾。

Oman



# Declaration of Conformity

Ukraine



Модель: MAZ

Діапазон частот: 2400 - 2483.5 МГц

Максимальна потужність вихідної потужності (Bluetooth): 4 дБм

Дана Visteon Corporation заявляє, що тип радіобладнання (позначення типу радіобладнання) відповідає Технічному регламенту радіобладнання;

Повний текст декларації про відповідність можна знайти на сайті за адресою: <https://www.visteondocs.com/>.

Paraguay

Distributor: Garden MPY S.A.

Address: Republica Argentina y Facundo Machain, Asuncion, PARAGUAY

Indonesia

59236/SDPPI/2018  
8032

Brazil



ANATEL web link:

<http://www.anatel.gov.br/institucional/>

"Este equipamento opera em caracter secundario, isto é, não tem direito a proteção contra interferência prejudicial, mesmo de estações do mesmo tipo, e não pode causar interferência a sistemas operando em caracter primario"

Thailand




Mozambique

INCM - 1B T15  
Model - MAZ  
Manufacturer - Visteon Corporation

Nigeria

Connection and use of this communications  
equipment is permitted by the Nigerian  
Communications Commission

Philippines



FCC ID: NT8MBLUEC09

### FCC

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

### Caution:

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

# Declaration of Conformity

---

## UK

Hereby, **Visteon Corporation** declares that the radio equipment type **MAZ** is in compliance with the Radio Equipment Regulations of the United Kingdom. The full text of the Declaration of Conformity is available at the following internet address:

[www.visteondocs.com](http://www.visteondocs.com)

a.Frequency band : 2.4 GHz

b.Maximum radio-frequency power transmitted in the frequency band(s) in which the radio equipment operates.

Max output power = 4 dBm



# Declaration of Conformity

## Mazda Connect (Type A)

### Without Wireless CarPlay

Български [Bulgarian]	С настоящото Visteon Corporation декларира, че този тип радиосъоръжение MAZDA_GEN_65_CMU е в съответствие с Директива 2014/53/ЕС. Цялостният текст на ЕС декларацията за съответствие може да се намери на следния интернет адрес: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Čeština [Czech]	Tímto Visteon Corporation prohlašuje, že typ radiového zařízení MAZDA_GEN_65_CMU je v souladu se směrnicí 2014/53/EU. Uplně znění EU prohlášení o shodě je k dispozici na této internetové adrese: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Dansk [Danish]	Herved erklærer Visteon Corporation, at radioudstyrstypen MAZDA_GEN_65_CMU er i overensstemmelse med direktiv 2014/53/EU. EU-overensstemmelseserklæringens fulde tekst kan findes på følgende internetadresse: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Deutsch [German]	Hiermit erklart Visteon Corporation, dass der Funkanlagentyp MAZDA_GEN_65_CMU der Richtlinie 2014/53/EU entspricht. Der vollständige Text der EU-Konformitätserklärung ist unter der folgenden Internetadresse verfügbar: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Eesti [Estonian]	Kaesolevaga deklareerib Visteon Corporation, et kaesolev raadioseadme tüüp MAZDA_GEN_65_CMU vastab direktiivi 2014/53/EÜ nõuetele. ELi vastavusdeklaratsiooni täielik tekst on kättesaadav järgmisel internetiaadressil: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
English	Hereby, Visteon Corporation declares that the radio equipment type MAZDA_GEN_65_CMU is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Espanol [Spanish]	Por la presente, Visteon Corporation declara que el tipo de equipo radioeléctrico MAZDA_GEN_65_CMU es conforme con la Directiva 2014/53/UE. El texto completo de la declaración UE de conformidad está disponible en la dirección Internet siguiente: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Ελληνική [Greek]	Με την παρούσα οή Visteon Corporation, δηλώνει ότι ο ραδιοεξοπλισμός MAZDA_GEN_65_CMU πληροί την οδηγία 2014/53/ΕΕ. Το πλήρες κείμενο της δήλωσης συμμόρφωσης ΕΕ διατίθεται στην ακόλουθη ιστοσελίδα στο διαδίκτυο: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Français [French]	Le soussigné, Visteon Corporation, déclare que l'équipement radioélectrique du type MAZDA_GEN_65_CMU est conforme à la directive 2014/53/UE. Le texte complet de la déclaration UE de conformité est disponible à l'adresse Internet suivante: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Hrvatski [Croatian]	Visteon Corporation ovdje izjavljuje da je radijska oprema tipa MAZDA_GEN_65_CMU u skladu s Direktivom 2014/53/EU. Cjeloviti tekst EU izjave o sukladnosti dostupan je na sljedećoj internetskoj adresi: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Italiano [Italian]	Il fabbricante, Visteon Corporation, dichiara che il tipo di apparecchiatura radio MAZDA_GEN_65_CMU è conforme alla direttiva 2014/53/UE. Il testo completo della dichiarazione di conformità UE è disponibile al seguente indirizzo Internet: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Latviešu valoda [Latvian]	Ar šo Visteon Corporation deklarē, ka radioiekārtā MAZDA_GEN_65_CMU atbilst Direktīvai 2014/53/ES. Pilns ES atbilstības deklarācijas teksts ir pieejams šādā interneta vietnē: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Lietuvių kalba [Lithuanian]	Aš, Visteon Corporation, patvirtinu, kad radijo įrenginys tipas MAZDA_GEN_65_CMU atitinka Direktyvą 2014/53/ES. Visas ES atitikties deklaracijos tekstas prieinamas šiuo interneto adresu: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Nederlands [Dutch]	Hierbij verklaar ik, Visteon Corporation, dat het type radioapparatuur MAZDA_GEN_65_CMU conform is met Richtlijn 2014/53/EU. De volledige tekst van de EU-conformiteitsverklaring kan worden geraadpleegd op het volgende internetadres: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Maltili [Maltese]	B'dan, Visteon Corporation, niddikjara li dan il-tip ta' tagħmir tar-radju MAZDA_GEN_65_CMU huwa konformi mad-Direttiva 2014/53/UE. Il-test kollu tad-dikjarazzjoni ta' konformita tal-UE huwa disponibbli f'dan l-indirizz tal-Internet li ġei: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Magyar [Hungarian]	Visteon Corporation igazolja, hogy a MAZDA_GEN_65_CMU típusu radióberendezés megfelel a 2014/53/EU irányelvnek. Az EU-megfelelősegi nyilatkozat teljes szövege elérhető a következő internetes címen: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Polski [Polish]	Visteon Corporation niniejszym oświadcza, że typ urządzenia radiowego MAZDA_GEN_65_CMU jest zgodny z dyrektywą 2014/53/UE. Pełny tekst deklaracji zgodności UE jest dostępny pod następującym adresem internetowym: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Portugues [Portuguese]	O(a) abaixo assinado(a) Visteon Corporation declara que o presente tipo de equipamento de radio MAZDA_GEN_65_CMU esta em conformidade com a Diretiva 2014/53/UE. O texto integral da declaracao de conformidade esta disponivel no seguinte endereço de Internet: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Română [Romanian]	Prin prezenta, Visteon Corporation declară că tipul de echipament radio MAZDA_GEN_65_CMU este în conformitate cu Directiva 2014/53/UE. Textul integral al declarației UE de conformitate este disponibil la următoarea adresă internet: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Slovenščina [Slovenian]	Visteon Corporation potrjuje, da je tip radijske opreme MAZDA_GEN_65_CMU skladen z Direktivo 2014/53/EU. Celotno besedilo izjave EU o skladnosti je na voljo na naslednjem spletnem naslovu: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Slovenčina [Slovak]	Visteon Corporation týmto vyhlasuje, že rádiové zariadenie typu MAZDA_GEN_65_CMU je v súlade so smernicou 2014/53/EU. Uplné EU vyhlásenie o zhode je k dispozícii na tejto internetovej adrese: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Suomi [Finnish]	Visteon Corporation vakuuttaa, että radiolaitetyyppi MAZDA_GEN_65_CMU on direktiivin 2014/53/EU mukainen. EU-vaatimustenmukaisuusvakuutuksen täysimittainen teksti on saatavilla seuraavassa internetosoitteessa: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Svenska [Swedish]	Härmed försäkrar Visteon Corporation att denna typ av radioutrustning MAZDA_GEN_65_CMU överensstämmer med direktiv 2014/53/EU. Den fullständiga texten till EU-försäkran om överensstämmelse finns på följande webbadress: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>

# Declaration of Conformity

---

Íslenska [Icelandic]	Hér með Visteon Corporation lýsir yfir að tegund þráðlausan búnað MAZDA_GEN_65_CMU er í samræmi við tilskipun 2014/53/ESB. The fullur texti af ESB-samræmisýfirlýsingu er í boði á eftirfarandi veffangi: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Norsk [Norwegian]	Herved Visteon Corporation erklærer at radioutstyr type MAZDA_GEN_65_CMU er i samsvar med direktiv 2014/53/EU. Den fullstendige teksten i EU-samsvarserklæringen er tilgjengelig på følgende internetadresse: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>
Türkçe [Turkish]	Burada, Visteon Corporation radyo ekipmanı türünün MAZDA_GEN_65_CMU 2014/53/EU direktiflerine uyumlu olduğunu beyan eder. Uyumu beyanının tam metni belirtilen internet sitesinde mevcuttur: <a href="https://www.visteondocs.com/">https://www.visteondocs.com/</a>

Frequency Range	2400-2483.5MHz
Output Power	Bluetooth < 4dBm WLAN < 30dBm

## UK

Hereby, **Visteon Corporation** declares that the radio equipment type **MAZDA\_GEN\_65\_CMU** is in compliance with the Radio Equipment Regulations of the United Kingdom. The full text of the Declaration of Conformity is available at the following internet address: [www.visteondocs.com](http://www.visteondocs.com)

- a. Frequency band : 2.4 GHz  
 b. Maximum radio-frequency power transmitted in the frequency band(s) in which the radio equipment operates.  
 Max output power = 30 mW



# Declaration of Conformity

CE MARK



Model: MAZDA\_GEN\_65\_CMU  
 Brand: Visteon  
 Manufacturer: Visteon Corporation  
 Address: One Village Center, Van Buren Township  
 48111-6711 Michigan  
 United States of America

Botswana

**BOCRA**  
 REGISTERED No :  
**BOCRA/TA/2020/2057**

Indonesia

**59282/SDPPI/2018**  
**8032**

Israel

מספר אישור אלחוטני של משרד התקשורת הוא 51-53307  
 אסור להחליף את האנטנה המקורית של המכשיר ולא  
 לעשות בו כל שינוי טכני אחר

Jamaica

This product has been Type Approved by Jamaica: SMA – “MAZDA\_GEN\_65\_CMU” .  
 This product contains a Type Approved Module by Jamaica: SMA – “MAZDA\_GEN\_65\_CMU”.

Jordan

**The manufacturer: Visteon Corporation**  
 Equipment type: MAZDA\_GEN\_65\_CMU  
 TRC's type approval certificate number: T/4/11/11/3654

Morocco

AGREE PAR L'ANRT MAROC  
 Numéro d'agrément :..... MR 8393 ANRT 2013  
 Date d'agrément :..... 08/08/2013

Mozambique

INCM - 23EBP15  
 Model - MAZDA\_GEN\_65\_CMU  
 Manufacturer - Visteon Corporation

Nigeria

Connection and use of this communications  
 equipment is permitted by the Nigerian  
 Communications Commission

Philippines

 **NTC**  
 Type Accepted  
 No.: ESD-1307587C \*

# Declaration of Conformity

Algeria

'Agrée par l'ARPT' and 'Référence d'agrément'.

Oman




Singapore



South Africa



UAE



Thailand



Ukraine



Модель: MAZDA\_GEN\_65\_CMU

Діапазон частот: 2400 - 2483.5 МГц

Максимальна потужність вихідної потужності (Bluetooth): 4 дБм

Максимальна потужність вихідної потужності (WLAN): 30 дБм

Дана Visteon Corporation заявляє, що тип радіообладнання (позначення типу  
радіообладнання) відповідає Технічному регламенту радіообладнання;

Повний текст декларації про відповідність можна знайти на сайті за адресою:

<https://www.visteondocs.com/>.

Paraguay

**Distributor:** Garden MPY S.A.**Address:** Republica Argentina y Facundo Machain, Asuncion, PARAGUAY

# Declaration of Conformity

Taiwan



Product Name: Automotive Electronics Infotainment Head Unit  
 Certification Name: MAZDA\_GEN\_65\_CMU  
 Certificate Holder: Visteon Corporation

**警語**

低功率電波輻射性電機管理辦法

第十二條經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

第十四條低功率射頻電機之使用不得影響飛航影響安全及干擾合法通信，經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。

前項合法通信，指一電信法規定作業之無線電通信低功率射頻電機需忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

Brazil



ANATEL web link:  
<http://www.anatel.gov.br/institucional/>

"Este equipamento opera em caráter secundário, isto é, não tem direito a proteção contra interferência prejudicial, mesmo de estações do mesmo tipo, e não pode causar interferência a sistemas operando em caráter primário"

FCC ID: NT862932

**FCC**

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

**Caution:**

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

# Declaration of Conformity

## With Wireless CarPlay

Model Name: MAZDA\_68\_CMU  
 Type of product: Automotive Electronics Infotainment Head Unit  
 Brand Name: Visteon Corporation  
 One Village center drive, Van Buren Township  
 48111-5711 Michigan  
 United States of America

CE MARK:



Simplified EU DoC:

Hereby, Visteon Corporation declares that the radio equipment type MAZDA\_68\_CMU is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:  
<http://www.visteondocs.com/>

Български [Bulgarian]	С това фирмата <b>Visteon Corporation</b> декларира, че частта MAZDA_68_CMU е в съответствие със съществените изисквания и други приложими разпоредби на директивата 2014/53/ЕС.
Česky [Czech]	<b>Visteon Corporation</b> tímto prohlašuje, že tento MAZDA_68_CMU je ve shodě se základními požadavky a dalšími příslušnými ustanoveními směrnice 2014/53/EU.
Dansk [Danish]	Undertegnede <b>Visteon Corporation</b> erklærer herved, at følgende udstyr MAZDA_68_CMU overholder de væsentlige krav og øvrige relevante krav i direktiv 2014/53/EU.
Deutsch [German]	Hiermit erklärt <b>Visteon Corporation</b> , dass sich das Gerät MAZDA_68_CMU in Übereinstimmung mit den grundlegenden Anforderungen und den übrigen einschlägigen Bestimmungen der Richtlinie 2014/53/EU befindet.
Eesti [Estonian]	Käesolevaga kinnitab <b>Visteon Corporation</b> seadme MAZDA_68_CMU vastavust direktiivi 2014/53/EL põhinõuetele ja nimetatud direktiivist tulenevatele teistele asjakohastele sätetele.
English	Hereby, <b>Visteon Corporation</b> , declares that this MAZDA_68_CMU is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU.
Español [Spanish]	Por medio de la presente <b>Visteon Corporation</b> declara que el MAZDA_68_CMU cumple con los requisitos esenciales y cualesquiera otras disposiciones aplicables o exigibles de la Directiva 2014/53/UE.
Ελληνικά [Greek]	ΜΕ ΤΗΝ ΠΑΡΟΥΣΑ <b>Visteon Corporation</b> ΔΗΛΩΝΕΙ ΟΤΙ MAZDA_68_CMU ΣΥΜΜΟΡΦΩΝΕΤΑΙ ΠΡΟΣ ΤΙΣ ΟΥΣΙΩΔΕΙΣ ΑΠΑΙΤΗΣΕΙΣ ΚΑΙ ΤΙΣ ΛΟΠΙΣ ΣΧΕΤΙΚΕΣ ΔΙΑΤΑΞΕΙΣ ΤΗΣ ΟΔΗΓΙΑΣ 2014/53/ΕΚ.
Français [French]	Par la présente <b>Visteon Corporation</b> déclare que l'appareil MAZDA_68_CMU est conforme aux exigences essentielles et aux autres dispositions pertinentes de la directive 2014/53/UE.

# Declaration of Conformity

Italiano [Italian]	Con la presente <b>Visteon Corporation</b> dichiara che questo MAZDA_68_CMU è conforme ai requisiti essenziali ed alle altre disposizioni pertinenti stabilite dalla direttiva 2014/53/UE.
Latviski [Latvian]	Ar šo <b>Visteon Corporation</b> deklarē, ka MAZDA_68_CMU atbilst Direktīvas 2014/53/EK būtiskajām prasībām un citiem ar to saistītajiem noteikumiem.
Lietuvių [Lithuanian]	Šiuo <b>Visteon Corporation</b> deklaruoją, kad šis MAZDA_68_CMU atitinka esminius reikalavimus ir kitas 2014/53/EB Direktyvos nuostatas.
Nederlands [Dutch]	Hierbij verklaart <b>Visteon Corporation</b> dat het toestel MAZDA_68_CMU in overeenstemming is met de essentiële eisen en de andere relevante bepalingen van richtlijn 2014/53/EG.
Malti [Maltese]	Hawnhekk, <b>Visteon Corporation</b> , jiddikjara li dan MAZDA_68_CMU jikkonforma mal-ftigijiet essenzjali u ma provvedimenti oħrajn rilevanti li hemm fid-Direttiva 2014/53/UE.
Magyar [Hungarian]	Alulírott, <b>Visteon Corporation</b> nyilatkozom, hogy a MAZDA_68_CMU megfelel a vonatkozó alapvető követelményeknek és az 2014/53/EU irányelv egyéb előírásainak.
Polski [Polish]	Niniejszym <b>Visteon Corporation</b> oświadcza, że MAZDA_68_CMU jest zgodny z zasadniczymi wymogami oraz pozostałymi stosownymi postanowieniami Dyrektywy 2014/53/UE.
Português [Portuguese]	<b>Visteon Corporation</b> declara que este MAZDA_68_CMU está conforme com os requisitos essenciais e outras disposições da Directiva 2014/53/UE.
Slovensko [Slovenian]	<b>Visteon Corporation</b> izjavlja, da je ta MAZDA_68_CMU v skladu z bistvenimi zahtevami in ostalimi relevantnimi določili direktive 2014/53/ES.
Slovensky [Slovak]	<b>Visteon Corporation</b> týmto vyhlasuje, že MAZDA_68_CMU spĺňa základné požiadavky a všetky príslušné ustanovenia Smernice 2014/53/EÚ.
Suomi [Finnish]	<b>Visteon Corporation</b> vakuuttaa täten että MAZDA_68_CMU tyyppinen laite on direktiivin 2014/53/EU oleellisten vaatimusten ja sitä koskevien direktiivin muiden ehtojen mukainen.
Svenska [Swedish]	Härmed intygar <b>Visteon Corporation</b> att denna MAZDA_68_CMU står i överensstämmelse med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiv 2014/53/EU.
Íslenska [Icelandic]	Hér með lýsir <b>Visteon Corporation</b> yfir því að MAZDA_68_CMU er í samræmi við grunnkröfur og aðrar kröfur, sem gerðar eru í tilskipun 2014/53/EU.
Norsk [Norwegian]	<b>Visteon Corporation</b> erklærer herved at utstyret MAZDA_68_CMU er i samsvar med de grunnleggende krav og øvrige relevante krav i direktiv 2014/53/EF.
Crnogorski jezik, Црногорски језик [Montenegrin]	Ovim, <b>Visteon Corporation</b> , izjavljuje da ovaj MAZDA_68_CMU je uskladen sa bitnim zahtjevima i drugim relevantnim odredbama Direktive 2014/53/UE.

Frequency Range	2400-2483.5MHz
Output Power	Bluetooth < 4dBm
	WLAN < 33dBm

# Declaration of Conformity

## FCC

FCC ID: NT8-MAZDA68CMU

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

### Caution:


Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Indonesia	68111/SDPPI/2020 8032		 Dilarang melakukan perubahan spesifikasi yang dapat menimbulkan gangguan fisik dan/atau elektromagnetik terhadap lingkungan sekitarnya
Israel	51-73011 מוסר אישור אלווסי של משרד התקשורת הוא 51-73011 מסור להחליף את האסנכה והמקורית של המכשיר א"א למשות בו כל שינוי מסבי אחר		
Jamaica	This product has been Type Approved by Jamaica: SMA - "MAZDA_68_CMU". This product contains a Type Approved Module by Jamaica: SMA - "MAZDA_68_CMU".		
Jordan	The manufacturer: Visteon Corporation Equipment type: MAZDA_68_CMU TRC's type approval certificate number: T/4/11/11/3277		
Morocco	AGREE PAR L'ANRT MAROC Numéro d'agrément : .....MR 22740 ANRT 2020 Date d'agrément : ..... 2020/04/06		
Nigeria	<u>Connection and use of this communications equipment is permitted by the Nigerian Communications Commission</u>		

# Declaration of Conformity

Algeria 'Agrée par l'ARPT' and 'Référence d'agrément'.


Oman



Singapore



South Africa



UAE



Thailand



Ukraine



Модель: MAZDA\_68\_CMU

Діапазон частот: 2400 - 2483,5 МГц

Максимальна потужність вихідної потужності (Bluetooth): 4 дБм

Максимальна потужність вихідної потужності (WLAN): 33 дБм

Дана Visteon Corporation заявляє, що тип радіообладнання (позначення типу радіообладнання) відповідає Технічному регламенту радіообладнання;

Повний текст декларації про відповідність можна знайти на сайті за адресою:  
<https://www.visteondocs.com/>.

Paraguay

**Distributor:** Garden MPY S.A.

**Address:** Republica Argentina y Facundo Machain, Asuncion, PARAGUAY

# Declaration of Conformity

---

Taiwan



Product Name: Automotive Electronics Infotainment Head Unit

Certification Name: MAZDA\_68\_CMU

Certificate Holder: Visteon Corporation

**警語**

低功率電波輻射性電機管理辦法

第十二條經型式認證合格之低功率射頻電機,非經許可,公司,商號或使用者均不得擅自變更頻率,加大功率或變更原設計之特性及功能。

第十四條低功率射頻電機之使用不得影響飛航安全及干擾合法通信,經發現有干擾現象時,應立即停用,並改善至無干擾時方得繼續使用。

前項合法通信,指一電信法規定作業之無線電通信低功率射頻電機需忍受合法通信或工業,科學及醫療用電波輻射性電機設備之干擾。

Brazil



ANATEL web link:

<http://www.anatel.gov.br/institucional/>

Este equipamento não tem direito à proteção contra interferência prejudicial e não pode causar interferência em sistemas devidamente autorizados

UK

Hereby, **Visteon Corporation** declares that the radio equipment type **MAZDA\_68\_CMU** is in compliance with the Radio Equipment Regulations of the United Kingdom. The full text of the Declaration of Conformity is available at the following internet address: [www.visteondocs.com](http://www.visteondocs.com)

a.Frequency band : 2.4 GHz

b.Maximum radio-frequency power transmitted in the frequency band(s) in which the radio equipment operates.

Max output power = 32.2 mW



# Declaration of Conformity

## ▼ Audio System (Mazda Connect (Type B))

[\*] : CL-MM1AE0JT, CL-MMZAE0JT

Cyprus, Canary Islands, Austria, Greece, Italy, Switzerland, Belgium, Denmark, Finland, Norway, Portugal, Spain, Sweden, Hungary, Germany, Poland, Bulgaria, Croatia, Slovenia, Luxembourg, Slovakia, Latvia, Lithuania, France, Czech, Estonia, Iceland, Romania, Netherlands, Malta, Ireland, Liechtenstein, Albania

### Manufacturer

•Name : Panasonic Corporation  
Automotive company  
•Address : 4261 Ikonobe-cho, Tsuzuki-ku, Yokohama-shi, Kanagawa-ken, 224-8520, Japan

### Importer, Address :

Mazda Motor Logistics Europe NV  
Blaasveldstraat 162, 2830 Willebroek, Belgium  
Mazda Motor Poland sp.zo.o.  
ul. Postępu 14B, 02-676 Warsaw, Poland  
Mazda Motor Czech, s.r.o.  
Türkova 2319/5b, Chodov, 149 00 Prague 4, Czech Republic  
Mazda Motor Slovakia, s.r.o.  
LINDNER II, Galvaniho 7/B, Bratislava - Ružinov 821 04, Slovak Republic  
Mazda Motor Logistics Europe NV Merkezi Belçika Türkiye İstanbul Şubesi  
Merdivenköy Mah. DikyoI Sok. Business Istanbul B Blok No:2/72, 34732 Kadıköy- Istanbul, Turkey

### Model No.[\*]

### Specifications of Bluetooth

Frequency band : 2402-2480MHz  
Maximum radio-frequency power : 100mW Max

### Specifications of WLAN

Frequency band : 2412-2472MHz  
Maximum radio-frequency power : 100mW Max

Hereby, Panasonic Corporation declares that the radio equipment type [ \* ] is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address:  
<https://www.ptc.panasonic.eu/>

Me anë të kësaj, Panasonic Corporation deklaroi se pajisjet e radios [\*] janë në përputhje me Direktivën 2014/53 / BE. Teksti i plotë i deklaratës së BE-së për konformitetin është në dispozicion në adresën e mëposhtme të internetit:  
<https://www.ptc.panasonic.eu/>

# Declaration of Conformity

С настоящото Panasonic Corporation декларира, че този тип радиосъоръжение [ \* ] е в съответствие с Директива 2014/53/ЕС.

Цялостният текст на ЕС декларацията за съответствие може да се намери на следния интернет адрес:  
<https://www.ptc.panasonic.eu/>

Tímto Panasonic Corporation prohlašuje, že typ rádiového zařízení [ \* ] je v souladu se směrnicí 2014/53/EU.

Úplné znění EU prohlášení o shodě je k dispozici na této internetové adrese:  
<https://www.ptc.panasonic.eu/>

Hermed erklærer Panasonic Corporation, at radioudstyrstypen [ \* ] er i overensstemmelse med direktiv 2014/53/EU.

EU-overensstemmelseserklæringens fulde tekst kan findes på følgende internetadresse:  
<https://www.ptc.panasonic.eu/>

Hiermit erkläre Panasonic Corporation, dass der Funkanlagentyp [ \* ] der Richtlinie 2014/53/EU entspricht.

Der vollständige Text der EU-Konformitätserklärung ist unter der folgenden Internetadresse verfügbar:  
<https://www.ptc.panasonic.eu/>

Με την παρούσα ο/η Panasonic Corporation, δηλώνει ότι ο ραδιοεξοπλισμός [ \* ] πληροί την οδηγία 2014/53/ΕΕ.

Το πλήρες κείμενο της δήλωσης συμμόρφωσης ΕΕ διατίθεται στην ακόλουθη ιστοσελίδα στο διαδίκτυο:  
<https://www.ptc.panasonic.eu/>

Por la presente, Panasonic Corporation declara que el tipo de equipo radioeléctrico [ \* ] es conforme con la Directiva 2014/53/UE.

El texto completo de la declaración UE de conformidad está disponible en la dirección Internet siguiente:  
<https://www.ptc.panasonic.eu/>

Käesolevaga deklareerib Panasonic Corporation, et käesolev raadioseadme tüüp [ \* ] vastab direktiivi 2014/53/EL nõuetele.

ELi vastavusdeklaratsiooni täielik tekst on kättesaadav järgmisel internetiaadressil:  
<https://www.ptc.panasonic.eu/>

Panasonic Corporation vakuuttaa, että radiolaitetyyppi [ \* ] on direktiivin 2014/53/EU mukainen.

EU vaatimustenmukaisuusvakuutuksen täysimittainen teksti on saatavilla seuraavassa internetosoitteessa:  
<https://www.ptc.panasonic.eu/>

Le soussigné, Panasonic Corporation, déclare que l'équipement radioélectrique du type [ \* ] est conforme à la directive 2014/53/UE.

Le texte complet de la déclaration UE de conformité est disponible à l'adresse internet suivante:  
<https://www.ptc.panasonic.eu/>

# Declaration of Conformity

Panasonic Corporation ovime izjavljuje da je radijska oprema tipa [ \* ] u skladu s Direktivom 2014/53/EU. Cjeloviti tekst EU izjave o sukladnosti dostupan je na sljedećoj internetskoj adresi:  
<https://www.ptc.panasonic.eu/>

Panasonic Corporation igazolja, hogy a [ \* ] típusú rádióberendezés megfelel a 2014/53/EU irányelvnek. Az EU-megfelelőségi nyilatkozat teljes szövege elérhető a következő internetes címen:  
<https://www.ptc.panasonic.eu/>

Hér með lýsir Panasonic Corporation því yfir að gerð útværpsbúnaðarins [ \* ] sé í samræmi við tilskipun 2014/53 / ESB. Heildartexti samræmisýfirlýsingar ESB er að finna á eftirfarandi internetið:  
<https://www.ptc.panasonic.eu/>

Il fabbricante, Panasonic Corporation, dichiara che il tipo di apparecchiatura radio [ \* ] è conforme alla direttiva 2014/53/UE.  
 Il testo completo della dichiarazione di conformità UE è disponibile al seguente indirizzo Internet:  
<https://www.ptc.panasonic.eu/>

Aš, Panasonic Corporation, patvirtinu, kad radijo įrenginių tipas [ \* ] atitinka Direktyvą 2014/53/ES. Visas ES atitikties deklaracijos tekstas prieinamas šiuo interneto adresu:  
<https://www.ptc.panasonic.eu/>

Ar šo Panasonic Corporation deklarē, ka radioiekārta [ \* ] atbilst Direktīvai 2014/53/ES. Pilns ES atbilstības deklarācijas teksts ir pieejams šādā interneta vietnē:  
<https://www.ptc.panasonic.eu/>

B'dan, Panasonic Corporation, niddikjara li dan it-tip ta' tagħmir tar-radju [ \* ] huwa konformi mad-Direttiva 2014/53/UE.  
 It-test kollu tad-dikjarazzjoni ta' konformità tal-UE huwa disponibbli f'dan l-indirizz tal-Internet li gej:  
<https://www.ptc.panasonic.eu/>

Herved erklærer Panasonic Corporation at radioutstyrstypen [ \* ] er i samsvar med direktiv 2014/53 / EU. Hele teksten til EU-samsvarserklæringen er tilgjengelig på følgende internetadresse:  
<https://www.ptc.panasonic.eu/>

Hierbij verklaar ik, Panasonic Corporation, dat het type radioapparatuur [ \* ] conform is met Richtlijn 2014/53/EU. De volledige tekst van de EU-conformiteitsverklaring kan worden geraadpleegd op het volgende internetadres:  
<https://www.ptc.panasonic.eu/>

# Declaration of Conformity

---

Panasonic Corporation niniejszym oświadcza, że typ urządzenia radiowego [ \* ] jest zgodny z dyrektywą 2014/53/UE.  
Pełny tekst deklaracji zgodności UE jest dostępny pod następującym adresem internetowym:  
<https://www.ptc.panasonic.eu/>

O(a) abaixo assinado(a) Panasonic Corporation declara que o presente tipo de equipamento de rádio [ \* ] está em conformidade com a Diretiva 2014/53/UE.  
O texto integral da declaração de conformidade está disponível no seguinte endereço de Internet:  
<https://www.ptc.panasonic.eu/>

Prin prezenta, Panasonic Corporation declară că tipul de echipamente radio [ \* ] este în conformitate cu Directiva 2014/53/UE.  
Textul integral al declarației UE de conformitate este disponibil la următoarea adresă internet:  
<https://www.ptc.panasonic.eu/>

Ovim, Panasonic, deklarirše da je [ \* ] u skladu sa osnovnim zahtevima i ostalim relevantnim odredbama Direktive 2014/53/EU  
Pun tekst EU deklaracije o usaglašenosti dostupan je na sledećoj internet adresi:  
<https://www.ptc.panasonic.eu/>

Panasonic Corporation týmto vyhlasuje, že rádiové zariadenie typu [ \* ] je v súlade so smernicou 2014/53/EÚ.  
Úplné EÚ vyhlásenie o zhode je k dispozícii na tejto internetovej adrese:  
<https://www.ptc.panasonic.eu/>

Panasonic Corporation potvrjuje, da je tip radijske opreme [ \* ] skladen z Direktivo 2014/53/EU.  
Celotno besedilo izjave EU o skladnosti je na voljo na naslednjem spletnem naslovu:  
<https://www.ptc.panasonic.eu/>

Härmed försäkrar Panasonic Corporation att denna typ av radioutrustning [ \* ] överensstämmer med direktiv 2014/53/EU.  
Den fullständiga texten till EU-försäkran om överensstämmelse finns på följande webbadress:  
<https://www.ptc.panasonic.eu/>

Panasonic Corporation, [ \* ] türü telsiz ekipmanının 2014/53/EU Direktifine uygun olduğunu beyan etmektedir.  
AB uygunluk beyanının tam metnini aşağıdaki internet adresinden ulaşabilirsiniz:  
<https://www.ptc.panasonic.eu/>

# Declaration of Conformity

Kazakhstan, Armenia, Russia, Belarus



UK

**Manufacturer**

•Name : Panasonic Corporation  
Automotive company  
•Address : 4261 Ikonobe-cho, Tsuzuki-ku, Yokohama-shi, Kanagawa-ken, 224-8520, Japan

**Importer, Address :**

Mazda Motors UK Limited  
Crossways Business Park, Victory Way, Dartford DA2 6DT, Kent, UK

**Model No.[\*]**

**Specifications of Bluetooth**

Frequency band : 2402-2480MHz  
Maximum radio-frequency power : 100mW Max

**Specifications of WLAN**

Frequency band : 2412-2472MHz  
Maximum radio-frequency power : 100mW Max

Hereby, Panasonic Corporation declares that the radio equipment type[ \* ] is in compliance with The Radio Equipment Regulations 2017.

The full text of the UK declaration of conformity is available at the following internet address:  
<https://www.ptc.panasonic.eu/>

# Declaration of Conformity

---

Moldova

Producător

Numele : Panasonic Corporation

Adresa : 4261 Ikonobe-cho, Tsuzuki-ku, Yokohama-shi, Kanagawa-ken, 224-8520, Japonia

Importatorii Numele :

Denumirea comercială înregistrată : Mazda Austria Gesellschaft m. b. H.

Adresa poștală : Ernst Diez Strasse 3, 9020 Klagenfurt, Österreich

Numarul modelului.[\*]

Bluetooth

Banda de frecvență : 2402-2480MHz

Puterea maximă a frecvenței radio : 100mW Max

WLAN

Banda de frecvență : 2412-2472MHz

Puterea maximă a frecvenței radio : 100mW Max

Prin prezenta, Panasonic Corporation declară că tipul de echipamente radio [\*] este în conformitate cu Reglementarea tehnică „Punerea la dispoziție pe piață a echipamentelor radio”.

Textul integral al declarației de conformitate este disponibil la următoarea adresă de Internet:

<https://service.panasonic.ua>

# Declaration of Conformity

Ukraine

**Виробники**

назву компанії; Panasonic Corporation

Automotive company

адресу ; 4261 Ikonobe-cho, Tsuzuki-ku, Yokohama-shi, Kanagawa-ken, 224-8520, Japan

**Імпортери**

назву компанії; SC AUTO International

адресу ; 22А, Stepana Bandery ave, Kiev, 04655, Ukraine

**моделі;[\*]**

**Bluetooth**

смугу радіочастот, в якій працює радіообладнання; 2402-2480MHz

максимальну потужність випромінювання в смузі радіочастот, в якій працює радіообладнання; 100mW

**WLAN**

смугу радіочастот, в якій працює радіообладнання; 2412-2472MHz

максимальну потужність випромінювання в смузі радіочастот, в якій працює радіообладнання; 100mW

справжнім Panasonic Corporation заявляє, що тип радіообладнання [ \* ] відповідає Технічному регламенту радіообладнання;

повний текст декларації про відповідність доступний на веб-сайті за такою адресою:

<https://service.panasonic.ua/>

(розділ «Технічне регулювання»)

# Declaration of Conformity

---

## ▼ Data Communication System

Information of the radio device: Type TN0014B

1. Name and postal address of the manufacturer

Name: DENSO TEN Limited

Address: 2-28, Goshō-dori 1-chome, Hyogo-ku, Kobe,  
652-8510 Japan

2. Simplified EU declaration of conformity

С настоящото DENSO TEN Limited декларира, че този тип радиосъоръжение TN0014B е в съответствие с Директива 2014/53/ЕС.

Цялостният текст на ЕС декларацията за съответствие може да се намери на следния интернет адрес:

[https://www.denso-ten.com/support/regulation/eu\\_doc/](https://www.denso-ten.com/support/regulation/eu_doc/)

Функция	Работна честотна лента	Максимална радиочестотна мощност
GSM	880 - 915 MHz	32 dBm e.i.r.p.
	1710 - 1785 MHz	30 dBm e.i.r.p.
UMTS	880 - 915 MHz	24 dBm e.i.r.p.
	1920 - 1980 MHz	
LTE	832 - 862 MHz	24 dBm e.i.r.p.
	880 - 915 MHz	
	1710 - 1785 MHz	
	1920 - 1980 MHz 2500 - 2570 MHz	

# Declaration of Conformity

Ovim putem, DENSO TEN Limited izjavljuje da je vrsta radio opreme TN0014B u saglasnosti s Direktivom 2014/53/EU.  
 Cijeli tekst EC deklaracije o usaglašenosti je dostupan na sljedećoj internetskoj adresi:  
[https://www.denso-ten.com/support/regulation/eu\\_doc/](https://www.denso-ten.com/support/regulation/eu_doc/)

Funkcija	Radni frekvencijski pojas	Maksimalna radiofrekvencijska snaga
GSM	880 - 915 MHz 1710 - 1785 MHz	32 dBm e.i.r.p. 30 dBm e.i.r.p.
UMTS	880 - 915 MHz 1920 - 1980 MHz	24 dBm e.i.r.p.
LTE	832 - 862 MHz 880 - 915 MHz 1710 - 1785 MHz 1920 - 1980 MHz 2500 - 2570 MHz	24 dBm e.i.r.p.

Tímto DENSO TEN Limited prohlašuje, že typ rádiového zařízení TN0014B je v souladu se směrnicí 2014/53/EU.  
 Úplné znění EU prohlášení o shodě je k dispozici na této internetové adrese:

[https://www.denso-ten.com/support/regulation/eu\\_doc/](https://www.denso-ten.com/support/regulation/eu_doc/)

Funkce	Provozní frekvenční pásmu	Maximální radiofrekvenční výkon
GSM	880 - 915 MHz 1710 - 1785 MHz	32 dBm e.i.r.p. 30 dBm e.i.r.p.
UMTS	880 - 915 MHz 1920 - 1980 MHz	24 dBm e.i.r.p.
LTE	832 - 862 MHz 880 - 915 MHz 1710 - 1785 MHz 1920 - 1980 MHz 2500 - 2570 MHz	24 dBm e.i.r.p.

# Declaration of Conformity

---

Hermed erklærer DENSO TEN Limited, at radioudstyrstypen TN0014B er i overensstemmelse med direktiv 2014/53/EU.  
EU-overensstemmelseserklæringens fulde tekst kan findes på følgende internetadresse:

[https://www.denso-ten.com/support/regulation/eu\\_doc/](https://www.denso-ten.com/support/regulation/eu_doc/)

Funktion	Driftsfrekvensbandet	Maksimal radio-frekvens effekt
GSM	880 - 915 MHz 1710 - 1785 MHz	32 dBm e.i.r.p. 30 dBm e.i.r.p.
UMTS	880 - 915 MHz 1920 - 1980 MHz	24 dBm e.i.r.p.
LTE	832 - 862 MHz 880 - 915 MHz 1710 - 1785 MHz 1920 - 1980 MHz 2500 - 2570 MHz	24 dBm e.i.r.p.

Hiermit erklært DENSO TEN Limited, dass der Funkanlagentyp TN0014B der Richtlinie 2014/53/EU entspricht.

Der vollständige Text der EU-Konformitätserklärung ist unter der folgenden Internetadresse verfügbar:

[https://www.denso-ten.com/support/regulation/eu\\_doc/](https://www.denso-ten.com/support/regulation/eu_doc/)

Funktion	Betriebsfrequenzband	Maximale Hochfrequenzleistung
GSM	880 - 915 MHz 1710 - 1785 MHz	32 dBm e.i.r.p. 30 dBm e.i.r.p.
UMTS	880 - 915 MHz 1920 - 1980 MHz	24 dBm e.i.r.p.
LTE	832 - 862 MHz 880 - 915 MHz 1710 - 1785 MHz 1920 - 1980 MHz 2500 - 2570 MHz	24 dBm e.i.r.p.

# Declaration of Conformity

Με την παρούσα ο/η DENSO TEN Limited, δηλώνει ότι ο ραδιοεξοπλισμός TN0014B πληροί την οδηγία 2014/53/ΕΕ.  
 Το πλήρες κείμενο της δήλωσης συμμόρφωσης ΕΕ διατίθεται στην ακόλουθη ιστοσελίδα στο διαδίκτυο:  
[https://www.denso-ten.com/support/regulation/eu\\_doc/](https://www.denso-ten.com/support/regulation/eu_doc/)

Λειτουργία	Ζώνη συχνοτήτων λειτουργίας	Μέγιστη ισχύς ραδιοσυχνότητας
GSM	880 - 915 MHz 1710 - 1785 MHz	32 dBm e.i.r.p. 30 dBm e.i.r.p.
UMTS	880 - 915 MHz 1920 - 1980 MHz	24 dBm e.i.r.p.
LTE	832 - 862 MHz 880 - 915 MHz 1710 - 1785 MHz 1920 - 1980 MHz 2500 - 2570 MHz	24 dBm e.i.r.p.

Hereby, DENSO TEN Limited declares that the radio equipment type TN0014B is in compliance with Directive 2014/53/EU.

The full text of the EU declaration of conformity is available at the following internet address:

[https://www.denso-ten.com/support/regulation/eu\\_doc/](https://www.denso-ten.com/support/regulation/eu_doc/)

Function	Operating frequency band	Maximum radio-frequency power
GSM	880 - 915 MHz 1710 - 1785 MHz	32 dBm e.i.r.p. 30 dBm e.i.r.p.
UMTS	880 - 915 MHz 1920 - 1980 MHz	24 dBm e.i.r.p.
LTE	832 - 862 MHz 880 - 915 MHz 1710 - 1785 MHz 1920 - 1980 MHz 2500 - 2570 MHz	24 dBm e.i.r.p.

# Declaration of Conformity

Por la presente, DENSO TEN Limited declara que el tipo de equipo radioeléctrico TN0014B es conforme con la Directiva 2014/53/UE.

El texto completo de la declaración UE de conformidad está disponible en la dirección Internet siguiente:

[https://www.denso-ten.com/support/regulation/eu\\_doc/](https://www.denso-ten.com/support/regulation/eu_doc/)

Función	Banda de frecuencia operativa	Potencia máxima de la radiofrecuencia
GSM	880 - 915 MHz 1710 - 1785 MHz	32 dBm e.i.r.p. 30 dBm e.i.r.p.
UMTS	880 - 915 MHz 1920 - 1980 MHz	24 dBm e.i.r.p.
LTE	832 - 862 MHz 880 - 915 MHz 1710 - 1785 MHz 1920 - 1980 MHz 2500 - 2570 MHz	24 dBm e.i.r.p.

Käesolevaga deklareerib DENSO TEN Limited, et käesolev raadioseadme tüüp TN0014B vastab direktiivi 2014/53/EL nõuetele.

ELi vastavusdeklaratsiooni täielik tekst on kättesaadav järgmisel internetiaadressil:

[https://www.denso-ten.com/support/regulation/eu\\_doc/](https://www.denso-ten.com/support/regulation/eu_doc/)

Funktsioon	Töösageduse laineala	Maksimaalne raadiosageduslik võimsus
GSM	880 - 915 MHz 1710 - 1785 MHz	32 dBm e.i.r.p. 30 dBm e.i.r.p.
UMTS	880 - 915 MHz 1920 - 1980 MHz	24 dBm e.i.r.p.
LTE	832 - 862 MHz 880 - 915 MHz 1710 - 1785 MHz 1920 - 1980 MHz 2500 - 2570 MHz	24 dBm e.i.r.p.

# Declaration of Conformity

DENSO TEN Limited vakuuttaa, että radiolaitetyyppi TN0014B on direktiivin 2014/53/EU mukainen.  
 EU-vaatimustenmukaisuusvakuutuksen täysimittainen teksti on saatavilla seuraavassa internetosoitteessa:  
[https://www.denso-ten.com/support/regulation/eu\\_doc/](https://www.denso-ten.com/support/regulation/eu_doc/)

Toiminto	Toimintataajuuskaista	Maksimi radiotaajuusteho
GSM	880 - 915 MHz	32 dBm e.i.r.p.
	1710 - 1785 MHz	30 dBm e.i.r.p.
UMTS	880 - 915 MHz	24 dBm e.i.r.p.
	1920 - 1980 MHz	
LTE	832 - 862 MHz	24 dBm e.i.r.p.
	880 - 915 MHz	
	1710 - 1785 MHz	
	1920 - 1980 MHz	
	2500 - 2570 MHz	

Le soussigné, DENSO TEN Limited, déclare que l'équipement radioélectrique du type TN0014B est conforme à la directive 2014/53/UE.  
 Le texte complet de la déclaration UE de conformité est disponible à l'adresse internet suivante:

[https://www.denso-ten.com/support/regulation/eu\\_doc/](https://www.denso-ten.com/support/regulation/eu_doc/)

Fonction	Bande de fréquence de fonctionnement	Puissance maximale de la radiofréquence
GSM	880 - 915 MHz	32 dBm e.i.r.p.
	1710 - 1785 MHz	30 dBm e.i.r.p.
UMTS	880 - 915 MHz	24 dBm e.i.r.p.
	1920 - 1980 MHz	
LTE	832 - 862 MHz	24 dBm e.i.r.p.
	880 - 915 MHz	
	1710 - 1785 MHz	
	1920 - 1980 MHz	
	2500 - 2570 MHz	

# Declaration of Conformity

Leis seo, dearbhaíonn DENSO TEN Limited go gcomhlíonann an cineál trealaimh raidió TN0014B Treoir 2014/53/EU.

Tá an téacs iomlán den dearbhú comhréireachta AE ar fáil ag an seoladh Idirlín seo a leanas:

[https://www.denso-ten.com/support/regulation/eu\\_doc/](https://www.denso-ten.com/support/regulation/eu_doc/)

Feidhm	Banda minicíochta oibriúcháin	Uaschumhacht radaimhnicíochta
GSM	880 - 915 MHz	32 dBm e.i.r.p.
	1710 - 1785 MHz	30 dBm e.i.r.p.
UMTS	880 - 915 MHz	24 dBm e.i.r.p.
	1920 - 1980 MHz	
LTE	832 - 862 MHz	24 dBm e.i.r.p.
	880 - 915 MHz	
	1710 - 1785 MHz	
	1920 - 1980 MHz	
	2500 - 2570 MHz	

DENSO TEN Limited ovime izjavlja da je radijska oprema tipa TN0014B u skladu s Direktivom 2014/53/EU.

Cjeloviti tekst EU izjave o sukladnosti dostupan je na sljedećoj internetskoj adresi:

[https://www.denso-ten.com/support/regulation/eu\\_doc/](https://www.denso-ten.com/support/regulation/eu_doc/)

Funkcija	Radni frekvencijski pojas	Maksimalna rediofrekvencijska snaga
GSM	880 - 915 MHz	32 dBm e.i.r.p.
	1710 - 1785 MHz	30 dBm e.i.r.p.
UMTS	880 - 915 MHz	24 dBm e.i.r.p.
	1920 - 1980 MHz	
LTE	832 - 862 MHz	24 dBm e.i.r.p.
	880 - 915 MHz	
	1710 - 1785 MHz	
	1920 - 1980 MHz	
	2500 - 2570 MHz	

# Declaration of Conformity

DENSO TEN Limited igazolja, hogy a TN0014B típusú rádióberendezés megfelel a 2014/53/EU irányelvnek.  
Az EU-megfelelőségi nyilatkozat teljes szövege elérhető a következő internetes címen:

[https://www.denso-ten.com/support/regulation/eu\\_doc/](https://www.denso-ten.com/support/regulation/eu_doc/)

Funkció	Üzemi frekvencia-tartomány	Maximális rádiófrekvenciás teljesítmény
GSM	880 - 915 MHz	32 dBm e.i.r.p.
	1710 - 1785 MHz	30 dBm e.i.r.p.
UMTS	880 - 915 MHz	24 dBm e.i.r.p.
	1920 - 1980 MHz	
LTE	832 - 862 MHz	24 dBm e.i.r.p.
	880 - 915 MHz	
	1710 - 1785 MHz	
	1920 - 1980 MHz	
	2500 - 2570 MHz	

Hér með, lýsir DENSO TEN Limited því yfir að gerð útvarpsbúnaðarins TN0014B samræmist tilskipun 2014/53/EU.

Allur texti ESB-samræmisýfirlýsingarinnar er aðgengilegur á eftirfarandi veffangi:

[https://www.denso-ten.com/support/regulation/eu\\_doc/](https://www.denso-ten.com/support/regulation/eu_doc/)

Aðgerð	Notkunartíðni hljómsveit	Hámarks útvarp-tíðni vald
GSM	880 - 915 MHz	32 dBm e.i.r.p.
	1710 - 1785 MHz	30 dBm e.i.r.p.
UMTS	880 - 915 MHz	24 dBm e.i.r.p.
	1920 - 1980 MHz	
LTE	832 - 862 MHz	24 dBm e.i.r.p.
	880 - 915 MHz	
	1710 - 1785 MHz	
	1920 - 1980 MHz	
	2500 - 2570 MHz	

# Declaration of Conformity

---

Il fabbricante, DENSO TEN Limited, dichiara che il tipo di apparecchiatura radio TN0014B è conforme alla direttiva 2014/53/UE.

Il testo completo della dichiarazione di conformità UE è disponibile al seguente indirizzo Internet:

[https://www.denso-ten.com/support/regulation/eu\\_doc/](https://www.denso-ten.com/support/regulation/eu_doc/)

Funzione	Frequenza operativa	Massima potenza a radiofrequenza
GSM	880 - 915 MHz	32 dBm e.i.r.p.
	1710 - 1785 MHz	30 dBm e.i.r.p.
UMTS	880 - 915 MHz	24 dBm e.i.r.p.
	1920 - 1980 MHz	
LTE	832 - 862 MHz	24 dBm e.i.r.p.
	880 - 915 MHz	
	1710 - 1785 MHz	
	1920 - 1980 MHz	
	2500 - 2570 MHz	

Aš, DENSO TEN Limited, patvirtinu, kad radijo įrenginių tipas TN0014B atitinka Direktyvą 2014/53/ES.

Visas ES atitikties deklaracijos tekstas prieinamas šiuo interneto adresu:

[https://www.denso-ten.com/support/regulation/eu\\_doc/](https://www.denso-ten.com/support/regulation/eu_doc/)

Funkcija	Veikimo dažnių juosta	Maksimalus radijo dažnių galingumas
GSM	880 - 915 MHz	32 dBm e.i.r.p.
	1710 - 1785 MHz	30 dBm e.i.r.p.
UMTS	880 - 915 MHz	24 dBm e.i.r.p.
	1920 - 1980 MHz	
LTE	832 - 862 MHz	24 dBm e.i.r.p.
	880 - 915 MHz	
	1710 - 1785 MHz	
	1920 - 1980 MHz	
	2500 - 2570 MHz	

# Declaration of Conformity

Ar šo DENSO TEN Limited deklarē, ka radioiekārta TN0014B atbilst Direktīvai 2014/53/ES.

Pilns ES atbilstības deklarācijas teksts ir pieejams šādā interneta vietnē:

[https://www.denso-ten.com/support/regulation/eu\\_doc/](https://www.denso-ten.com/support/regulation/eu_doc/)

Funkcija	Darba frekvences josla	Maksimālā radiofrekvences jauda
GSM	880 - 915 MHz 1710 - 1785 MHz	32 dBm e.i.r.p. 30 dBm e.i.r.p.
UMTS	880 - 915 MHz 1920 - 1980 MHz	24 dBm e.i.r.p.
LTE	832 - 862 MHz 880 - 915 MHz 1710 - 1785 MHz 1920 - 1980 MHz 2500 - 2570 MHz	24 dBm e.i.r.p.

Со ова, DENSO TEN Limited изјавува дека радио опремата од типот TN0014B е во согласност со Директивата 2014/53/EU.

Целиот текст на ЕУ изјавата за сообразност е достапен на следната интернет адреса:

[https://www.denso-ten.com/support/regulation/eu\\_doc/](https://www.denso-ten.com/support/regulation/eu_doc/)

Функција	Работен фреквенциски опсег	Максимална радио-фреквенциска моќ
GSM	880 - 915 MHz 1710 - 1785 MHz	32 dBm e.i.r.p. 30 dBm e.i.r.p.
UMTS	880 - 915 MHz 1920 - 1980 MHz	24 dBm e.i.r.p.
LTE	832 - 862 MHz 880 - 915 MHz 1710 - 1785 MHz 1920 - 1980 MHz 2500 - 2570 MHz	24 dBm e.i.r.p.

# Declaration of Conformity

Ovim, DENSO TEN Limited izjavljuje da je tip radio opreme TN0014B u skladu sa Direktivom 2014/53/EU.

Cjelokupan tekst EU deklaracije o usklađenosti dostupan je na sljedećoj internet adresi:

[https://www.denso-ten.com/support/regulation/eu\\_doc/](https://www.denso-ten.com/support/regulation/eu_doc/)

Funkcija	Operativni frekvencijski opseg	Maksimalna jačina radio frekvencije
GSM	880 - 915 MHz 1710 - 1785 MHz	32 dBm e.i.r.p. 30 dBm e.i.r.p.
UMTS	880 - 915 MHz 1920 - 1980 MHz	24 dBm e.i.r.p.
LTE	832 - 862 MHz 880 - 915 MHz 1710 - 1785 MHz 1920 - 1980 MHz 2500 - 2570 MHz	24 dBm e.i.r.p.

B'dan, DENSO TEN Limited, niddikjara li dan it-tip ta' tagħmir tar-radju TN0014B huwa konformi mad-Direttiva 2014/53/UE.

It-test kollu tad-dikjarazzjoni ta' konformità tal-UE huwa disponibbli f'dan l-indirizz tal-Internet li ġej:

[https://www.denso-ten.com/support/regulation/eu\\_doc/](https://www.denso-ten.com/support/regulation/eu_doc/)

Funzjoni	Band tal-frekwenza operattiva	l-energija massima bi frekwenza tar-radju
GSM	880 - 915 MHz 1710 - 1785 MHz	32 dBm e.i.r.p. 30 dBm e.i.r.p.
UMTS	880 - 915 MHz 1920 - 1980 MHz	24 dBm e.i.r.p.
LTE	832 - 862 MHz 880 - 915 MHz 1710 - 1785 MHz 1920 - 1980 MHz 2500 - 2570 MHz	24 dBm e.i.r.p.

# Declaration of Conformity

Hierbij verklaar ik, DENSO TEN Limited, dat het type radioapparatuur TN0014B conform is met Richtlijn 2014/53/EU.

De volledige tekst van de EU-conformiteitsverklaring kan worden geraadpleegd op het volgende internetadres:

[https://www.denso-ten.com/support/regulation/eu\\_doc/](https://www.denso-ten.com/support/regulation/eu_doc/)

Functie	Actieve frequentieband	Maximale radiofrequentie
GSM	880 - 915 MHz	32 dBm e.i.r.p.
	1710 - 1785 MHz	30 dBm e.i.r.p.
UMTS	880 - 915 MHz	24 dBm e.i.r.p.
	1920 - 1980 MHz	
LTE	832 - 862 MHz	24 dBm e.i.r.p.
	880 - 915 MHz	
	1710 - 1785 MHz	
	1920 - 1980 MHz	
	2500 - 2570 MHz	

DENSO TEN Limited erklærer herved at radioutstyrstypen TN0014B er i samsvar med direktiv 2014/53/EU.

Den fullstendige teksten i EU-erklæringen er tilgjengelig på følgende internetadresse:

[https://www.denso-ten.com/support/regulation/eu\\_doc/](https://www.denso-ten.com/support/regulation/eu_doc/)

Funksjon	Driftsfrekvensbånd	Maksimal radiofrekvent strøm
GSM	880 - 915 MHz	32 dBm e.i.r.p.
	1710 - 1785 MHz	30 dBm e.i.r.p.
UMTS	880 - 915 MHz	24 dBm e.i.r.p.
	1920 - 1980 MHz	
LTE	832 - 862 MHz	24 dBm e.i.r.p.
	880 - 915 MHz	
	1710 - 1785 MHz	
	1920 - 1980 MHz	
	2500 - 2570 MHz	

# Declaration of Conformity

DENSO TEN Limited niniejszym oświadcza, że typ urządzenia radiowego TN0014B jest zgodny z dyrektywą 2014/53/UE.

Pełny tekst deklaracji zgodności UE jest dostępny pod następującym adresem internetowym:

[https://www.denso-ten.com/support/regulation/eu\\_doc/](https://www.denso-ten.com/support/regulation/eu_doc/)

Funkcja	Pasma częstotliwości pracy	Maksymalna moc częstotliwości radiowej
GSM	880 - 915 MHz	32 dBm e.i.r.p.
	1710 - 1785 MHz	30 dBm e.i.r.p.
UMTS	880 - 915 MHz	24 dBm e.i.r.p.
	1920 - 1980 MHz	
LTE	832 - 862 MHz	24 dBm e.i.r.p.
	880 - 915 MHz	
	1710 - 1785 MHz	
	1920 - 1980 MHz	
	2500 - 2570 MHz	

O(a) abaixo assinado(a) DENSO TEN Limited declara que o presente tipo de equipamento de rádio TN0014B está em conformidade com a Diretiva 2014/53/UE.

O texto integral da declaração de conformidade está disponível no seguinte endereço de Internet:

[https://www.denso-ten.com/support/regulation/eu\\_doc/](https://www.denso-ten.com/support/regulation/eu_doc/)

Função	Faixa de frequência operacional	Potência máxima de radiofrequência
GSM	880 - 915 MHz	32 dBm e.i.r.p.
	1710 - 1785 MHz	30 dBm e.i.r.p.
UMTS	880 - 915 MHz	24 dBm e.i.r.p.
	1920 - 1980 MHz	
LTE	832 - 862 MHz	24 dBm e.i.r.p.
	880 - 915 MHz	
	1710 - 1785 MHz	
	1920 - 1980 MHz	
	2500 - 2570 MHz	

# Declaration of Conformity

Prin prezenta, DENSO TEN Limited declară că tipul de echipamente radio TN0014B este în conformitate cu Directiva 2014/53/UE.  
Textul integral al declarației UE de conformitate este disponibil la următoarea adresă internet:  
[https://www.denso-ten.com/support/regulation/eu\\_doc/](https://www.denso-ten.com/support/regulation/eu_doc/)

Funcție	Bandă de frecvență activă	Puterea maximă a radio-frecvenței
GSM	880 - 915 MHz 1710 - 1785 MHz	32 dBm e.i.r.p. 30 dBm e.i.r.p.
UMTS	880 - 915 MHz 1920 - 1980 MHz	24 dBm e.i.r.p.
LTE	832 - 862 MHz 880 - 915 MHz 1710 - 1785 MHz 1920 - 1980 MHz 2500 - 2570 MHz	24 dBm e.i.r.p.

DENSO TEN Limited tímto vyhlasuje, že rádiové zariadenie typu TN0014B je v súlade so smernicou 2014/53/EÚ.  
Úplné EÚ vyhlásenie o zhode je k dispozícii na tejto internetovej adrese:  
[https://www.denso-ten.com/support/regulation/eu\\_doc/](https://www.denso-ten.com/support/regulation/eu_doc/)

Funkcia	Prevádzkové frekvenčné pásmo	Maximálny rádiový výkon
GSM	880 - 915 MHz 1710 - 1785 MHz	32 dBm e.i.r.p. 30 dBm e.i.r.p.
UMTS	880 - 915 MHz 1920 - 1980 MHz	24 dBm e.i.r.p.
LTE	832 - 862 MHz 880 - 915 MHz 1710 - 1785 MHz 1920 - 1980 MHz 2500 - 2570 MHz	24 dBm e.i.r.p.

# Declaration of Conformity

DENSO TEN Limited potruje, da je tip radijske opreme TN0014B skladen z Direktivo 2014/53/EU.

Celotno besedilo izjave EU o skladnosti je na voljo na naslednjem spletnem naslovu:

[https://www.denso-ten.com/support/regulation/eu\\_doc/](https://www.denso-ten.com/support/regulation/eu_doc/)

Funkcija	Delovni frekvenčni pas	Maksimalna radiofrekvenčna moč
GSM	880 - 915 MHz 1710 - 1785 MHz	32 dBm e.i.r.p. 30 dBm e.i.r.p.
UMTS	880 - 915 MHz 1920 - 1980 MHz	24 dBm e.i.r.p.
LTE	832 - 862 MHz 880 - 915 MHz 1710 - 1785 MHz 1920 - 1980 MHz 2500 - 2570 MHz	24 dBm e.i.r.p.

Nëpërmjet kësaj, DENSO TEN Limited deklarom se lloji i aparatit të radios TN0014B është në përputhje me Direktivën 2014/53/EU.

Teksti i plotë i deklaratës së BE-së mbi përputhshmërinë është i disponueshëm në adresën e mëposhtme të internetit:

[https://www.denso-ten.com/support/regulation/eu\\_doc/](https://www.denso-ten.com/support/regulation/eu_doc/)

Funksion	Banda e frekuencës së punës	Fuqia maksimale e frekuencave radio
GSM	880 - 915 MHz 1710 - 1785 MHz	32 dBm e.i.r.p. 30 dBm e.i.r.p.
UMTS	880 - 915 MHz 1920 - 1980 MHz	24 dBm e.i.r.p.
LTE	832 - 862 MHz 880 - 915 MHz 1710 - 1785 MHz 1920 - 1980 MHz 2500 - 2570 MHz	24 dBm e.i.r.p.

# Declaration of Conformity

Ovim, DENSO TEN Limited izjavljuje da je ovaj tip radijske opreme TN0014B u skladu sa odredbama Direktive 2014/53/EU. Kompletan tekst EU deklaracije o konformitetu je dostupan na sledećoj internet adresi:

[https://www.denso-ten.com/support/regulation/eu\\_doc/](https://www.denso-ten.com/support/regulation/eu_doc/)

Funkcija	Radni frekvencijski pojas	Maksimalna radiofrekvencijska snaga
GSM	880 - 915 MHz	32 dBm e.i.r.p.
	1710 - 1785 MHz	30 dBm e.i.r.p.
UMTS	880 - 915 MHz	24 dBm e.i.r.p.
	1920 - 1980 MHz	
LTE	832 - 862 MHz	24 dBm e.i.r.p.
	880 - 915 MHz	
	1710 - 1785 MHz	
	1920 - 1980 MHz	
	2500 - 2570 MHz	

Härmed försäkrar DENSO TEN Limited att denna typ av radioutrustning TN0014B överensstämmer med direktiv 2014/53/EU.

Den fullständiga texten till EU-försäkran om överensstämmelse finns på följande webbadress:

[https://www.denso-ten.com/support/regulation/eu\\_doc/](https://www.denso-ten.com/support/regulation/eu_doc/)

Funktion	Operationsfrekvensbandet	Maximal radiofrekvenseffekt
GSM	880 - 915 MHz	32 dBm e.i.r.p.
	1710 - 1785 MHz	30 dBm e.i.r.p.
UMTS	880 - 915 MHz	24 dBm e.i.r.p.
	1920 - 1980 MHz	
LTE	832 - 862 MHz	24 dBm e.i.r.p.
	880 - 915 MHz	
	1710 - 1785 MHz	
	1920 - 1980 MHz	
	2500 - 2570 MHz	

# Declaration of Conformity

---

DENSO TEN Limited, TN0014B türü telsiz ekipmanının 2014/53/EU Direktifine uygun olduğunu beyan etmektedir.  
AB uygunluk beyanının tam metnine aşağıdaki internet adresinden ulaşılabilir:  
[https://www.denso-ten.com/support/regulation/eu\\_doc/](https://www.denso-ten.com/support/regulation/eu_doc/)

İşlev	Çalışma frekans bandı	Maksimum radyo-frekans gücü
GSM	880 - 915 MHz 1710 - 1785 MHz	32 dBm e.i.r.p. 30 dBm e.i.r.p.
UMTS	880 - 915 MHz 1920 - 1980 MHz	24 dBm e.i.r.p.
LTE	832 - 862 MHz 880 - 915 MHz 1710 - 1785 MHz 1920 - 1980 MHz 2500 - 2570 MHz	24 dBm e.i.r.p.

# Declaration of Conformity

Information of the radio device: Type TN0014B

1. Name and postal address of the manufacturer

Name: DENSO TEN Limited  
 Address: 2-28, Goshō-dōri 1-chōme, Hyōgo-ku, Kobe,  
 652-8510 Japan

2. Simplified UK declaration of conformity

Hereby, DENSO TEN Limited declares that the radio equipment type TN0014B is in compliance with Regulations 2017.

The full text of the UK declaration of conformity is available at the following internet address:

[https://www.denso-ten.com/support/regulation/uk\\_doc/](https://www.denso-ten.com/support/regulation/uk_doc/)

Function	Operating frequency band	Maximum radio-frequency power
GSM	880~915 MHz	32 dBm e.i.r.p.
	1710~1785 MHz	30 dBm e.i.r.p.
UMTS	880~915 MHz	24 dBm e.i.r.p.
	1920~1980 MHz	
LTE	832 - 862 MHz	24 dBm e.i.r.p.
	880 - 915 MHz	
	1710 - 1785 MHz	
	1920 - 1980 MHz	
	2500 - 2570 MHz	

UK

Importer Information

Name: Mazda Motors UK Limited

Address: Crossways Business Park, Victory Way, Dartford, Kent, DA2 6DT, UK

# Declaration of Conformity

---

## ▼ Distance Recognition Support System (DRSS)/Mazda Radar Cruise Control (MRCC)/Smart Brake Support (SBS)

Transmitter: Model: DNMWR006  
 Operation frequency: 76.5 GHz  
 Maximum output power: 6.31 W or less  
 Manufacturer: DENSO CORPORATION  
 Address: 1-1, Showa-cho, Kariya-shi, Aichi-ken, 448-8661  
 Japan



The latest "DECLARATION of CONFORMITY" (DoC) is available at the following address:  
<https://www.denso.com/global/en/contact-us/doc/>

Hereby, DENSO CORPORATION declares that the radio equipment type is in compliance with Directive 2014/53/EU.  
 The full text of the EU declaration of conformity is available at the following internet address:  
<https://www.denso.com/global/en/contact-us/doc/>

DENSO CORPORATION vakuuttaa, että radiolaitetyyppi on direktiivin 2014/53/EU mukainen.  
 EU-vaatimustenmukaisuusvakuutuksen täysimittainen teksti on saatavilla seuraavassa internetosoitteessa:  
<https://www.denso.com/global/en/contact-us/doc/>

Hierbij verklaar ik, DENSO CORPORATION, dat het type radioapparaatuur conform is met Richtlijn 2014/53/EU.  
 De volledige tekst van de EU-conformiteitsverklaring kan worden geraadpleegd op het volgende internetadres:  
<https://www.denso.com/global/en/contact-us/doc/>

Le soussigné, DENSO CORPORATION, déclare que l'équipement radioélectrique du type est conforme à la directive 2014/53/UE.  
 Le texte complet de la déclaration UE de conformité est disponible à l'adresse internet suivante:  
<https://www.denso.com/global/en/contact-us/doc/>

Härmed försäkrar DENSO CORPORATION att denna typ av radioutrustning överensstämmer med direktiv 2014/53/EU.  
 Den fullständiga texten till EU-försäkran om överensstämmelse finns på följande webbadress:  
<https://www.denso.com/global/en/contact-us/doc/>

Hermed erklærer DENSO CORPORATION, at radioudstyrstypen er i overensstemmelse med direktiv 2014/53/EU.  
 EU-overensstemmelseserklæringens fulde tekst kan findes på følgende internetadresse:  
<https://www.denso.com/global/en/contact-us/doc/>

# Declaration of Conformity

<p>Hiermit erklärt DENSO CORPORATION, dass der Funkanlagentyp der Richtlinie 2014/53/EU entspricht. Der vollständige Text der EU-Konformitätserklärung ist unter der folgenden Internetadresse verfügbar: <a href="https://www.denso.com/global/en/contact-us/doc/">https://www.denso.com/global/en/contact-us/doc/</a></p>
<p>Με την παρούσα ο/η DENSO CORPORATION, δηλώνει ότι ο ραδιοεξοπλισμός πληροί την οδηγία 2014/53/ΕΕ. Το πλήρες κείμενο της δήλωσης συμμόρφωσης ΕΕ διατίθεται στην ακόλουθη ιστοσελίδα στο διαδίκτυο: <a href="https://www.denso.com/global/en/contact-us/doc/">https://www.denso.com/global/en/contact-us/doc/</a></p>
<p>Il fabbricante, DENSO CORPORATION, dichiara che il tipo di apparecchiatura radio è conforme alla direttiva 2014/53/UE. Il testo completo della dichiarazione di conformità UE è disponibile al seguente indirizzo Internet: <a href="https://www.denso.com/global/en/contact-us/doc/">https://www.denso.com/global/en/contact-us/doc/</a></p>
<p>Por la presente, DENSO CORPORATION declara que el tipo de equipo radioeléctrico es conforme con la Directiva 2014/53/UE. El texto completo de la declaración UE de conformidad está disponible en la dirección Internet siguiente: <a href="https://www.denso.com/global/en/contact-us/doc/">https://www.denso.com/global/en/contact-us/doc/</a></p>
<p>O(a) abaixo assinado(a) DENSO CORPORATION declara que o presente tipo de equipamento de rádio está em conformidade com a Diretiva 2014/53/UE. O texto integral da declaração de conformidade está disponível no seguinte endereço de Internet: <a href="https://www.denso.com/global/en/contact-us/doc/">https://www.denso.com/global/en/contact-us/doc/</a></p>
<p>B'dan, DENSO CORPORATION, niddikjara li dan it-tip ta' taghmir tar-radju huwa konformi mad-Direttiva 2014/53/UE. It-test kollu tad-dikjarazzjoni ta' konformità tal-UE huwa disponibbli f'dan l-indirizz tal-Internet li ġej: <a href="https://www.denso.com/global/en/contact-us/doc/">https://www.denso.com/global/en/contact-us/doc/</a></p>
<p>Käesolevaga deklareerib DENSO CORPORATION, et käesolev raadioseadme tüüp vastab direktiivi 2014/53/EL nõuetele. ELi vastavusdeklaratsiooni täielik tekst on kättesaadav järgmisel internetiaadressil: <a href="https://www.denso.com/global/en/contact-us/doc/">https://www.denso.com/global/en/contact-us/doc/</a></p>
<p>DENSO CORPORATION igazolja, hogy a típusú rádióberendezés megfelel a 2014/53/EU irányelvnek. Az EU-megfelelőségi nyilatkozat teljes szövege elérhető a következő internetes címen: <a href="https://www.denso.com/global/en/contact-us/doc/">https://www.denso.com/global/en/contact-us/doc/</a></p>

# Declaration of Conformity

---

<p>DENSO CORPORATION týmto vyhlasuje, že rádiové zariadenie typu je v súlade so smernicou 2014/53/EÚ. Úplné EÚ vyhlásenie o zhode je k dispozícii na tejto internetovej adrese: <a href="https://www.denso.com/global/en/contact-us/doc/">https://www.denso.com/global/en/contact-us/doc/</a></p>
<p>Tímto DENSO CORPORATION prohlašuje, že typ rádiového zariadení je v súlade se směrnicí 2014/53/EU. Úplné znění EU prohlášení o shodě je k dispozici na této internetové adrese: <a href="https://www.denso.com/global/en/contact-us/doc/">https://www.denso.com/global/en/contact-us/doc/</a></p>
<p>DENSO CORPORATION potvrdjuje, da je tip radijske opreme skladen z Direktivo 2014/53/EU. Celotno besedilo izjave EU o skladnosti je na voljo na naslednjem spletnem naslovu: <a href="https://www.denso.com/global/en/contact-us/doc/">https://www.denso.com/global/en/contact-us/doc/</a></p>
<p>Aš, DENSO CORPORATION, patvirtinu, kad radijo įrenginių tipas atitinka Direktyvą 2014/53/ES. Visas ES atitikties deklaracijos tekstas prieinamas šiuo interneto adresu: <a href="https://www.denso.com/global/en/contact-us/doc/">https://www.denso.com/global/en/contact-us/doc/</a></p>
<p>Ar šo DENSO CORPORATION deklarē, ka radioiekārta atbilst Direktīvai 2014/53/ES. Pilns ES atbilstības deklarācijas teksts ir pieejams šādā interneta vietnē: <a href="https://www.denso.com/global/en/contact-us/doc/">https://www.denso.com/global/en/contact-us/doc/</a></p>
<p>DENSO CORPORATION niniejszym oświadcza, że typ urządzenia radiowego jest zgodny z dyrektywą 2014/53/UE. Pełny tekst deklaracji zgodności UE jest dostępny pod następującym adresem internetowym: <a href="https://www.denso.com/global/en/contact-us/doc/">https://www.denso.com/global/en/contact-us/doc/</a></p>
<p>Hér með lýsir DENSO CORPORATION yfir því að er í samræmi við grunnkröfur og aðrar kröfur, sem gerðar eru í tilskipun 2014/53/EU. Samræmisýfirlýsing er einnig aðgengileg á eftirfarandi vefslóð: <a href="https://www.denso.com/global/en/contact-us/doc/">https://www.denso.com/global/en/contact-us/doc/</a></p>
<p>DENSO CORPORATION erklærer at er i overensstemmelse med direktiv 2014/53/EU. Samsvarserklæringen i fulltekst er tilgjengelig på følgende internetadresse: <a href="https://www.denso.com/global/en/contact-us/doc/">https://www.denso.com/global/en/contact-us/doc/</a></p>

# Declaration of Conformity

<p>С настоящото DENSO CORPORATION декларира, че този тип радиосъоръжение е в съответствие с Директива 2014/53/ЕС. Цялостният текст на ЕС декларацията за съответствие може да се намери на следния интернет адрес:  <a href="https://www.denso.com/global/en/contact-us/doc/">https://www.denso.com/global/en/contact-us/doc/</a></p>
<p>Prin prezenta, DENSO CORPORATION declară că tipul de echipamente radio este în conformitate cu Directiva 2014/53/UE. Textul integral al declarației UE de conformitate este disponibil la următoarea adresă internet:  <a href="https://www.denso.com/global/en/contact-us/doc/">https://www.denso.com/global/en/contact-us/doc/</a></p>
<p>DENSO CORPORATION ovime izjavljuje da je radijska oprema tipa u skladu s Direktivom 2014/53/EU. Cjeloviti tekst EU izjave o sukladnosti dostupan je na sljedećoj internetskoj adresi:  <a href="https://www.denso.com/global/en/contact-us/doc/">https://www.denso.com/global/en/contact-us/doc/</a></p>
<p>Овиме, DENSO CORPORATION изјављује да је радио опрема тип усаглашена са Директивом 2014/53/EU. Цео текст ЕУ декларације о усаглашености доступан је на следећој интернет адреси:  <a href="https://www.denso.com/global/en/contact-us/doc/">https://www.denso.com/global/en/contact-us/doc/</a></p>
<p>Amb aquest document, DENSO CORPORATION declara que el tipus d'equipament radioelèctric es conforme a la Directiva 2014/53/UE. El text complet de la declaració UE de conformitat està disponible en la següent adreça d'Internet:  <a href="https://www.denso.com/global/en/contact-us/doc/">https://www.denso.com/global/en/contact-us/doc/</a></p>
<p>İşbu belge; DENSO CORPORATION telsiz ekipmanı tipinin 2014/53/AB sayılı Direktife uygun olduğunu beyan eder. AB uygunluk beyanının tam metni aşağıdaki internet adresinde mevcuttur:  <a href="https://www.denso.com/global/en/contact-us/doc/">https://www.denso.com/global/en/contact-us/doc/</a></p>
<p>Nepermjet kesaj, DENSO CORPORATION, deklaroj qe ky DNMWR006 eshte ne pajtim me kerkesat thelbesore dhe dispozitat e tjera perkatese te Direktives 1999/5/EC.</p>
<p>Prin prezenta, DENSO CORPORATION declară că tipul de echipamente radio este în conformitate cu Reglementarea tehnică „Punerea la dispoziție pe piață a echipamentelor radio”. Textul integral al declarației de conformitate este disponibil la următoarea adresă de Internet:  <a href="https://www.denso.com/global/en/contact-us/doc/">https://www.denso.com/global/en/contact-us/doc/</a></p>

This equipment complies with European radio regulation.  
 Doesn't comply with the radio regulation of other countries.

# Declaration of Conformity




Hereby, DENSO CORPORATION declares that the radio equipment type is in compliance with the relevant statutory requirements.

The full text of the UK declaration of conformity is available at the following internet address:

<https://www.denso.com/global/en/contact-us/doc/>

מוצר: מכ"מ הדוארה
סימל רישום: OSNCD
שם היבואן: דגס מילניקס בע"מ
כתובת היבואן ת.ד. 200, מנזח ניר צבי 7290500, ישראל
ארץ ייצור: רואר סוג'ר
דגם: 60GRW/MND
שם ייצור: רואר סוג'ר



**DENSO** DNMR13



**MCMC**  
CIDF15000184

## Declaration of Conformity

---

เพื่อหลีกเลี่ยงจากการสัมผัสสนามแม่เหล็กไฟฟ้า ควรอยู่ห่างจาก  
เซ็นเซอร์ตรวจจับ ใน ระยะไม่ต่ำกว่า 20 เซนติเมตร

เครื่องโทรคมนาคมและอุปกรณ์นี้มีความสอดคล้องตามข้อกำหนด  
ของคณะกรรมการ กิจการกระจายเสียง กิจการโทรทัศน์ และ  
กิจการโทรคมนาคมแห่งชาติ(กสทช.)

เครื่องวิทยุคมนาคมนี้มีระดับการแผ่คลื่นแม่เหล็กไฟฟ้าสอดคล้อง  
ตามมาตรฐาน ความปลอดภัยต่อสุขภาพของมนุษย์จากการใช้  
เครื่องวิทยุคมนาคมที่ คณะกรรมการ กิจการกระจายเสียง กิจการ  
โทรทัศน์ และกิจการโทรคมนาคมแห่งชาติ(กสทช.) กำหนด

\*มีเฉพาะบางรุ่น

# Declaration of Conformity

---

## NOTICE

This equipment has been registered with the Telecommunications Regulatory Authority for use in the UAE.

TRA REGISTERED No: ER0085986/12

DEALER No: 0019626/09

DENSO DNMWR006

經型式認證合格之低功率射頻電機，非經許可、公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

低功率射頻電機之使用不得影響飛航安全及干擾合法通信；然發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。

前項合法通信，指依電信法規定作業之無線電通信。

低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。



UA RF: 3DENS FR06

модель: DNMWR006

смуга радіочастот: 76-77 ГГц

максимальна вихідна потужність: 6.31 Вт або менше

виробник: DENSO CORPORATION

адреса: 1-1, Showa-cho, Kariya-shi, Aichi-ken, 448-8661 Japan

справжнім DENSO CORPORATION заявляє, що тип

радіообладнання відповідає Технічному регламенту

радіообладнання;

повний текст декларації про відповідність доступний на веб-сайті

за такою адресою:

<https://www.denso.com/global/en/contact-us/doc/>

Імпортер

виробник: AUTO International

**▼ Mazda ERA-GLONASS**

Нотификация ФСБ № RU0000038283 от 10.07.2018, действительна до 05.07.2023, зарегистрирована ФСБ РФ.

Декларация о соответствии средства связи № Д-ИДРТ-11635 от 06.09.2018, действительна до 31.08.2023, зарегистрирована Федеральным агентством связи РФ.

Декларация о соответствии техническому регламенту Таможенного союза 020/2011 № ЕАЭС N RU Д-JP МЛ26.В.00626 от 30.08.2018, действительна по 29.08.2023, зарегистрирована органом по сертификации продукции АНО «СЦ Связь-сертификат» (аттестат аккредитации RA.RU.11МЛ26, дата регистрации 10.02.2015).

Декларация о соответствии аккумуляторной батареи FT0098A № РОСС RU Д-JP.АД37.В.01289/18 от 24.10.2018, действительна до 23.10.2023, зарегистрирована органом по сертификации продукции «Красно Дар» ООО «ИД Контроль» (аттестат аккредитации RA.RU.11АД37, дата регистрации 03.11.2016).

# Declaration of Conformity

## ▼ Wireless Charger (Qi)


Simplified EU Declaration of Conformity :

The simplified EU declaration of conformity referred to in Article 10(9) shall be provided as follows:  
Hereby, [Huizhou Desay SV Automotive Co., Ltd.] declares that the radio equipment type [designation of type of radio equipment] is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: <http://www.desaysv.com/index.php?id=oumeng>

Importer, address:

Mazda Motor Logistics Europe NV  
Blaasveldstraat 162, 2830 Willebroek, België

Max power transmitter(Wireless Charging): 15W  
Operating Frequency: 127KHz  
NFC Operating Frequency:13.56Mhz  
Maximum RF Output Power(NFC): 6.48 dBuA/m at 3m distance



Philippines

Connection and use of this communications  
equipment is permitted by the Nigerian  
Communications Commission

Nigeria



TRA - United Arab Emirates  
Device ID : ESEF130/20  
TA RITE : ESE130/20  
Model: GND-WIRELESS  
Type: Car Wireless Charger

UAE(United Arab Emirates)



For more certification marks, please see the product label.

Taiwan

RoHS 含有物質標識表，請至下列網址查閱：<https://www.desaysv.com/index.php?id=twrohs>

台灣 NCC 警語：

低功率電波輻射性電機管理辦法

第十二條 經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

第十四條 低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。

前項合法通信，指依電信法規定作業之無線電通信。低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

商標：Mazda

# Electromagnetic Compatibility

## Electromagnetic Compatibility


Your Mazda has been tested and certified to the UN-R\*<sup>1</sup> 10 regulation as related to electromagnetic compatibility. Radio Frequency (RF) transmitter equipment (e.g. cellular telephones, amateur radio transmitters, etc.) may only be fitted to your Mazda if they comply with the parameters shown in the table below.

\*1 UN-R stands for United Nations Regulation.

It is your responsibility to ensure that any equipment you have fitted complies with applicable local legislations. Have any equipment fitted by properly trained technicians.

### CAUTION

- Do not mount any transceiver, microphones, speakers, or any other item in the deployment path of the air bag system.
- Do not fasten aerial lead to original vehicle wiring, fuel pipes or brake pipes. Avoid running the aerial lead parallel with the wire harness to the best extent possible.
- Keep the aerial and power leads at least 100 mm (3.9 in) from any electronic modules and the air bags.
- Avoid using the cigar lighter or accessory socket as a power source for the RF-transmitting equipment.

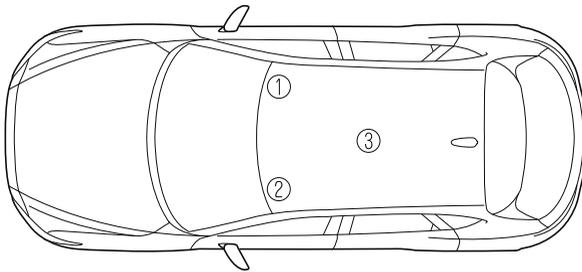

#### Aerial positions:

- ① : front right of roof
- ② : front left of roof
- ③ : centre of roof

Frequency Band (MHz)	Maximum output power (Wattage)	Aerial Positions
50 — 54	50	①②③
68 — 87.5	50	①②
142 — 176	50	①②③
380 — 470	50	①②③
806 — 940	10	①②③
1200 — 1300	10	①②③

# Electromagnetic Compatibility

---

Frequency Band (MHz)	Maximum output power (Wattage)	Aerial Positions
1710 — 1885	10	①②③
1885 — 2025	10	①②③
2400 — 2500	0.01*1	In a cabin*1

\*1 Only for Bluetooth®

## NOTE

*After the installation of RF transmitters, check for disturbances from and to all electrical equipment in the vehicle, both in the standby and transmit modes.*

*Check all electrical equipment:*


- *with the ignition ON*
- *with the engine running*
- *during a road test at various speeds.*

# Collection/Disposal of Old Equipment/Used Battery

## Information for Users on Collection and Disposal of Old Equipment and Used Batteries

When disposing your old battery, please refer to the information as follows.

### ▼ Information on Disposal in the European Union



These crossed-out wheeled bin symbols on the products, packaging, and/or accompanying documents mean that used electronic products and batteries should not be mixed with general household waste. For proper treatment, recovery and recycling of old products and used batteries, please take them to applicable collection points, in accordance with your national legislation and the Directives 2006/66/EC.

By disposing of these products and batteries correctly, you will help to save valuable resources and prevent any potential negative effects on human health and the environment which could otherwise arise from inappropriate waste handling.

For more information about collection and recycling of old products and batteries, please contact your local municipality, your waste disposal service or the point of sales where you purchased the items.

### NOTE



*The bottom two letters might be used in combination with the crossed-out wheeled bin symbol. In this case it complies with the requirement established by the Directive for the chemical involved.*

*“Pb” and “Cd” mean lead and cadmium respectively.*

## **Collection/Disposal of Old Equipment/Used Battery**

---

### **▼ Information on Disposal in Other Countries Outside the European Union**

The above symbols are only valid in the European Union. If you wish to discard old products and used batteries, please contact your local authorities, your waste disposal service or the point of sales where you purchased the items, and ask for the correct method of disposal.

# 9

## Specifications

Technical information about your Mazda.


<b>Identification Numbers.....</b>	<b>9-2</b>	<b>Specifications.....</b>	<b>9-5</b>
Vehicle Information Labels.....	9-2	Specifications.....	9-5

# Identification Numbers

## Vehicle Information Labels


### ▼ Vehicle Identification Number (South Africa, Arab Gulf Cooperation Council, Iraq, Ghana)

The vehicle identification number legally identifies your vehicle. The number is on a plate attached to the cowl panel located on the left corner of the instrument panel. This plate can easily be seen through the windscreen.

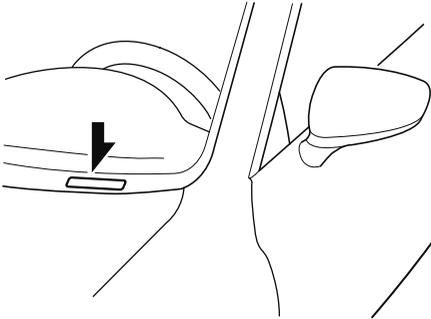


### ▼ Model Plate

#### Vehicles assembled in any country other than the Russian Federation

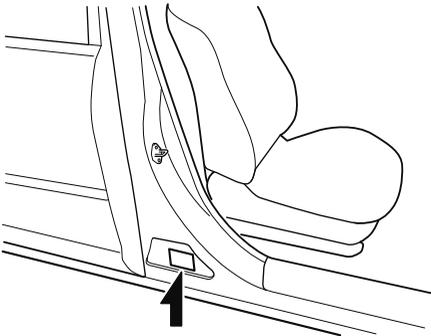


### Vehicles assembled in Russian Federation

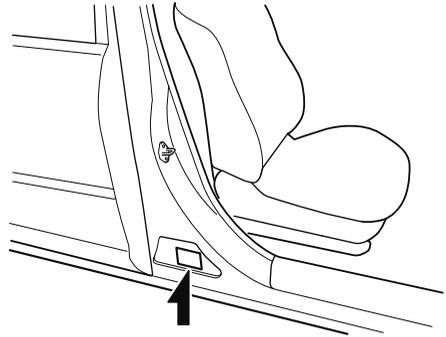

### ▼ Chassis Number/Vehicle Identification Number

#### Chassis Number


Open the cover shown in the figure to check the chassis number.

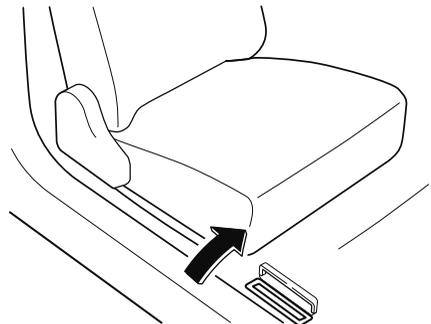


# Identification Numbers

## Vehicle Identification Number

Ireland, UK, Cyprus, Malta, Swaziland,  
Namibia, Botswana, Lesotho

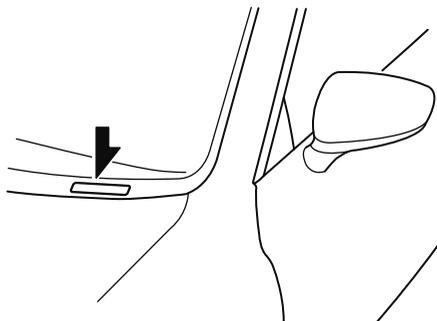


Vehicles assembled in Russian  
Federation

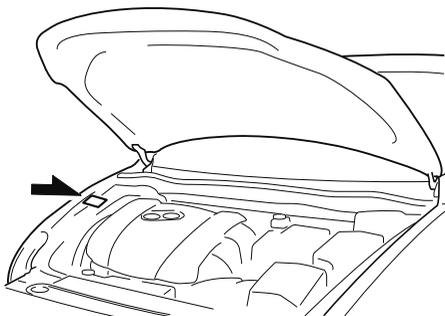


## ▼ Tyre Pressure Label

Left-hand drive model




## Right-hand drive model




## ▼ Engine Number

SKYACTIV-G 2.0, SKYACTIV-G 2.5,  
and SKYACTIV-G 2.5T



SKYACTIV-D 2.2

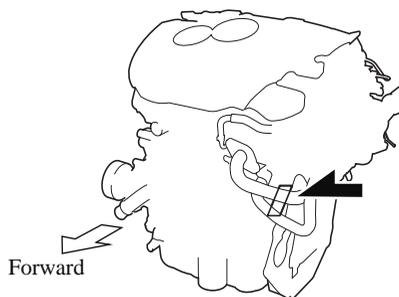


# Identification Numbers

---

## ▼ Conformity Plate (Arab Gulf Cooperation Council, Iraq)

Production year and month are shown on this plate.

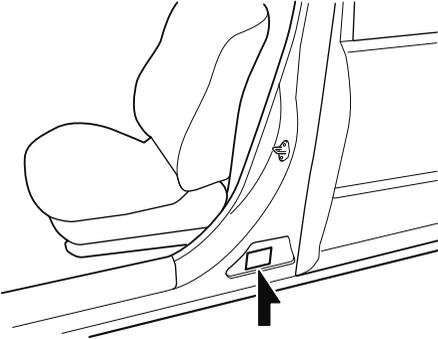

**Specifications****▼ Engine****Petrol engine**

Item	Specification		
	SKYACTIV-G 2.0	SKYACTIV-G 2.5	SKYACTIV-G 2.5T
Type	DOHC-16V in-line, 4-cylinder		
Bore × Stroke	83.5 × 91.2 mm (3.29 × 3.59 in)	89.0 × 100 mm (3.50 × 3.94 in)	
Displacement	1,998 ml (1,998 cc)	2,488 ml (2,488 cc)	
Compression ratio	13.0		10.5

**Arab Gulf Cooperation Council**

Item	Specification	
	SKYACTIV-G 2.5	
	FWD	AWD
Maximum engine power/revolution	140 kW/6,000 rpm	140 kW/6,000 rpm
Maximum engine torque/revolution	252 N·m/4,000 rpm	252 N·m/4,000 rpm
Maximum speed	192 km/h (119 mph)	190 km/h (118 mph)

**Diesel engine**

Item	Specification	
	SKYACTIV-D 2.2	
Type	DOHC-16V in-line, 4-cylinder	
Bore × Stroke	86.0 × 94.3 mm (3.39 × 3.71 in)	
Displacement	2,191 ml (2,191 cc)	
Compression ratio	14.4	

**▼ Electrical System****Battery\*1**

Classification		Specification
SKYACTIV-G 2.0, SKYACTIV-G 2.5, SKYACTIV-G 2.5T	With i-stop	Q-85*2
	Without i-stop	12V-60Ah/20HR or 12V-65Ah/20HR
SKYACTIV-D 2.2		S-95*2

# Specifications

- \*1 Check the battery installed on the vehicle and use a battery with an equal or higher performance. However, the performance of the battery may vary even among the same battery types, consult an expert repairer (we recommend an Authorised Mazda Repairer) for replacement.
- \*2 Q-85 or S-95 is designed for i-stop system (FOR STOP & START). Only Q-85 or S-95 should be used to ensure correct operation of i-stop system (FOR STOP & START). Consult an expert repairer (we recommend an Authorised Mazda Repairer) for details.

## Spark-plug

Classification	Specification	
SKYACTIV-G 2.0, SKYACTIV-G 2.5,	Mazda Genuine spark plug*1	PE5R-18110-A or PE5S-18-110
SKYACTIV-G 2.5T	Mazda Genuine spark plug*1	PY8V-18-110

- \*1 The spark plugs provide the SKYACTIV-G its optimum performance. Consult an expert repairer (we recommend an Authorised Mazda Repairer) for details.



*When cleaning the iridium plugs, do not use a wire brush. The fine particulate coating on the iridium alloy and platinum tips could be damaged.*

## ▼ Lubricant Quality

Engine oil	Europe and Taiwan	Except Europe and Taiwan
SKYACTIV-G 2.0, SKYACTIV-G 2.5	Recommended Oils*1	
	Oil Quality	
	Mazda Original Oil Supra-X 0W-20	
	Mazda Original Oil Ultra 5W-30	
	Alternative Oil Quality*2	
API SN*3 or higher, or ACEA A5/B5		API SL or higher
0W-20		
5W-30		
SKYACTIV-G 2.5T	Recommended Oils*1	
	Oil Quality	
	Mazda Original Oil Ultra 5W-30	
	Alternative Oil Quality*2	
	API SN or higher, or ACEA A5/B5	
0W-30		
5W-30		
SKYACTIV-D 2.2	Recommended Oils*1	
	Oil Quality	
	Mazda Original Oil Supra DPF 0W-30	
	Mazda Original Oil Ultra DPF 5W-30	
	Alternative Oil Quality*2	
ACEA C3		ACEA C3 0W-30/5W-30
0W-30		
5W-30		

# Specifications

\*1 Mazda Original Oils are specially designed/tested for the respective engine. For optimum performance we recommend to use Mazda Original Oils at all times.

\*2 If you are unable to find a Mazda Original Oil, alternative oils meeting the listed specification may also be used.

\*3 Use API SM or higher in Kazakhstan.

Do not use oils which do not meet the above specification or requirements. Use of unsuitable oil may lead to engine damage which is not covered by the Mazda Warranty.

Lubricant	Classification
Coolant	FL-22 type
Manual transaxle oil	Mazda Long Life Gear Oil G7*1
Automatic transaxle fluid*2	Mazda Original Oil ATF-FZ
Transfer case oil*3	Mazda Long Life Hypoid Gear Oil SG1
Rear differential oil*3	Mazda Long Life Hypoid Gear Oil SG1
Brake/Clutch fluid	SAE J1703 or FMVSS116 DOT-3 or DOT-4

\*1 Mazda Long Life Gear Oil G7 is superior oil for low fuel cost and optimum shift-feel. Using Mazda Long Life Gear Oil G7 is recommended.

If Mazda Long Life Gear Oil G7 cannot be obtained, use standard oil (API Service GL-4 (SAE 75W-80)).

\*2 Periodic replacement is unnecessary.

\*3 Replacement is necessary when the component is submerged in water.

## ▼ Cleaner

Cleaner	Classification
Deposit Cleaner*1	Mazda genuine deposit cleaner (K002 W0 001 A)

\*1 Use Mazda genuine deposit cleaner. Using non-genuine deposit cleaner would cause internal failure of the fuel system. Refer to 3-31, 6-3 for the details.

## ▼ Capacities

### (Approximate Quantities)

		Item	Capacity
Engine oil	SKYAC-TIV-G 2.0	With oil filter replacement	4.2 L (4.4 US qt, 3.7 Imp qt)
		Without oil filter replacement	4.0 L (4.2 US qt, 3.5 Imp qt)
	SKYAC-TIV-G 2.5	With oil filter replacement	4.5 L (4.8 US qt, 4.0 Imp qt)
		Without oil filter replacement	4.3 L (4.5 US qt, 3.8 Imp qt)
	SKYAC-TIV-G 2.5T	With oil filter replacement	4.8 L (5.1 US qt, 4.2 Imp qt)
		Without oil filter replacement	4.6 L (4.9 US qt, 4.0 Imp qt)
SKYAC-TIV-D 2.2	With oil filter replacement	5.1 L (5.4 US qt, 4.5 Imp qt)	
	Without oil filter replacement	4.8 L (5.1 US qt, 4.2 Imp qt)	

# Specifications

Item		Capacity	
Coolant	SKYAC-TIV-G 2.0	Manual transaxle	7.1 L (7.5 US qt, 6.2 Imp qt)
		Automatic transaxle	7.4 L (7.8 US qt, 6.5 Imp qt)
	SKYACTIV-G 2.5		7.5 L (7.9 US qt, 6.6 Imp qt)
	SKYACTIV-G 2.5T		8.5 L (9.0 US qt, 7.5 Imp qt)
	SKYAC-TIV-D 2.2	Manual transaxle	8.5 L (9.0 US qt, 7.5 Imp qt)
Automatic transaxle		8.7 L (9.2 US qt, 7.7 Imp qt)	
Manual transaxle oil	SKYAC-TIV-G 2.0	FWD	1.65 L (1.74 US qt, 1.45 Imp qt)
		AWD	1.70 L (1.80 US qt, 1.50 Imp qt)
	SKYACTIV-D 2.2		2.40 L (2.54 US qt, 2.11 Imp qt)
Automatic transaxle fluid	SKYACTIV-G 2.0		7.8 L (8.2 US qt, 6.9 Imp qt)
	SKYAC-TIV-G 2.5	With Cylinder Deactivation	8.0 L (8.5 US qt, 7.0 Imp qt)
		Without Cylinder Deactivation	7.8 L (8.2 US qt, 6.9 Imp qt)
	SKYACTIV-G 2.5T, SKYACTIV-D 2.2		8.0 L (8.5 US qt, 7.0 Imp qt)
Transfer case oil		0.40 L (0.42 US qt, 0.35 Imp qt)/ 0.45 L (0.48 US qt, 0.40 Imp qt)	
Rear differential oil		0.35 L (0.37 US qt, 0.31 Imp qt)	
Fuel tank	FWD		56.0 L (14.8 US gal, 12.3 Imp gal)
	AWD		58.0 L (15.3 US gal, 12.8 Imp gal)

Check oil and fluid levels with dipsticks or reservoir gauges.

## ▼ Dimensions

Item	Vehicle specification	
Overall length	4,575 mm (180.1 in)	
Overall width	1,845 mm (72.6 in)	
Overall height	17 inch wheel vehicle	1,675 mm (65.9 in)
	19 inch wheel vehicle	1,680 mm (66.1 in)

Item		Vehicle specification
Front tread	17 inch styled steel wheel vehicle	1,585 mm (62.4 in)
	17 inch aluminium wheel vehicle	1,595 mm (62.8 in)
	19 inch aluminium wheel vehicle	1,595 mm (62.8 in)
Rear tread	17 inch styled steel wheel vehicle	1,585 mm (62.4 in)
	17 inch aluminium wheel vehicle	1,595 mm (62.8 in)
	19 inch aluminium wheel vehicle	1,595 mm (62.8 in)
Wheelbase		2,700 mm (106.3 in)

## ▼ Light Bulbs

### Exterior light

All the light bulbs are the LED type.

The LED bulb cannot be replaced. Consult an expert repairer (we recommend an Authorised Mazda Repairer) when the replacement is necessary.

### Interior light


Light bulb		Category	
		Wattage	UN-R*1
Luggage compartment light	LED type	LED	—
	Bulb type	8	—
Overhead light (Front)/Map lights	LED type	LED	—
	Bulb type	8	—
Rear map lights	LED type	LED	—
	Bulb type	8	—
Vanity mirror lights*	LED type	LED	—
	Bulb type	2	—
Ambient lights*		LED	—

\*1 UN-R stands for United Nations Regulation.

# Specifications

## ▼ Tyres

### Sample tyre mark and its meaning

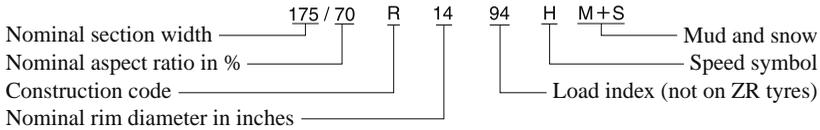

### Tyre mark information

Choose the proper tyres for your vehicle using the following tyre mark information.

Speed symbol	Maximum permissible speed
Q	Up to 160 km/h (99 mph)
R	Up to 170 km/h (105 mph)
S	Up to 180 km/h (111 mph)
T	Up to 190 km/h (118 mph)
U	Up to 200 km/h (124 mph)
H	Up to 210 km/h (130 mph)
V	Up to 240 km/h (149 mph)
W	Up to 270 km/h (167 mph)
Y	Up to 300 km/h (186 mph)
ZR	Over 240 km/h (149 mph)

### Tyre and inflation pressure

#### **NOTE**

*The tyres have been optimally matched with the chassis of your vehicle.*

*When replacing tyres, Mazda recommends that you replace tyres of the same type originally fitted to your vehicle. For details, contact an expert repairer (we recommend an Authorised Mazda Repairer).*

Check the tyre pressure label for tyre size and inflation pressure.

Refer to Tyre Pressure Label on page 9-3.

Refer to Tyre Inflation Pressure on page 6-49.

**Standard tyre****(Left-hand drive model)**

Tyre size		Inflation pressure	
		Up to 3 persons	—Full load
225/65R17 102V	Front	230 kPa (2.3 bar, 33 psi)	260 kPa (2.6 bar, 38 psi)
	Rear	230 kPa (2.3 bar, 33 psi)	280 kPa (2.8 bar, 41 psi)
225/55R19 99V	Front	250 kPa (2.5 bar, 36 psi)	260 kPa (2.6 bar, 38 psi)
	Rear	250 kPa (2.5 bar, 36 psi)	290 kPa (2.9 bar, 42 psi)

**(Right-hand drive model)**

Tyre size		Inflation pressure	
		Up to 3 persons	—Full load
225/65R17 102H	Front	230 kPa (2.3 bar, 33 psi)	260 kPa (2.6 bar, 38 psi)
	Rear	230 kPa (2.3 bar, 33 psi)	280 kPa (2.8 bar, 41 psi)
225/55R19 99V	Front	250 kPa (2.5 bar, 36 psi)	260 kPa (2.6 bar, 38 psi)
	Rear	250 kPa (2.5 bar, 36 psi)	290 kPa (2.9 bar, 42 psi)

1 person's weight: About 75 kg

**Temporary spare tyre\***

Tyre size	Inflation pressure
T155/80R17 100M	420 kPa (4.2 bar, 60 psi)
T145/90D16 106M	420 kPa (4.2 bar, 60 psi)

**Winter tyre**

Tyre size		Inflation pressure	
		Up to 3 persons	—Full load
225/65R17*1 M+S	Front	230 kPa (2.3 bar, 33 psi)	260 kPa (2.6 bar, 38 psi)
	Rear	250 kPa (2.5 bar, 36 psi)	300 kPa (3.0 bar, 44 psi)
225/55R19*2 M+S	Front	250 kPa (2.5 bar, 36 psi)	260 kPa (2.6 bar, 38 psi)
	Rear	270 kPa (2.7 bar, 39 psi)	310 kPa (3.1 bar, 45 psi)

1 person's weight: About 75 kg

\*1 Load index and Speed Symbol: 102Q/102S/102H/102V

\*2 Load index and Speed Symbol: 99Q/99S/99H/99V

**Wheel nut tightening torque**

When installing a tyre, tighten the wheel nut to the following torque.

108—147 N·m (12—14 kgf·m, 80—108 ft·lbf)

# Specifications

---

## ▼ Fuses

Refer to Fuses on page 6-57.

## ▼ Brakes

If you require information regarding the wear limit specification for the brake disc plates and the measurement method, please contact an expert repairer (we recommend an Authorised Mazda Repairer). The information is made freely available.

---

# **10** **Index**

# Index

---

## A

- Accessory Socket..... 5-109
- Active Driving Display..... 4-75
- Adaptive Front Lighting System (AFS)..... 4-137
- Adaptive LED Headlights (ALH)... 4-140
- AdBlue® (With Selective Catalytic Reduction (SCR) System)..... 6-34
  - AdBlue® Replenishment..... 6-35
- Add-On Non-Genuine Parts and Accessories..... 8-3
- Adjustable Speed Limiter (ASL).... 4-226
  - Activation/deactivation..... 4-232
  - Adjustable Speed Limiter (ASL) display..... 4-228
  - Adjustable Speed Limiter (ASL) main indication (white)..... 4-228
  - Adjustable Speed Limiter (ASL) set indication (green)..... 4-228
  - Setting the system..... 4-232
  - Speed limiter warning beep..... 4-230
  - Temporarily cancelling the system..... 4-234
- Advanced Key
  - Advanced keyless entry system... 3-10
  - Operational range..... 3-11
- Advanced Keyless Entry System..... 3-10
- Advanced Smart City Brake Support (Advanced SCBS)..... 4-235
  - Collision warning..... 4-237
  - Smart City Brake Support (SCBS) Indicator Light (Red)..... 4-237
  - Stopping the Advanced Smart City Brake Support (Advanced SCBS) system operation..... 4-237
- Air Bag Systems..... 2-52
- Air Bag/Seat Belt Pretensioner System Warning Beep..... 7-65
- Air-Conditioning System..... 5-2
  - Fully Automatic Type..... 5-9
  - Manual Type..... 5-5
  - Operating Tips..... 5-2
  - Vent Operation..... 5-3
- Antilock Brake System (ABS)..... 4-119
- Armrest Box..... 5-118
- Ashtray..... 5-124
- Audio Control Switch
  - Adjusting the Volume..... 5-14
  - Mute Switch..... 5-14
  - Seek Switch..... 5-15
- Audio Set
  - Appendix..... 5-65
- Audio Set [Type A (non-touchscreen)]
  - AUX..... 5-25
  - Bluetooth®..... 5-32
  - Clock..... 5-21
  - Error Indications..... 5-31
  - iPod mode..... 5-29
  - Power/Volume/Sound Controls... 5-19
  - Radio..... 5-22
  - Radio (RDS)..... 5-22
  - Troubleshooting..... 5-61
  - USB..... 5-26
  - Voice Recognition..... 5-57
- Audio System
  - Aerial..... 5-18
  - Audio Control Switch..... 5-14
  - Audio set..... 5-19
  - AUX/USB mode..... 5-16
  - Before Using the Audio System..... 5-14
- AUTOHOLD..... 4-113
- AUTOHOLD Warning Beep..... 7-68
- Automatic Transaxle..... 4-80
  - Active Adaptive Shift (AAS)..... 4-83
  - Automatic transaxle controls..... 4-80
  - Direct mode..... 4-89
  - Driving tips..... 4-90
  - Manual shift mode..... 4-84
  - Shift-lock system..... 4-81
  - Transaxle ranges..... 4-82

## B

Battery.....	6-44
Inspecting electrolyte level.....	6-46
Maintenance.....	6-46
Recharging.....	6-46
Replacement.....	6-46
Specifications.....	9-5
Battery Runs Out.....	7-31
Jump-starting.....	7-31
Beep Sounds	
Lights-on reminder.....	7-65
Blind Spot Monitoring (BSM).....	4-143
Cancelling operation of Blind Spot Monitoring (BSM).....	4-147
Blind Spot Monitoring (BSM) Warning Beep.....	7-69
Bluetooth® [Type A (non-touchscreen)]	
Bluetooth® Audio.....	5-47
Bluetooth® Hands-Free.....	5-50
Bluetooth® Preparation.....	5-35
Body Lubrication.....	6-38
Bonnet Release.....	6-21
Bottle Holder.....	5-116
Brakes	
Brake assist.....	4-112
Electric parking brake (EPB).....	4-109
Foot brake.....	4-108
Pad wear indicator.....	4-111
Parking brake.....	4-109
Warning light.....	4-111

## C

Capacities.....	9-7
Carbon Monoxide.....	3-35
Cell Phones.....	8-4
Centre Console.....	5-118
Child Restraint	
Categories of child-restraint systems.....	2-38

Child-restraint precautions.....	2-33
Child-restraint system installation position.....	2-38
Child-restraint system suitability for various seat positions table.....	2-43
Installing child-restraint systems.....	2-48
Collision warning.....	7-71
Coming Home Light.....	4-95
Cruise Control.....	4-318
Cruise control switch.....	4-318
Cruise main indication (white)/cruise set indication (green).....	4-319
Cruising & Traffic Support (CTS).....	4-192
Close proximity warning.....	4-199
Display indication.....	4-197
Setting the system.....	4-200
Shift-up/shift-down request display.....	4-211
Stop hold control.....	4-209
Cup Holder.....	5-115
Cylinder Deactivation.....	4-20

## D

Defogger.....	4-104
Mirror.....	4-105
Rear window.....	4-104
Deposit Cleaner.....	3-31
Diesel Particulate Filter (SKYACTIV-D 2.2).....	4-327
Dimensions.....	9-8
Direction Indicators.....	4-98
Display.....	4-21
Distance Recognition Support System (DRSS).....	4-154
Indication on display.....	4-155
Door Locks.....	3-12
Driver Attention Alert (DAA).....	4-158
Driving In Flooded Area.....	3-61

# Index

---

Driving Tips.....	3-55
Automatic transaxle.....	4-90
Driving in flooded area.....	3-61
Floor mat.....	3-57
Hazardous driving.....	3-56
Rocking the vehicle.....	3-58
Running-in.....	3-55
Saving fuel and protection of the environment.....	3-55
Turbocharged vehicles (SKYACTIV-G 2.5T, SKYACTIV-D 2.2).....	3-62
Winter driving.....	3-58
Dynamic Stability Control (DSC)...	4-122
TCS/DSC indicator light.....	4-122

## E

Electric parking brake (EPB).....	4-109
Electric Parking Brake (EPB) Warning Beep.....	7-68
Electronic steering lock warning beep.....	7-67
Emergency Starting	
Push-starting.....	7-34
Running out of fuel (SKYACTIV-D 2.2).....	7-35
Starting a flooded engine (SKYACTIV-G 2.0, SKYACTIV-G 2.5, and SKYACTIV-G 2.5T).....	7-34
Emergency Stop Signal System.....	4-117
Emergency Towing	
Towing description.....	7-38
Towing hooks.....	7-40
Emission Control System (SKYACTIV-D 2.2).....	3-33
Emission Control System (SKYACTIV-G 2.0, SKYACTIV-G 2.5, SKYACTIV-G 2.5T).....	3-32
Engine	
Bonnet release.....	6-21
Coolant.....	6-31

Engine compartment overview....	6-23
Exhaust gas.....	3-35
Oil.....	6-25
Starting.....	4-5
Essential Information.....	6-2
Excessive Speed Warning.....	7-70
Exhaust Gas.....	3-35
Exterior Care.....	6-64
Aluminium wheel maintenance..	6-69
Bright-metal maintenance.....	6-68
Cavity protection.....	6-68
Maintaining the finish.....	6-65
Paint damage touch-up.....	6-68
Plastic part maintenance.....	6-69
Undercoating.....	6-69

## F

Flasher	
Hazard warning.....	4-107
Headlights.....	4-91
Flat Tyre.....	7-14
Mounting the spare tyre.....	7-28
Removing a flat tyre.....	7-26
Floor Mat.....	3-57
Fluid	
Brake/Clutch.....	6-33
Washer.....	6-34
Fluids	
Classification.....	9-6
Fog Lights	
Rear.....	4-97
Foot Brake.....	4-108
Forward Sensing Camera (FSC).....	4-305
Fuel	
Filler flap and cap.....	3-36
Requirements (SKYACTIV-D 2.2).....	3-32
Requirements (SKYACTIV-G 2.0, SKYACTIV-G 2.5, SKYACTIV-G 2.5T).....	3-30

Tank capacity.....	9-7
Fuses.....	6-57
Panel description.....	6-60
Replacement.....	6-57

## G

Gauges.....	4-21
Glove Compartment.....	5-117

## H

Hazardous Driving.....	3-56
Hazard Warning Flasher.....	4-107
Headlights	
Coming home light.....	4-95
Control.....	4-91
Flashing.....	4-95
Headlight flashing.....	4-95
High-low beam.....	4-95
Leaving home light.....	4-96
Levelling.....	4-96
Running lights.....	4-96
Washer.....	4-103
Headlight Washer.....	4-103
Head Restraint.....	2-21
High Beam Control System (HBC).....	4-138
High Beam Control System (HBC) indicator light (green).....	4-139
Hill Launch Assist (HLA).....	4-118
Horn.....	4-106

## I

If a Warning Light Turns On or Flashes.....	7-42
If the Active Driving Display Does Not Operate.....	7-73
Ignition	
Switch.....	4-4
Ignition Not Switched Off (STOP) Warning Beep.....	7-66

Illuminated Entry System.....	5-109
Immobilizer System.....	3-48
Inspecting Brake/Clutch Fluid Level.....	6-33
Inspecting Coolant Level.....	6-31
Inspecting Engine Oil Level.....	6-30
Inspecting Washer Fluid Level.....	6-34
Instrument Cluster.....	4-21
Instrument Cluster (Type A).....	4-22
Instrument Cluster (Type B).....	4-42
Instrument Cluster (Type C).....	4-61
Instrument Cluster (Type A).....	4-22
Adjustable Speed Limiter (ASL) Display.....	4-33
Average Fuel Economy.....	4-30
Blind Spot Monitoring (BSM) Display.....	4-32
Cruise Control Set Vehicle Speed Display.....	4-33
Cruising & Traffic Support (CTS) Display.....	4-33
Current Fuel Economy.....	4-30
Distance Recognition Support System (DRSS) Display.....	4-33
Distance-to-empty.....	4-29
Engine Coolant Temperature Gauge.....	4-26
Fuel Gauge.....	4-27
Indication/Indicator Lights.....	4-37
Instrument Panel Illumination.....	4-27
Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS) Display.....	4-32
Maintenance Monitor.....	4-30
Mazda intelligent Drive Select (Mi-Drive) Display.....	4-31
Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) Display.....	4-32
Mazda Radar Cruise Control (MRCC) Display.....	4-32

# Index

---

- Message Display.....4-33
- Multi-information Display (Type A).....4-23
- Odometer.....4-26
- Outside Temperature Display.....4-28
- Remaining AdBlue® and Maximum Driving Distance Display.....4-30
- Speedometer.....4-22
- Speed Unit Selector.....4-28
- Tachometer.....4-22
- Trip Meter.....4-26
- Vehicle Speed Alarm.....4-31
- Warning Indication/Warning Lights.....4-35
- Instrument Cluster (Type B).....4-42
  - Adjustable Speed Limiter (ASL) Display.....4-52
  - Average Fuel Economy.....4-49
  - Blind Spot Monitoring (BSM) Display.....4-50
  - Cruise Control Set Vehicle Speed Display.....4-52
  - Cruising & Traffic Support (CTS) Display.....4-51
  - Current Fuel Economy.....4-49
  - Distance Recognition Support System (DRSS) Display.....4-51
  - Distance-to-empty.....4-48
  - Engine Coolant Temperature Gauge.....4-46
  - Fuel Gauge.....4-46
  - Indication/Indicator Lights.....4-55
  - Instrument Panel Illumination....4-47
  - Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS) Display.....4-51
  - Maintenance Monitor.....4-49
  - Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) Display.....4-51
  - Mazda Radar Cruise Control (MRCC) Display.....4-51
  - Multi-information Display (Type B).....4-43
  - Odometer.....4-45
  - Outside Temperature Display.....4-48
  - Remaining AdBlue® and Maximum Driving Distance Display.....4-50
  - Speedometer.....4-42
  - Tachometer.....4-42
  - Trip Meter.....4-45
  - Vehicle Speed Alarm.....4-50
  - Warning Indication/Warning Lights.....4-53
  - Warning (Display Indication).....4-52
- Instrument Cluster (Type C).....4-61
  - Adjustable Speed Limiter (ASL) Display.....4-68
  - Cruise Control Set Vehicle Speed Display.....4-68
  - Engine Coolant Temperature Gauge.....4-64
  - Fuel Gauge.....4-64
  - Indication/Indicator Lights.....4-71
  - Instrument Panel Illumination....4-65
  - Multi-information Display (Type C).....4-62
  - Odometer.....4-63
  - Outside Temperature Display.....4-66
  - Speedometer.....4-61
  - Tachometer.....4-61
  - Trip Computer.....4-66
  - Trip Meter.....4-63
  - Vehicle Speed Alarm.....4-68
  - Warning Indication/Warning Lights.....4-69
- Interior Care.....6-70
  - Active driving display maintenance.....6-72
  - Cleaning the window interiors....6-73

- Instrument panel top (Soft pad) maintenance..... 6-72
  - Leather upholstery maintenance..... 6-71
  - Panel maintenance..... 6-73
  - Plastic part maintenance..... 6-72
  - Seat belt maintenance..... 6-70
  - Upholstery and synthetic leather maintenance..... 6-71
  - Vinyl upholstery maintenance..... 6-71
  - Interior Lights..... 5-105
    - Luggage compartment light..... 5-105
    - Map lights..... 5-105
    - Overhead lights..... 5-105
  - i-ACTIVSENSE..... 4-133
    - Active safety technology..... 4-133
    - Adaptive Front Lighting System (AFS)..... 4-137
    - Adaptive LED Headlights (ALH)..... 4-140
    - Adjustable Speed Limiter (ASL)..... 4-226
    - Advanced Smart City Brake Support (Advanced SCBS)..... 4-235
    - Blind Spot Monitoring (BSM)..... 4-143
    - Camera and sensors..... 4-135
    - Cruising & Traffic Support (CTS)..... 4-192
    - Distance Recognition Support System (DRSS)..... 4-154
    - Driver Attention Alert (DAA)... 4-158
    - Forward Sensing Camera (FSC)..... 4-305
    - High Beam Control System (HBC)..... 4-138
    - Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS)..... 4-212
    - Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function)..... 4-177
    - Mazda Radar Cruise Control (MRCC)..... 4-164
    - Pre-crash safety technology..... 4-134
    - Radar sensors (rear)..... 4-314
    - Radar sensor (front)..... 4-311
    - Rear Cross Traffic Alert (RCTA)..... 4-160
    - Smart Brake Support (SBS)..... 4-247
    - Smart City Brake Support [Forward] (SCBS F)..... 4-239
    - Smart City Brake Support [Reverse] (SCBS R)..... 4-243
    - Traffic Sign Recognition System (TSR)..... 4-148
    - Ultrasonic sensor (rear)..... 4-316
    - 360°View Monitor (Mazda Connect (Type A))..... 4-249
    - 360°View Monitor (Mazda Connect (Type B))..... 4-276
  - i-ACTIV AWD Operation..... 4-130
  - i-ELOOP..... 4-125
    - Control status display..... 4-126
    - Display..... 4-125
  - i-stop..... 4-12
    - Indicator light (Green)..... 4-18
    - i-stop OFF switch..... 4-16
    - Vehicle roll prevention function..... 4-17
    - Warning light (Amber)..... 4-18
  - i-stop warning beep..... 7-67
- 
- ## J
- Jack..... 7-16
  - Jump-Starting..... 7-31
- 
- ## K
- Keyless Entry System..... 3-4

# Index

---

Keys.....	3-2
Key suspend function.....	3-9
Transmitter.....	3-5
Key Left-in-luggage Compartment Warning beep (With the advanced keyless function).....	7-66
Key Left-in-vehicle Warning Beep (With the advanced keyless function).....	7-67
Key Removed from Vehicle Warning Beep.....	7-66
Key Suspend Function.....	3-9

## L

Label Information.....	9-2
Lane Departure Warning sound.....	7-70
Lane-change Signals.....	4-99
Lane-Change Signals.....	4-98
Lane-keep Assist System (LAS) & Lane Departure Warning System (LDWS).....	4-212
Leaving Home Light.....	4-96
Liftgate.....	3-19
Luggage compartment cover.....	3-27
When liftgate cannot be opened.....	7-72
Lighting Control.....	4-91
Lights-on Reminder.....	7-65
Light Bulbs	
Replacement.....	6-53
Specifications.....	9-9
Lubricant Quality.....	9-6
Luggage Compartment.....	5-119
Cargo Securing Loops.....	5-119
Cargo Sub-Compartment.....	5-119
Luggage Compartment Light.....	5-105

## M

Maintenance	
Information.....	6-2
Scheduled.....	6-3

Map Lights.....	5-105
Mazda Connect.....	5-70
Appendix (Mazda Connect (Type A)).....	5-81
Appendix (Mazda Connect (Type B)).....	5-99
Mazda Connect Basic Operations (Mazda Connect (Type A)).....	5-73
Mazda Connect Basic Operations (Mazda Connect (Type B)).....	5-91
Mazda ERA-GLONASS.....	7-2
Mazda intelligent Drive Select (Mi- Drive).....	4-127
Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function).....	4-177
Close proximity warning.....	4-181
Cruise control function.....	4-189
Display indication.....	4-180
Setting the system.....	4-181
Stop hold control.....	4-188
Mazda Radar Cruise Control with Stop & Go function (MRCC with Stop & Go function) System Warnings.....	7-70
Mazda Radar Cruise Control (MRCC).....	4-164
Close proximity warning.....	4-167
Cruise control function.....	4-174
Display indication.....	4-166
Setting the system.....	4-167
Shift-up/shift-down request display.....	4-174
Mazda Radar Cruise Control (MRCC) System warnings.....	7-69
Message Indicated in Multi-information Display.....	7-60
Message Indicated on Display.....	7-63
Meters.....	4-21
Mirrors	
Outside mirrors.....	3-38
Rearview mirror.....	3-40

Mirror Defogger.....	4-105
Multi-information Display (Type A).....	4-23
Multi-information Display (Type B).....	4-43
Multi-information Display (Type C).....	4-62

## O

Off-Road Traction Assist	
Off-Road Traction Assist indicator light.....	4-123
Off-Road Traction Assist switch.....	4-124
Outside Mirrors.....	3-38
Outside temperature warning beep....	7-67
Overhead Console.....	5-117
Overhead Lights.....	5-105
Overheating.....	7-36
Owner Maintenance	
Closing the bonnet.....	6-22
Engine compartment overview....	6-23
Key battery replacement.....	6-47
Opening the bonnet.....	6-21
Owner maintenance precautions.....	6-19

## P

Parking Brake.....	4-109
Parking Sensor System (Mazda Connect (Type A)).....	4-352
Obstruction detection indication.....	4-357
Parking sensor system operation.....	4-356
Parking sensor warning beep....	4-359
Sensor detection range.....	4-354
When warning indicator/beep is activated.....	4-361

Parking Sensor System (Mazda Connect (Type B)).....	4-362
Obstruction detection indication.....	4-366
Parking Sensor System Operation.....	4-366
Parking sensor warning beep....	4-369
Sensor detection range.....	4-364
When warning indicator/beep is activated.....	4-371
Power Liftgate.....	3-21
Power Liftgate Warning Beep.....	7-67
Power Steering.....	4-132
Power Steering Warning Buzzer.....	7-68
Power Windows.....	3-42

## R

Radar Sensors (Rear).....	4-314
Radar Sensor (Front).....	4-311
Rearview Mirror.....	3-40
Rear Coat Hooks.....	5-124
Rear Cross Traffic Alert (RCTA)....	4-160
Rear Door Child Safety Locks.....	3-18
Rear Fog Light.....	4-97
Rear Seat.....	2-16
Rear View Monitor.....	4-332
Rear View Monitor (Mazda Connect (Type A)).....	4-332
Displayable range on the screen.....	4-334
Picture quality adjustment.....	4-343
Rear view monitor operation....	4-337
Rear view parking camera location.....	4-333
Switching to the rear view monitor display.....	4-333
Variance between actual road conditions and displayed image.....	4-341
Viewing the display.....	4-335

# Index

---

Rear View Monitor (Mazda Connect (Type B))..... 4-332  
    Displayable range on the screen..... 4-346  
    Rear view monitor operation..... 4-347  
    Rear view parking camera location..... 4-345  
    Switching to the rear view monitor display..... 4-345  
    Variance between actual road conditions and displayed image..... 4-350  
    Viewing the display..... 4-347

Rear window  
    Rear Window Defogger..... 4-104

Rear Window Defogger..... 4-104

Rear Window Washer..... 4-103

Rear Window Wiper..... 4-103

Recommended Oil..... 6-25

Registering Your Vehicle in A Foreign Country..... 8-2

Replacement  
    Fuse..... 6-57  
    Key battery..... 6-47  
    Light bulbs..... 6-53  
    Tyres..... 6-51  
    Wheel..... 6-52  
    Wiper..... 6-39

Request Switch Inoperable Warning Beep (With the advanced keyless function)..... 7-66

Roadside Emergency Triangle Retaining Strap..... 7-13

Rocking the Vehicle..... 3-58

Running-In..... 3-55

## S

Saving Fuel and Protection of the Environment..... 3-55

Scheduled Maintenance..... 6-3

Seats..... 2-5  
    Driving position memory..... 2-11  
    Front seat..... 2-5  
    Head restraint..... 2-21  
    Rear seat..... 2-16  
    Seat ventilation..... 2-24  
    Seat warmer..... 2-23

Seat Belt System  
    Emergency locking..... 2-28  
    Pregnant women..... 2-28  
    Seat belt precautions..... 2-26  
    3-point type..... 2-29

Seat Belt Warning Beep..... 7-65

Security System  
    Immobilizer system..... 3-48  
    Theft-deterrent system..... 3-50

Selective Catalytic Reduction (SCR) System..... 4-329

Selective Catalytic Reduction (SCR) Warning Beep..... 7-68

Smart Brake Support (SBS)..... 4-247  
    Collision warning..... 4-248  
    Stopping the Smart Brake Support (SBS) system operation..... 4-248

Smart City Brake Support [Forward] (SCBS F)..... 4-239  
    Collision warning..... 4-241  
    Smart City Brake Support (SCBS) Indicator Light (Red)..... 4-241  
    Stopping the Smart City Brake Support [Forward] (SCBS F) system operation..... 4-242

Smart City Brake Support [Reverse] (SCBS R)..... 4-243  
    Stopping the Smart City Brake Support [Reverse] (SCBS R) system operation..... 4-246

Spare Tyre..... 7-16

Specifications..... 9-5

Speed Limiter Warning Beep..... 7-71

SRS Air Bags

Front passenger occupant classification system.....	2-69
How the SRS air bags work.....	2-61
Limitations to SRS air bag.....	2-67
Monitoring.....	2-74
SRS air bag deployment criteria.....	2-65
Supplementary restraint system components.....	2-59
Starting the Engine.....	4-5
Steering Wheel	
Heated steering wheel.....	2-25
Horn.....	4-106
Storage Compartments.....	5-117
Armrest box.....	5-118
Centre console.....	5-118
Glove compartment.....	5-117
Luggage Compartment.....	5-119
Overhead console.....	5-117
Rear coat hooks.....	5-124
Sunroof.....	3-45
Sunshade.....	3-47
Sunvisors.....	5-105

## T

Theft-Deterrent System.....	3-50
Three-flash Turn Signal.....	4-99
Towing	
Hook.....	7-40
Towing Caravans and Trailers (Europe/Russia/Turkey/Israel/South Africa).....	3-63
Towing Description.....	7-38
Traction Control System (TCS).....	4-120
TCS OFF Indicator Light.....	4-121
TCS OFF switch.....	4-121
TCS/DSC indicator light.....	4-120
Traffic Sign Recognition System (TSR).....	4-148
Transmitter.....	3-5

## Trouble

Battery runs out.....	7-31
Emergency starting.....	7-34
Emergency towing.....	7-38
Flat tyre.....	7-14
Overheating.....	7-36
Parking in an emergency.....	7-13
Warning/indicator lights and warning sounds.....	7-42
When liftgate cannot be opened.....	7-72
Turn and Lane-Change Signals.....	4-98
Tyres.....	6-49
Flat tyre.....	7-14
Replacing a tyre.....	6-51
Replacing a wheel.....	6-52
Snow tyres.....	3-59
Specifications.....	9-10
Temporary spare tyre.....	6-51
Tyre chains.....	3-59
Tyre inflation pressure.....	6-49
Tyre rotation.....	6-50
Tyre Inflation Pressure Warning Beep.....	7-68
Tyre Pressure Monitoring System...	4-323

## U

Ultrasonic Sensor (Rear).....	4-316
USB Power Outlet.....	5-111

## V

Vanity Mirrors.....	5-105
Vehicle Information Labels.....	9-2
Vehicle Speed Alarm.....	7-68

## W

Warning Sound is Activated.....	7-65
Air bag/seat belt pretensioner system warning beep.....	7-65
AUTOHOLD Warning Beep.....	7-68

# Index

---

Blind Spot Monitoring (BSM)  
warning beep..... 7-69  
Collision warning..... 7-71  
Electric Parking Brake (EPB)  
Warning Beep..... 7-68  
Electronic steering lock warning  
beep..... 7-67  
Excessive speed warning..... 7-70  
Ignition not switched off (STOP)  
warning beep..... 7-66  
i-stop warning beep..... 7-67  
Key left-in-luggage compartment  
warning beep (With the advanced  
keyless function)..... 7-66  
Key left-in-vehicle warning beep  
(With the advanced keyless  
function)..... 7-67  
Key removed from vehicle warning  
beep..... 7-66  
Lane Departure Warning sound... 7-70  
Lights-on reminder..... 7-65  
Mazda Radar Cruise Control with  
Stop & Go function (MRCC with  
Stop & Go function) system  
warnings..... 7-70  
Mazda Radar Cruise Control  
(MRCC) System warnings..... 7-69  
Outside temperature warning  
beep..... 7-67  
Power Liftgate Warning Beep.... 7-67  
Power steering warning buzzer.... 7-68  
Request switch inoperable warning  
beep (With the advanced keyless  
function)..... 7-66  
Seat belt warning beep..... 7-65  
Selective Catalytic Reduction (SCR)  
Warning Beep..... 7-68  
Speed limiter warning beep..... 7-71  
Tyre inflation pressure warning  
beep..... 7-68  
Vehicle speed alarm..... 7-68

120 km/h warning beep..... 7-68  
Warning/Buzzer..... 7-42  
Warranty..... 8-2  
Windows  
Power windows..... 3-42  
Windscreen Washer..... 4-102  
Windscreen Wipers..... 4-100  
Windscreen Wiper De-icer..... 4-105  
Winter Driving..... 3-58  
Wiper  
Replacing Rear Window Wiper  
Blade..... 6-42  
Replacing windscreen wiper  
blades..... 6-39  
Wireless Charger (Qi)..... 5-112

## 0-9

120 km/h warning beep..... 7-68  
360°View Monitor (Mazda Connect  
(Type A))..... 4-249  
Front wide view..... 4-263  
How to use the system..... 4-255  
Margin of error between road surface  
on screen and actual road  
surface..... 4-272  
Rear wide view..... 4-270  
Side view..... 4-265  
Top view/front view..... 4-260  
Top view/rear view..... 4-267  
Types of images displayed on the  
screen..... 4-253  
360°View Monitor (Mazda Connect  
(Type B))..... 4-276  
How to use the system..... 4-282  
Margin of error between road surface  
on screen and actual road  
surface..... 4-300  
Side view..... 4-291  
Top view/front view..... 4-286  
Top view/front wide view..... 4-289

Top view/rear view.....	4-294	Types of images displayed on the	
Top view/rear wide view.....	4-298	screen.....	4-280

